

# PEP Testing Laboratory

REPORT NO. : 990435

## RFI / EMI TEST REPORT

**APPLICANT** : EDTASONIC TECHNOLOGY CO., LTD.  
**E. U. T.** : MOUSE  
**TRADE NAME** : N/A  
**FCC ID** : OL2 SHBM  
**REGULATION** : CFR 47 , Part 15 Subpart B , Class B  
**TEST SITE** : PEP Testing Laboratory  
**TEST ENGINEER** : *Tony Wang*  
**TEST DATE** : 7 / 21 / 1999  
**ISSUED DATE** : AUG. / 11 / 1999  
**REPORT No.** : 990435

FEDERAL COMMUNICATIONS COMMISSION  
Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD. 21046

May 25, 1999

Registration Number: 90868

PEP Testing Laboratory  
12-3 Fl., No. 27-1, Lane 169  
Kang-Ning St., Hsi-chi Town  
Taipei Hsien  
Taiwan, R.O.C.  
Attention: M. Tsui


Re: Measurement facility located at Hsi-chi  
3 & 10 meter site  
Date of Listing: May 25, 1999

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years from the date of listing the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at [WWW.FCC.GOV](http://WWW.FCC.GOV), Electronic Filing, OET Equipment Authorization Electronic Filing.

Sincerely,



Thomas W Phillips  
Electronics Engineer

# PEP Testing Laboratory

REPORT NO. : 990435

## VERIFICATION

### **WE HEREBY VERIFY THAT:**

The E. U. T. listed below has completed RFI testing by PEP Testing Laboratory and the interference emissions can pass FCC Class B limitations .

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992 .

Any data in this RFI report is " reference " only .

**APPLICANT :** EDTASONIC TECHNOLOGY CO., LTD.\*

**PRODUCT :** MOUSE \*

**FCC ID :** OL2SHBM \*

**MODEL :** SHBM \*

*M. Y. Tsui*

M. Y. TSUI / Manager

### **PEP Testing Laboratory**

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,  
Hsi-Chih, Taipei Hsien, Taiwan, R. O. C.  
TEL : 886-2-26922097      FAX : 886-2-26956236

# PEP Testing Laboratory

REPORT NO. : 990435

## TABLE OF CONTENTS

<b><u>1. GENERAL</u></b>	4
1.1 General Information	
1.2 Place of Measurement	
1.3 Labeling Requirements	
1.4 Information to User	
<b><u>2. CONDUCTED EMISSIONS TEST</u></b>	7
2.1 Setup of the Test Facilities	
2.2 Test Procedures	
<b><u>3. RADIATED EMISSIONS TEST</u></b>	9
3.1 Setup of the Test Facilities	
3.2 Test Procedures	
<b><u>4. DESCRIPTION FOR EUT TESTING CONFIGURATION</u></b>	11
<b><u>5. SUPPORTING DEVICES TO TEST</u></b>	12
<b><u>6. TEST CONFIGURATION</u></b>	14
** Conducted Emission Test Photo. and Data	
** Radiated Emission Test Photo. and Data	
<b><u>7. APPENDIX</u></b>	
A. Photos of EUT Appearance	24
B. List of Test Equipment	25

# PEP Testing Laboratory

REPORT NO. : 990435

## 1. GENERAL

### 1.1 GENERAL INFORMATION:

APPLICANT : EDTASONIC TECHNOLOGY CO., LTD.

5F-2, NO. 96, SEC. 3, MUCHA RD.,  
TAIPEI, TAIWAN, R. O. C.

MANUFACTURER : EDTA POWER ELECTRONICS CO., LTD.

DONG CHONG, PAN-YU GUANDONG  
PROVINCE, CHINA

MEASUREMENT PROCEDURE : ANSI C63 , 4 - 1992

TESTED FOR COMPLIANCE WITH : Title 47 of CFR  
Part 15 , Subpart B , Class B


### 1.2 PLACE OF MEASUREMENT PEP Testing Laboratory

# PEP Testing Laboratory

REPORT NO. : 990435

## 1.3 LABELING REQUIREMENT

A FCC ID label shall be permanently attached and conspicuously located on the equipment :

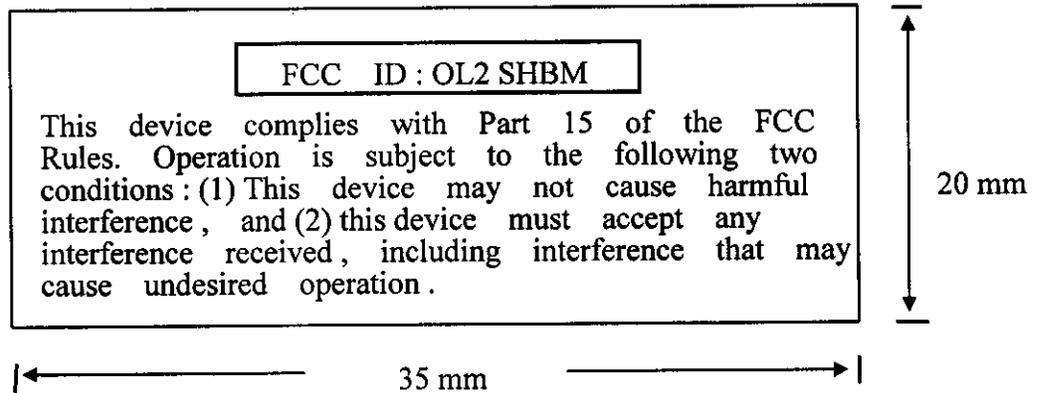

# PEP Testing Laboratory

REPORT NO. : 990435

## 1.4 INFORMATION TO THE USER

The following FCC statement should be declared in a conspicuous location in the user's manual.

### Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.


Warning : A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

## 2. CONDUCTION EMISSIONS TEST

### 2.1 GENERAL SETUP OF THE TEST FACILITIES

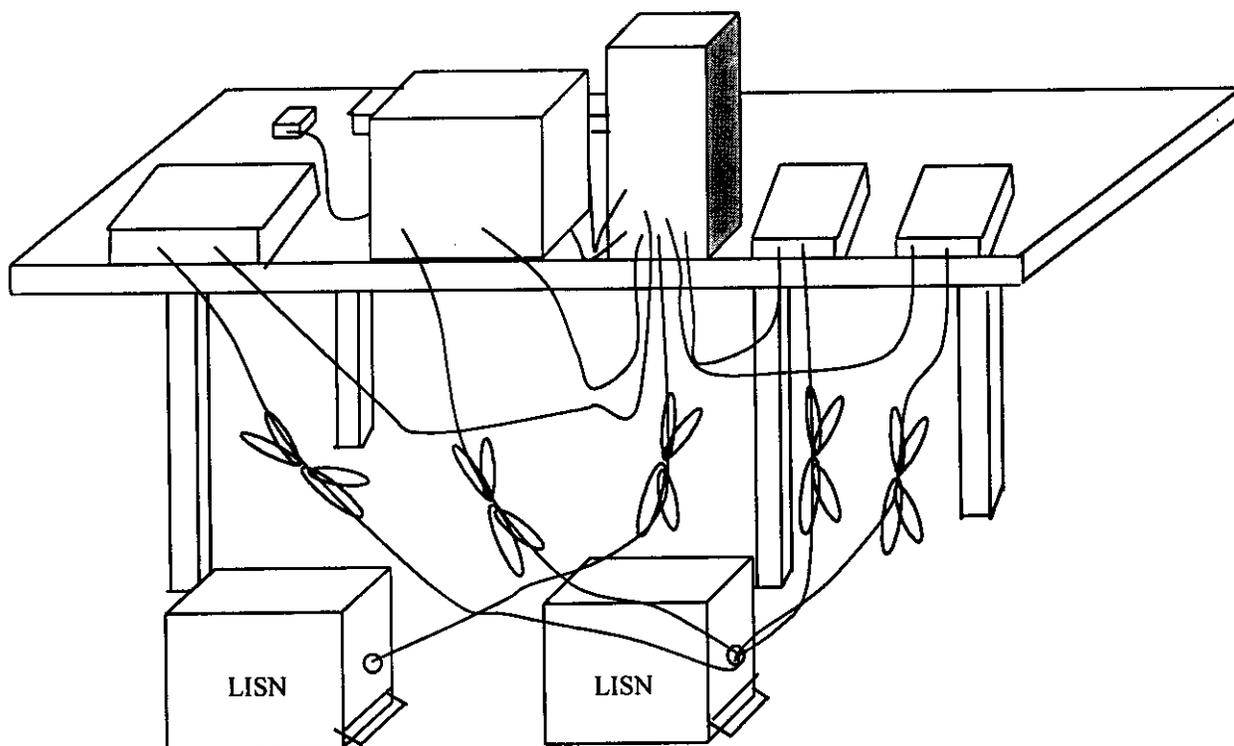

# PEP Testing Laboratory

REPORT NO. : 990435

## 2.2 TEST PROCEDURES

The system was setup as described above, with the EMI diagnostic software.

Both the line of power cord, hot and neutral, were run with the EMI tests software.

To get the maximum power line conducted emission, we changed the configuration by varying the monitor power cord fed from floor outlet and from the outlet on the power supply of this computer.


The highest emissions were recorded in the RFI test report.

# PEP Testing Laboratory

REPORT NO. : 990435

## 3. RADIATED EMISSIONS TEST

### 3.1 GENERAL SETUP OF THE FACILITIES

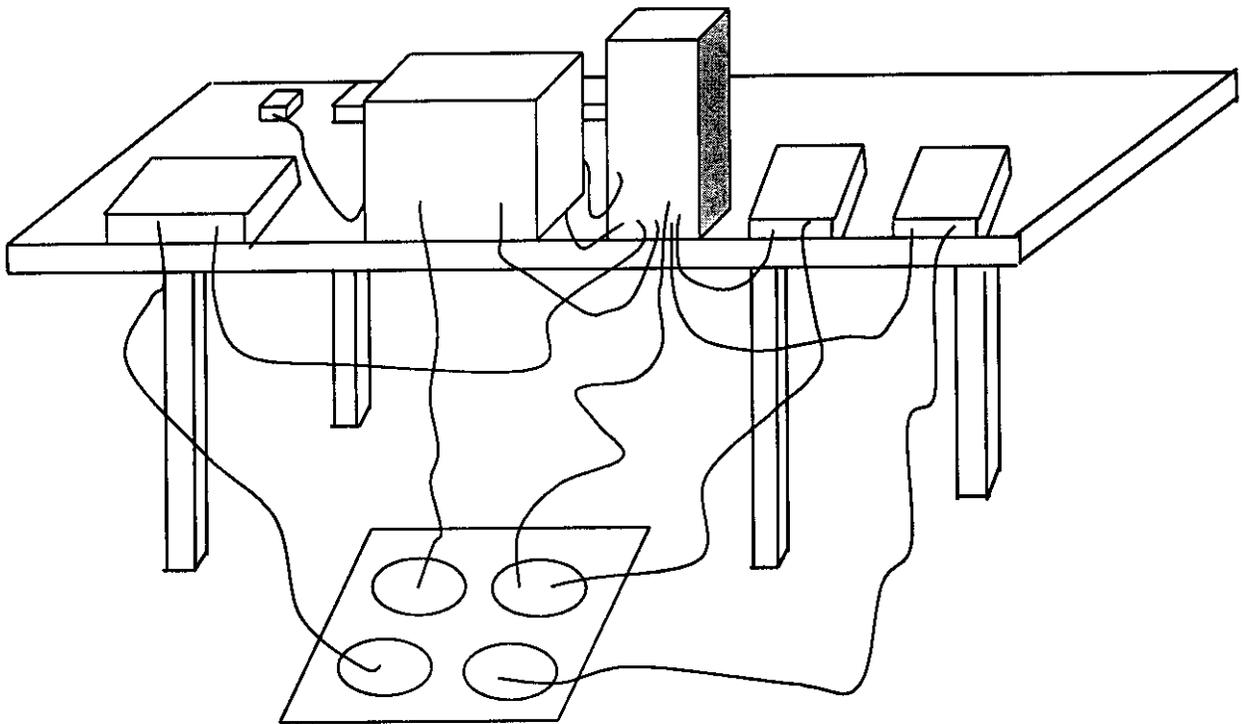

## 3.2 TEST PROCEDURES

Radiated emissions test was carried out by **PEP Testing Laboratory** at the open field test site authorized by FCC.

The EUT and supporting equipments were setup with the EMI diagnostic software.

- a. setting up the EUT under normally position, and scanning it from 30 MHz to 1000 MHz, then recording those narrow band noises which cannot be 6 dBuV below lower bound. Both horizontal and vertical antenna are measured from 1 meter height to 4.0 meter height, and turntable rotate 360 degrees.
- b. fixing the EUT rear face to antenna and antenna 1.0 meter height. We adjusted I/O cables to find the highest coupling noise and moved the height of antenna from 1 to 4 meters, then rotated the turntable simultaneously.
- c. checking following step b. all points which were recorded in step a.
- d. changing the peripherals position, and routine steps a. b. c.

The highest emissions were recorded in the RFI test report.

## 4. DESCRIPTION FOR EUT TESTING CONEIGURATION

### \*\* TEST PROCEDURE - - - -

- (A) The EUT is PC mouse with PS/2 connector , FCC ID: OL2 SHBM , this product is OEM product which have alternative plastic enclosure shown as 8" x 10" photo. 7 - 9 , for more detail information about the EUT , please refer user's manual .
- (B) The EUT connected to PC and enable it under test , we provided the worst case testing data in this RFI report .
- (C) After the EUT was set up , we did the conducted emission test in the shielded room and the worst case placement finding as the ANSI C63.4 requirement ; similarly , the radiated emission test was done at the open field site .
- (D) If the peak value of the noise can't under Non-consumer equipment limit 3 dBuV more , we'll change Biconical antenna or Log-periodic antenna for Dipole antenna and record its Quasi-Peak value , making sure it can under 6 dBuV at least .
- (E) In the RFI test report , we provided the worst conducted emission testing data and radiated emission test data.

## 5. SUPPORTING DEVICES TO TEST

### **SUPPORT UNIT 1. ---- PERSONAL COMPUTER**

Manufacturer : ELITEGROUP  
Model Number : P6BXT-A+  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1.2m  
FCC ID : Declaration of Conformity (DoC)

### **SUPPORT UNIT 2. ---- MONITOR**

Manufacturer : Acer Peripherals Inc.  
Model Number : 1455  
Power Supply Type : Switching  
Power Cord : Shielded, Detachable, 1.2m  
Data Cable : Shielded, Undetachable, 1m  
FCC ID : JVP7234E

### **SUPPORT UNIT 3. ---- PRINTER**

Manufacturer : Hewlett-Packard Singapore Pte Ltd.  
Model Number : HP400  
Power Supply Type : Linear  
Power Cord : Non-Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1m. 2464  
FCC ID : B94C2642X

# PEP Testing Laboratory

REPORT NO. : 990435

## **SUPPORT UNIT 4. -----MODEM × 2**

Manufacturer : ACEEX  
Model Number : 1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded, Detachable, 1.2m  
Data Cable : Shielded, Detachable, 1m  
FCC ID : IFAXDM1414

## **SUPPORT UNIT 5. -----KEYBOARD**

Manufacturer : Acer Peripherals Inc.  
Model Number : 6311-KW  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, Undetachable, 1.2m  
FCC ID : JVPKBS-WIN

## **EQUIPMENT UNDER TEST -----MOUSE**

Manufacturer : EDTASONIC TECHNOLOGY CO., LTD.  
Model Number : SHBM  
Data Cable : Shielded, Undetachable, 1.2m  
FCC ID : OL2 SHBM

## 6. TEST CONFIGURATION

### **Radiated emission detector function :**

**(1) 30MHZ~1GHZ : Quasi-Peak Value**

**Resolution BW : 120KHZ Video BW : 300KHZ**

**(2) above 1GHZ : Quasi-Peak value and Average Value**

**Resolution BW : 1MHZ Video BW : 1MHZ**

**\* either Q. P. or average value will be recorded  
in the report**

### **Conducted emission detector function :**

**(1) 150KHZ~30MHZ : Quasi-Peak Value**

**Resolution BW : 9KHZ Video BW : 30KHZ**

**The else descriptions : N/A**

**Conducted Emission Test Photo. : Page 15**

**Test Data : Hot 17, 18**

**Neutral 19, 20**

**Radiated Emission Test Photo. : Page 21**

**Test Data : Horizontal 22**

**Vertical 23**

# PEP Testing Laboratory

REPORT NO. : 990435

## CONDUCTED EMISSIONS TEST DATA

**Model No.** : SHBM  
**Frequency range** : 150KHz to 30MHz  
**Detector** : Quasi-peak Value  
**Temperature** : 28 °C  
**Humidity** : 60 %

**Test Data :** # 2286 < LINE >  
# 2291 < NEUTRAL >


- ※ Note
1. Level = Meter read + Cable Loss + LISN Factor
  2. Margin = Level – Limit
  3. LISN = AMN



PEP Testing Laboratory

Data#: 2286 File#: cispr22b.EMI

Date: 1999-07-29 Time: 09:49:43

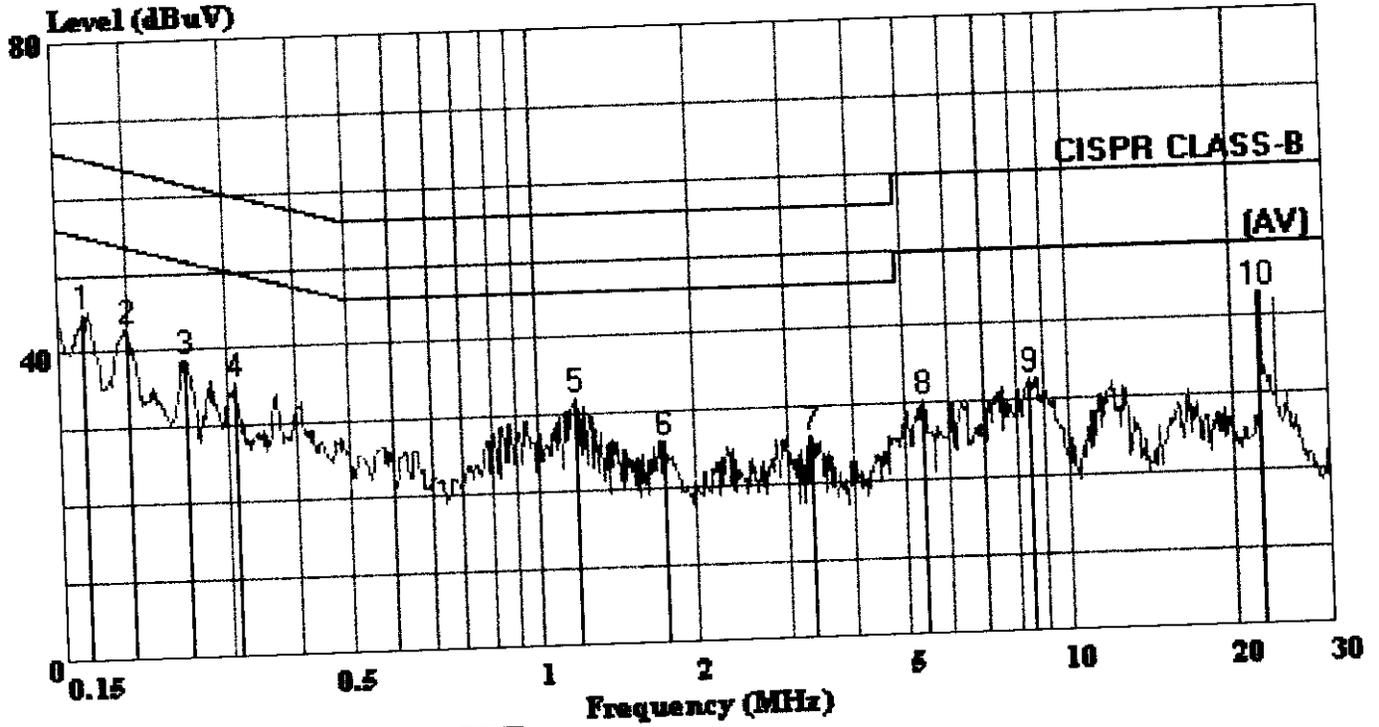

PEP Testing Laboratory (EMI 4:JEFF)

Ref Trace:

Trace: 2285  
 Condition: CISPR CLASS-B LISN.L LINE  
 EUT : SHBM  
 Power: AC 115V/60Hz  
 Memo : Quasi Peak Value

# PEP Testing Laboratory

Date of test: 7/29/1999

Data # : 2286

EUT Model : SHBM

Phase : LINE

Detector : Q.P.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
-----	-----	-----	-----	-----	-----	-----
0.167	0.73	0.74	43.40	44.87	65.12	-20.25
0.199	0.73	0.80	41.40	42.93	63.67	-20.74
0.253	0.73	0.81	37.40	38.94	61.64	-22.70
0.312	0.73	0.90	34.00	35.63	59.93	-24.30
1.296	0.71	0.94	30.40	32.05	56.00	-23.95
1.858	0.70	0.99	24.80	26.49	56.00	-29.51
3.436	0.69	1.00	24.80	26.49	56.00	-29.51
5.505	0.68	1.00	28.80	30.48	60.00	-29.52
8.592	0.66	0.94	31.39	32.99	60.00	-27.01
22.655	0.62	0.90	41.60	43.12	60.00	-16.88

Note: LISN Factor means LISN insertion loss .




**PEP**

PEP Testing Laboratory

12-3FL., NO.27-1, LANE 169, KANG NING, ST.,  
HSI-CHI, TAIPEI HSIEN, TAIWAN, R.O.C.  
TEL: 886-2-6922097 FAX: 886-2-6956236

Data#: 2291 File#: cispr22b.EMI

Date: 1999-07-29 Time: 09:53:05

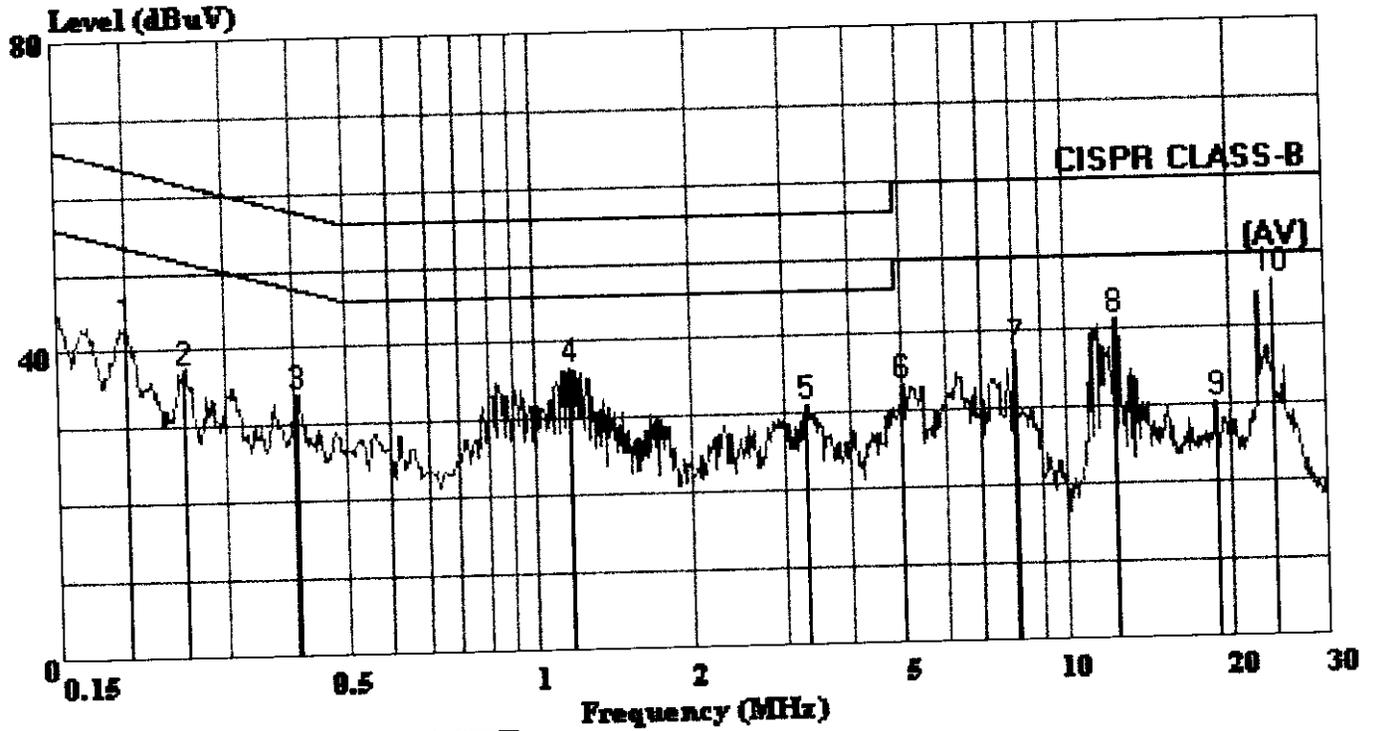

**PEP Testing Laboratory (EMI 4:JEFF)**

Ref Trace:

Trace: 2290  
Condition: CISPR CLASS-B LISN.N NEUTRAL  
EUT : SHBM  
Power: AC 115V/60Hz  
Memo : Quasi Peak Value

# PEP Testing Laboratory

Date of test: 7/29/1999

Data # : 2291

EUT Model : SHBM

Phase : NEUTRAL

Detector : Q.P.

Frequency (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter read (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dBuV)
0.200	0.73	0.80	41.60	43.13	63.62	-20.49
0.255	0.73	0.81	35.80	37.34	61.60	-24.26
0.406	0.73	0.90	32.40	34.03	57.73	-23.70
1.269	0.71	0.93	35.01	36.65	56.00	-19.35
3.417	0.68	1.00	29.40	31.08	56.00	-24.92
5.112	0.67	1.00	31.80	33.47	60.00	-26.53
8.192	0.64	0.98	36.00	37.62	60.00	-22.38
12.449	0.62	0.80	40.00	41.42	60.00	-18.58
18.920	0.62	0.80	29.20	30.62	60.00	-29.38
24.142	0.61	0.96	45.00	46.57	60.00	-13.43

Note: LISN Factor means LISN insertion loss .

# PEP Testing Laboratory

REPORT NO. : 990435

## RADIATED EMISSIONS TEST DATA

Antenna polarization : HORIZONTAL ; Test distance : 10 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
131.99	21.40	- 8.60	30.00	28.23	11.88	1.29	20.00
143.99	22.37	- 7.63	30.00	28.69	12.28	1.40	20.00
155.99	20.49	- 9.51	30.00	26.51	12.52	1.46	20.00
167.99	20.41	- 9.59	30.00	25.93	12.92	1.55	20.00
216.00	19.61	-10.39	30.00	22.29	15.38	1.94	20.00
240.04	24.66	-12.34	37.00	26.23	16.30	2.13	20.00
320.75	20.95	-16.05	37.00	23.19	13.90	3.86	20.00
342.87	20.22	-16.78	37.00	21.64	14.43	4.15	20.00
398.18	21.83	-15.17	37.00	20.64	16.33	4.87	20.00
420.30	21.24	-15.75	37.00	18.94	17.20	5.10	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990435

## RADIATED EMISSIONS TEST DATA

Antenna polarization : VERTICAL ; Test distance : 10 m ;

Freq. (MHz)	Level (dB)	Over Limit (dB)	Limit Line (dB)	Read Level (dB)	Probe Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)
132.01	19.14	-10.86	30.00	25.97	11.88	1.29	20.00
143.99	25.63	- 4.37	30.00	31.95	12.28	1.40	20.00
155.99	23.13	- 6.87	30.00	29.15	12.52	1.46	20.00
167.99	24.89	- 5.11	30.00	30.41	12.92	1.55	20.00
240.05	22.32	-14.68	37.00	23.89	16.30	2.13	20.00
320.75	16.85	-20.15	37.00	19.09	13.90	3.86	20.00
342.87	18.98	-18.02	37.00	20.40	14.43	4.15	20.00
353.93	18.44	-18.56	37.00	19.33	14.81	4.30	20.00
409.13	19.73	-17.27	37.00	18.00	16.74	4.98	20.00
420.25	20.28	-16.72	37.00	17.98	17.20	5.10	20.00

Note :

1. Level = Read Level + Probe Factor + Cable Loss - Preamp Factor
2. Over Limit = Level - Limit Line

# PEP Testing Laboratory

REPORT NO. : 990435

## List of Test Equipment

<b>Instrument</b>	<b>Model No.</b>	<b>Cal. Due Date</b>	<b>S/N</b>
R&S Receiver	ESVS30(30M~1GHZ)	Apr. 15, 2000	863342/012
R&S Receiver	ESBI (20~5GHZ)	Apr. 15, 2000	845658/003
Spectrum Analyzer	R3261A (9K~2.6GHZ)	Apr. 15, 2000	91720076
MEB L. I. S. N	NNB-4/63T1(10K~30MHZ)	Feb. 12, 2000	98008
Anritsu Pre-Amp	3825/2 (10K~30MHZ)	Sep. 20, 1999	M40076
R & S Pre-Amp	ESMI-Z7(100K~1.4GHZ)	Feb. 12, 2000	6/2278/011
COM-Power Horn Antenna	AH-118 (1G~18GHZ)	Feb. 20, 2001	10056
EMCO Biconical Antenna	3110B (30M~300M)	Mar. 10, 2000	N/A
EMCO Log-Periodic Antenna	3146A (300M~1GHZ)	Apr. 14, 2000	1384