



FCC Test Report

FCC Part15 Subpart E

Product Name : M8 DeskPhone
Model No. : M8
FCC ID : OL3M8

Applicant : ALE International
Address : 32, Avenue Kléber – 92700 Colombes –
FRANCE

Date of Receipt : Sep. 13, 2021
Test Date : Sep. 22, 2021 ~ Dec. 22, 2021
Issued Date : Mar. 08, 2022
Report No. : 2190372R-RF-US-P09V01
Report Version : V1.2

The test results presented in this report relate only to the object tested.

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.

This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.

This report is not used for social proof in China (or Mainland China) market.

Test Report Certification

Issued Date: Mar. 08, 2022

Report No. : 2190372R-RF-US-P09V01



Product Name : M8 DeskPhone
Applicant : ALE International
Address : 32, Avenue Kléber – 92700 Colombes – FRANCE
Manufacturer : ALE International
Address : 32, Avenue Kléber – 92700 Colombes – FRANCE
Model No. : M8
Brand : M8 DeskPhone
FCC ID : OL3M8
Applicable Standard : FCC CFR Title 47 Part 15 Subpart E
ANSI C63.10:2013;
789033 D02 General UNII Test Procedures New Rules
v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01
Test Result : Complied
Performed Location : DEKRA Testing and Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou,215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199

Documented By : 

(Project Engineer: Adma Lu)

Approved By : 

(Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Antenna information	8
1.3. Working Frequency of Each Channel:	9
1.4. Mode of Operation.....	10
1.5. Tested System Details	11
1.6. Configuration of Tested System.....	12
1.7. EUT Exercise Software	13
2. Technical Test.....	14
2.1. Summary of Test Result	14
2.2. Test Frequency configuration:.....	15
2.3. Power vs Data Rate	16
2.4. Duty Cycle.....	17
2.5. Test Environment.....	18
2.6. Uncertainty	18
3. Conducted Emission	19
3.1. Test Equipment	19
3.2. Test Setup	19
3.3. Limit	20
3.4. Test Procedure	20
3.5. Test Result	21
4. Radiated Emission	23
4.1. Test Equipment	23
4.2. Test Setup	24
4.3. Limit	25
4.4. Test Procedure	28
4.5. EUT test Axis definition.....	29

4.6.	Test Result	30
5.	Emission bandwidth and occupied bandwidth	150
5.1.	Test Equipment	150
5.2.	Test Setup	150
5.3.	Limit	150
5.4.	Test Procedure	151
5.5.	EUT test Axis definition.....	152
5.6.	Test Result	153
6.	6dB bandwidth	156
6.1.	Test Equipment	156
6.2.	Test Setup	156
6.3.	Limit	156
6.4.	Test Procedure	157
6.5.	EUT test Axis definition.....	158
6.6.	Test Result	159
7.	Power Output.....	161
7.1.	Test Equipment	161
7.2.	Test Setup	161
7.3.	Limit	162
7.4.	Test Procedure	163
7.5.	EUT test Axis definition.....	165
7.6.	Test Result	166
8.	Maximum Power Spectral Density.....	169
8.1.	Test Equipment	169
8.2.	Test Setup	169
8.3.	Limit	170
8.4.	Test Procedure	172
8.5.	EUT test Axis definition.....	173
8.6.	Test Result	174

9.	Band Edge	180
9.1.	Test Equipment	180
9.2.	Test Setup	180
9.3.	Limit	181
9.4.	Test Procedure	184
9.5.	EUT test Axis definition.....	185
9.6.	Test Result	186
10.	Frequency Stability	286
10.1.	Test Equipment	286
10.2.	Test Setup	286
10.3.	Limit	287
10.4.	Test Procedure	288
10.5.	EUT test Axis definition.....	289
10.6.	Test Result	290
11.	Antenna Requirement	294
11.1.	Limit	294
11.2.	Antenna Connector Construction.....	294

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
2190372R-RF-US-P09V01	V1.0	Initial Issued Report	Mar. 01, 2022
2190372R-RF-US-P09V01	V1.1	Updated equipment list information, Page21-22updated AC Power Line Conducted Emission,Page146-147 Radiated Emission (30MHz-1GHz) test data.	Mar. 07, 2022
2190372R-RF-US-P09V01	V1.2	Page22 Modified Note for AC Power Line Conducted Emission Test Data.	Mar. 08, 2022

1. General Information

1.1. EUT Description

Product Name	M8 DeskPhone					
Model No.	M8					
EUT Voltage	48 Volt via POE Adapter: Input: 100-240V,50/60H,0.3A,Output:5V,2A ,10W					
Type of Modulation	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM					
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps					
	802.11n: up to 150Mbps					
	802.11ac: up to 433.3Mbps					
Channel Control	Auto					
Transmit modes	☒	802.11a	☒	802.11n(20MHz)	☒	802.11n(40MHz)
	☒	802.11ac(20MHz)	☒	802.11ac(40MHz)	☒	802.11ac(80MHz)
Support Bands	☐		☐	Outdoor AP		
	☒	5150MHz~5250MHz	☐	Indoor AP		
			☐	Fixed point-to-point AP		
			☒	Mobile Client		
	☒	5250MHz~5350MHz				
	☒	5470MHz~5725MHz	☒	With TDWR Channels		
			☐	Without TDWR Channels		
	☒	5725MHz~5850MHz				

1.2. Antenna information

Antenna model / type number .. :	N/A			
Antenna serial number	N/A			
Antenna Delivery	☒	1TX + 1RX		
	☐	2TX + 2RX		
	☐	Others:.....		
Antenna technology	☒	SISO		
	☐	MIMO	☐	CDD
			☐	Beam-forming
Antenna Type	☐	External	☐	Dipole
			☐	Sectorized
	☒	Internal	☐	PIFA
			☒	PCB
			☐	Metal Antenna
			☐	Others.....
	Antenna Gain	5150-5250: 5.81dBi 5250-5350: 5.61dBi 5470-5725: 5.98dBi 5725-5850: 5.47dBi		

1.3. Working Frequency of Each Channel:

802.11a/n/ac(20MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	144	5720 MHz
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	N/A	N/A	N/A	N/A	N/A	N/A
802.11n/ac(40MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	151	5755 MHz	159	5795 MHz
802.11ac(80MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	155	5775 MHz	N/A	N/A	N/A	N/A

1.4. Mode of Operation

DEKRA Testing and Certification (Suzhou) Co., Ltd. has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit by 802.11a
Mode 2: Transmit by 802.11n(20MHz)
Mode 3: Transmit by 802.11n(40MHz)
Mode 4: Transmit by 802.11ac(20MHz)
Mode 5: Transmit by 802.11ac(40MHz)
Mode 6: Transmit by 802.11ac(80MHz)

Note 1: Regards to the frequency band operation: the lowest, middle and highest frequency channel were selected to perform the test, then shown on this report.

Note 2: For portable device, radiated tests was verified over X, Y, Z axis, and shown the worst case on this report.


1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter

1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

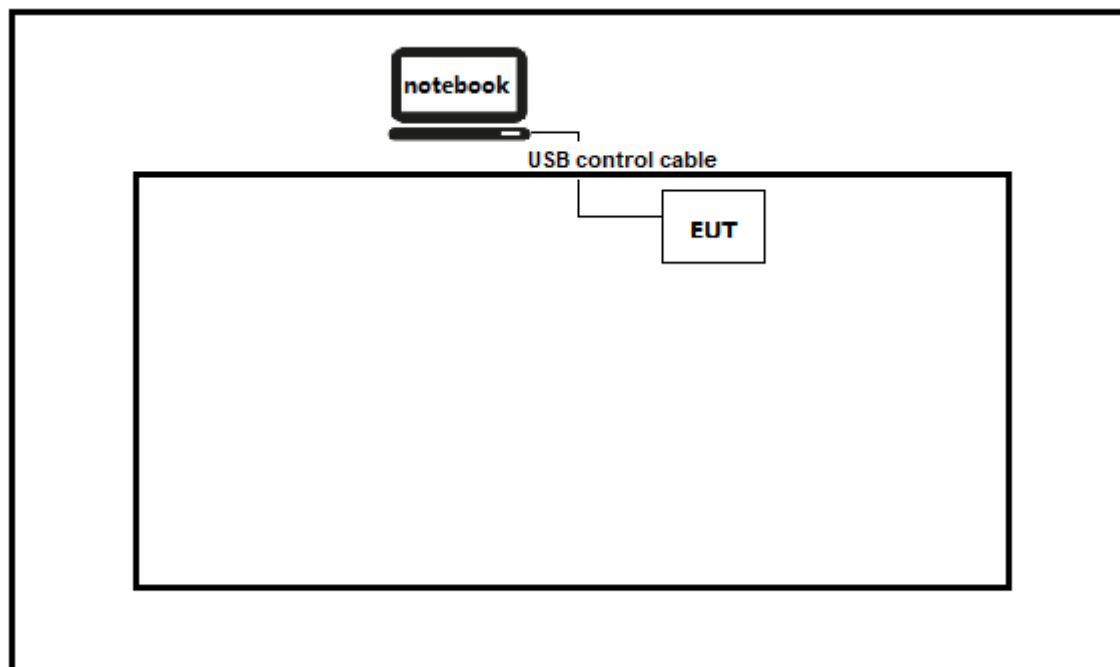

Test setup Diagram- Radiated Emission

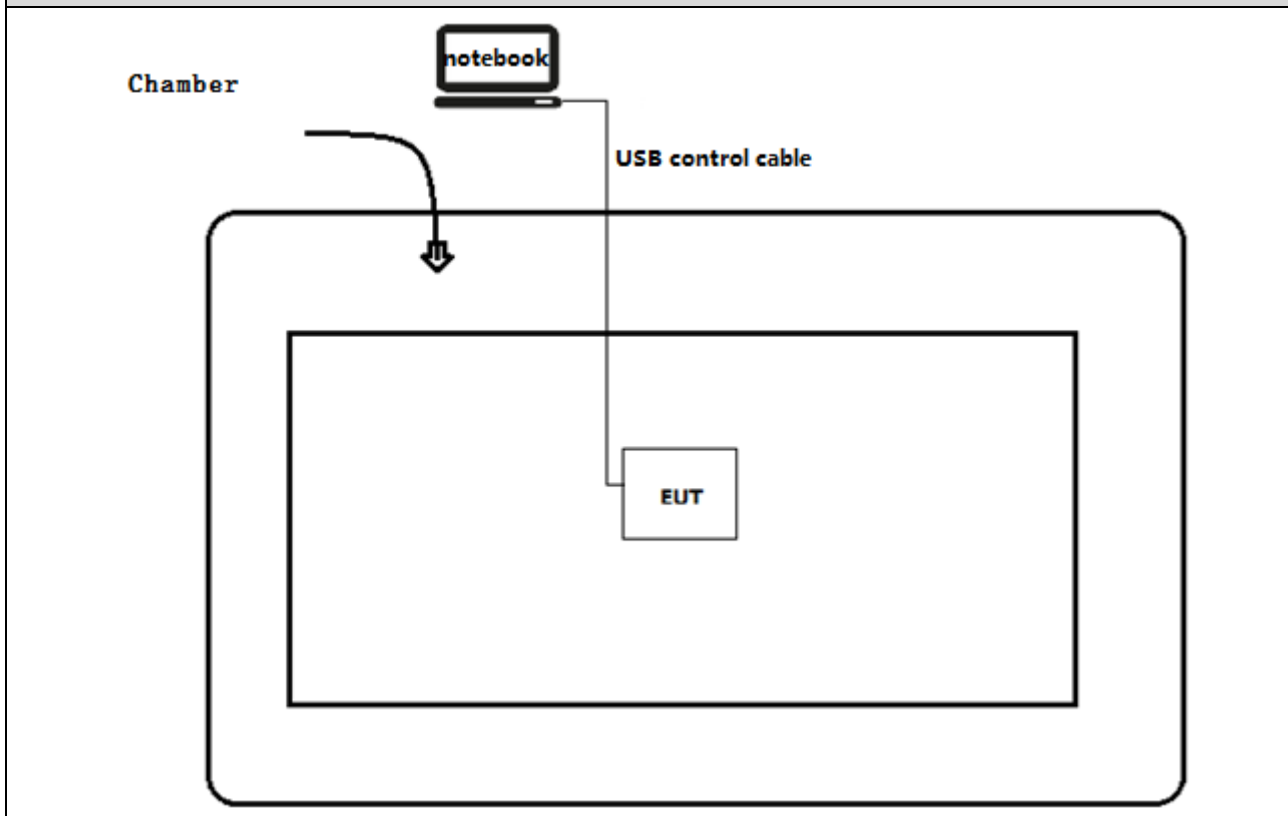

1.7. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Run the software “MobaXterm ” on the notebook computer.
3	Open the serial port and enter the corresponding commands to configure the test mode, test channel, test power and data rate.
4	Select the transmission mode and test channel, then start test.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
- ☐ Deviations from the test standards as below description:

Performed Test Item	Normative References	Limit	Result
Conducted Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.207	FCC 15.207	PASS
Radiated Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.209	FCC 15.209	PASS
Emission bandwidth and occupied bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	FCC 15.407(e)	PASS
6dB Emission Bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	FCC 15.407(e)	PASS
Power Output	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	FCC 15.407(a)	PASS
Peak Power Spectral Density	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	FCC 15.407(a)	PASS
Band Edge	FCC CFR Title 47 Part 15 Subpart E: Section 15.205, 15.407(b)	FCC 15.407(b)	PASS
Frequency Stability	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(g)	±20ppm	PASS

Note: The DFS report please refer to DEKRA report 2190372R-RF-US-P08V01.

2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
802.11a/n/ac(20MHz)	36	5180 MHz	44	5220 MHz	48	5240 MHz
	52	5260 MHz	60	5300 MHz	64	5320 MHz
	100	5500 MHz	116	5580 MHz	132	5700 MHz
	144	5720 MHz	149	5745 MHz	157	5785 MHz
	165	5825 MHz	N/A	N/A	N/A	N/A
802.11n/ac(40MHz)	38	5190 MHz	46	5230 MHz	54	5270 MHz
	62	5310 MHz	102	5510 MHz	110	5550 MHz
	134	5670 MHz	142	5710 MHz	151	5755 MHz
	159	5795 MHz	N/A	N/A	N/A	N/A
802.11ac(80MHz)	42	5210 MHz	58	5290 MHz	106	5530 MHz
	138	5690 MHz	155	5775 MHz	N/A	N/A

2.3. Power vs Data Rate

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)						
		802.11b	802.11g	802.11a	20MHz		40MHz	
					800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6	6.5	7.2	13.5	15.0
1	1	2	9	9	13.0	14.4	27.0	30.0
2	1	5.5	12	12	19.5	21.7	40.5	45.0
3	1	11	18	18	26.0	28.9	54.0	60.0
4	1	---	24	24	39.0	43.3	81.0	90.0
5	1	---	36	36	52.0	57.8	108.0	120.0
6	1	---	48	48	58.5	65.0	121.5	135.0
7	1	---	54	54	65.0	72.2	135.0	150.0

Note1: The blue form is the maximum power data rate.

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)					
				20MHz		40MHz		80MHz	
				Guard Interval		Guard Interval		Guard Interval	
				800ns	400ns	800ns	400ns	800ns	400ns
1	0	BPSK	1/2	6.5	7.2	13.5	15	29.3	32.5
	1	QPSK	1/2	13	14.4	27	30	58.5	65
	2	QPSK	3/4	19.5	21.7	40.5	45	87.8	97.5
	3	16-QAM	1/2	26	28.9	54	60	117	130
	4	16-QAM	3/4	39	43.3	81	90	175.5	195
	5	64-QAM	2/3	52	57.8	108	120	234	260
	6	64-QAM	3/4	58.5	65	121.5	135	263.3	292.5
	7	64-QAM	5/6	65	72.2	135	150	292.5	325
	8	256-QAM	3/4	78	86.7	162	180	351	390
	9	256-QAM	5/6	N/A	N/A	180	200	390	433.3

Note 1: The blue form is the maximum power data rate.

2.4. Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle (%)
802.11a	1.385	0.11	0.722	1.495	92.64
802.11n(20MHz)	1.300	0.05	0.769	1.350	96.30
802.11n(40MHz)	0.640	0.05	1.563	0.690	92.75
802.11ac(20MHz)	1.310	0.045	0.763	1.355	96.68
802.11ac(40MHz)	0.648	0.05	1.543	0.698	92.84
802.11ac(80MHz)	0.3159	0.0506	3.166	0.3665	86.19

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 789033, when test for Conducted Emission Band Edge and Radiated Emission, $VBW \geq 1/T$ will be used.

2.5. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.6. Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	± 2.02 dB
Radiated Emission	Below 1GHz ± 3.8 dB
	Above 1GHz ± 3.9 dB
RF Antenna Port Conducted Emission	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
Occupied Bandwidth	± 1 kHz
Power Spectral Density	± 1.27 dB
Frequency Stability	± 100 Hz


3. Conducted Emission

3.1. Test Equipment

Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2021.04.18	2022.04.17
Two-Line V-Network	R&S	ENV216	101044	2021.03.20	2022.03.19
50ohm Termination	SHX	TF2	7081403	2021.09.04	2022.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

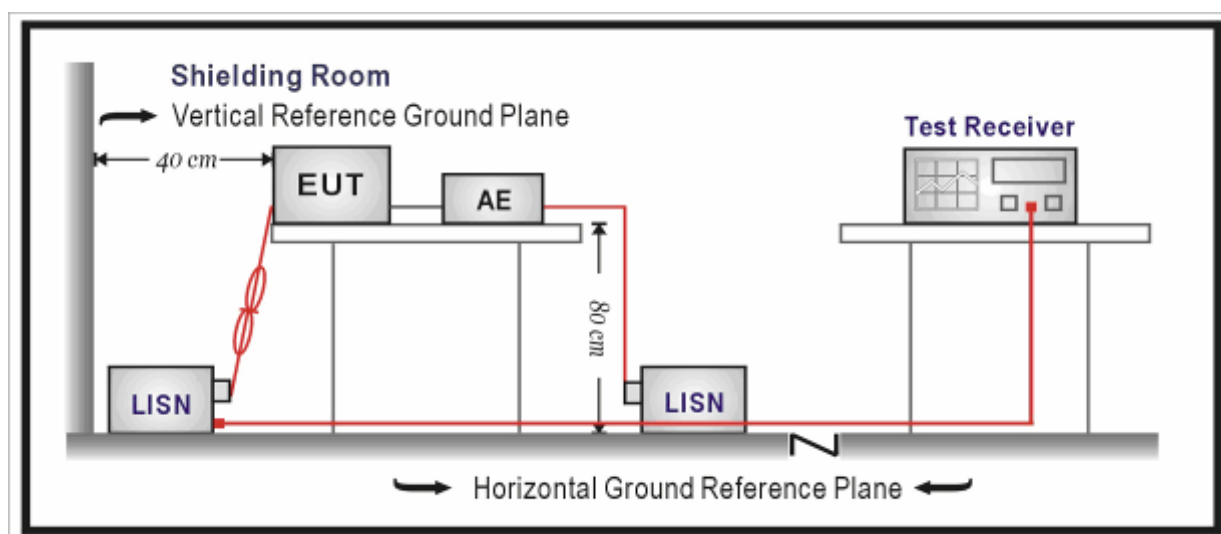

3.3. Limit

Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 – 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


3.5. Test Result

Profile:2190372R	Page No.: 19
Engineer: Tim Cao	
Site: TR1	Time: 2022/03/07 - 11:25
Limit: FCC_Part15.107_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode: 1	

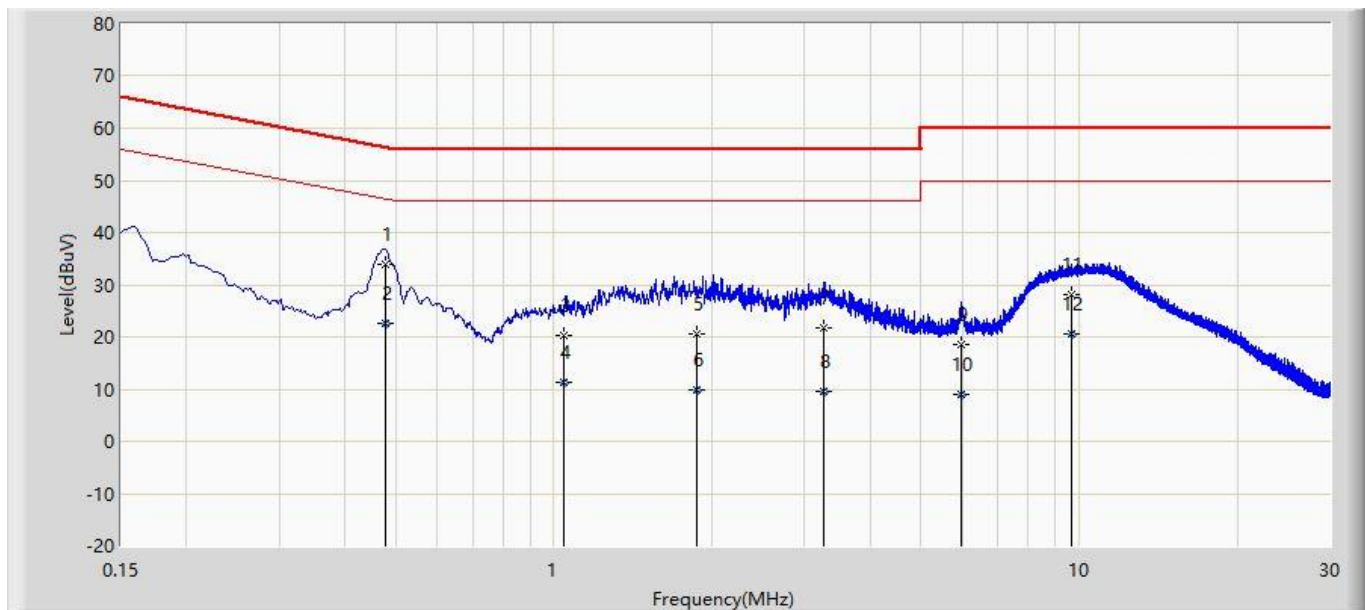

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.478	33.902	24.285	-22.463	56.365	9.617	QP
2		0.478	22.693	13.077	-23.672	46.365	9.617	AV
3		1.046	20.195	10.545	-35.805	56.000	9.650	QP
4		1.046	11.204	1.554	-34.796	46.000	9.650	AV
5		1.865	20.648	10.976	-35.352	56.000	9.671	QP
6		1.865	9.930	0.258	-36.070	46.000	9.671	AV
7		3.273	21.609	11.874	-34.391	56.000	9.735	QP
8		3.273	9.560	-0.175	-36.440	46.000	9.735	AV
9		5.978	18.497	8.647	-41.503	60.000	9.850	QP
10		5.978	9.116	-0.734	-40.884	50.000	9.850	AV
11		9.679	28.055	18.057	-31.945	60.000	9.998	QP
12		9.679	20.677	10.678	-29.323	50.000	9.998	AV

Profile: 2190372R	Page No.: 20
Engineer: Tim Cao	
Site: TR1	Time: 2022/03/07 - 11:27
Limit: FCC_Part15.107_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode: 1	

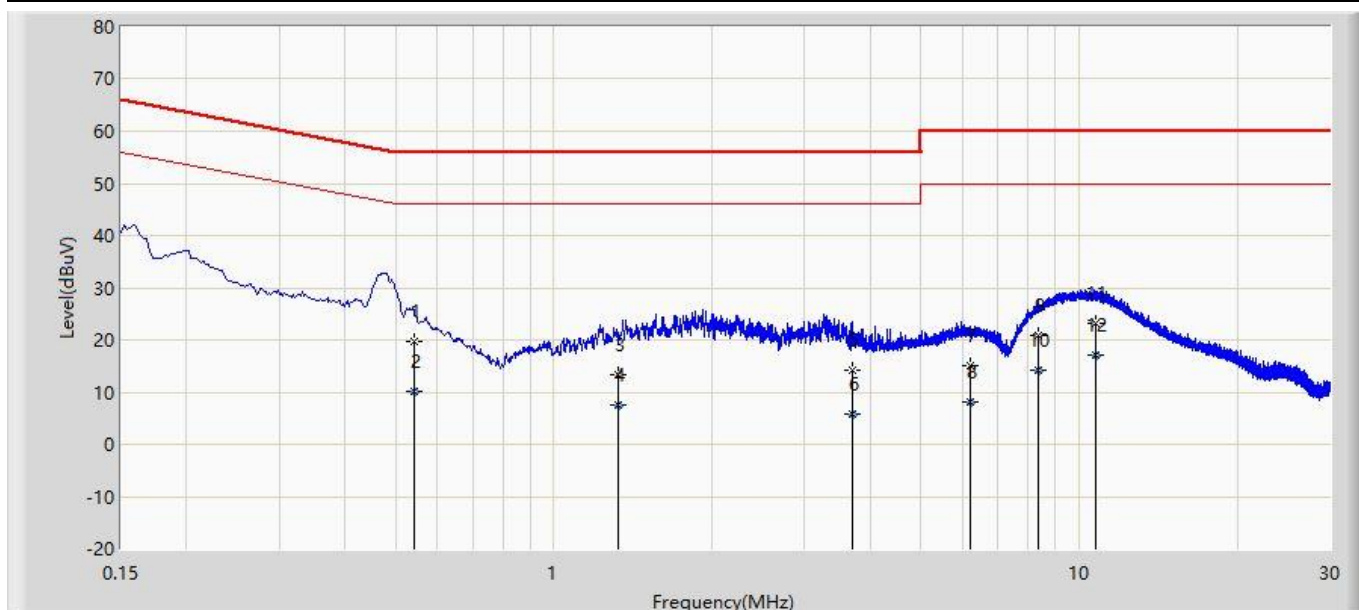

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.541	19.694	10.070	-36.306	56.000	9.624	QP
2		0.541	10.238	0.614	-35.762	46.000	9.624	AV
3		1.328	13.262	3.605	-42.738	56.000	9.657	QP
4		1.328	7.535	-2.123	-38.465	46.000	9.657	AV
5		3.689	14.107	4.351	-41.893	56.000	9.757	QP
6		3.689	5.851	-3.905	-40.149	46.000	9.757	AV
7		6.200	15.028	5.157	-44.972	60.000	9.871	QP
8		6.200	8.094	-1.777	-41.906	50.000	9.871	AV
9		8.331	20.916	10.962	-39.084	60.000	9.954	QP
10		8.331	14.262	4.308	-35.738	50.000	9.954	AV
11		10.716	23.208	13.180	-36.792	60.000	10.028	QP
12	*	10.716	17.168	7.140	-32.832	50.000	10.028	AV

4. Radiated Emission


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-3					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100176	2021.08.15	2022.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.03.02	2023.03.01
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2021.08.23	2022.08.22
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2021.03.31	2022.03.30
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2021.11.23	2022.11.22
Dekra test software	Dekra	-	-	-	-
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EXASpectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
Amplifier	Keleto	LNPA	SK20190225	2021.04.16	2022.04.15
Preamplifier	EMCI	EMC184045SE	980263	2021.05.22	2022.05.21
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2021.08.23	2022.08.22
Broad-BandHornAntenna	Schwarzbeck	BBHA9170	294	2021.04.14	2023.04.13
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2021.03.31	2022.03.30
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2021.03.20	2022.03.19
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

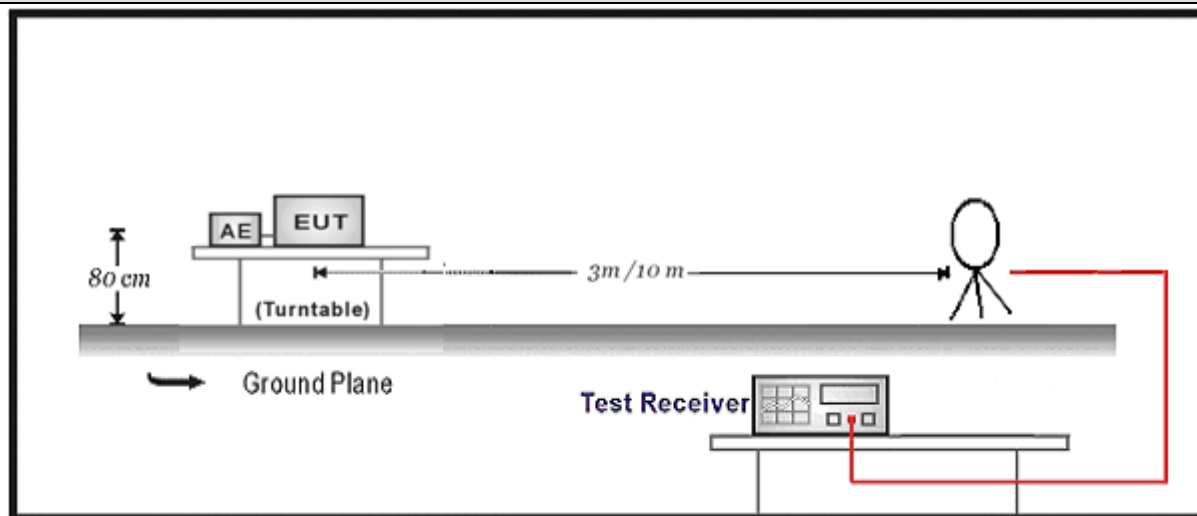

30MHz-1GHz Test Setup:

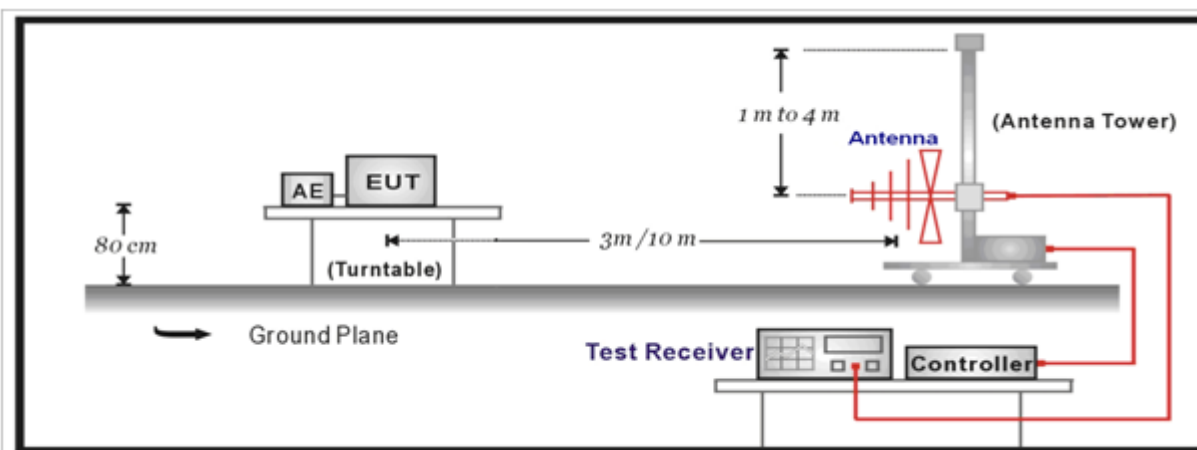

Above 1GHz Test Setup:

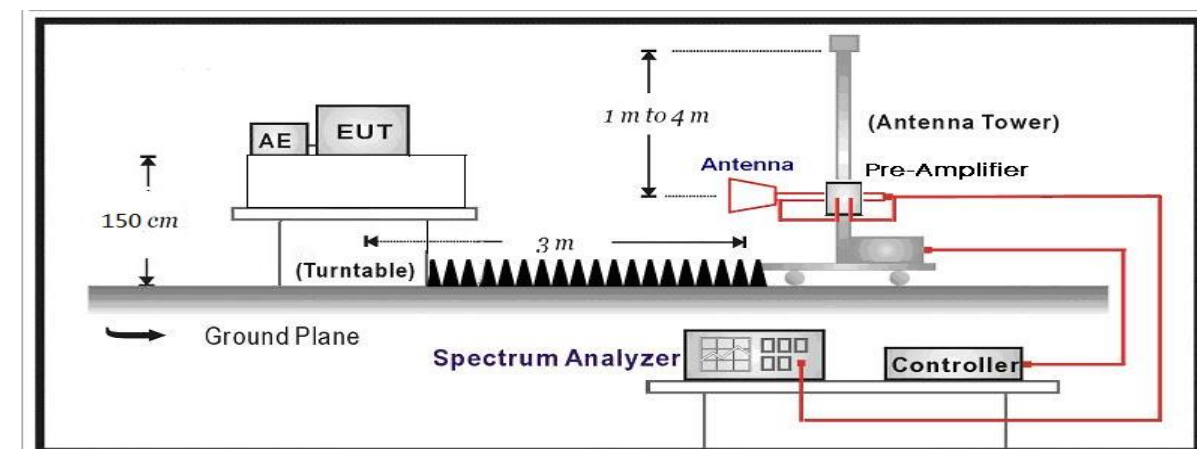


4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)		
Frequency (MHz)	Distance (m)	Level (dBμV/m)
0.009-0.490	300	2400/F(kHz)
0.490-1.705	30	24000/F(kHz)
1.705-30.0	30	30
30-88	3	100**
88-216	3	150**
216-960	3	200**
Above 960	3	500

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).




FCC Part 15 Subpart C Paragraph 15.205 (Restricted Band)			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

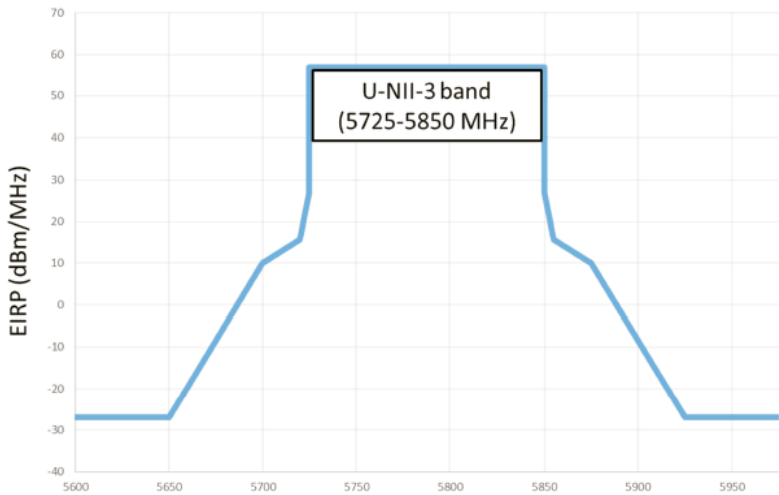FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)		
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	
5725 - 5850	 U-NII-3 band (5725-5850 MHz)	

4.4. Test Procedure


Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		12.7.3	Emissions in non-restricted frequency bands
☒	ANSI C63.10		12.7.2	Emissions in restricted frequency bands
	☒	ANSI C63.10	12.7.5	Radiated emission measurements
	☒	ANSI C63.10	12.7.6	Procedure for peak unwanted emissions measurements above 1000 MHz
	☒	ANSI C63.10	12.7.7	Procedures for average unwanted emissions measurements above 1000 MHz
	☐	ANSI C63.10	12.7.7.2	Method AD (average detection)—primary method
	☒	ANSI C63.10	12.7.7.3	Method VB-A (Alternative)
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.5. EUT test Axis definition

Item	Radiated Emission				
Device Category	☐	Indoor use			
	☐	Outdoor use			
	☐	Fix position use			
	☒	Client use			
Test mode	Mode 1-6				
Test method	☒	Radiated			
		X Axis	Y Axis	Z Axis	
					
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐	
	☐	Conducted			
	☐	Chain 1			
					
	☐	Chain 1	Chain 2		
					
	☐	Chain 1	Chain 2	Chain 3	
					
	☐	Chain 1	Chain 2	Chain 3	Chain 4
					


4.6. Test Result

Profile: 2190372R	Page No.: 117
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5180MHz by 802.11a	

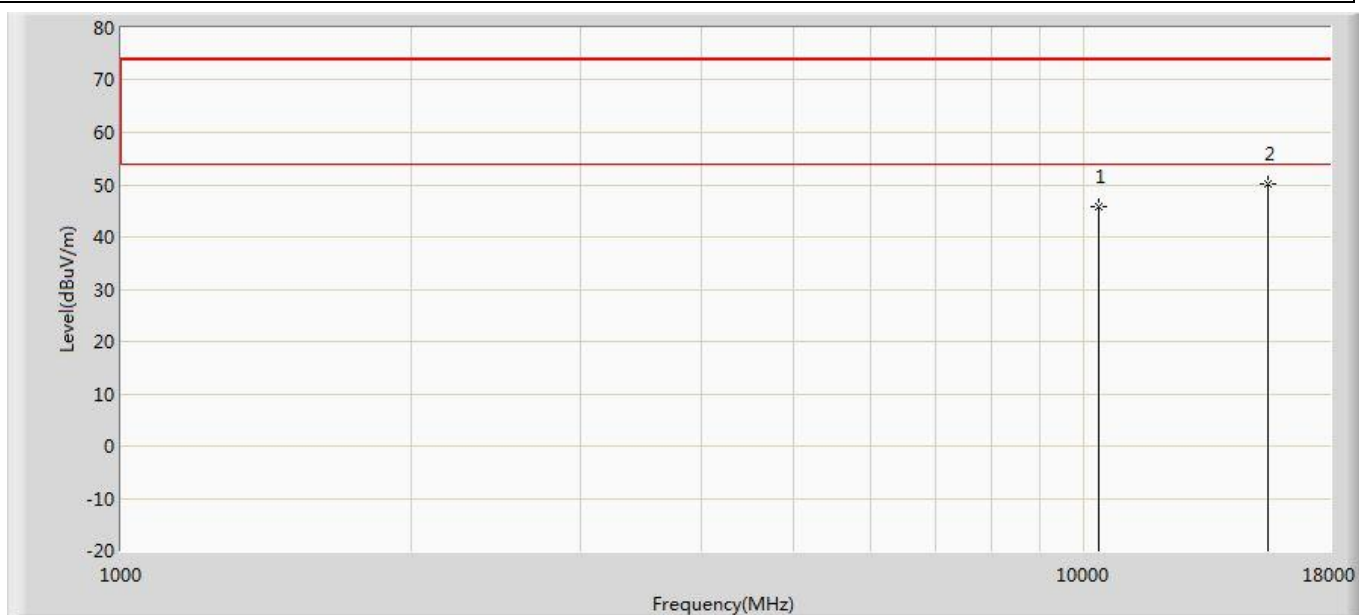


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	45.933	49.674	-28.067	74.000	-3.742	PK
2	*	15540.000	50.027	48.331	-23.973	74.000	1.695	PK

Profile: 2190372R	Page No.: 118
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5180MHz by 802.11a	

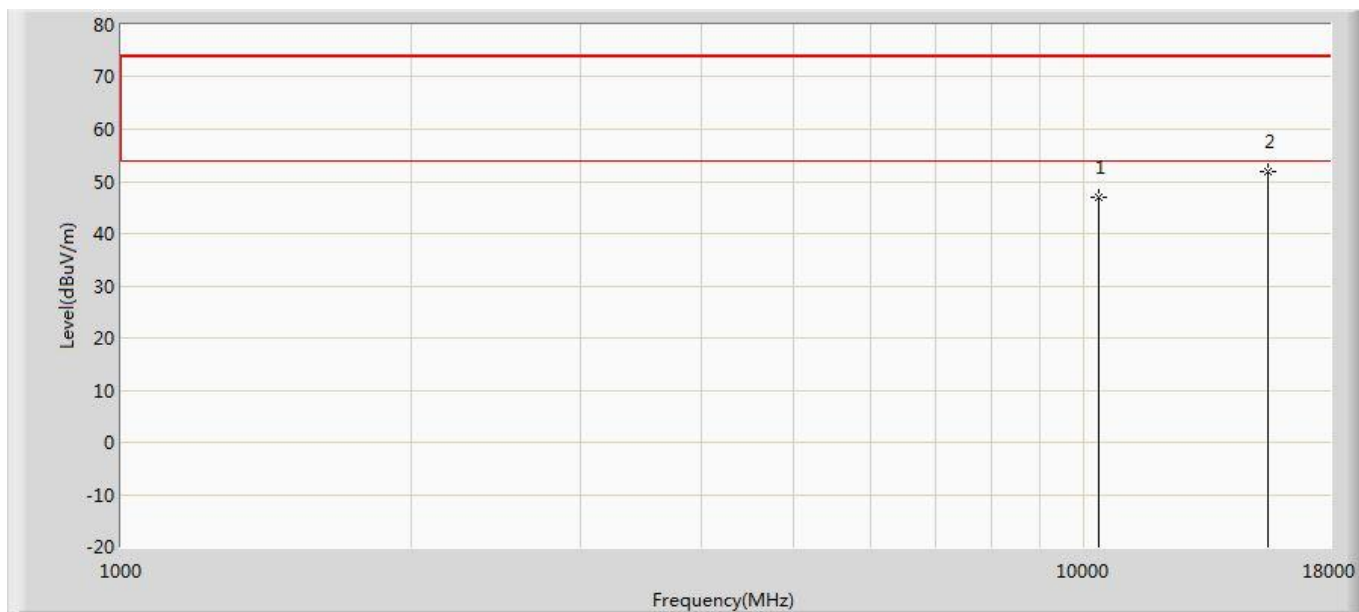


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	46.930	50.671	-27.070	74.000	-3.742	PK
2	*	15540.000	51.896	50.200	-22.104	74.000	1.695	PK

Profile: 2190372R	Page No.: 119
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5220MHz by 802.11a	

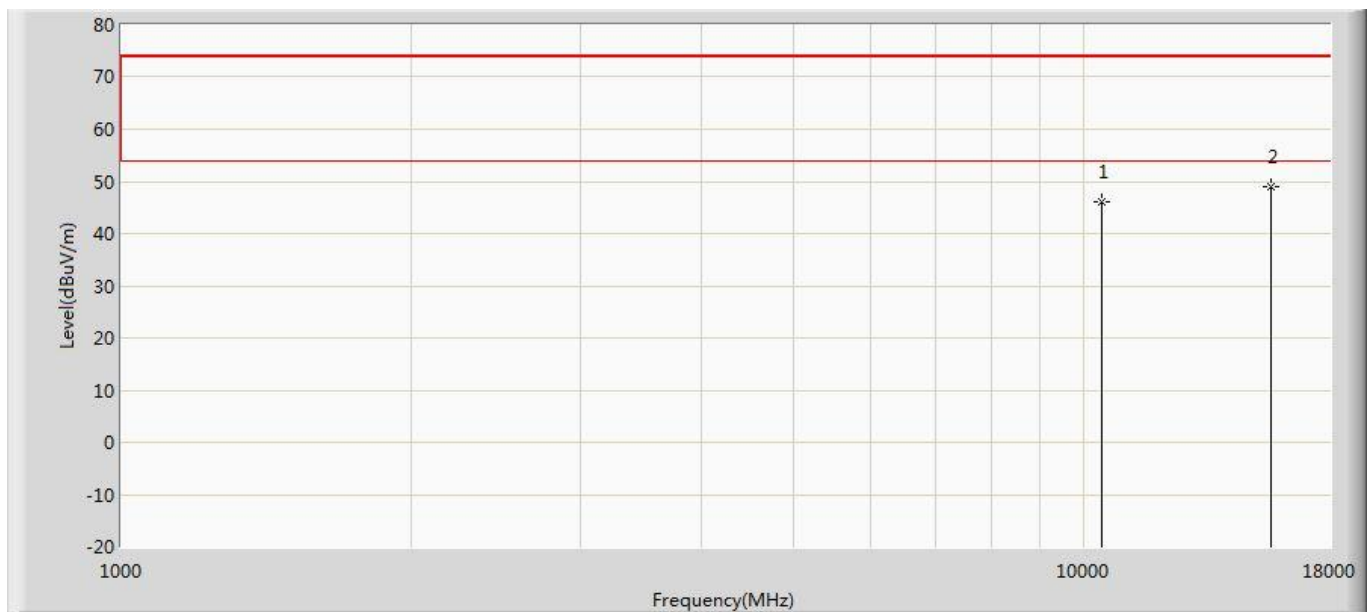


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	46.157	49.737	-27.843	74.000	-3.580	PK
2	*	15660.000	48.967	47.035	-25.033	74.000	1.933	PK

Profile: 2190372R	Page No.: 120
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5220MHz by 802.11a	

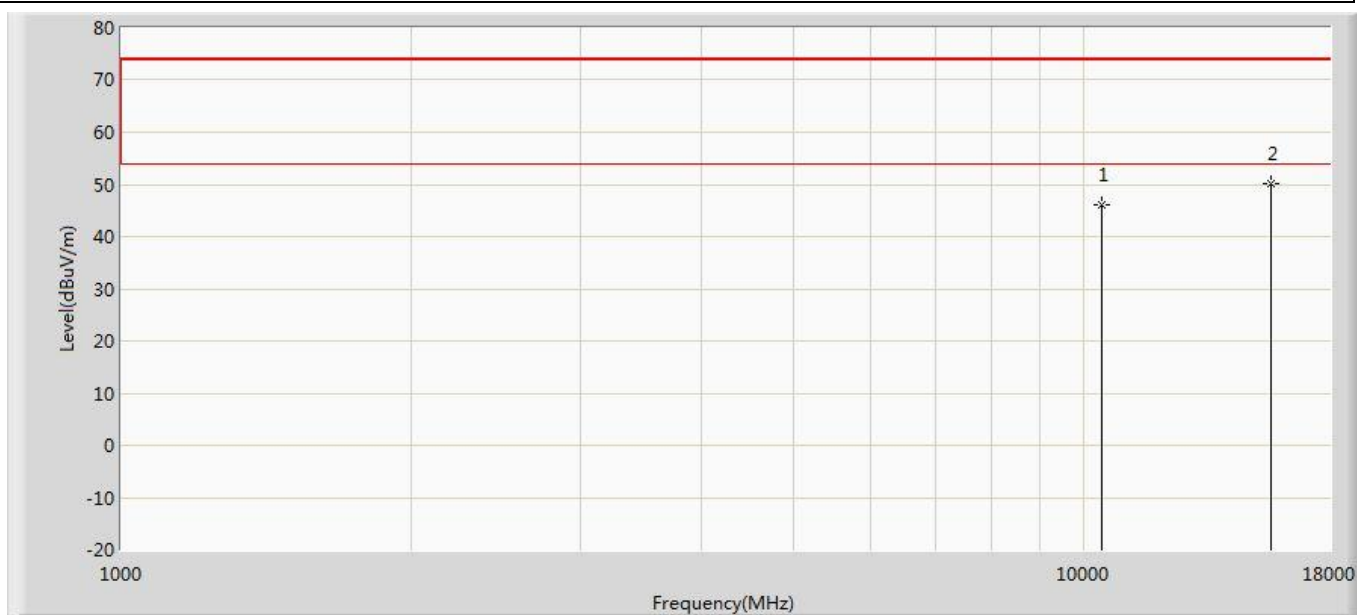


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	45.955	49.535	-28.045	74.000	-3.580	PK
2	*	15660.000	50.153	48.221	-23.847	74.000	1.933	PK

Profile: 2190372R	Page No.: 121
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5240MHz by 802.11a	

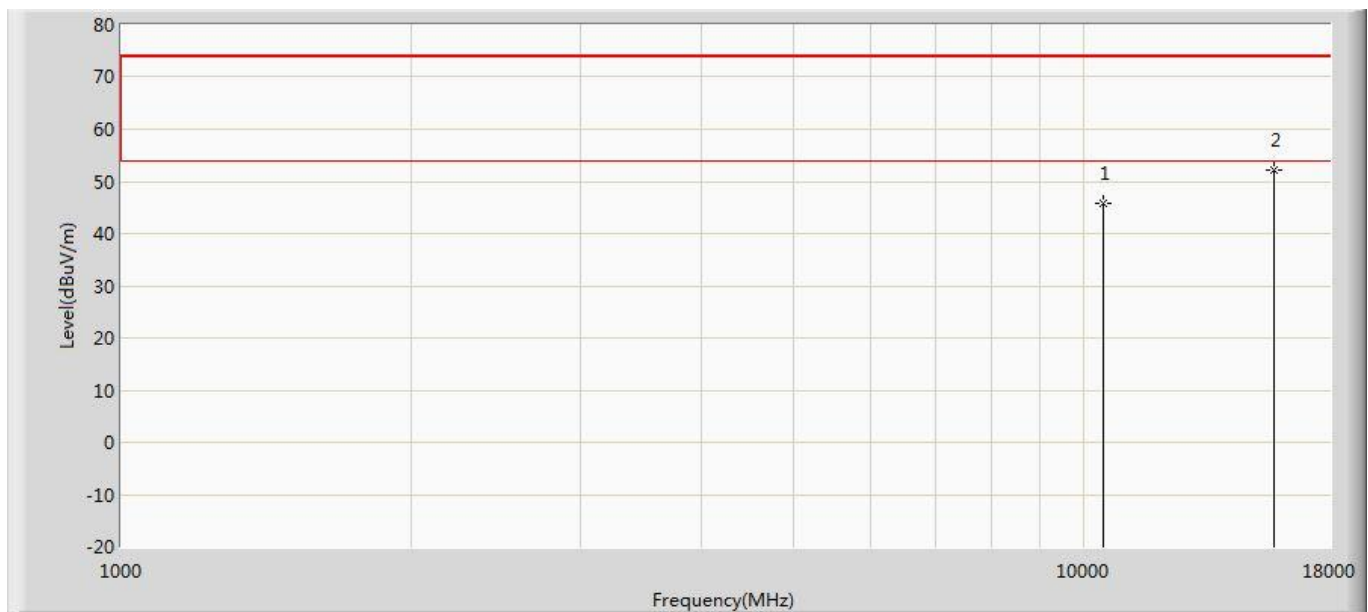


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.879	49.694	-28.121	74.000	-3.815	PK
2	*	15720.000	52.049	49.955	-21.951	74.000	2.094	PK

Profile: 2190372R	Page No.: 122
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5240MHz by 802.11a	

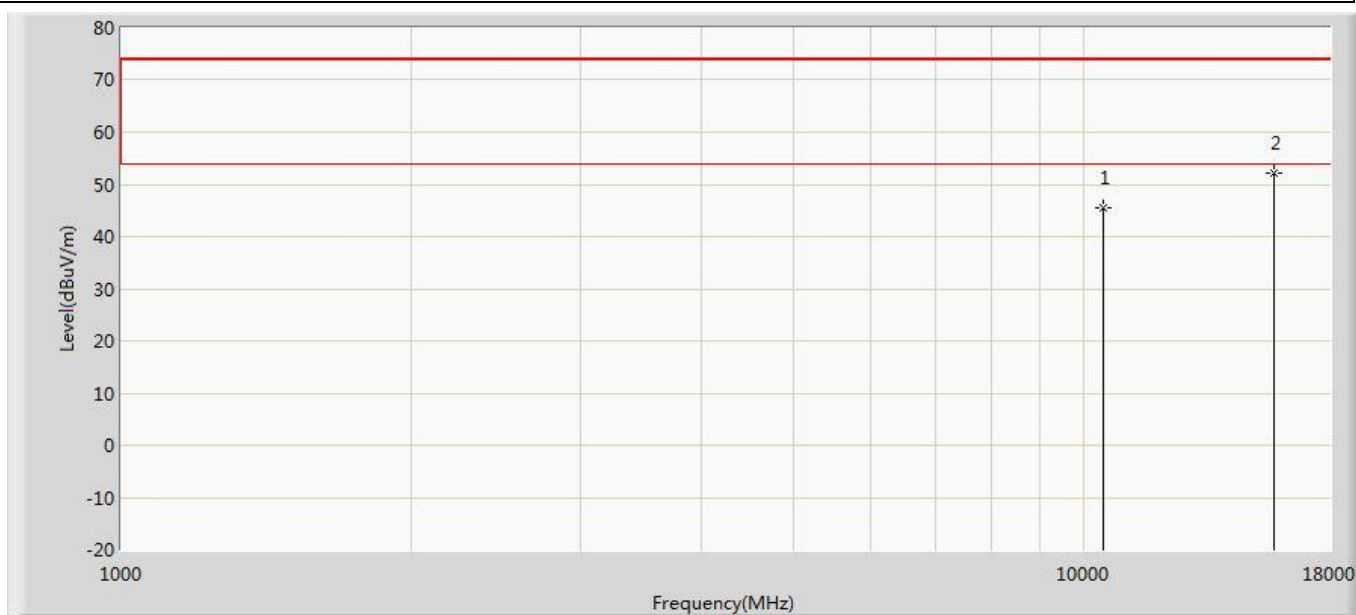


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.401	49.216	-28.599	74.000	-3.815	PK
2	*	15720.000	52.066	49.972	-21.934	74.000	2.094	PK

Profile: 2190372R	Page No.: 123
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5260MHz by 802.11a	

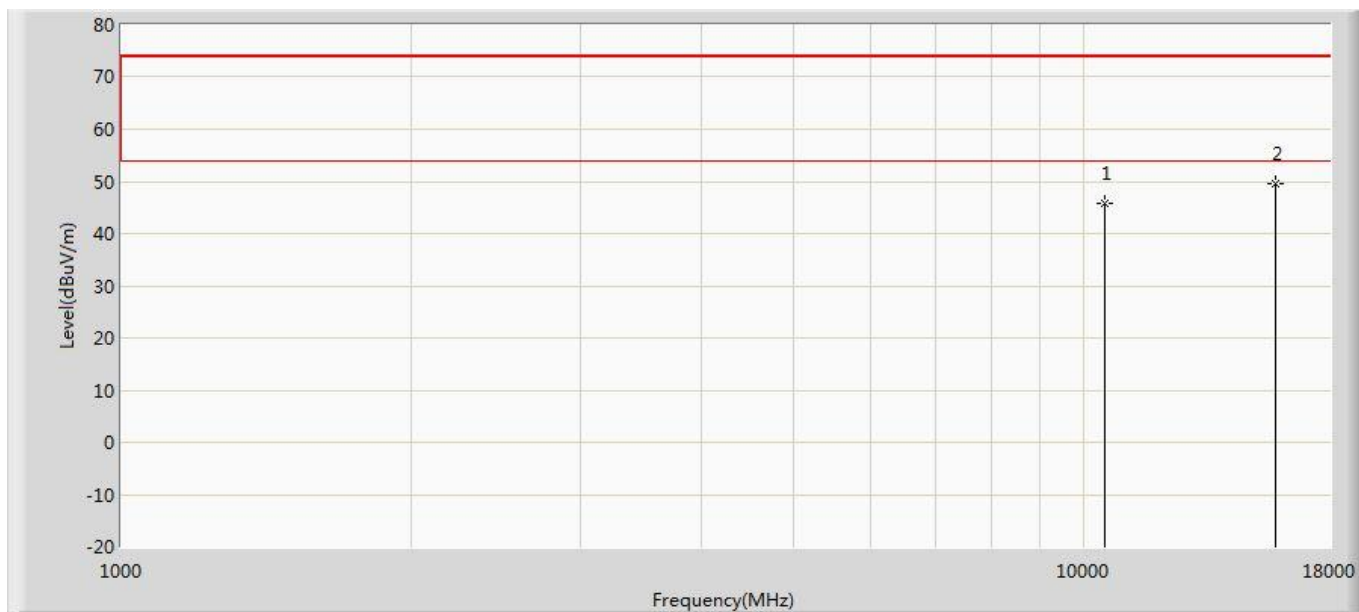


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.854	49.219	-28.146	74.000	-3.365	PK
2	*	15780.000	49.578	47.210	-24.422	74.000	2.369	PK

Profile: 2190372R	Page No.: 124
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5260MHz by 802.11a	

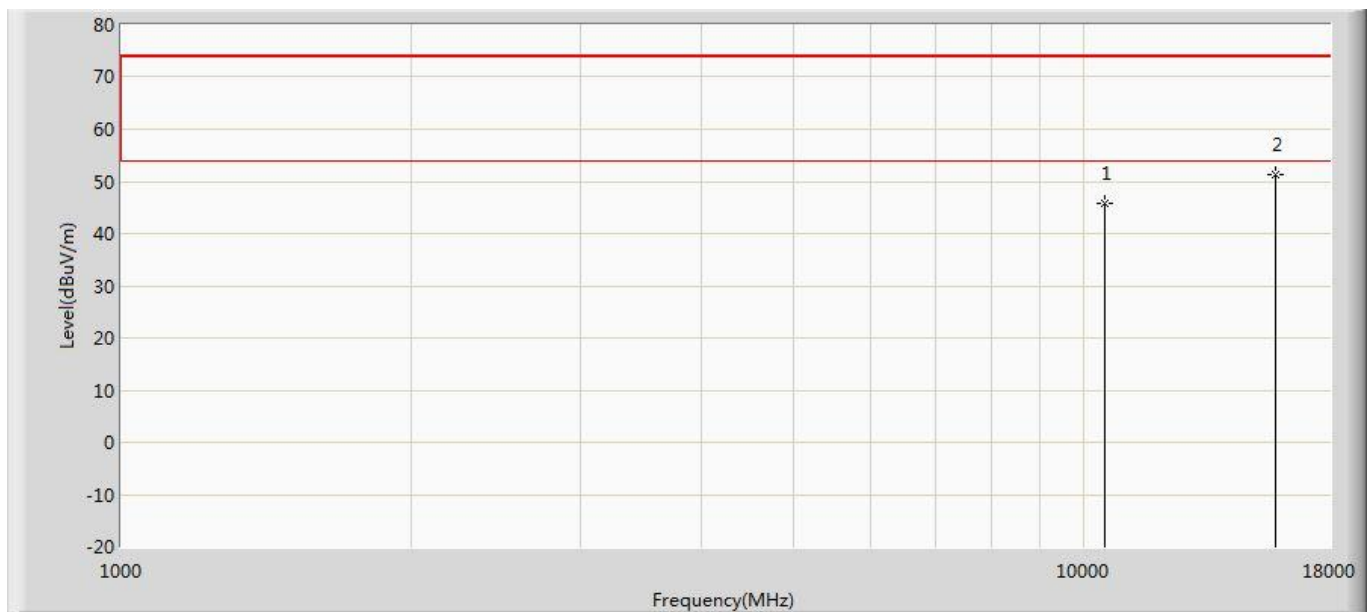


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.654	49.019	-28.346	74.000	-3.365	PK
2	*	15780.000	51.369	49.001	-22.631	74.000	2.369	PK

Profile: 2190372R	Page No.: 125
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5300MHz by 802.11a	

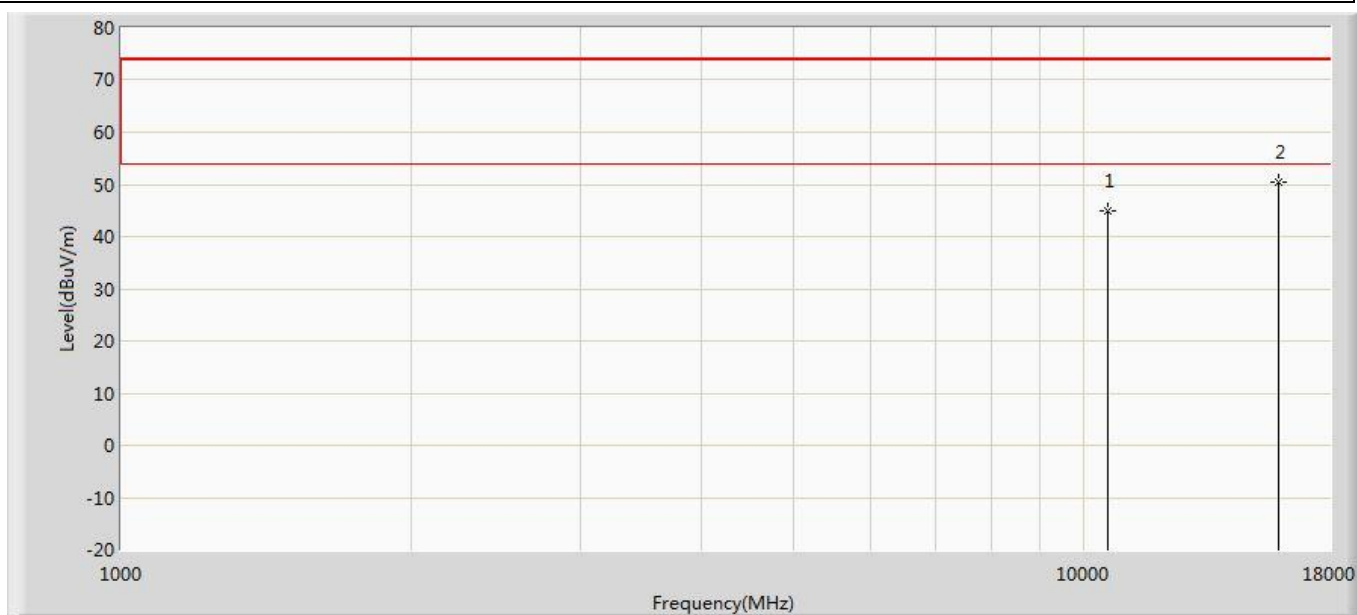


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	44.801	48.544	-29.199	74.000	-3.743	PK
2	*	15900.000	50.482	47.588	-23.518	74.000	2.894	PK

Profile: 2190372R	Page No.: 126
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5300MHz by 802.11a	

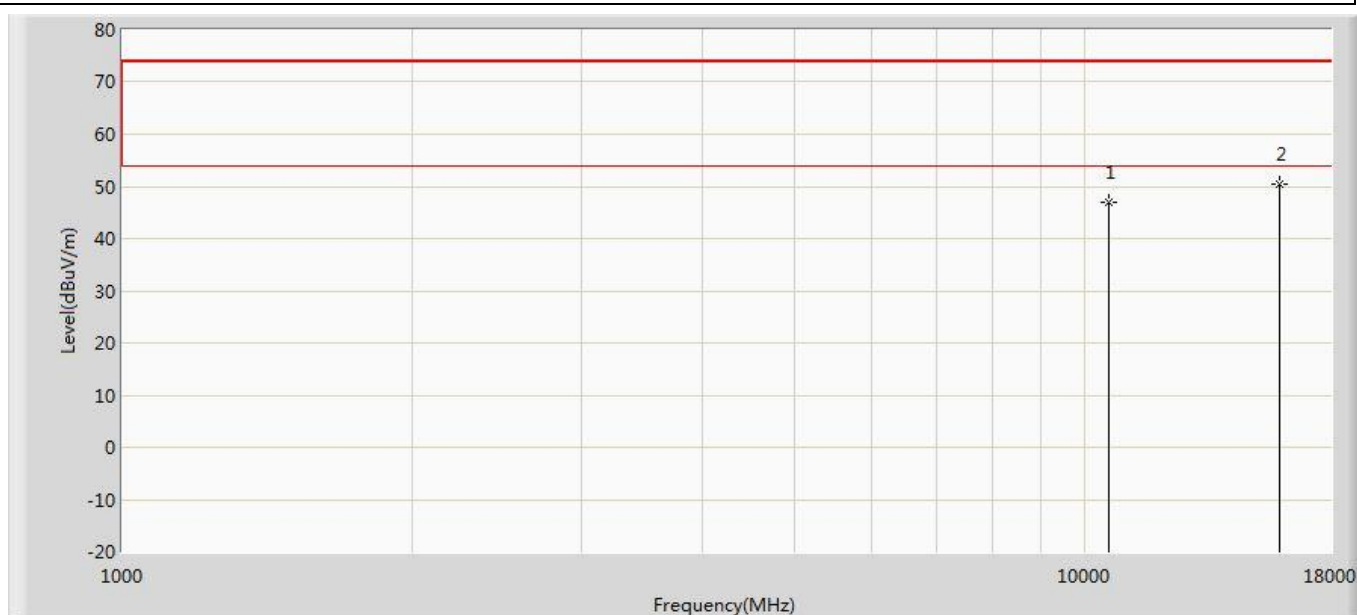


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	46.829	50.572	-27.171	74.000	-3.743	PK
2	*	15900.000	50.448	47.554	-23.552	74.000	2.894	PK

Profile: 2190372R	Page No.: 127
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5320MHz by 802.11a	

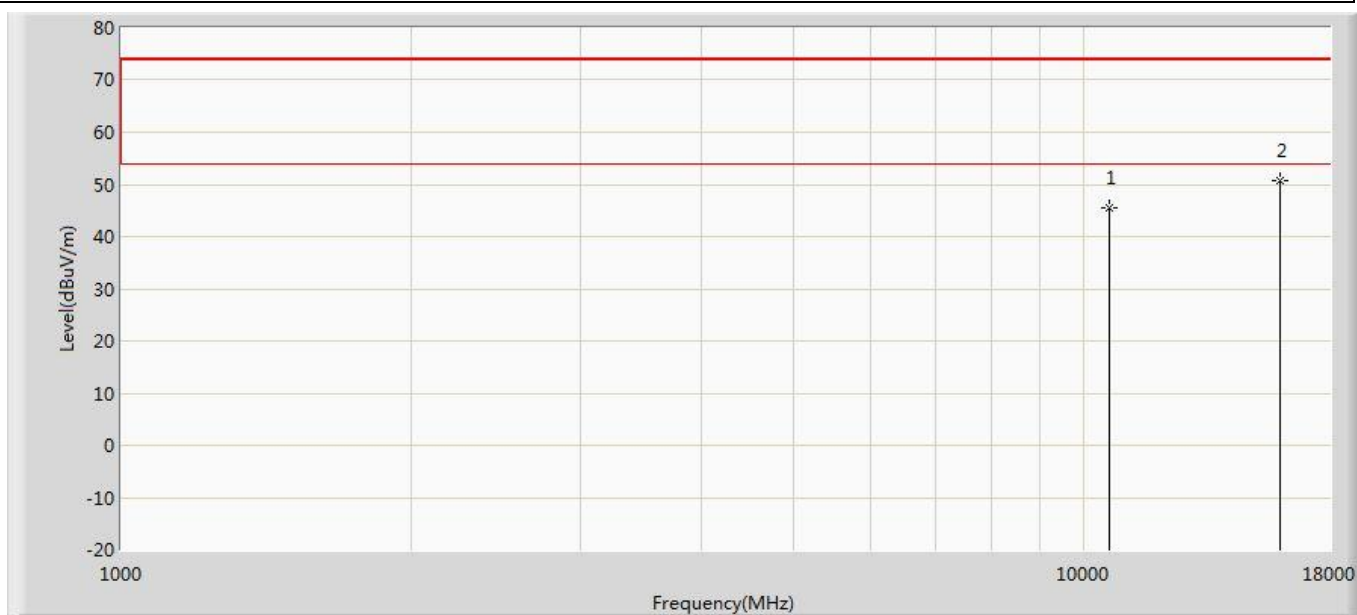


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	45.371	49.094	-28.629	74.000	-3.723	PK
2	*	15960.000	50.863	48.810	-23.137	74.000	2.053	PK

Profile: 2190372R	Page No.: 128
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5320MHz by 802.11a	

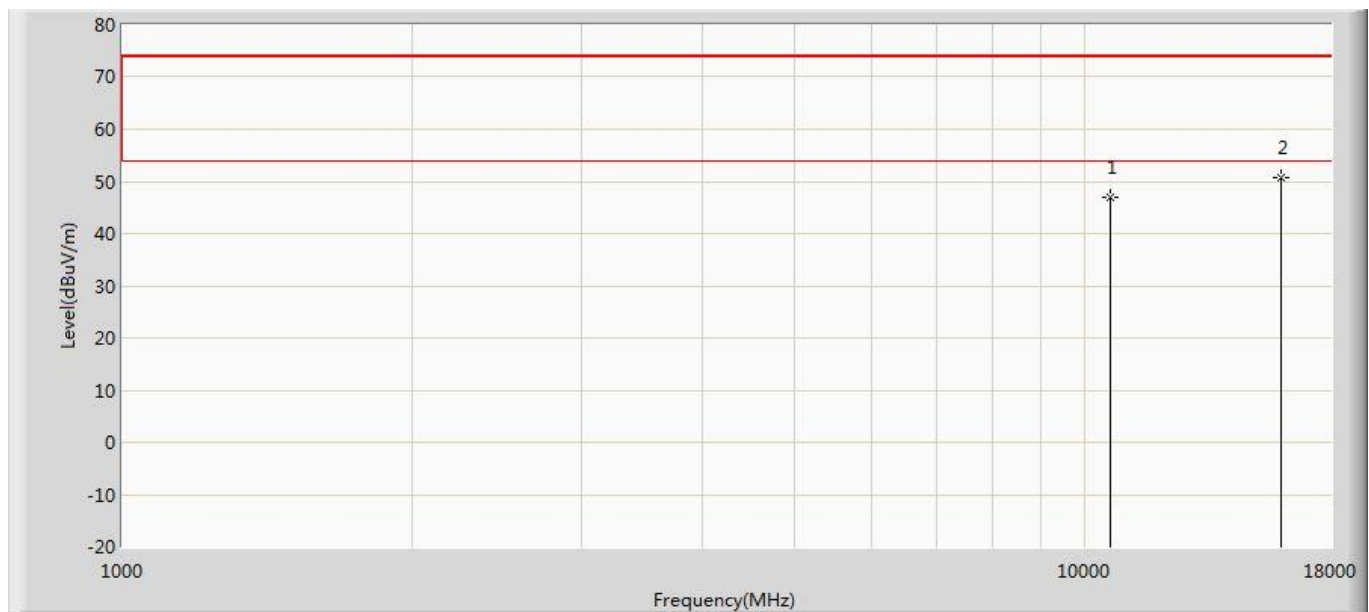


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	46.932	50.655	-27.068	74.000	-3.723	PK
2	*	15960.000	50.869	48.816	-23.131	74.000	2.053	PK

Profile: 2190372R	Page No.: 129
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5500MHz by 802.11a	

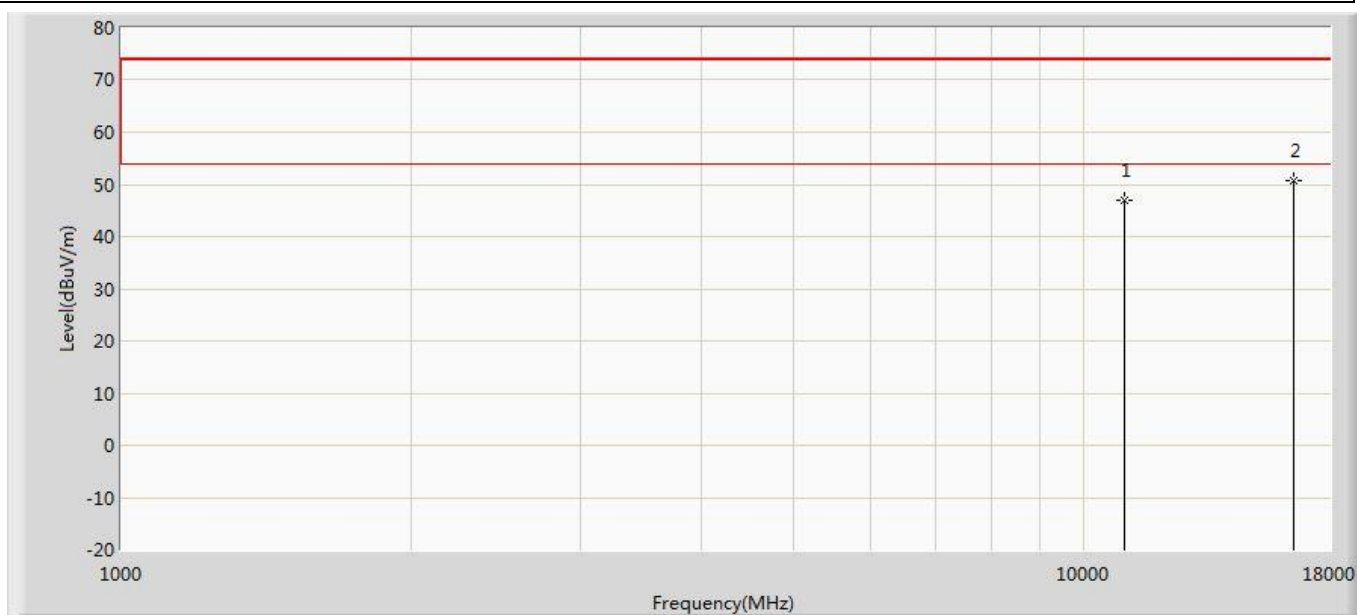


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	47.029	50.152	-26.971	74.000	-3.123	PK
2	*	16500.000	50.758	47.564	-23.242	74.000	3.195	PK

Profile: 2190372R	Page No.: 130
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5500MHz by 802.11a	

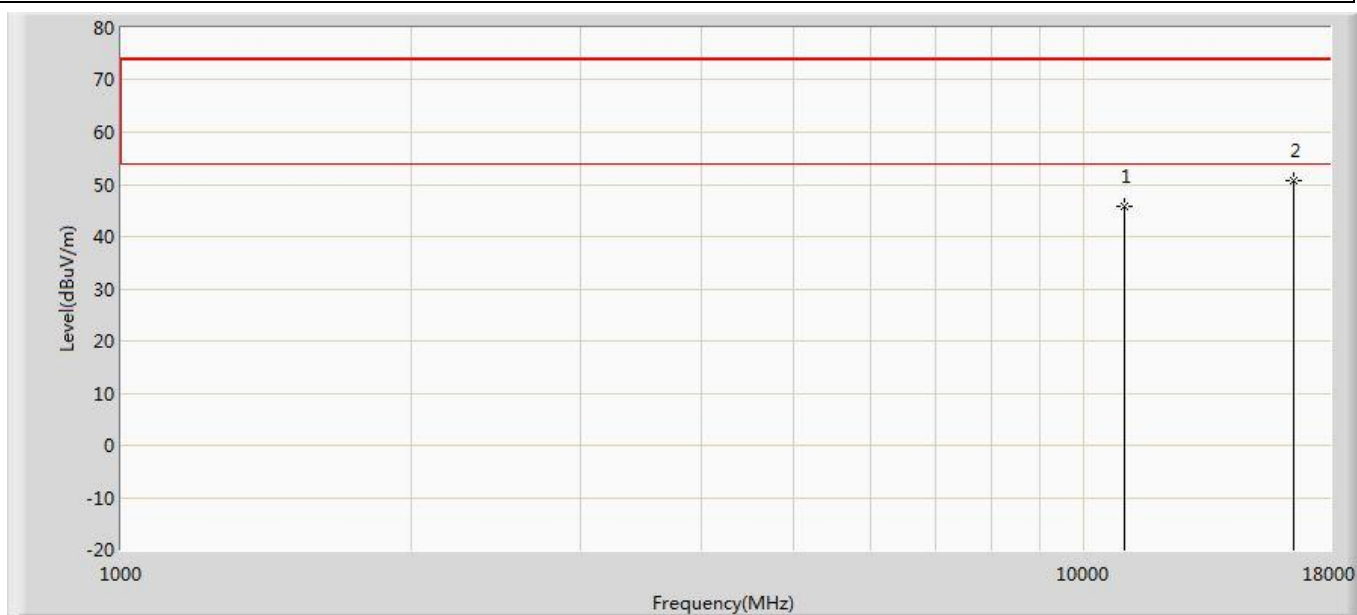


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	45.751	48.874	-28.249	74.000	-3.123	PK
2	*	16500.000	50.726	47.532	-23.274	74.000	3.195	PK

Profile: 2190372R	Page No.: 131
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5580MHz by 802.11a	

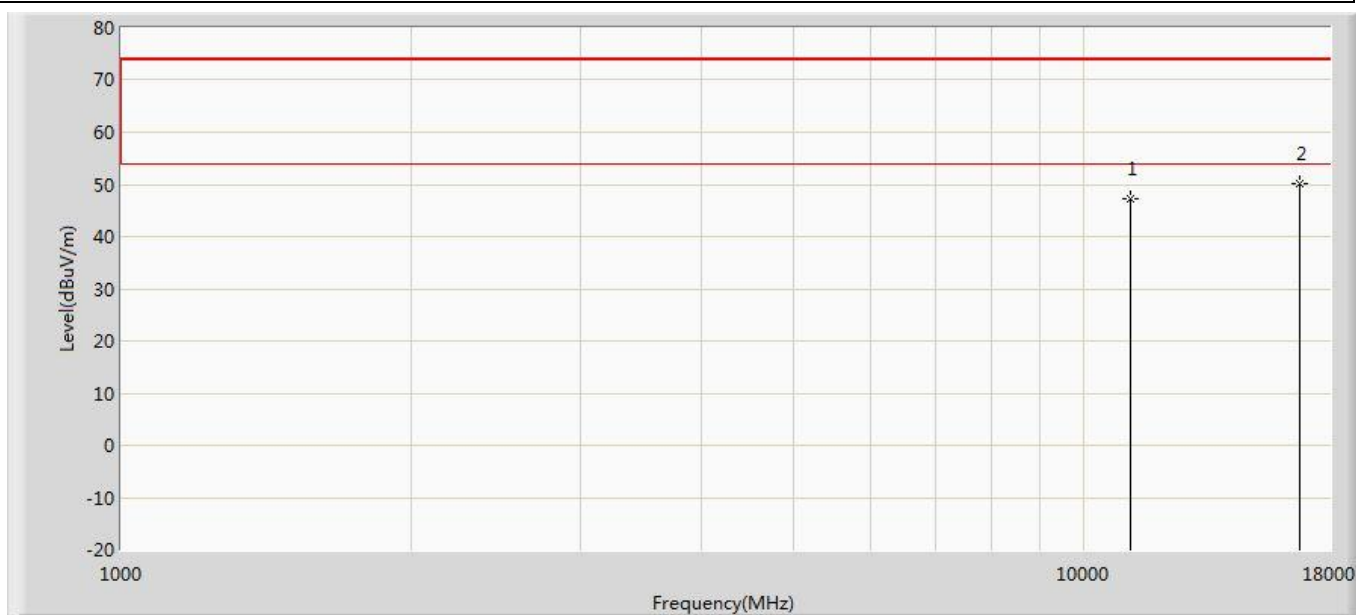


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	47.168	49.970	-26.832	74.000	-2.802	PK
2	*	16740.000	50.073	46.447	-23.927	74.000	3.626	PK

Profile: 2190372R	Page No.: 132
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5580MHz by 802.11a	

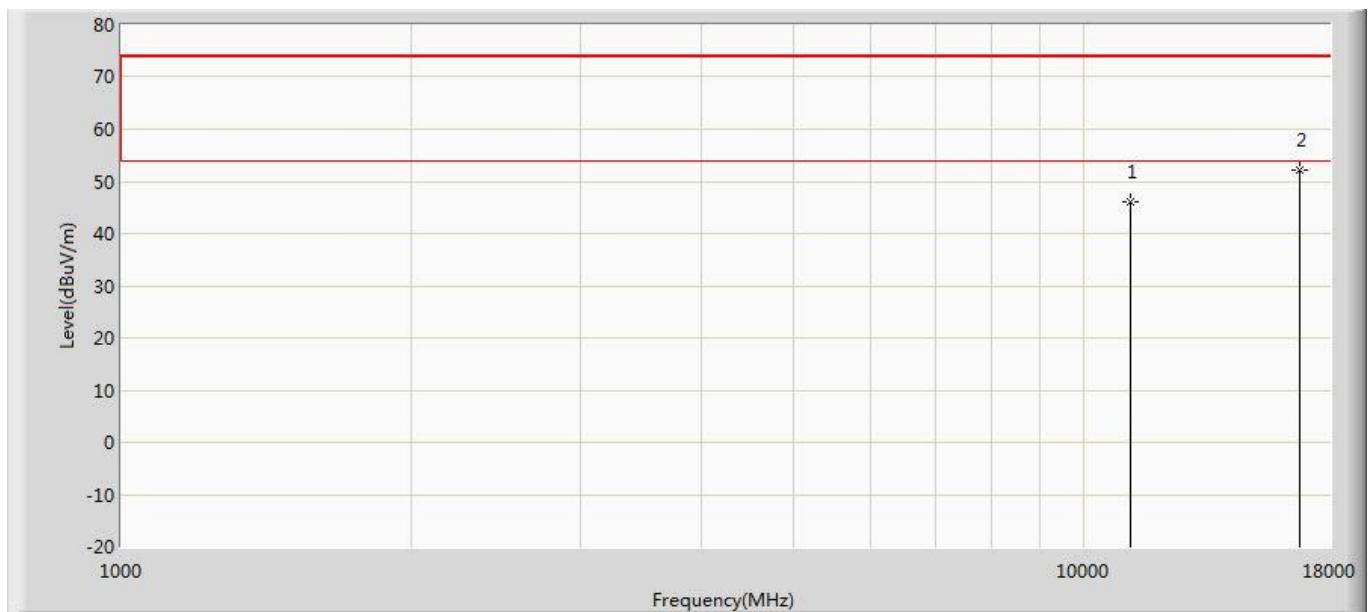


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.018	48.820	-27.982	74.000	-2.802	PK
2	*	16740.000	52.090	48.464	-21.910	74.000	3.626	PK

Profile: 2190372R	Page No.: 133
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5700MHz by 802.11a	

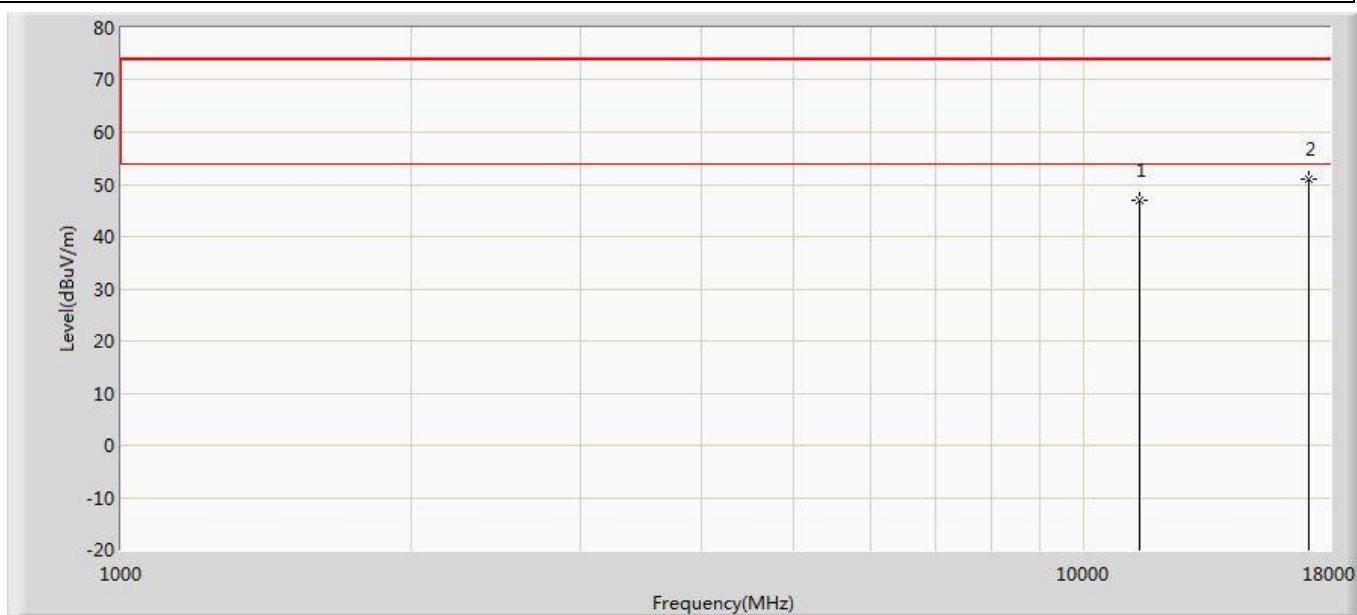


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	46.971	49.241	-27.029	74.000	-2.271	PK
2	*	17100.000	50.980	47.532	-23.020	74.000	3.448	PK

Profile: 2190372R	Page No.: 134
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5700MHz by 802.11a	

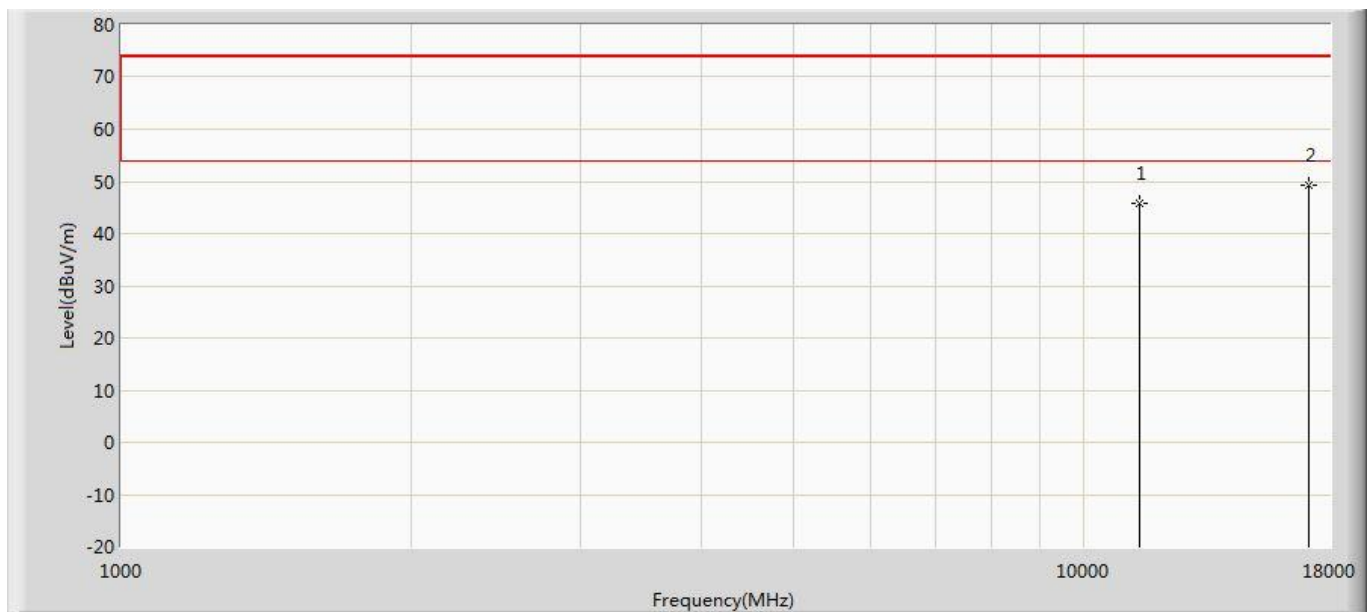


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.725	47.995	-28.275	74.000	-2.271	PK
2	*	17100.000	49.131	45.683	-24.869	74.000	3.448	PK

Profile: 2190372R	Page No.: 135
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5745MHz by 802.11a	

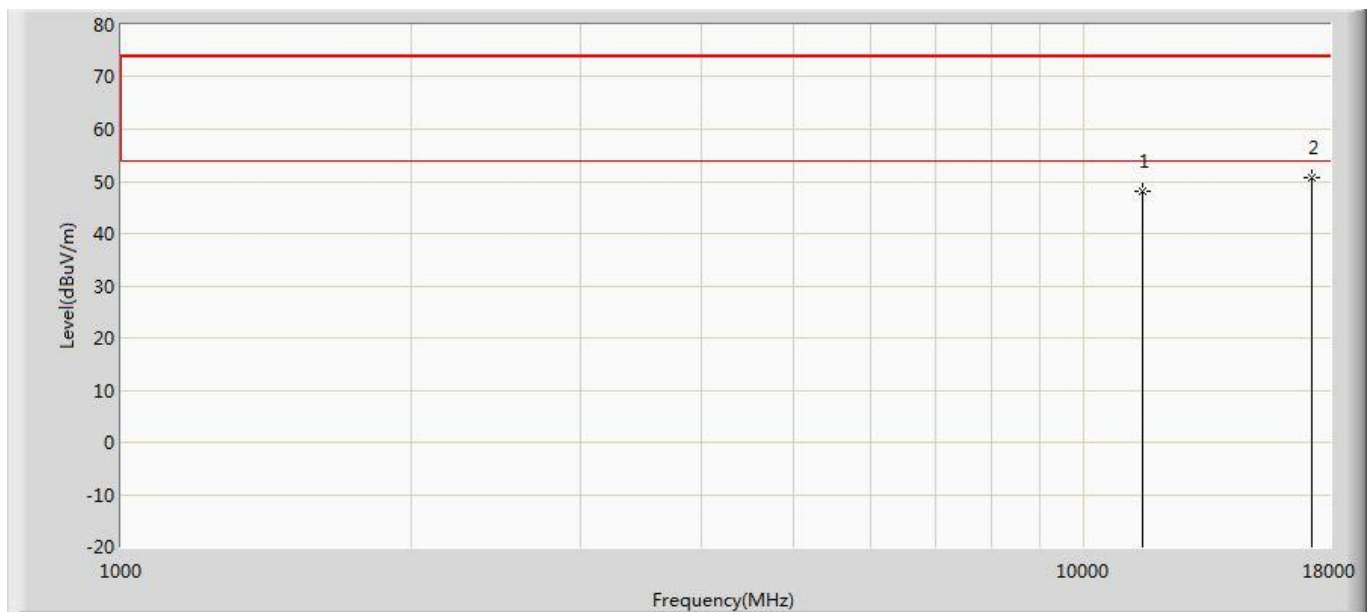


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	48.222	50.704	-25.778	74.000	-2.482	PK
2	*	17235.000	50.791	47.038	-23.209	74.000	3.753	PK

Profile: 2190372R	Page No.: 136
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5745MHz by 802.11a	

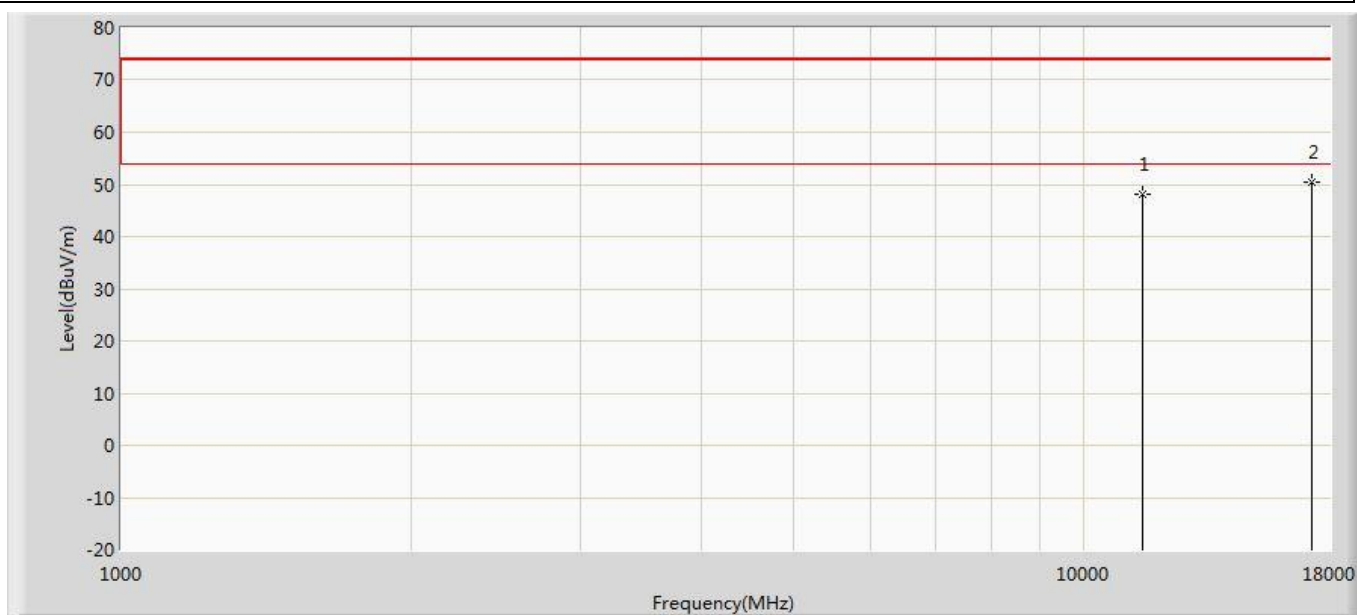


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	48.008	50.490	-25.992	74.000	-2.482	PK
2	*	17235.000	50.377	46.624	-23.623	74.000	3.753	PK

Profile: 2190372R	Page No.: 137
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5785MHz by 802.11a	

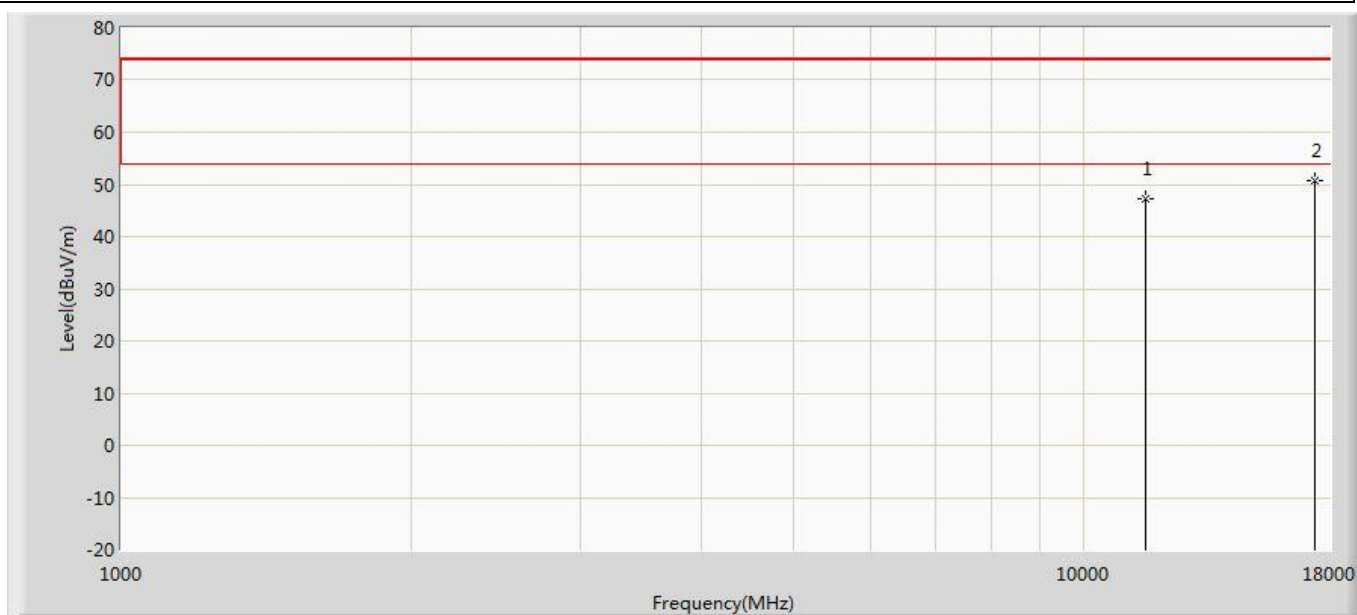


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	47.116	49.079	-26.884	74.000	-1.963	PK
2	*	17355.000	50.841	47.197	-23.159	74.000	3.643	PK

Profile: 2190372R	Page No.: 138
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5785MHz by 802.11a	

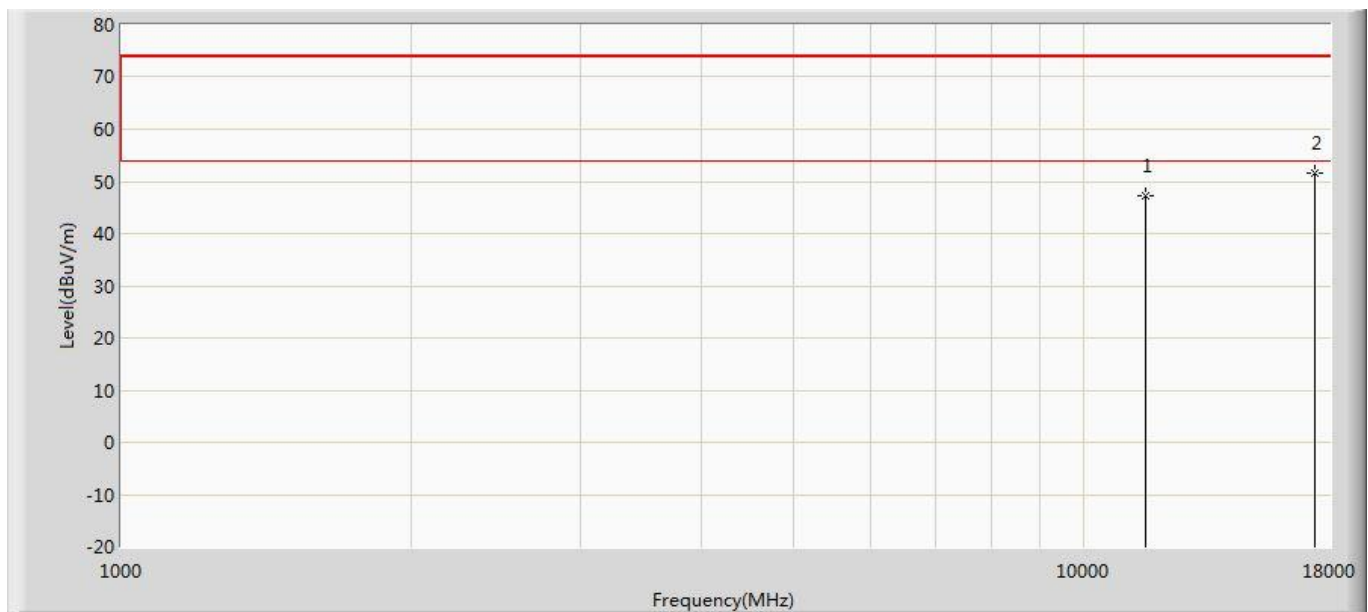


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	47.299	49.262	-26.701	74.000	-1.963	PK
2	*	17355.000	51.528	47.884	-22.472	74.000	3.643	PK

Profile: 2190372R	Page No.: 139
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5825MHz by 802.11a	

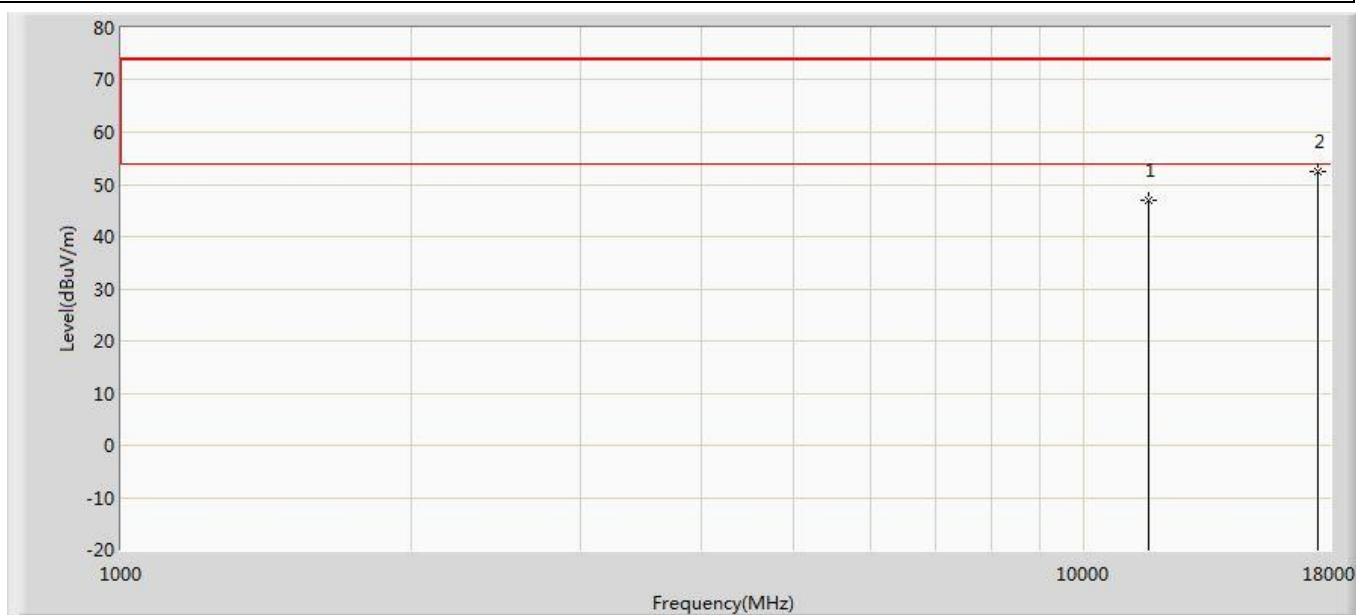


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.995	48.814	-27.005	74.000	-1.819	PK
2	*	17475.000	52.569	48.674	-21.431	74.000	3.895	PK

Profile: 2190372R	Page No.: 140
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 5825MHz by 802.11a	

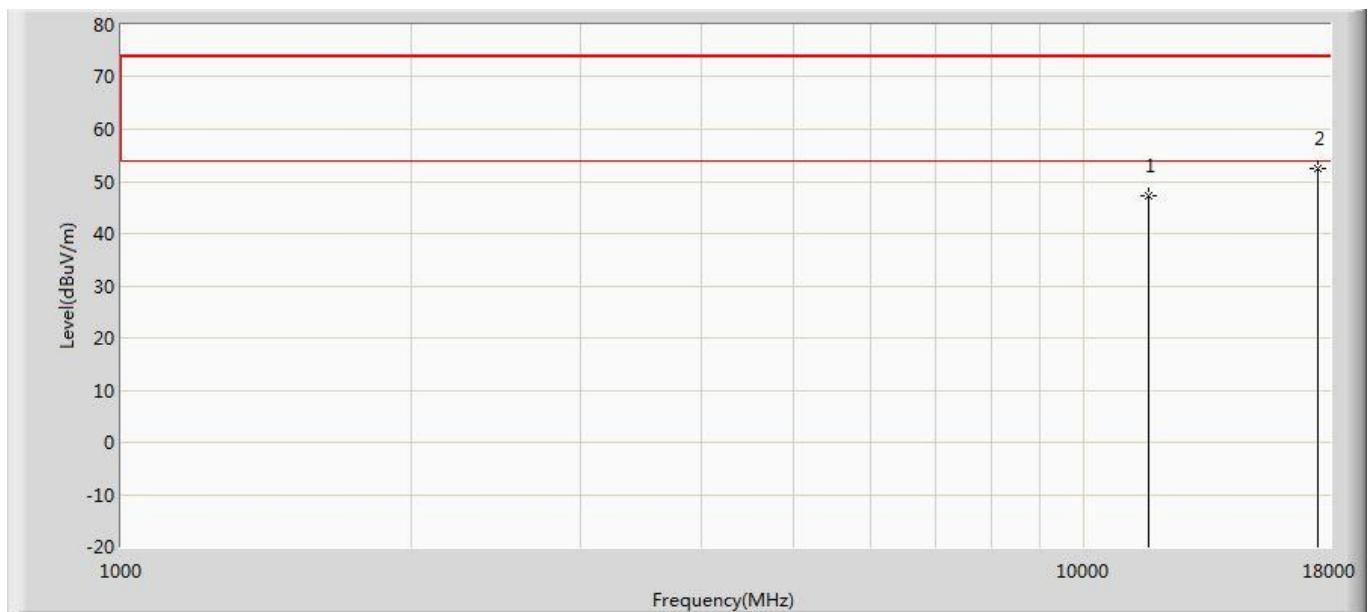


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	47.327	49.146	-26.673	74.000	-1.819	PK
2	*	17475.000	52.427	48.532	-21.573	74.000	3.895	PK

Profile: 2190372R	Page No.: 141
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5180MHz by 802.11n(20MHz)	

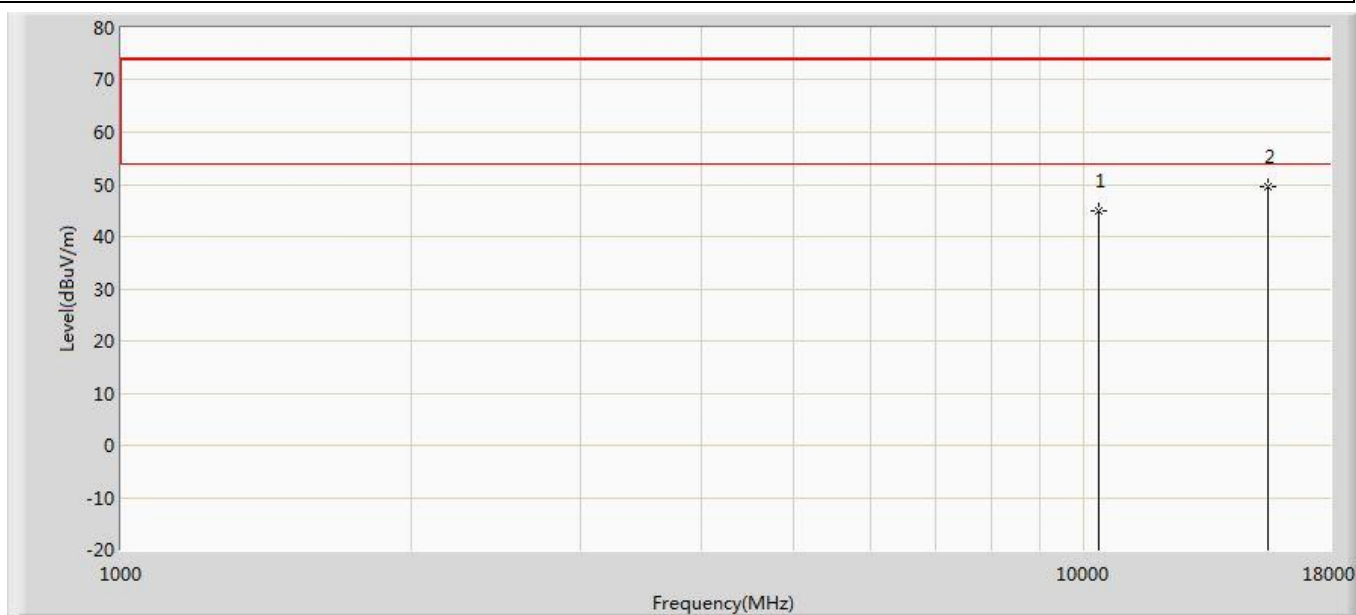


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	44.978	48.719	-29.022	74.000	-3.742	PK
2	*	15540.000	49.709	48.013	-24.291	74.000	1.695	PK

Profile: 2190372R	Page No.: 142
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5180MHz by 802.11n(20MHz)	

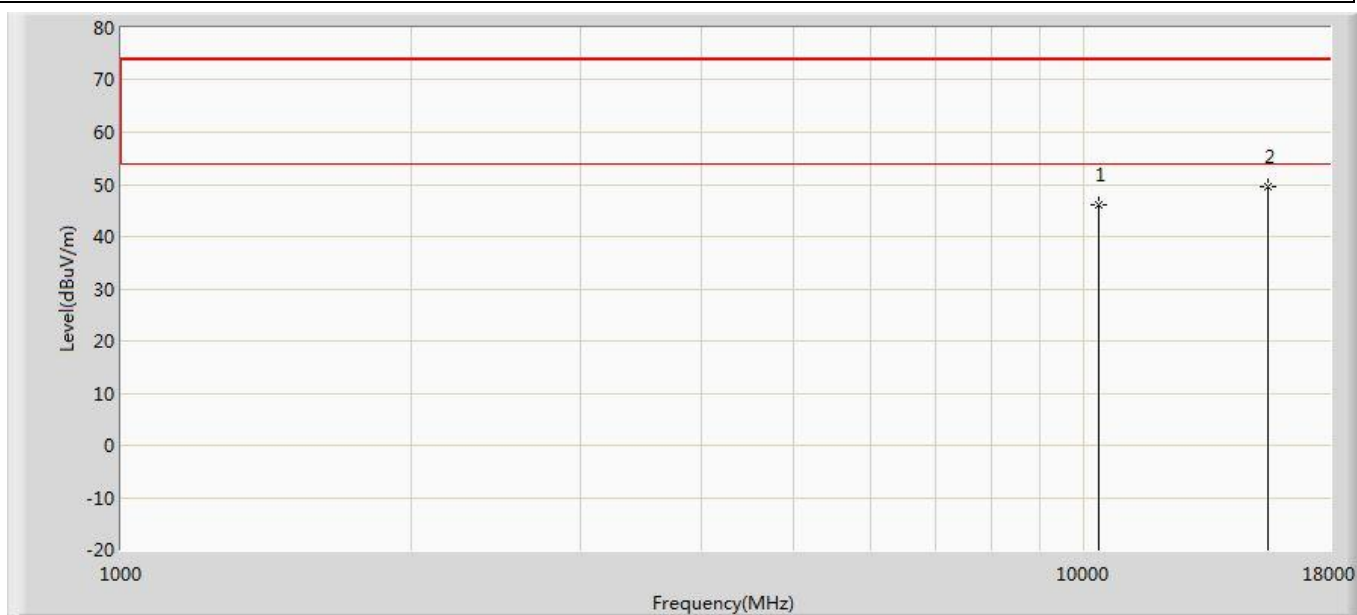


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	45.993	49.734	-28.007	74.000	-3.742	PK
2	*	15540.000	49.512	47.816	-24.488	74.000	1.695	PK

Profile: 2190372R	Page No.: 143
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5220MHz by 802.11n(20MHz)	

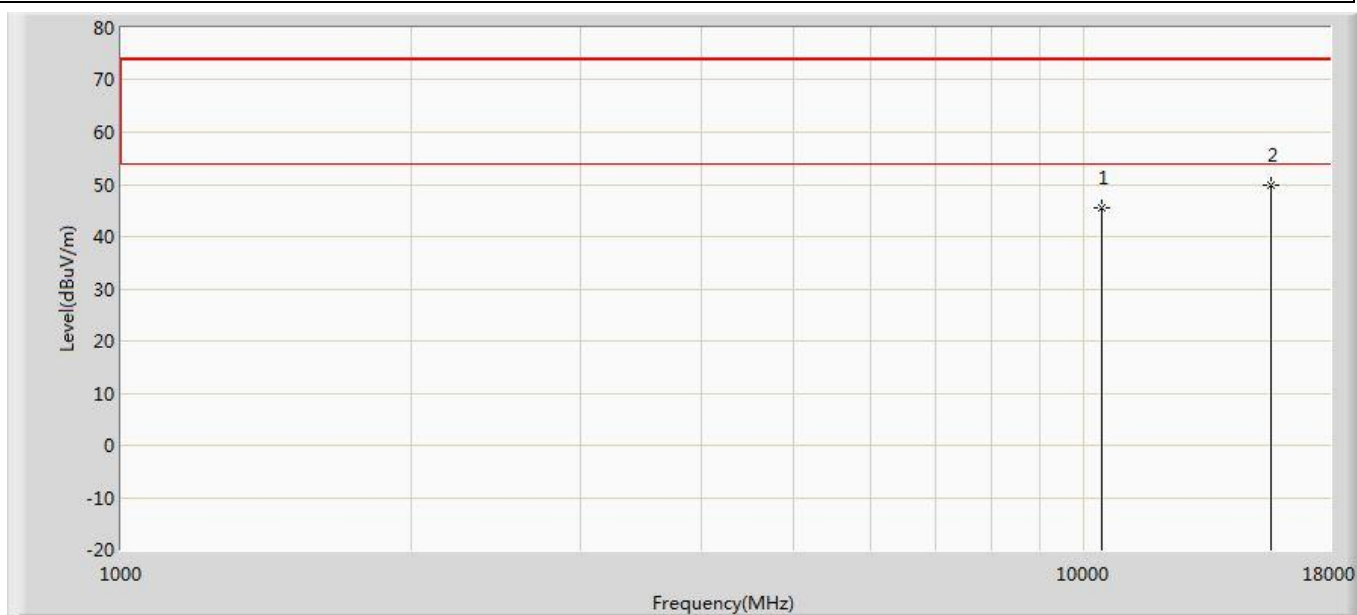


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	45.407	48.987	-28.593	74.000	-3.580	PK
2	*	15660.000	49.754	47.822	-24.246	74.000	1.933	PK

Profile: 2190372R	Page No.: 144
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5220MHz by 802.11n(20MHz)	

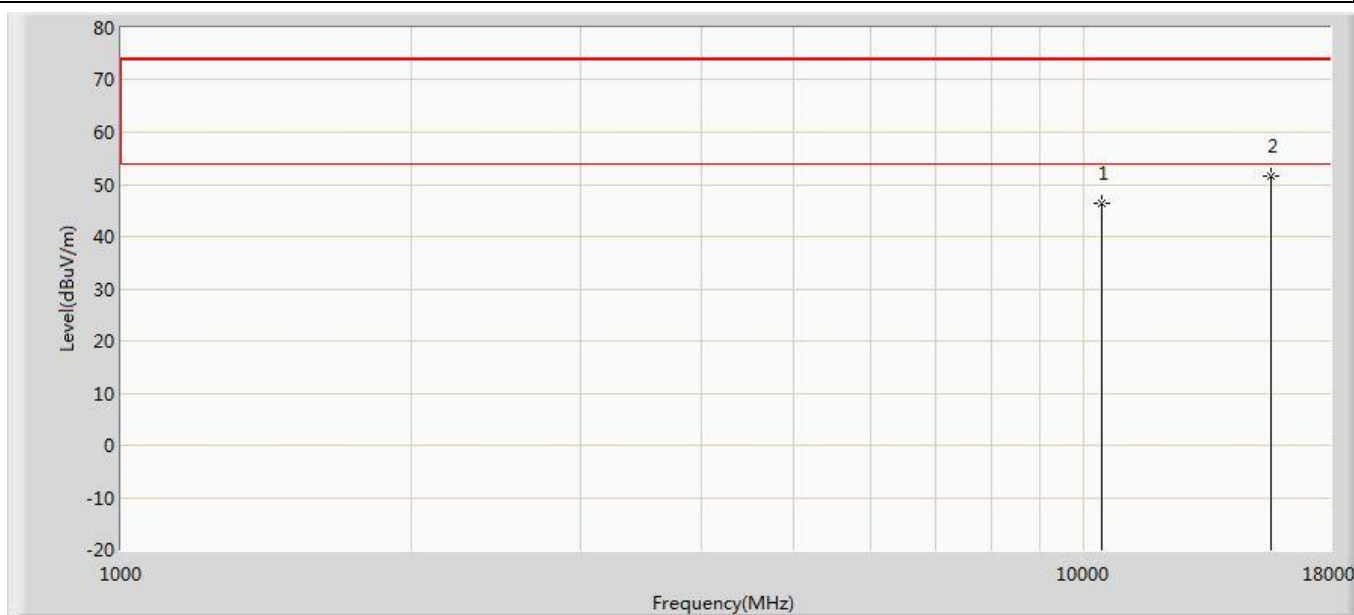


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	46.248	49.828	-27.752	74.000	-3.580	PK
2	*	15660.000	51.642	49.710	-22.358	74.000	1.933	PK

Profile: 2190372R	Page No.: 145
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5240MHz by 802.11n(20MHz)	

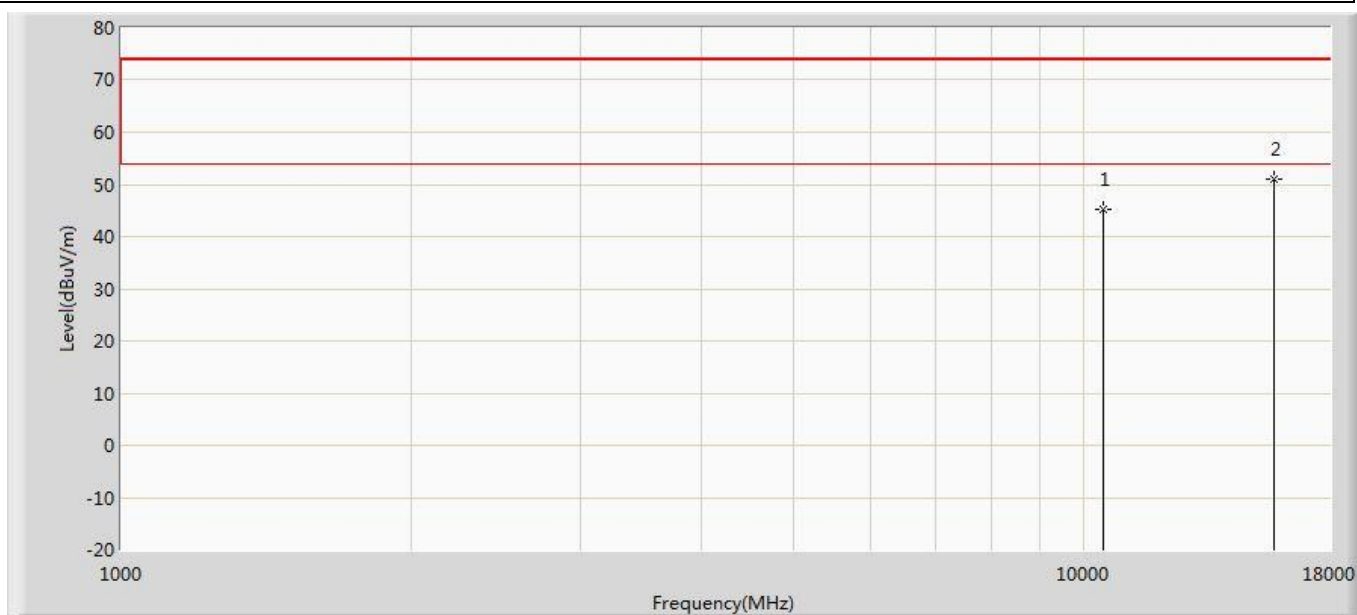


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.239	49.054	-28.761	74.000	-3.815	PK
2	*	15720.000	50.961	48.867	-23.039	74.000	2.094	PK

Profile: 2190372R	Page No.: 146
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5240MHz by 802.11n(20MHz)	

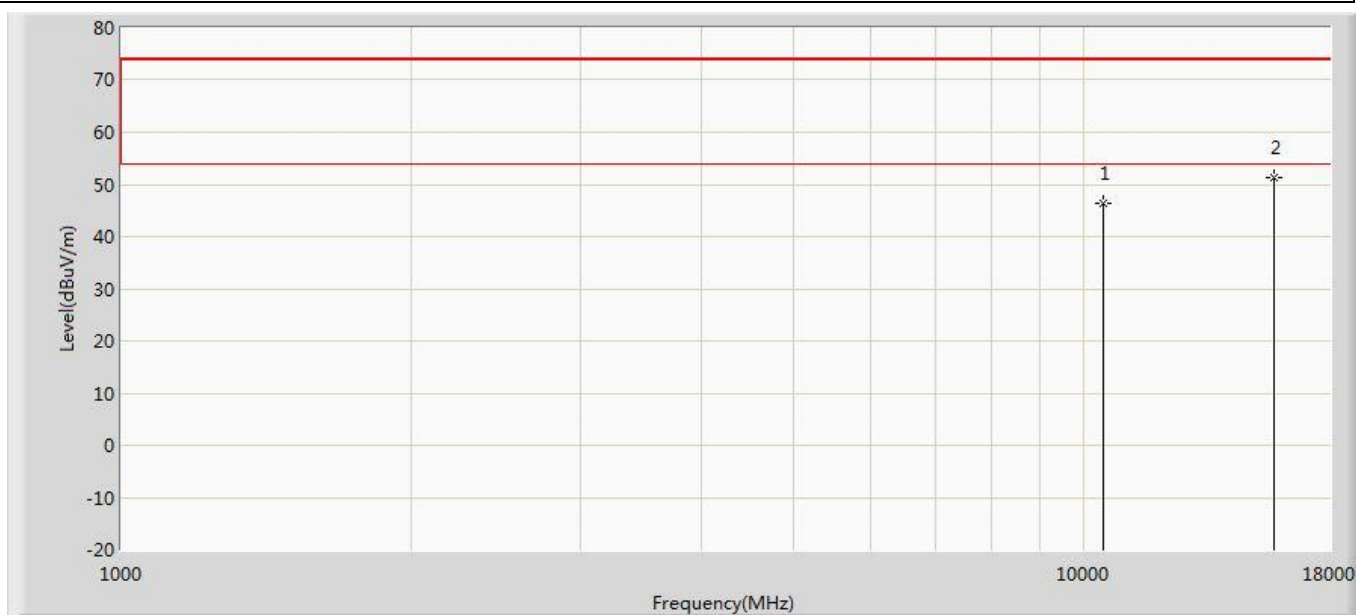


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	46.295	50.110	-27.705	74.000	-3.815	PK
2	*	15720.000	51.229	49.135	-22.771	74.000	2.094	PK

Profile: 2190372R	Page No.: 147
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5260MHz by 802.11n(20MHz)	

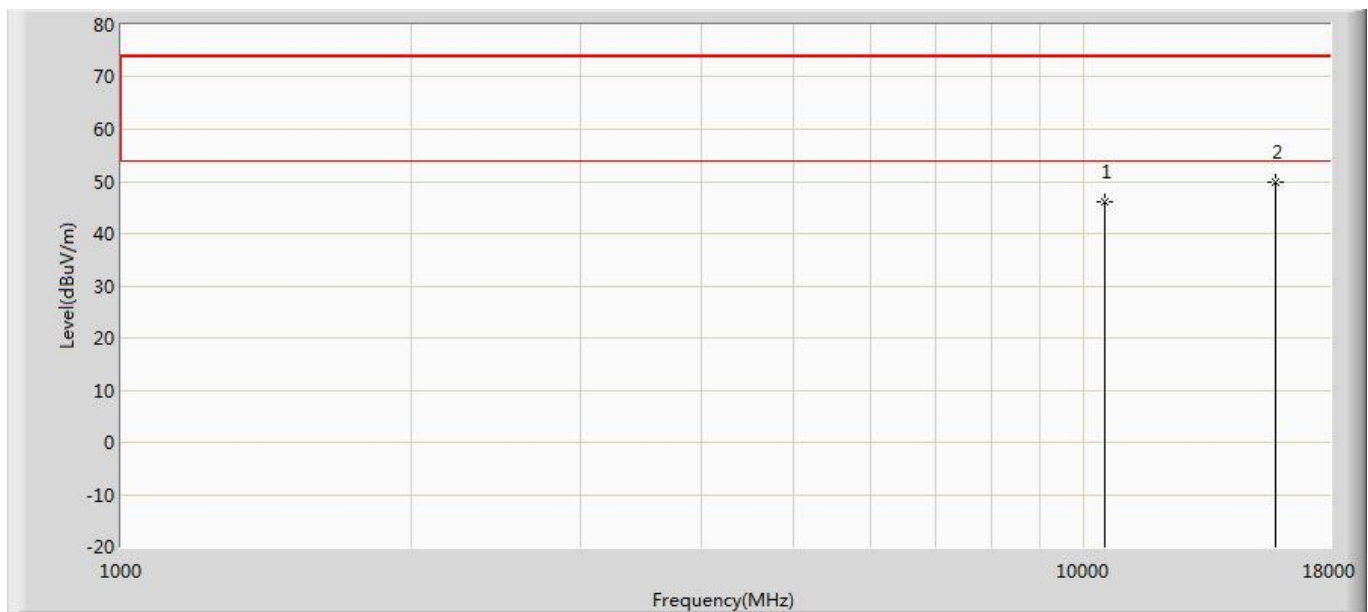


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	46.034	49.399	-27.966	74.000	-3.365	PK
2	*	15780.000	49.906	47.538	-24.094	74.000	2.369	PK

Profile: 2190372R	Page No.: 148
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5260MHz by 802.11n(20MHz)	

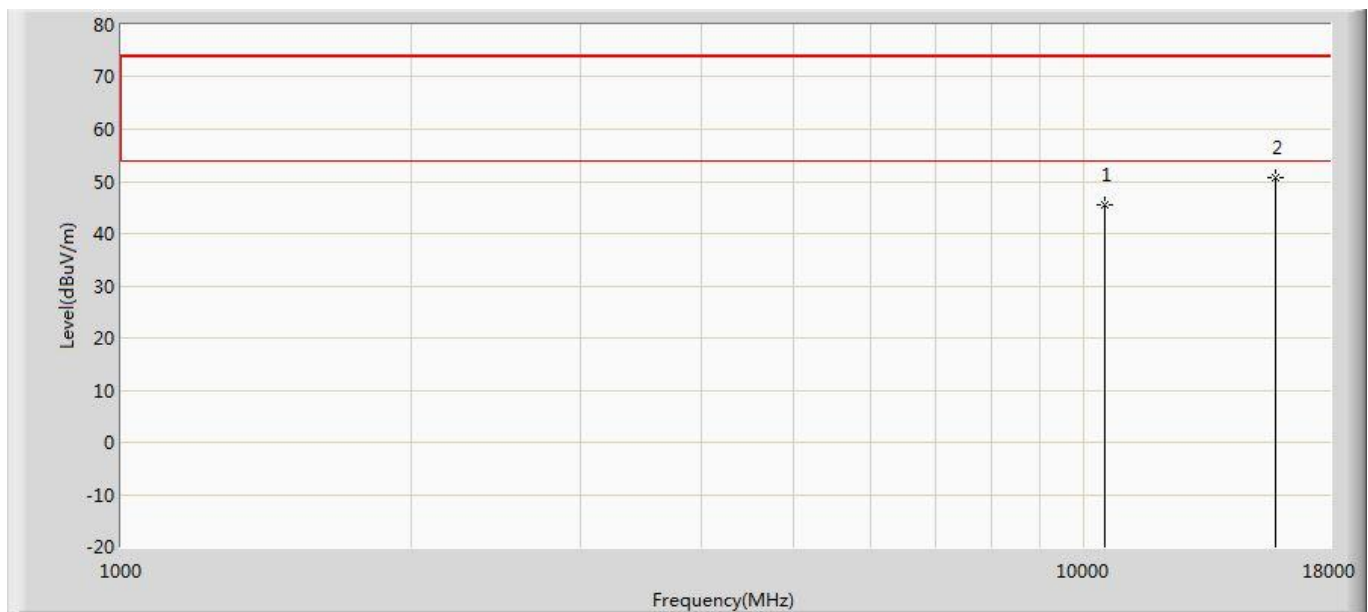


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.502	48.867	-28.498	74.000	-3.365	PK
2	*	15780.000	50.658	48.290	-23.342	74.000	2.369	PK

Profile: 2190372R	Page No.: 149
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5300MHz by 802.11n(20MHz)	

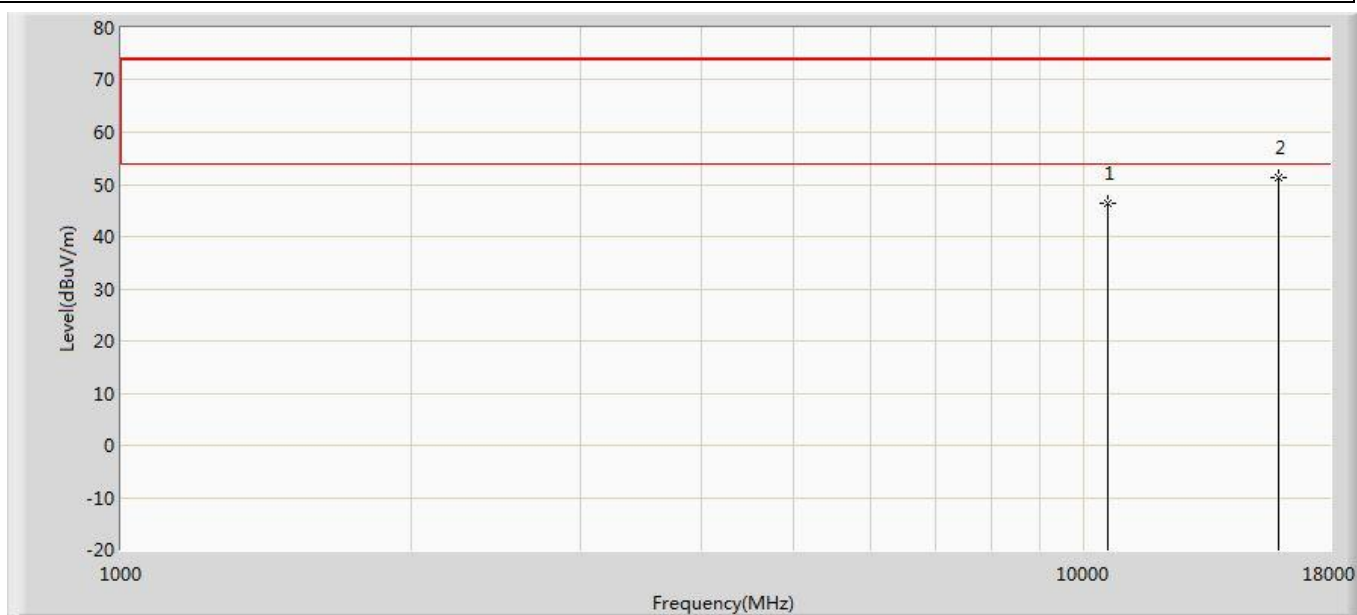


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	46.462	50.205	-27.538	74.000	-3.743	PK
2	*	15900.000	51.371	48.477	-22.629	74.000	2.894	PK

Profile: 2190372R	Page No.: 150
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5300MHz by 802.11n(20MHz)	

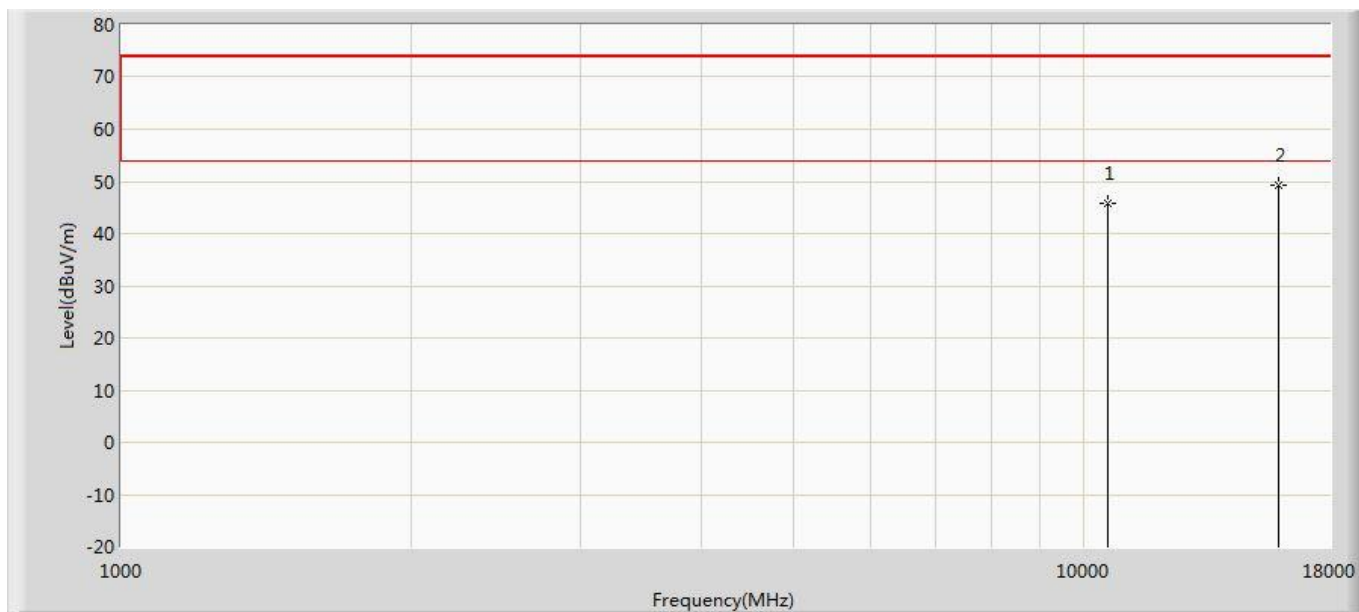


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	45.691	49.434	-28.309	74.000	-3.743	PK
2	*	15900.000	49.389	46.495	-24.611	74.000	2.894	PK

Profile: 2190372R	Page No.: 151
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5320MHz by 802.11n(20MHz)	

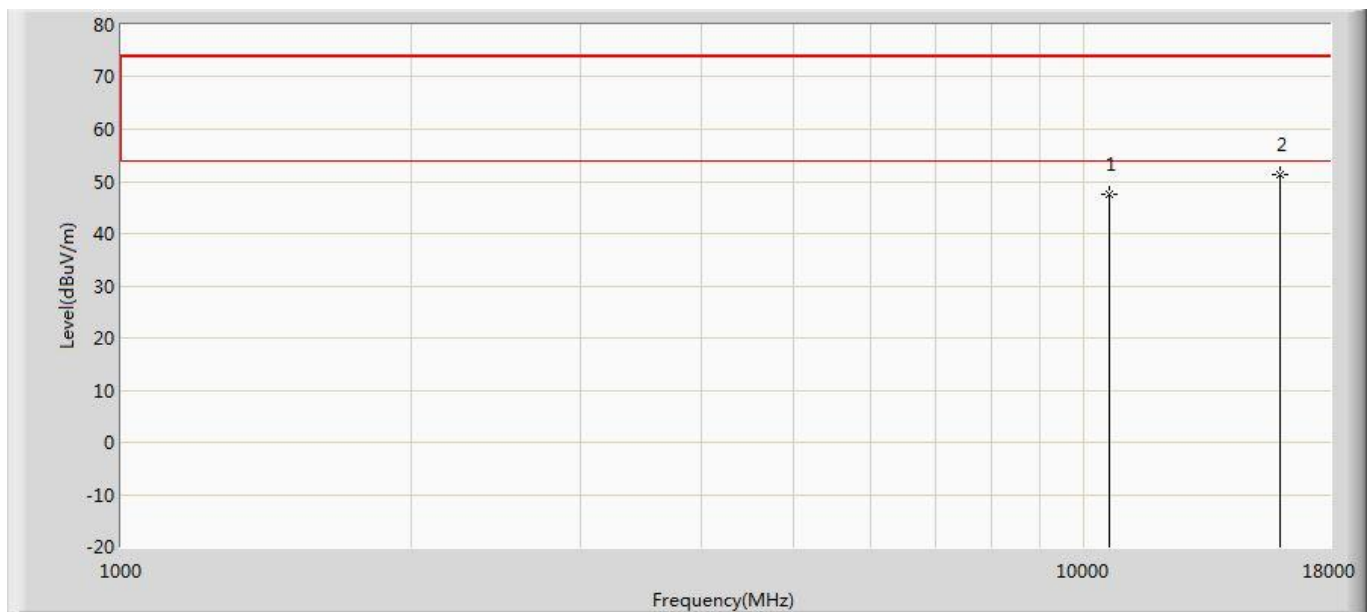


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	47.576	51.299	-26.424	74.000	-3.723	PK
2	*	15960.000	51.420	49.367	-22.580	74.000	2.053	PK

Profile: 2190372R	Page No.: 152
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5320MHz by 802.11n(20MHz)	

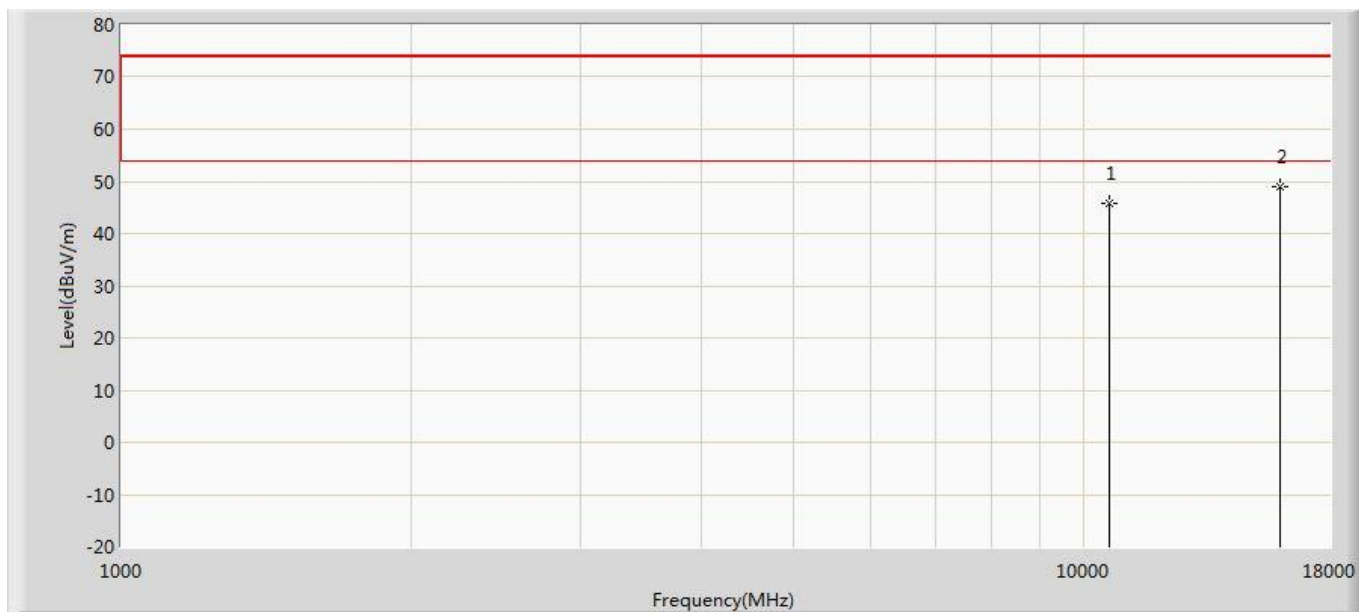


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	45.867	49.590	-28.133	74.000	-3.723	PK
2	*	15960.000	49.087	47.034	-24.913	74.000	2.053	PK

Profile: 2190372R	Page No.: 153
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5500MHz by 802.11n(20MHz)	

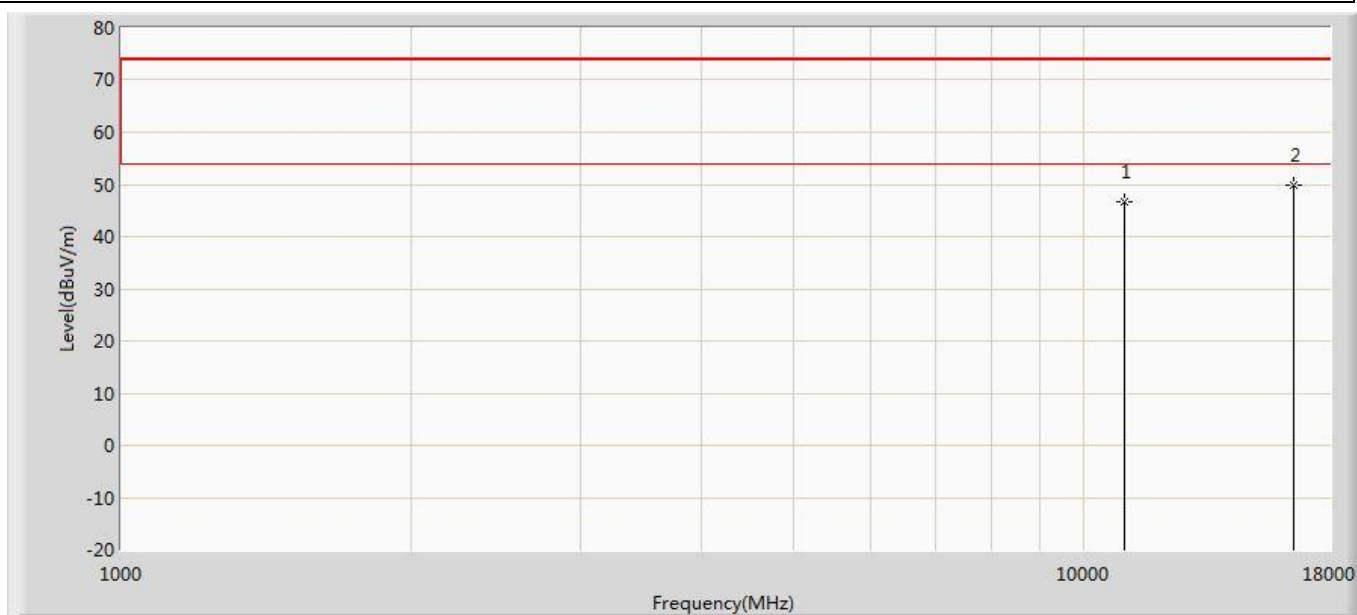


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	46.793	49.916	-27.207	74.000	-3.123	PK
2	*	16500.000	49.880	46.686	-24.120	74.000	3.195	PK

Profile: 2190372R	Page No.: 154
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5500MHz by 802.11n(20MHz)	

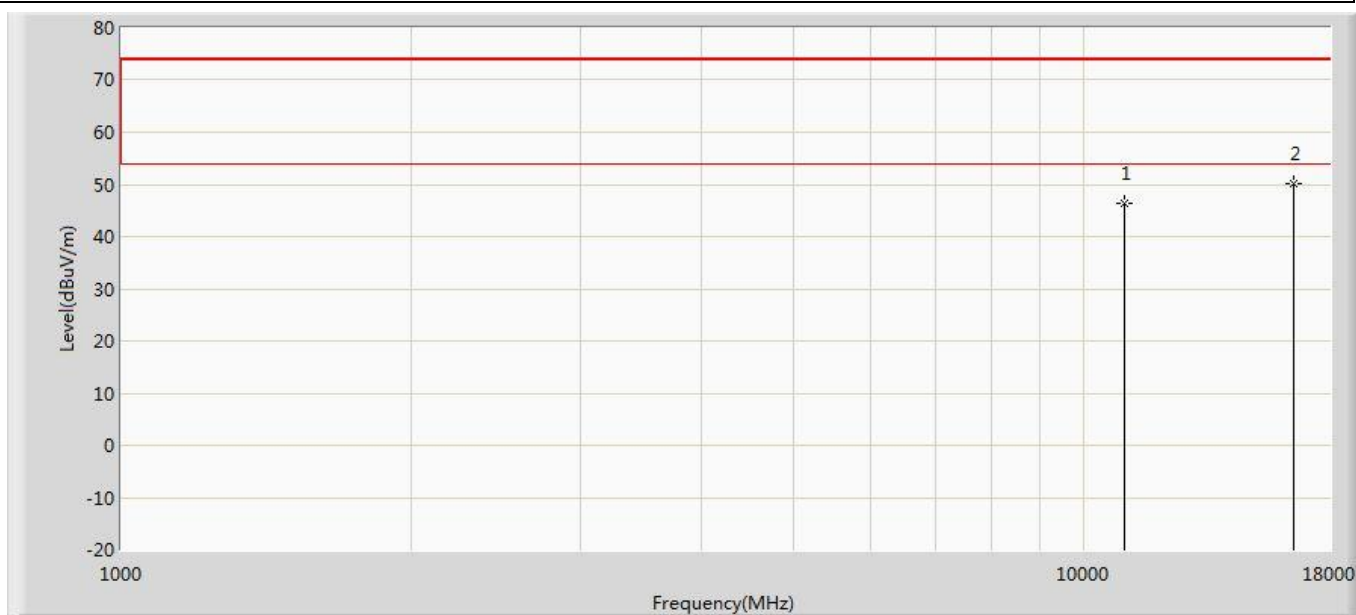


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	46.298	49.421	-27.702	74.000	-3.123	PK
2	*	16500.000	50.264	47.070	-23.736	74.000	3.195	PK

Profile: 2190372R	Page No.: 155
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5580MHz by 802.11n(20MHz)	

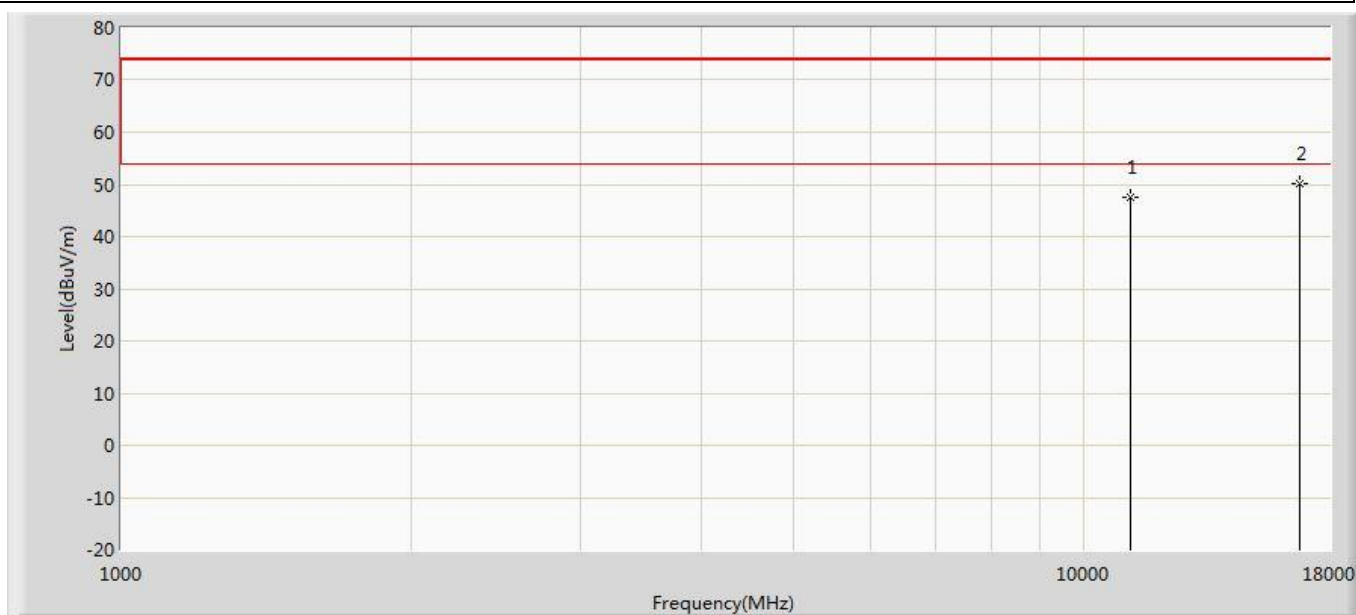


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	47.526	50.328	-26.474	74.000	-2.802	PK
2	*	16740.000	50.056	46.430	-23.944	74.000	3.626	PK

Profile: 2190372R	Page No.: 156
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5580MHz by 802.11n(20MHz)	

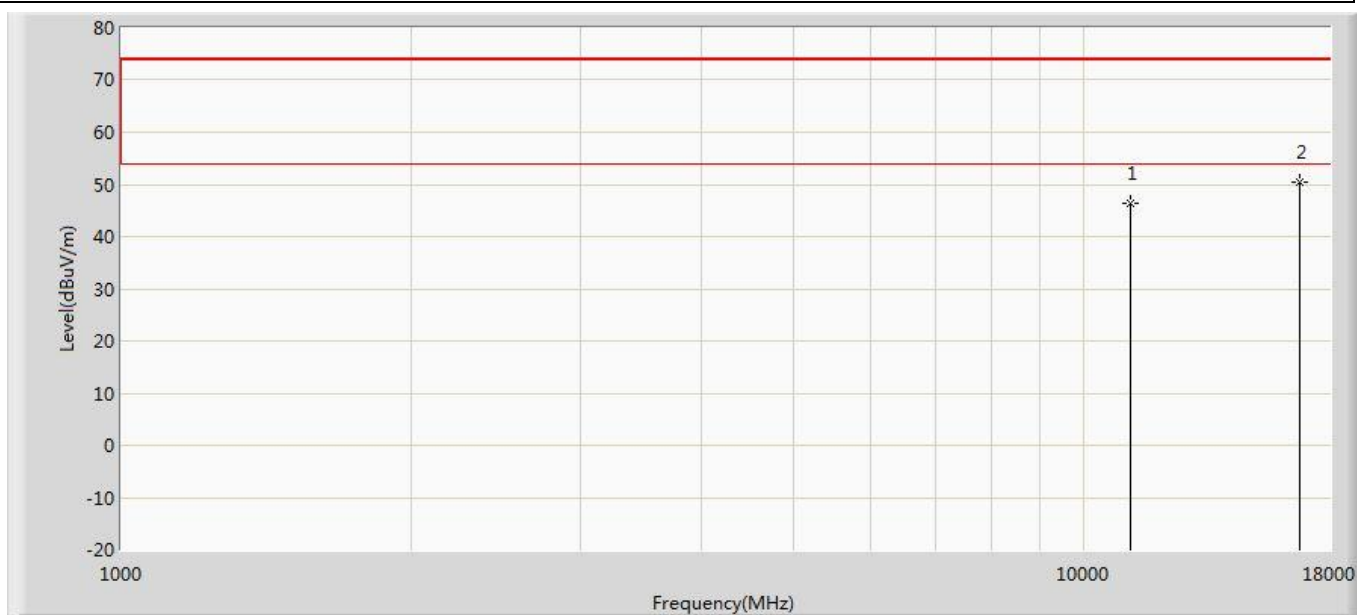


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.243	49.045	-27.757	74.000	-2.802	PK
2	*	16740.000	50.331	46.705	-23.669	74.000	3.626	PK

Profile: 2190372R	Page No.: 157
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5700MHz by 802.11n(20MHz)	

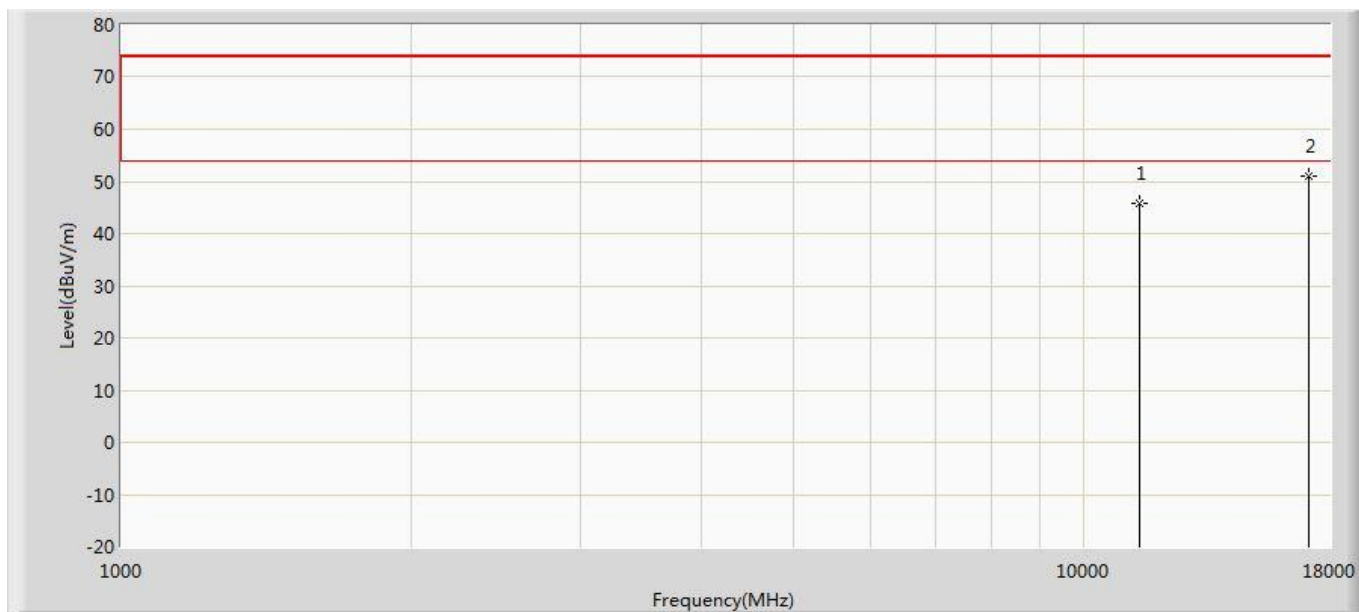


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.800	48.070	-28.200	74.000	-2.271	PK
2	*	17100.000	50.974	47.526	-23.026	74.000	3.448	PK

Profile: 2190372R	Page No.: 158
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5700MHz by 802.11n(20MHz)	

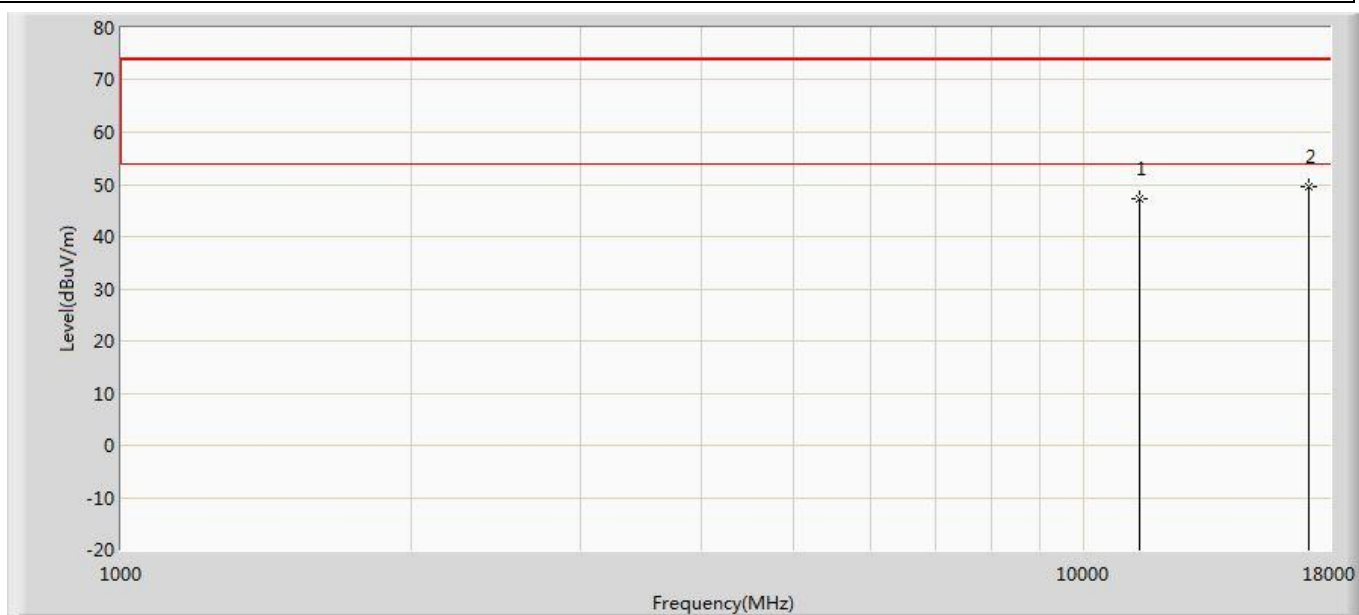


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	47.110	49.380	-26.890	74.000	-2.271	PK
2	*	17100.000	49.561	46.113	-24.439	74.000	3.448	PK

Profile: 2190372R	Page No.: 159
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	

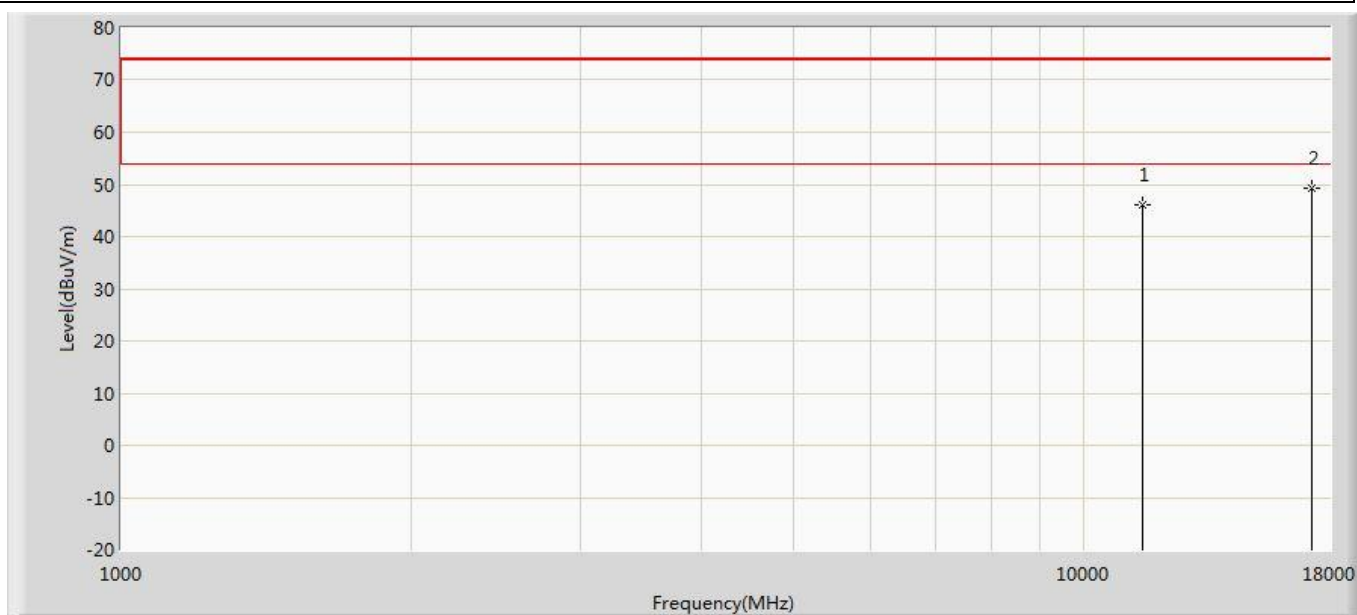


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	46.221	48.703	-27.779	74.000	-2.482	PK
2	*	17235.000	49.334	45.581	-24.666	74.000	3.753	PK

Profile: 2190372R	Page No.: 160
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	

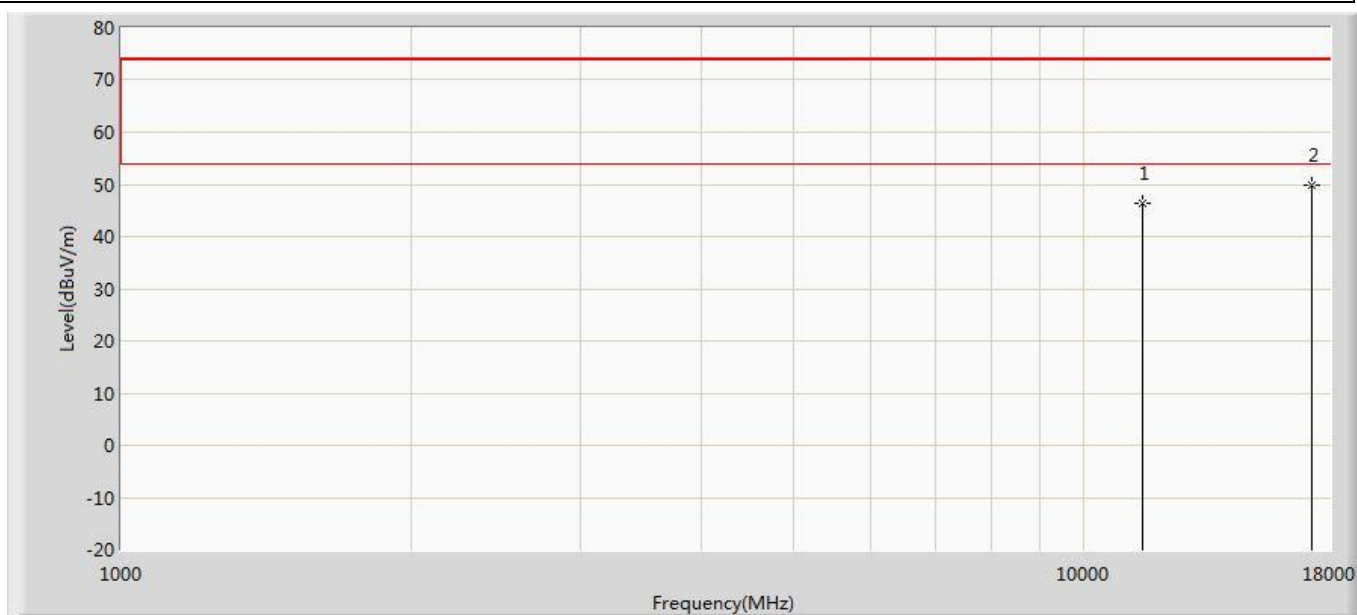


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	46.457	48.939	-27.543	74.000	-2.482	PK
2	*	17235.000	49.774	46.021	-24.226	74.000	3.753	PK

Profile: 2190372R	Page No.: 161
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	

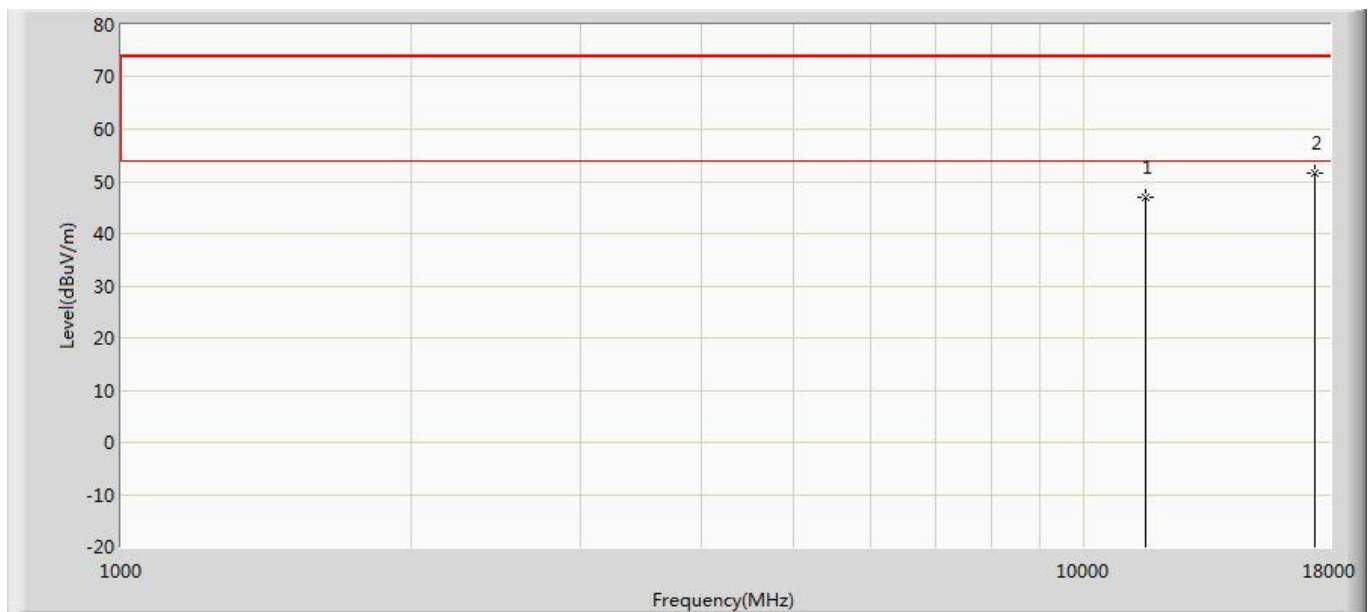


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.934	48.897	-27.066	74.000	-1.963	PK
2	*	17355.000	51.668	48.024	-22.332	74.000	3.643	PK

Profile: 2190372R	Page No.: 162
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	

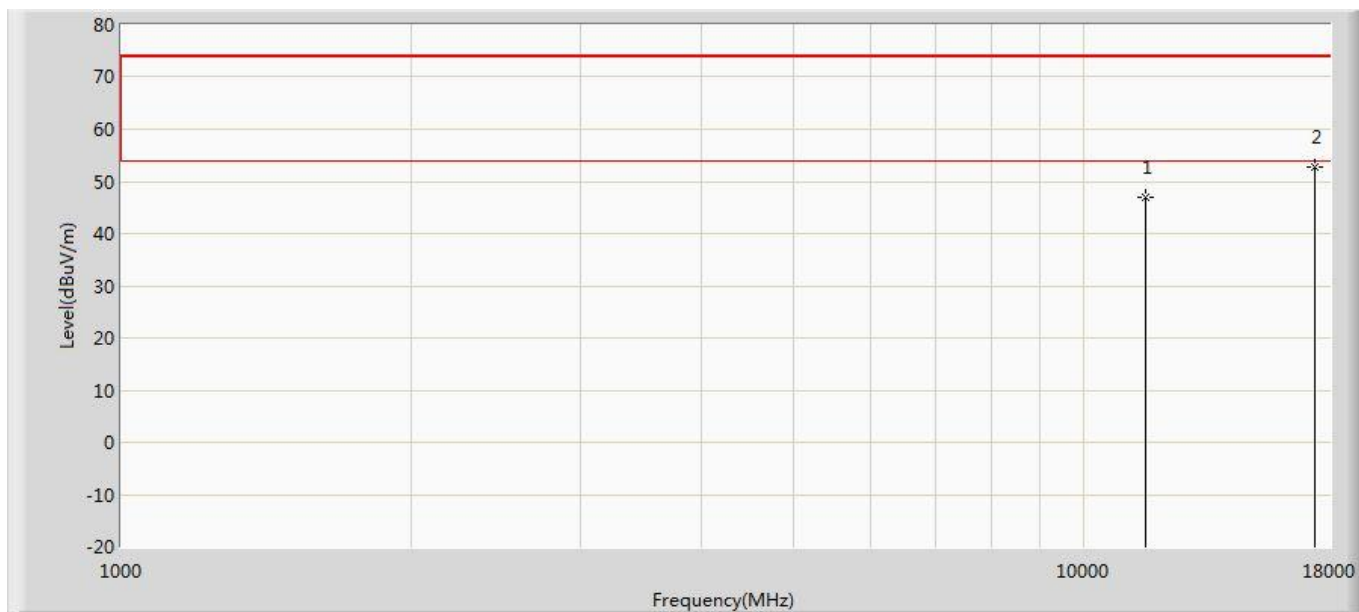


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	47.040	49.003	-26.960	74.000	-1.963	PK
2	*	17355.000	52.742	49.098	-21.258	74.000	3.643	PK

Profile: 2190372R	Page No.: 163
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	

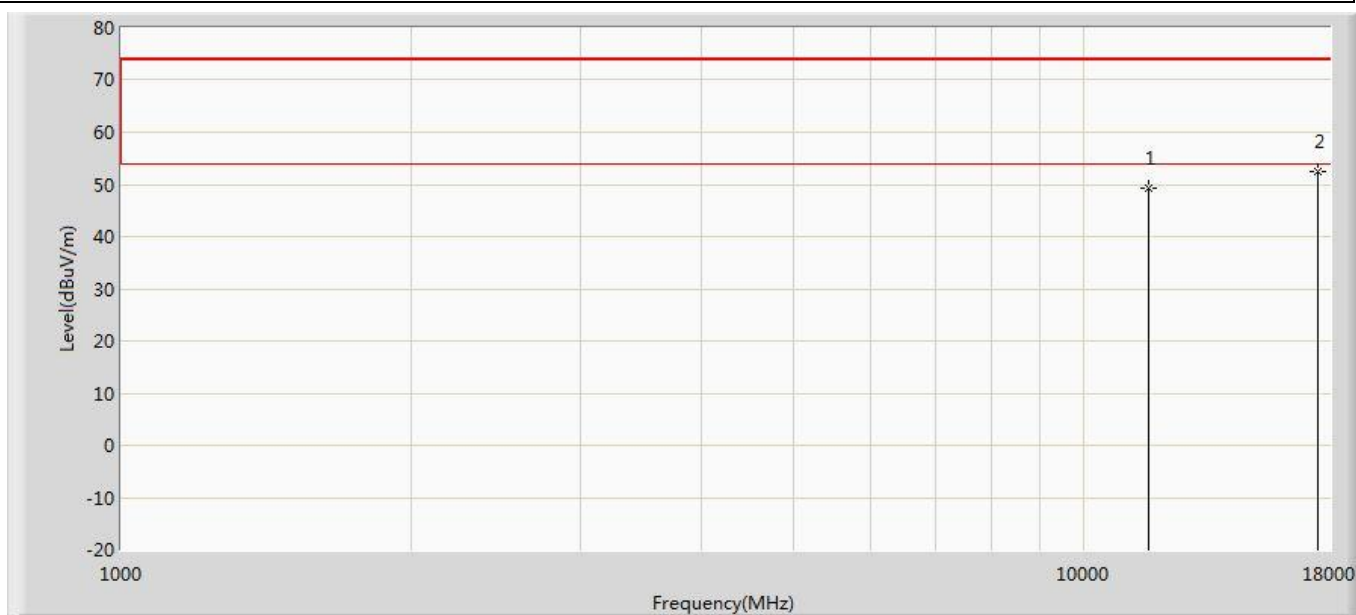


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	49.281	51.100	-24.719	74.000	-1.819	PK
2	*	17475.000	52.412	48.517	-21.588	74.000	3.895	PK

Profile: 2190372R	Page No.: 164
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	

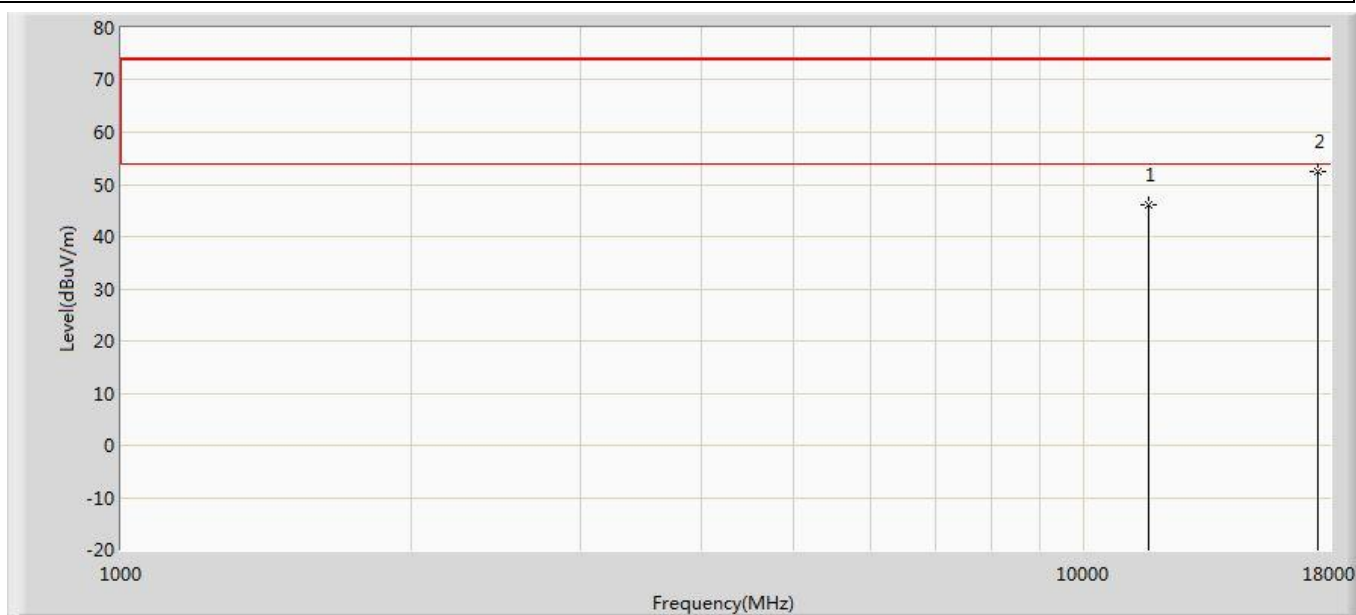


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.056	47.875	-27.944	74.000	-1.819	PK
2	*	17475.000	52.539	48.644	-21.461	74.000	3.895	PK

Profile: 2190372R	Page No.: 165
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	

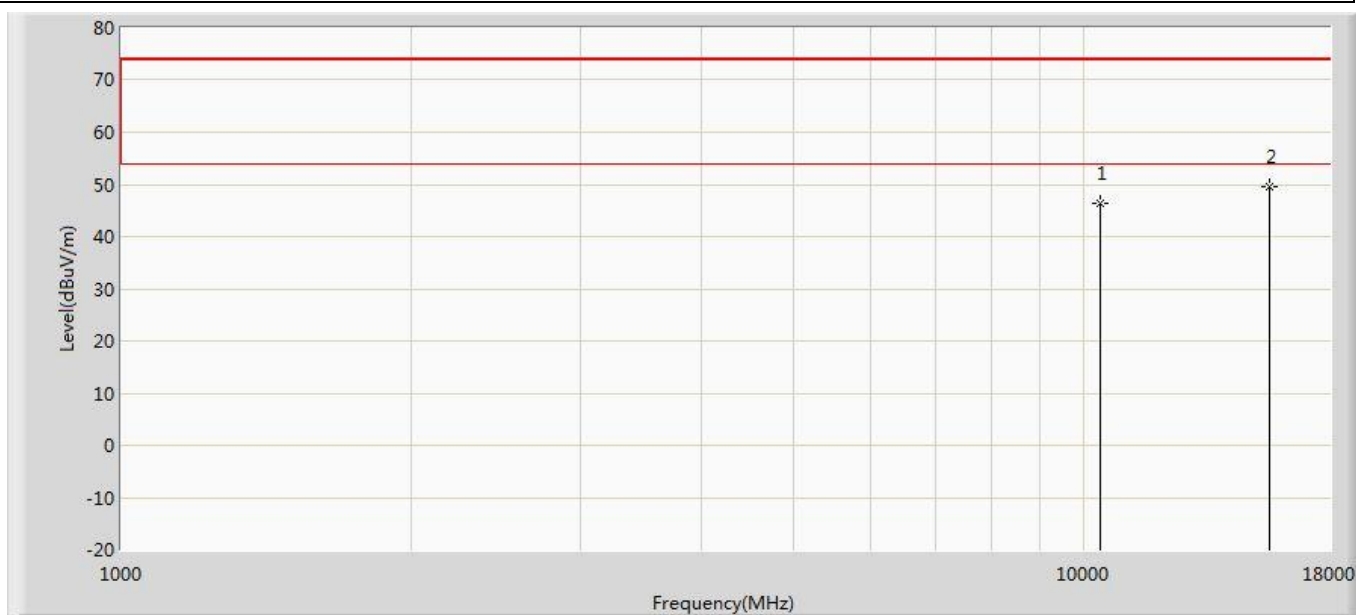


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	46.248	50.332	-27.752	74.000	-4.083	PK
2	*	15570.000	49.702	47.615	-24.298	74.000	2.086	PK

Profile: 2190372R	Page No.: 166
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	

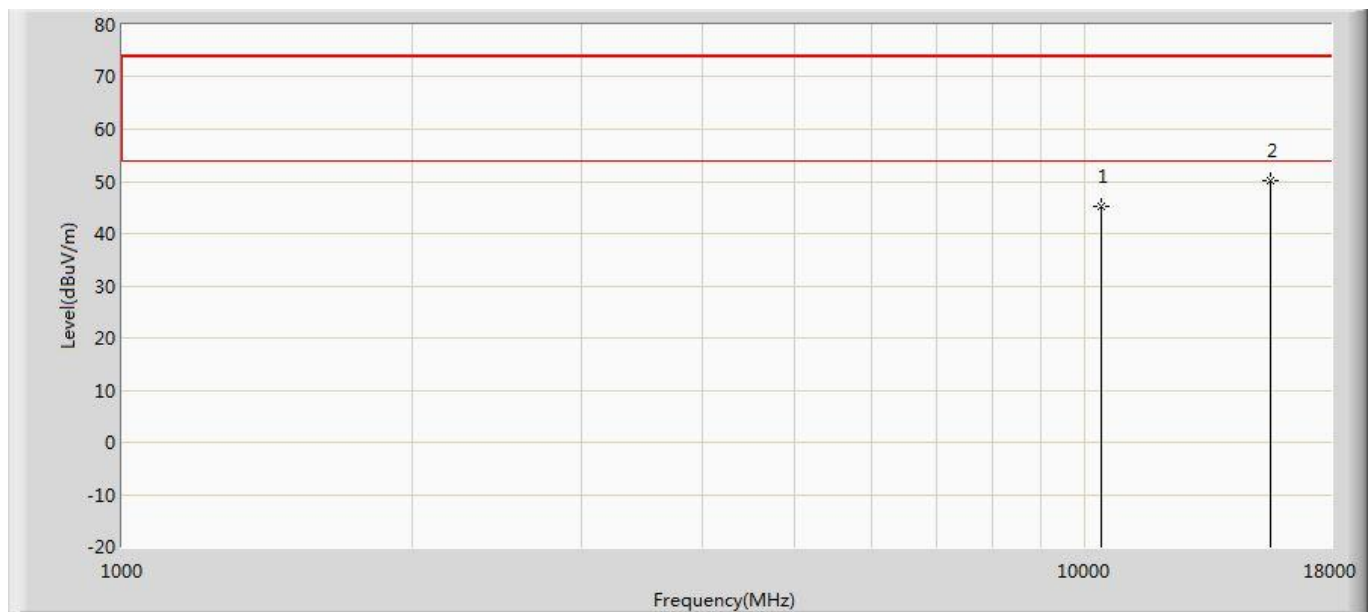


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	45.078	49.162	-28.922	74.000	-4.083	PK
2	*	15570.000	50.213	48.126	-23.787	74.000	2.086	PK

Profile: 2190372R	Page No.: 167
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5230MHz by 802.11n(40MHz)	

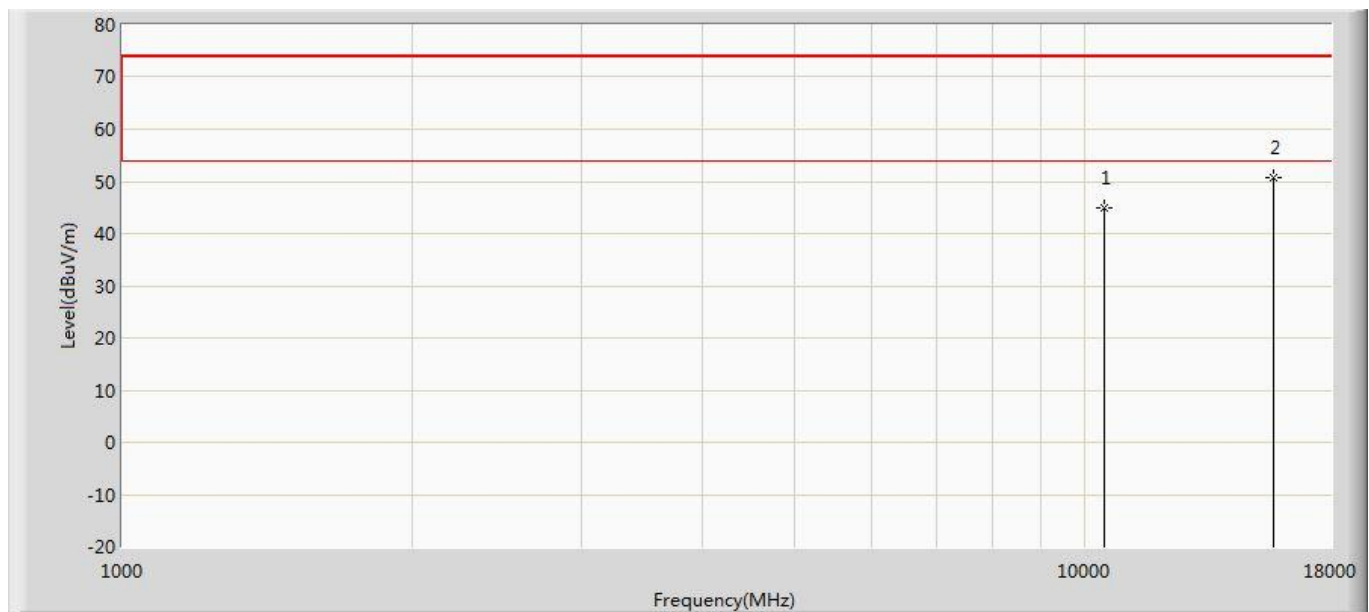


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	44.881	48.827	-29.119	74.000	-3.946	PK
2	*	15690.000	50.688	48.417	-23.312	74.000	2.271	PK

Profile: 2190372R	Page No.: 168
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5230MHz by 802.11n(40MHz)	

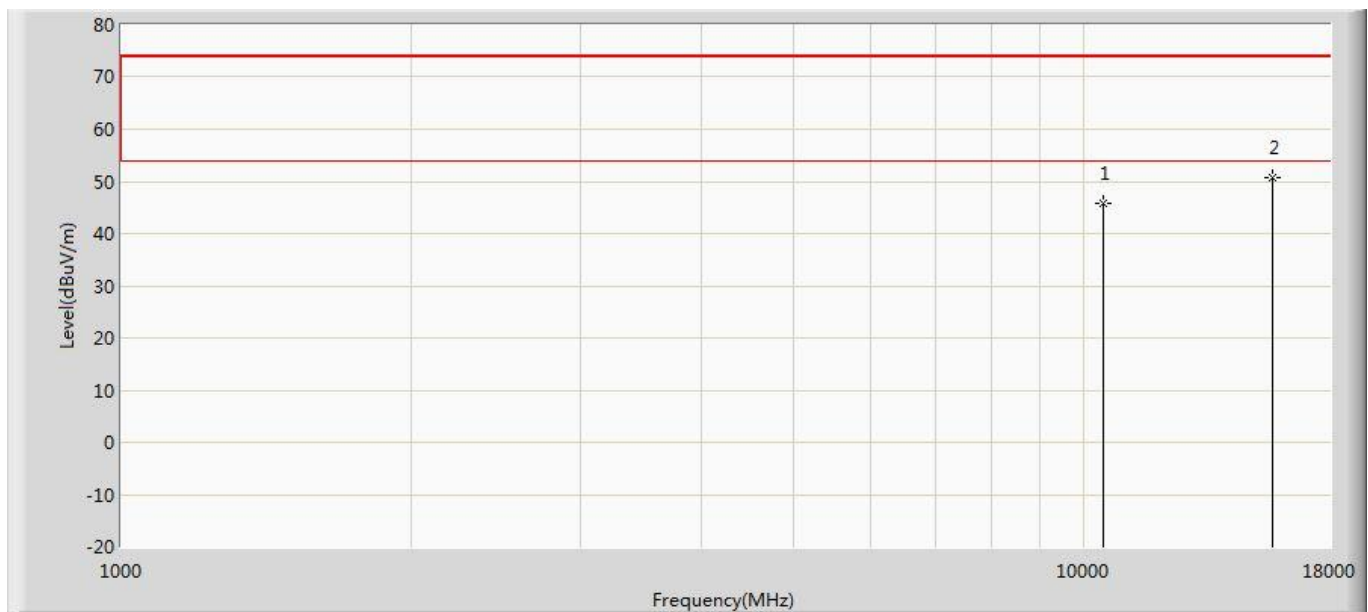


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	45.814	49.760	-28.186	74.000	-3.946	PK
2	*	15690.000	50.683	48.412	-23.317	74.000	2.271	PK

Profile: 2190372R	Page No.: 169
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5270MHz by 802.11n(40MHz)	

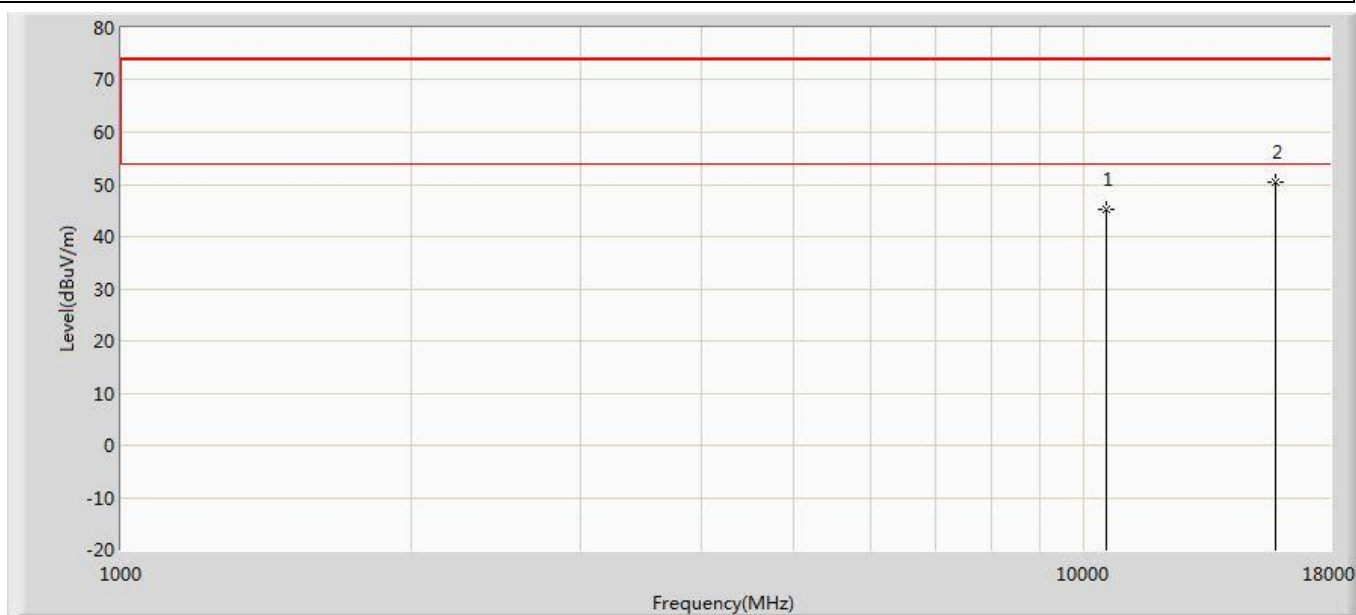


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	45.074	49.093	-28.926	74.000	-4.019	PK
2	*	15810.000	50.419	48.319	-23.581	74.000	2.100	PK

Profile: 2190372R	Page No.: 170
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5270MHz by 802.11n(40MHz)	

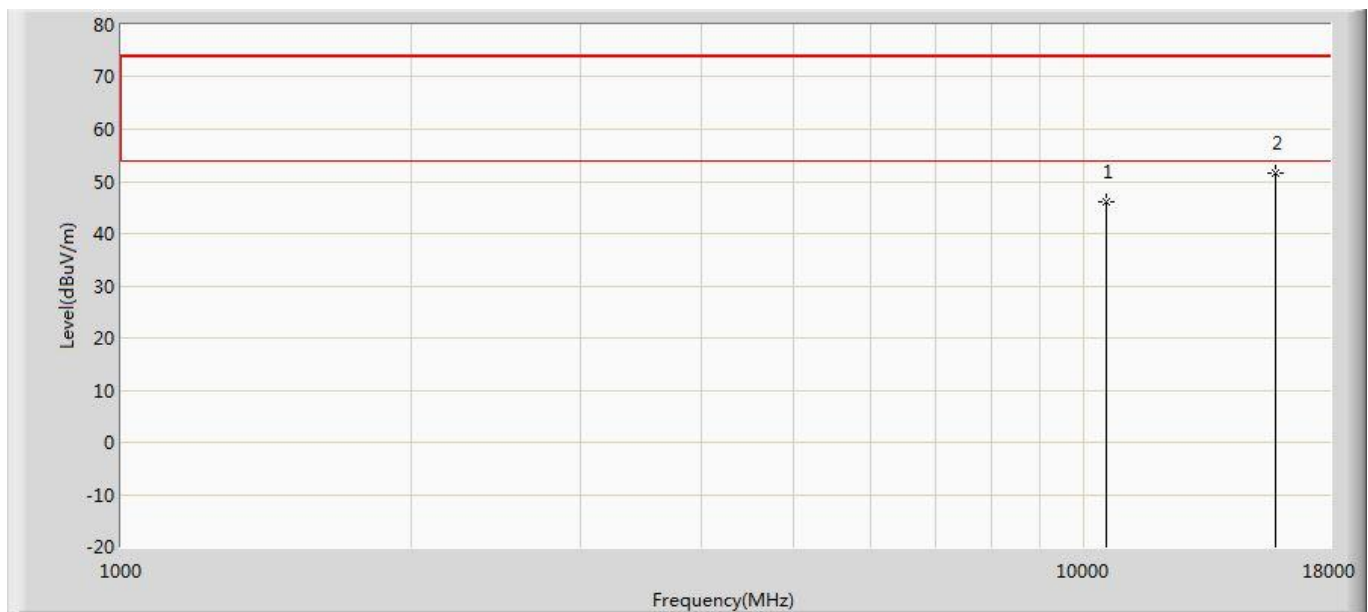


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	46.066	50.085	-27.934	74.000	-4.019	PK
2	*	15810.000	51.736	49.636	-22.264	74.000	2.100	PK

Profile: 2190372R	Page No.: 171
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5310MHz by 802.11n(40MHz)	

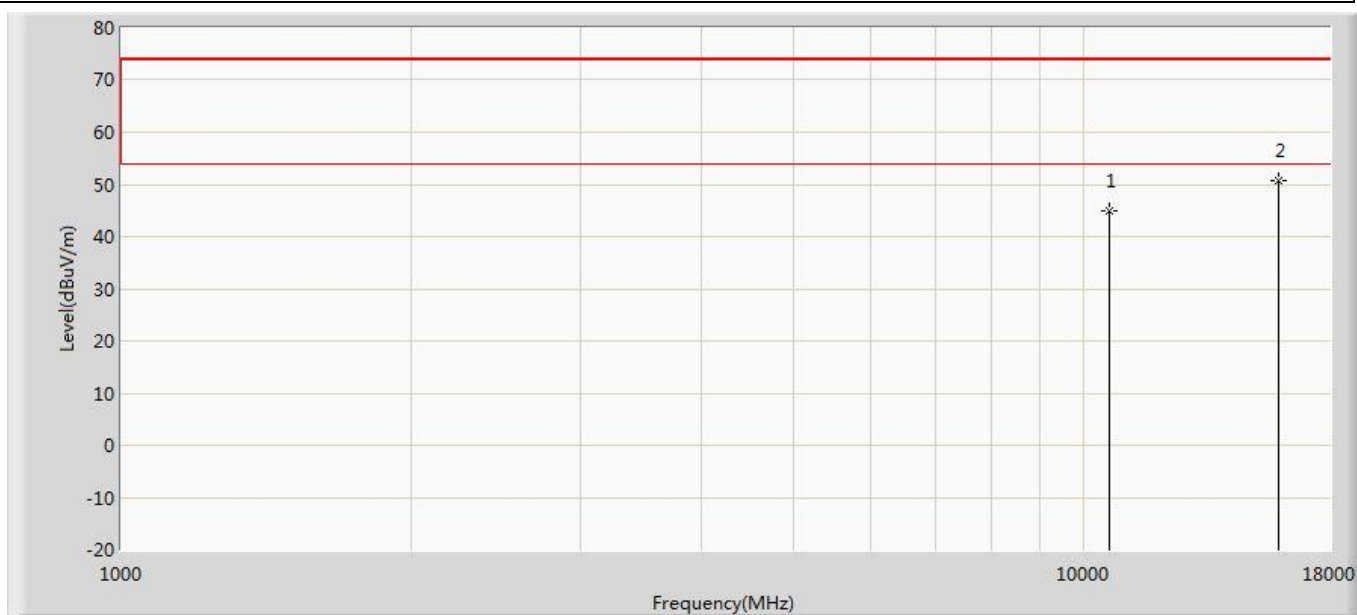


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	44.833	48.614	-29.167	74.000	-3.781	PK
2	*	15930.000	50.794	48.033	-23.206	74.000	2.762	PK

Profile: 2190372R	Page No.: 172
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5310MHz by 802.11n(40MHz)	

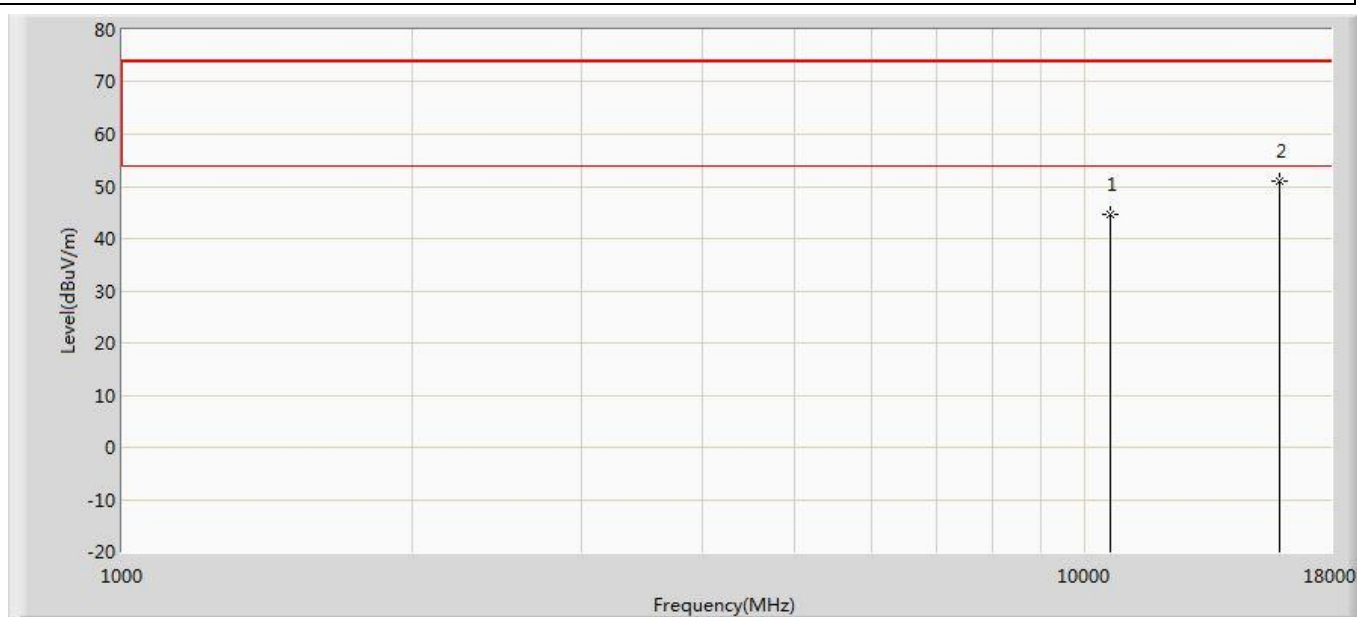


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	44.588	48.369	-29.412	74.000	-3.781	PK
2	*	15930.000	51.071	48.310	-22.929	74.000	2.762	PK

Profile: 2190372R	Page No.: 173
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5510MHz by 802.11n(40MHz)	

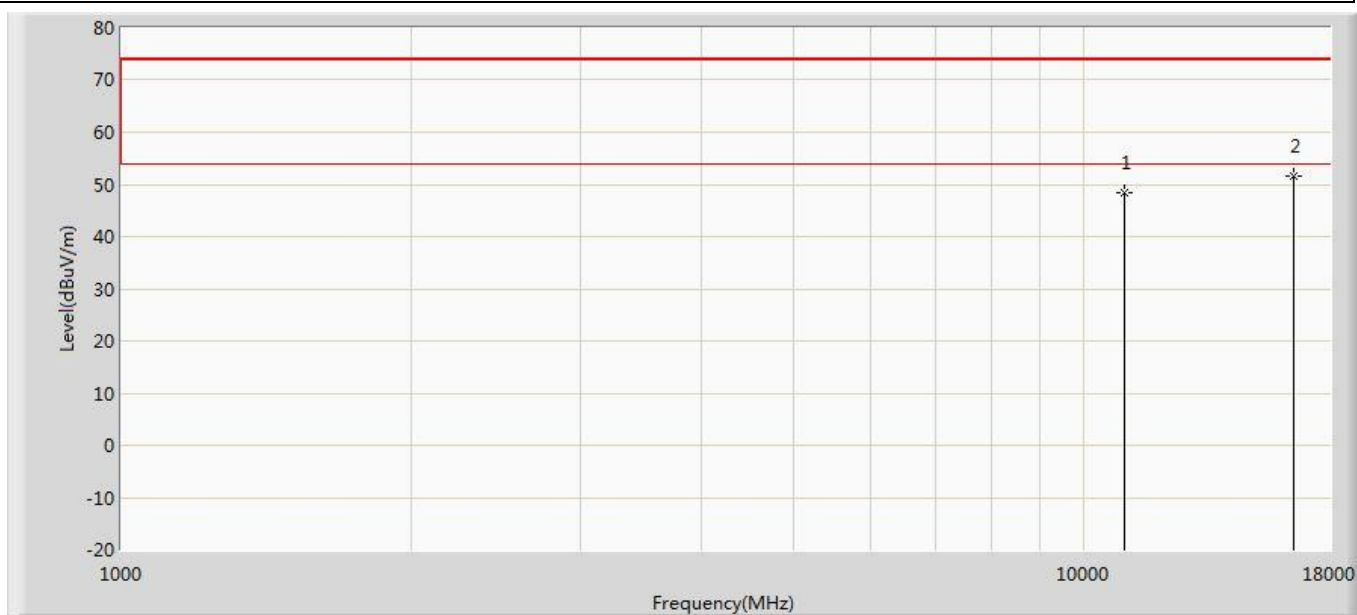


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	48.272	50.890	-25.728	74.000	-2.618	PK
2	*	16530.000	51.612	47.486	-22.388	74.000	4.126	PK

Profile: 2190372R	Page No.: 174
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5510MHz by 802.11n(40MHz)	

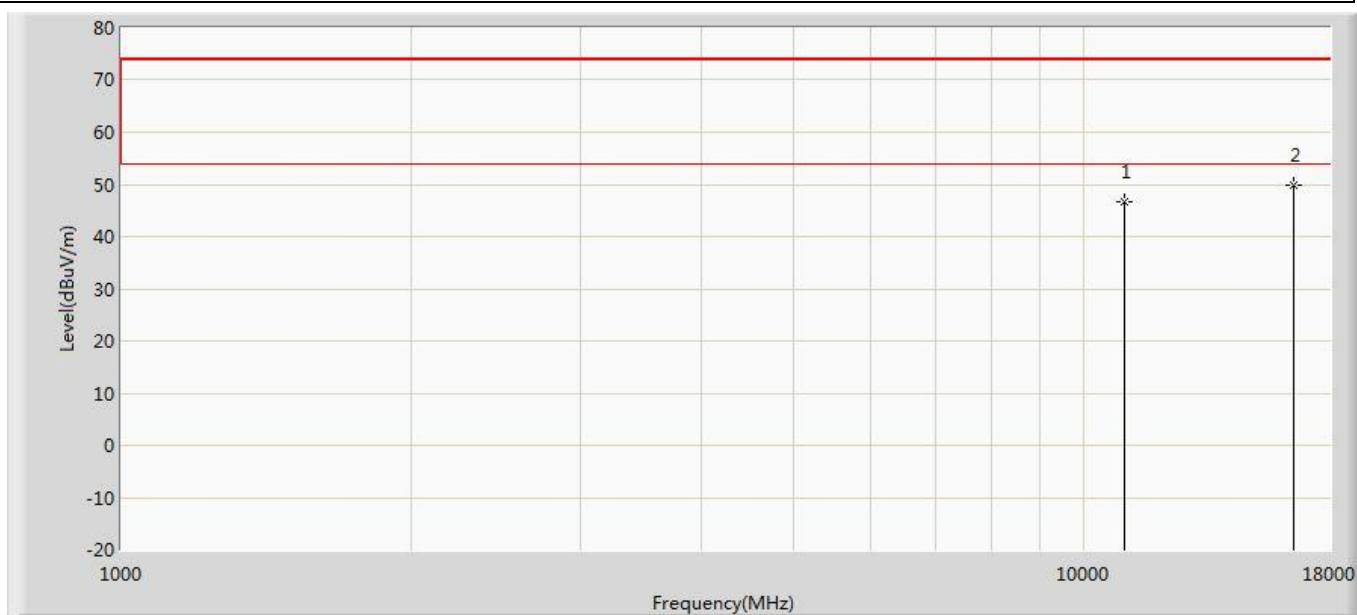


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	46.690	49.308	-27.310	74.000	-2.618	PK
2	*	16530.000	49.735	45.609	-24.265	74.000	4.126	PK

Profile: 2190372R	Page No.: 175
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5590MHz by 802.11n(40MHz)	

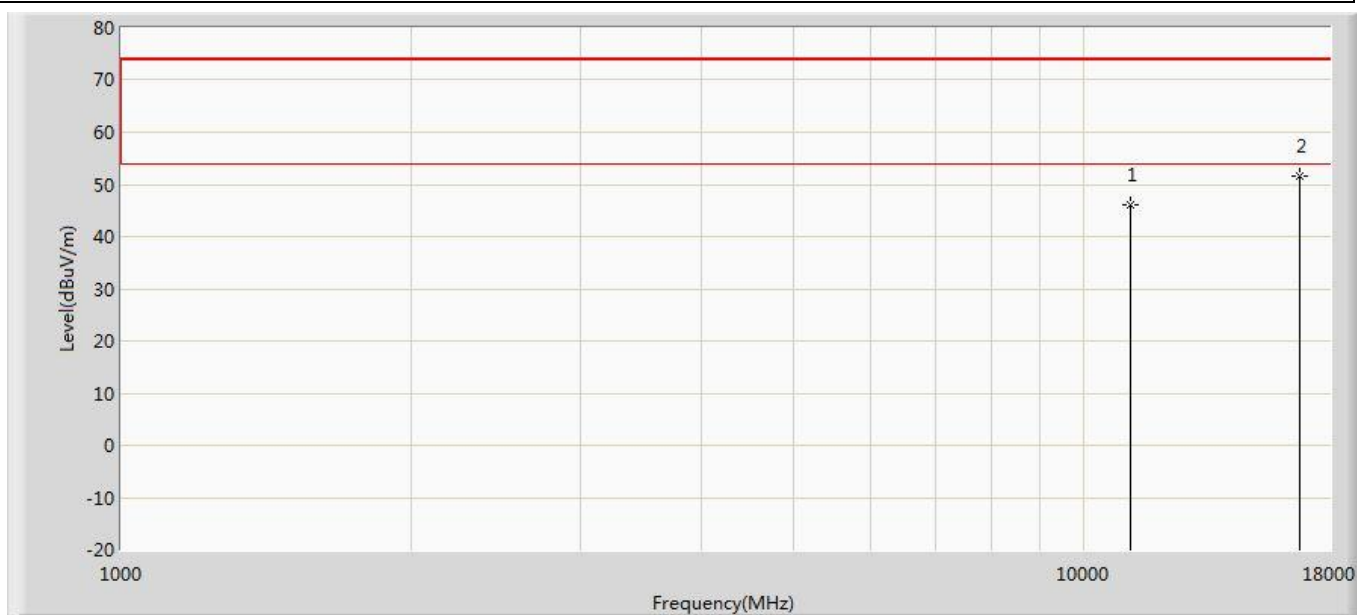


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.087	48.607	-27.913	74.000	-2.520	PK
2	*	16770.000	51.531	47.722	-22.469	74.000	3.809	PK

Profile: 2190372R	Page No.: 176
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5590MHz by 802.11n(40MHz)	

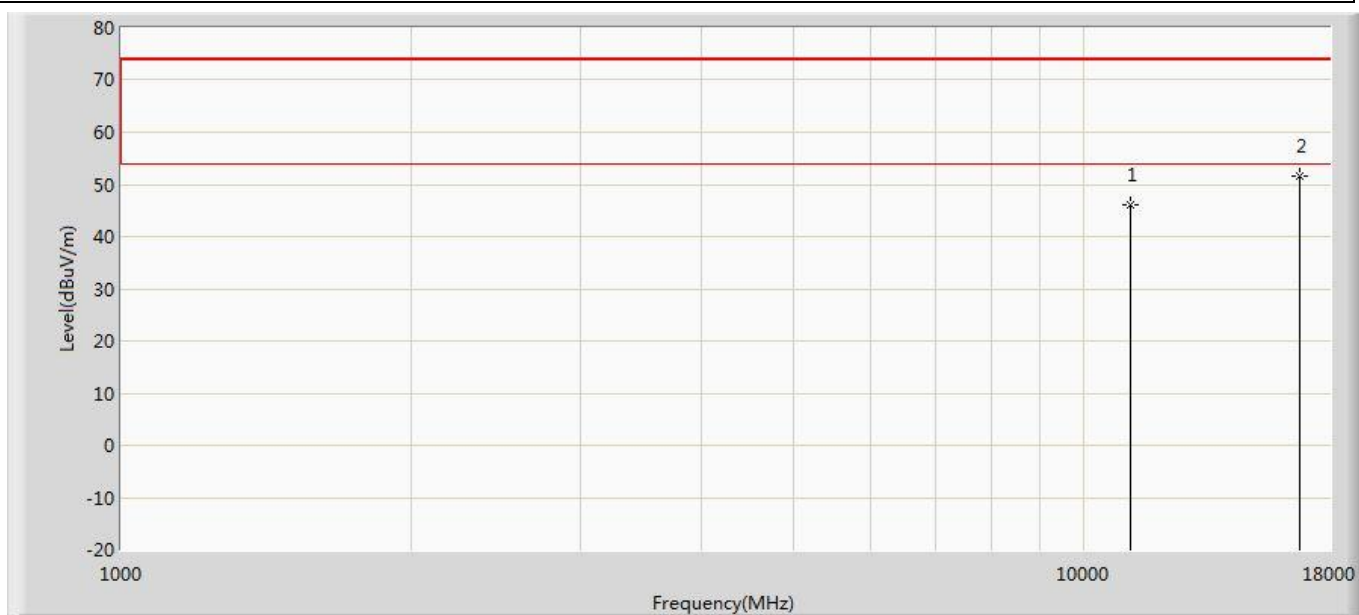


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.120	48.640	-27.880	74.000	-2.520	PK
2	*	16770.000	51.582	47.773	-22.418	74.000	3.809	PK

Profile: 2190372R	Page No.: 177
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5670MHz by 802.11n(40MHz)	

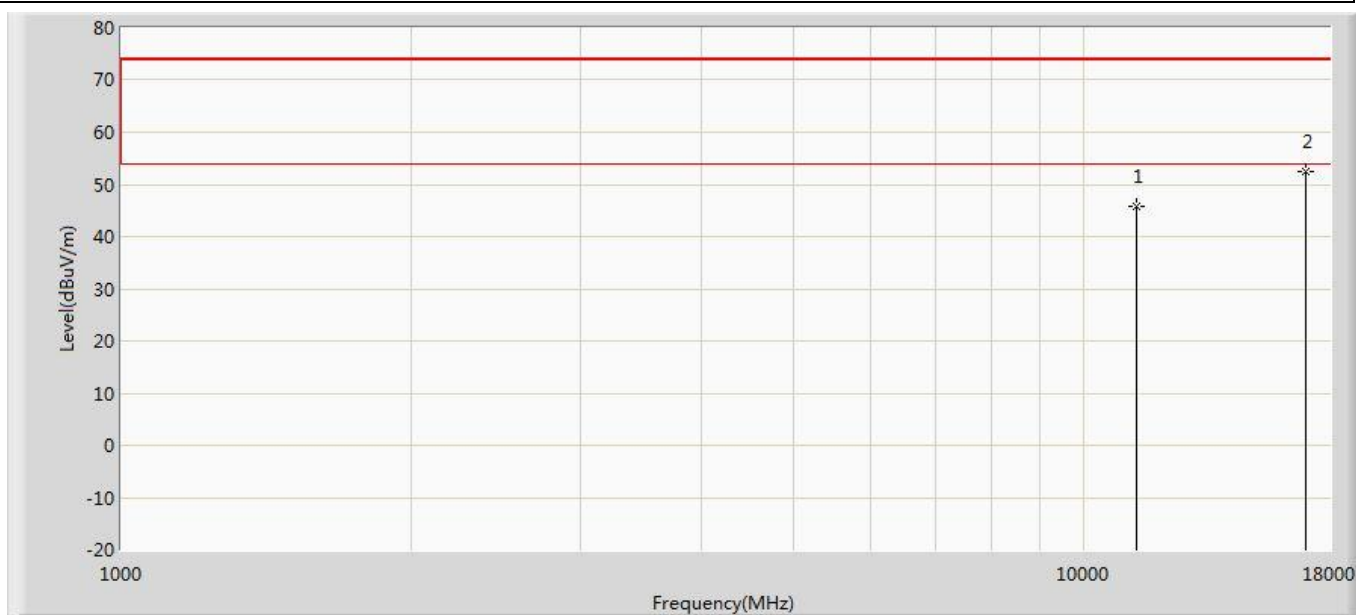


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.866	48.294	-28.134	74.000	-2.428	PK
2	*	17010.000	52.326	48.304	-21.674	74.000	4.023	PK

Profile: 2190372R	Page No.: 178
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5670MHz by 802.11n(40MHz)	

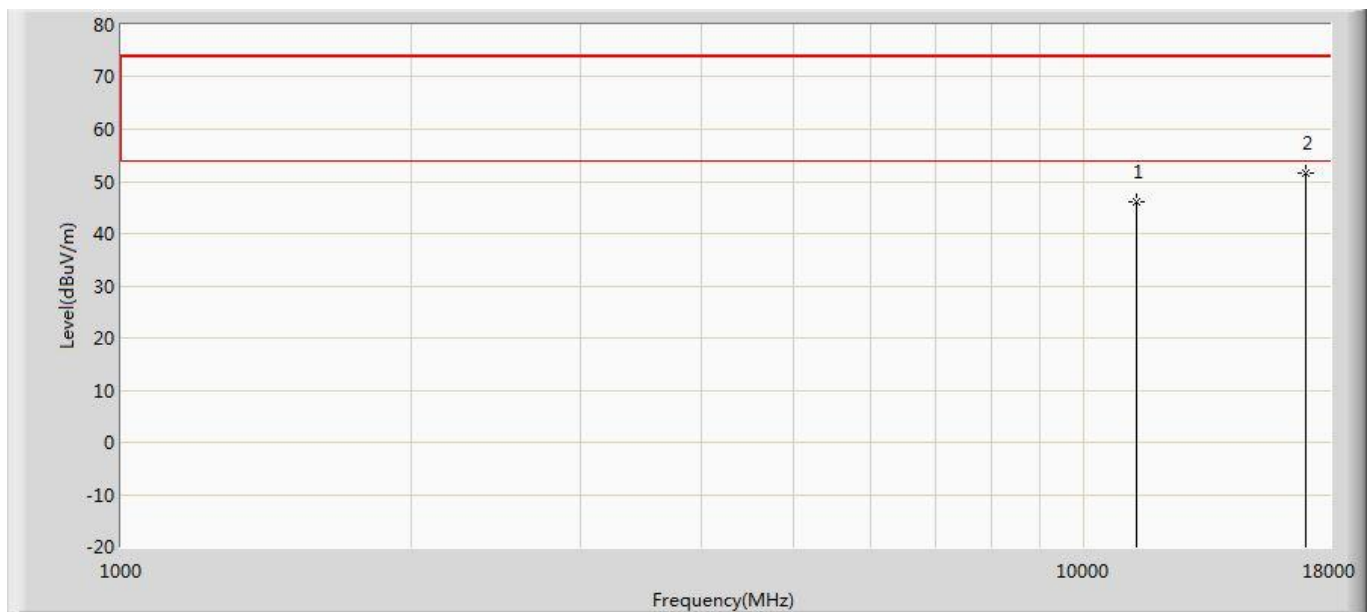


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	46.188	48.616	-27.812	74.000	-2.428	PK
2	*	17010.000	51.450	47.428	-22.550	74.000	4.023	PK

Profile: 2190372R	Page No.: 179
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	

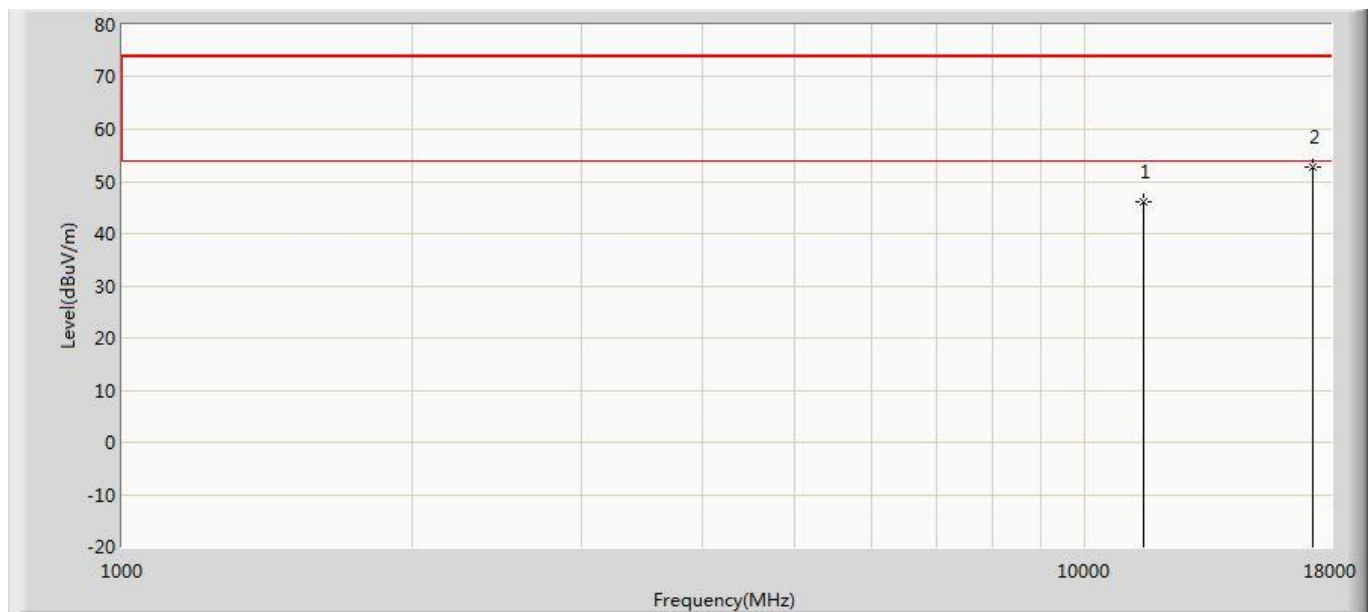


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	46.090	47.881	-27.910	74.000	-1.791	PK
2	*	17265.000	52.850	48.579	-21.150	74.000	4.271	PK

Profile: 2190372R	Page No.: 180
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	

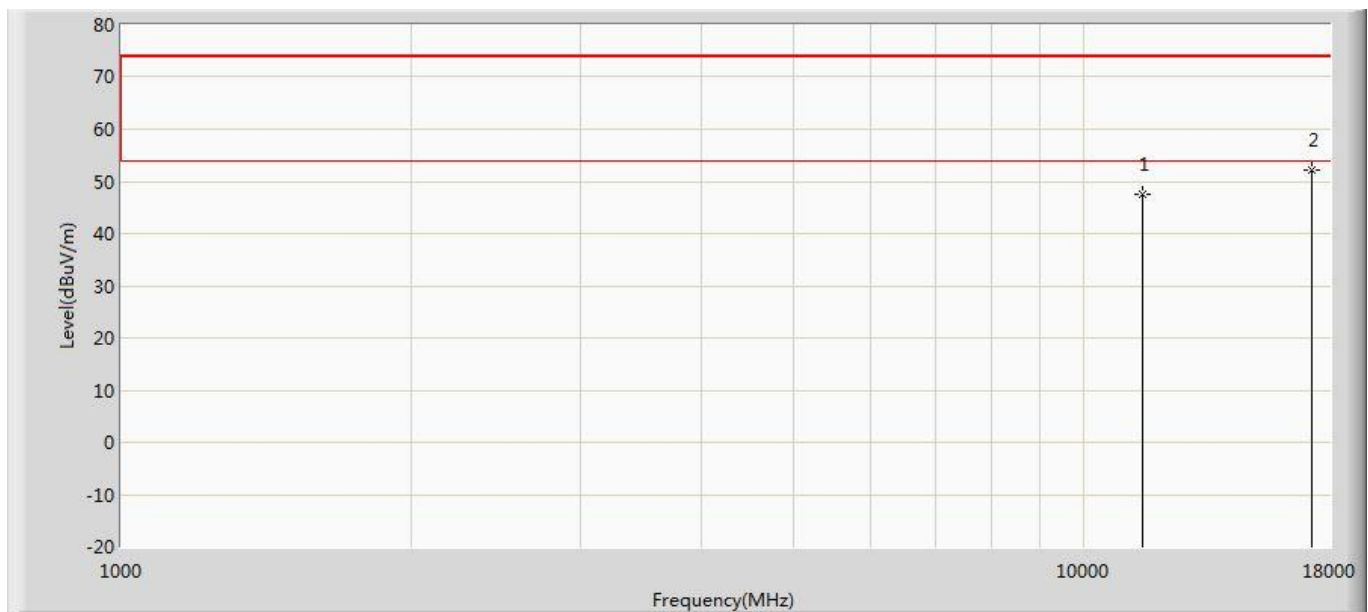


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	47.450	49.241	-26.550	74.000	-1.791	PK
2	*	17265.000	52.228	47.957	-21.772	74.000	4.271	PK

Profile: 2190372R	Page No.: 181
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	

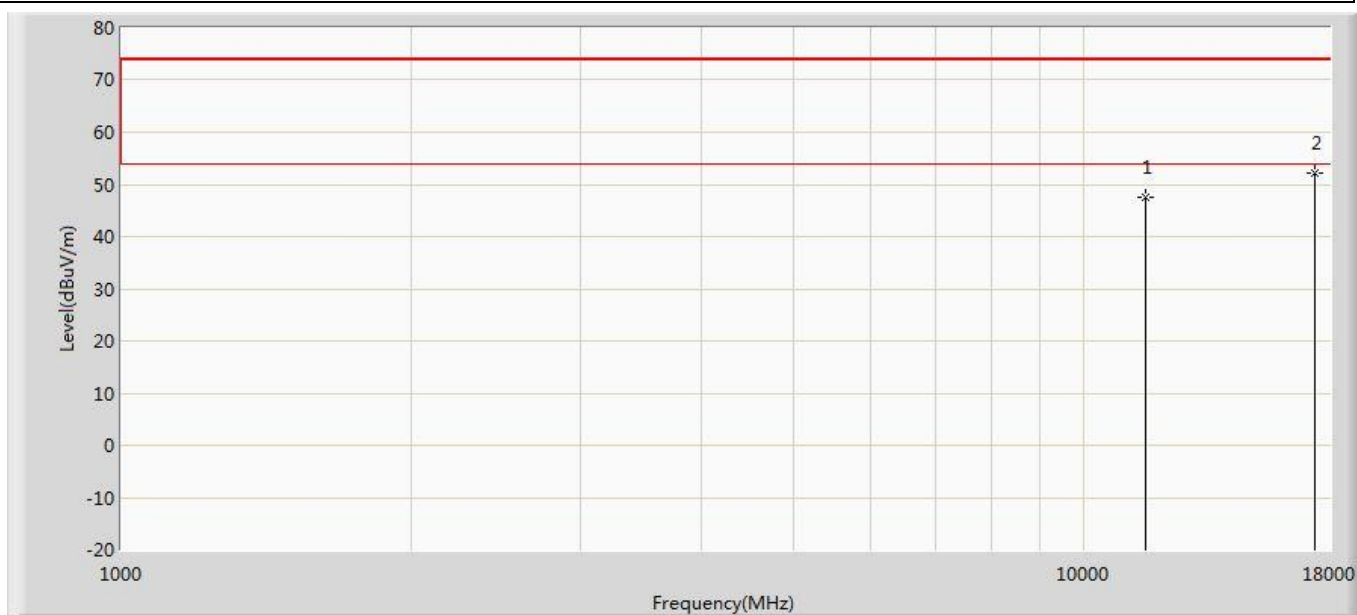


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	47.582	48.972	-26.418	74.000	-1.390	PK
2	*	17385.000	52.268	48.803	-21.732	74.000	3.465	PK

Profile: 2190372R	Page No.: 182
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	

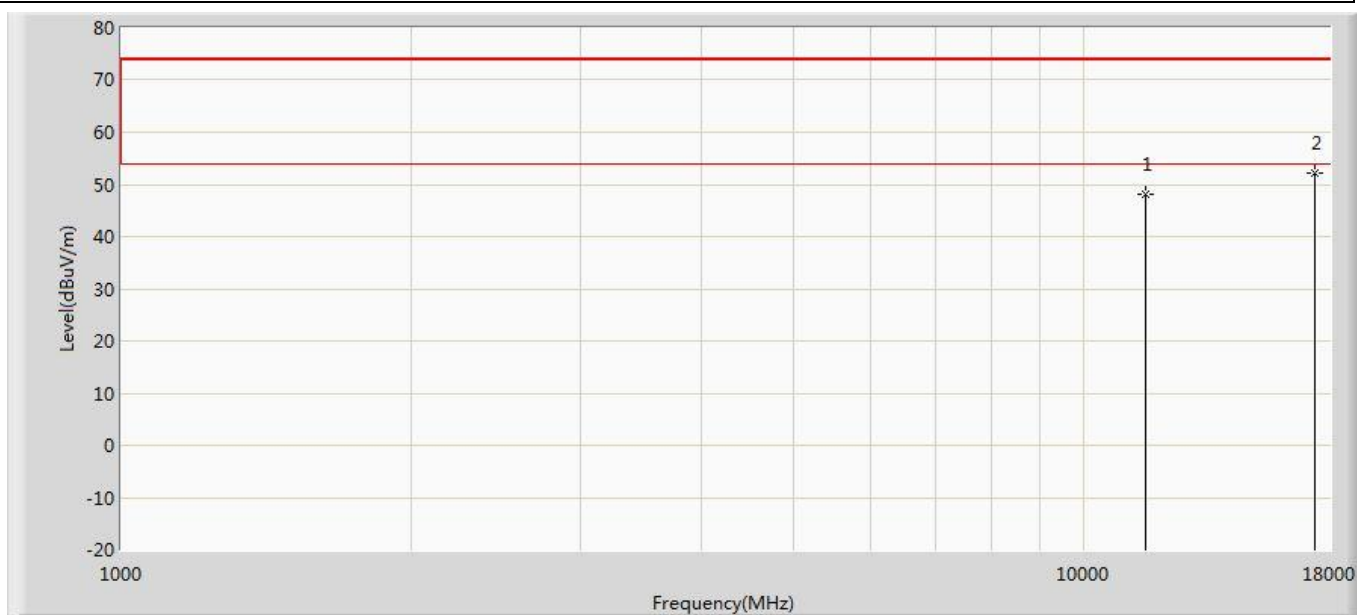


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	48.042	49.432	-25.958	74.000	-1.390	PK
2	*	17385.000	52.187	48.722	-21.813	74.000	3.465	PK

Profile: 2190372R	Page No.: 183
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	

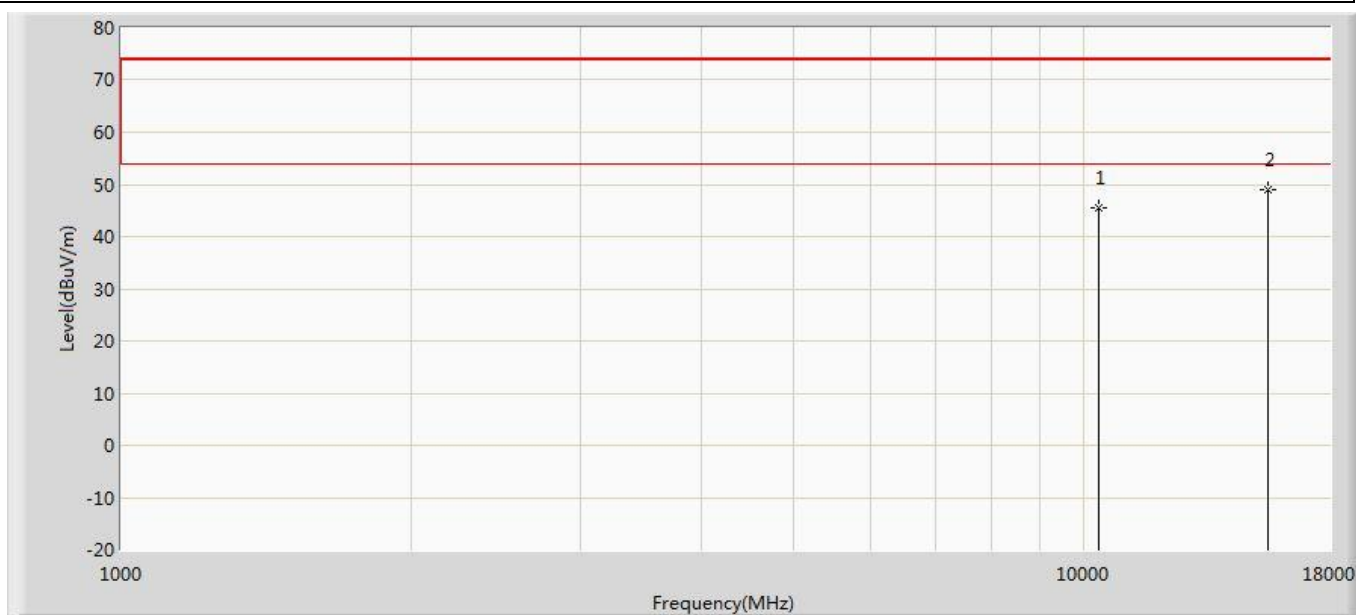


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	45.499	49.240	-28.501	74.000	-3.742	PK
2	*	15540.000	48.971	47.275	-25.029	74.000	1.695	PK

Profile: 2190372R	Page No.: 184
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	

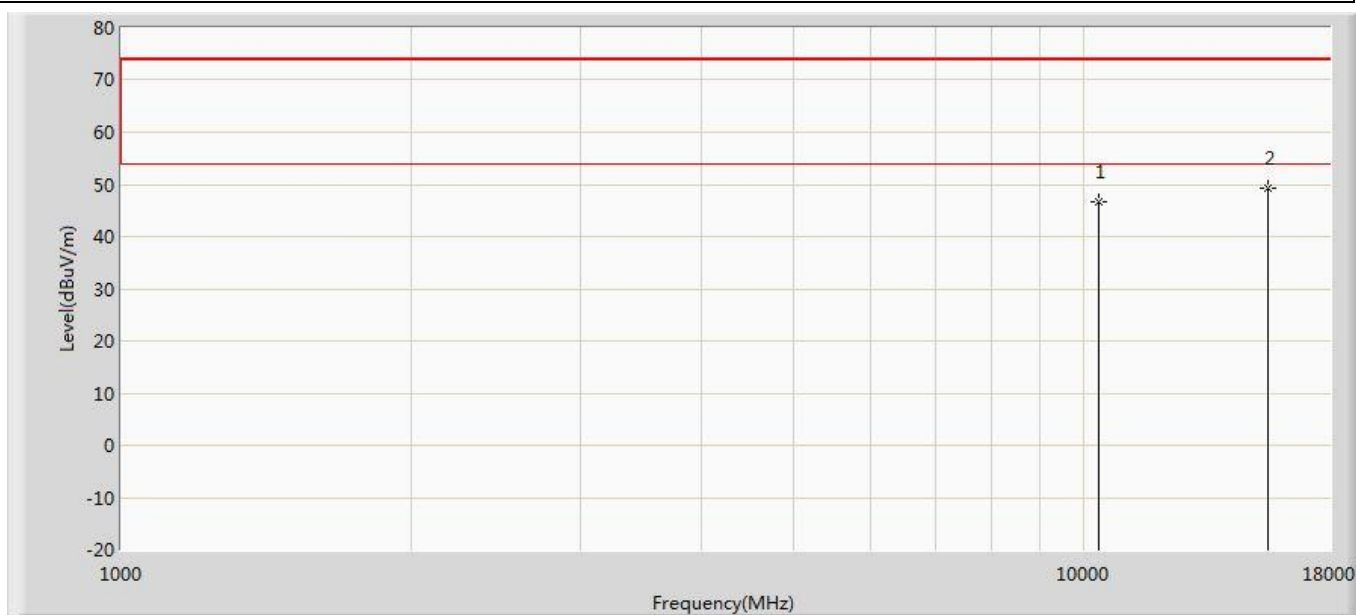


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	46.582	50.323	-27.418	74.000	-3.742	PK
2	*	15540.000	49.285	47.589	-24.715	74.000	1.695	PK

Profile: 2190372R	Page No.: 185
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5220MHz by 802.11ac(20MHz)	

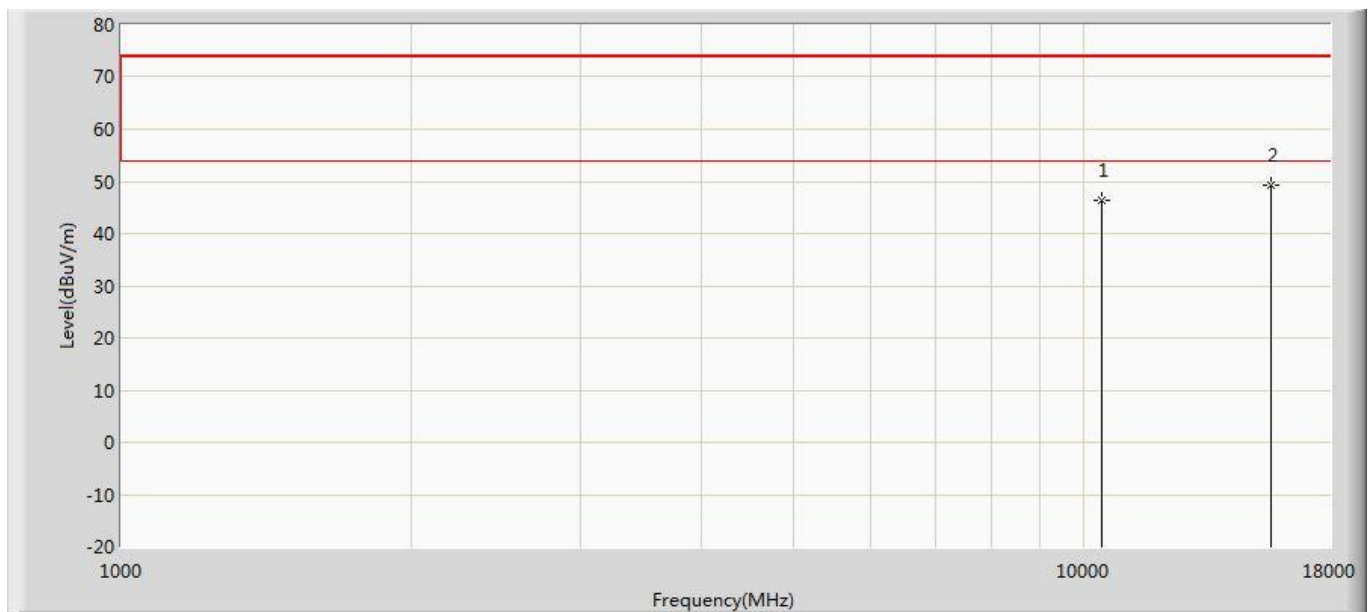


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	46.258	49.838	-27.742	74.000	-3.580	PK
2	*	15660.000	49.243	47.311	-24.757	74.000	1.933	PK

Profile: 2190372R	Page No.: 186
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5220MHz by 802.11ac(20MHz)	

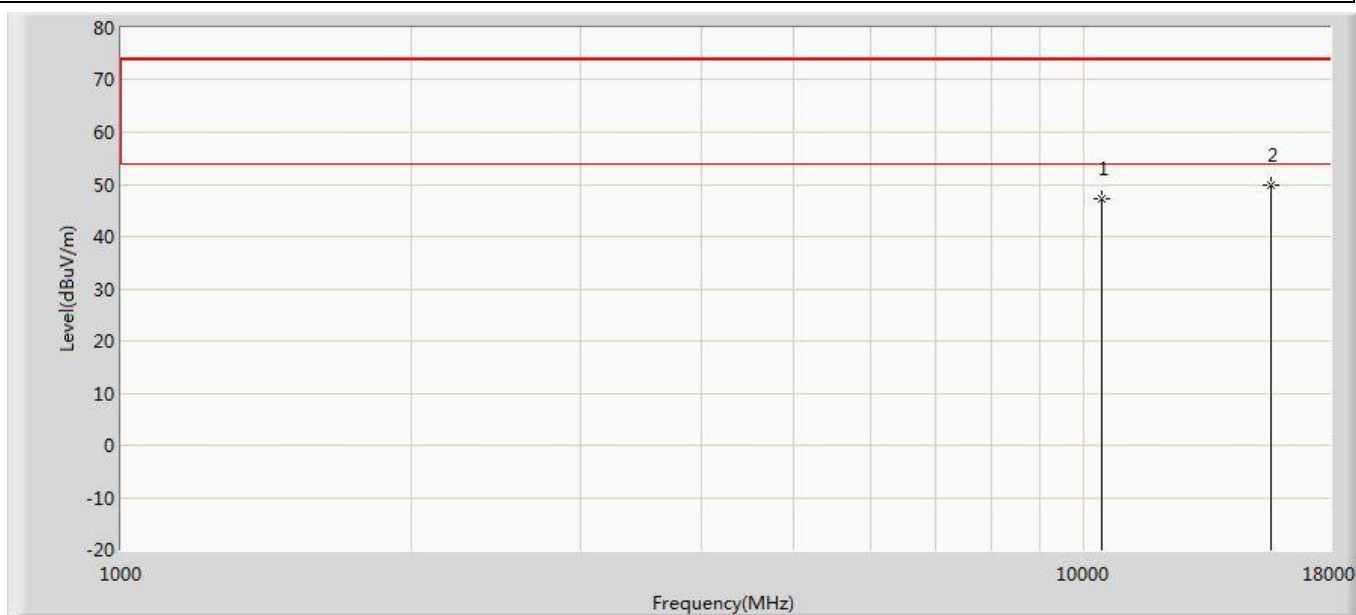


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	47.161	50.741	-26.839	74.000	-3.580	PK
2	*	15660.000	49.827	47.895	-24.173	74.000	1.933	PK

Profile: 2190372R	Page No.: 187
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5240MHz by 802.11ac(20MHz)	

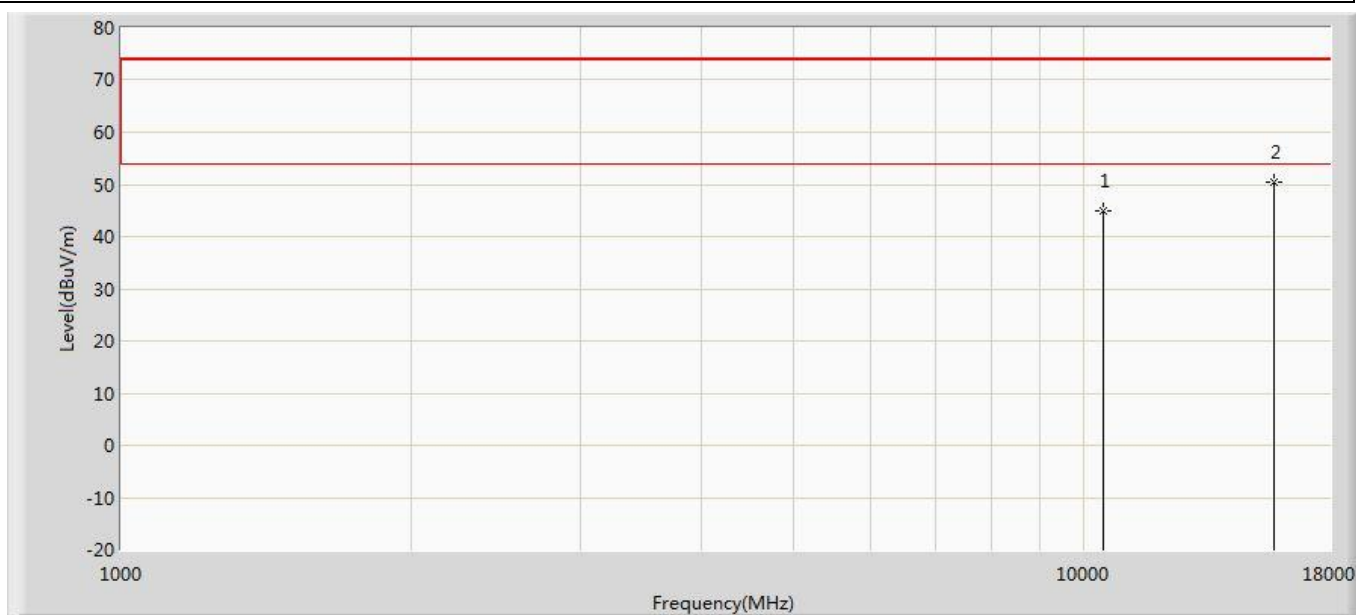


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.026	48.841	-28.974	74.000	-3.815	PK
2	*	15720.000	50.297	48.203	-23.703	74.000	2.094	PK

Profile: 2190372R	Page No.: 188
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5240MHz by 802.11ac(20MHz)	

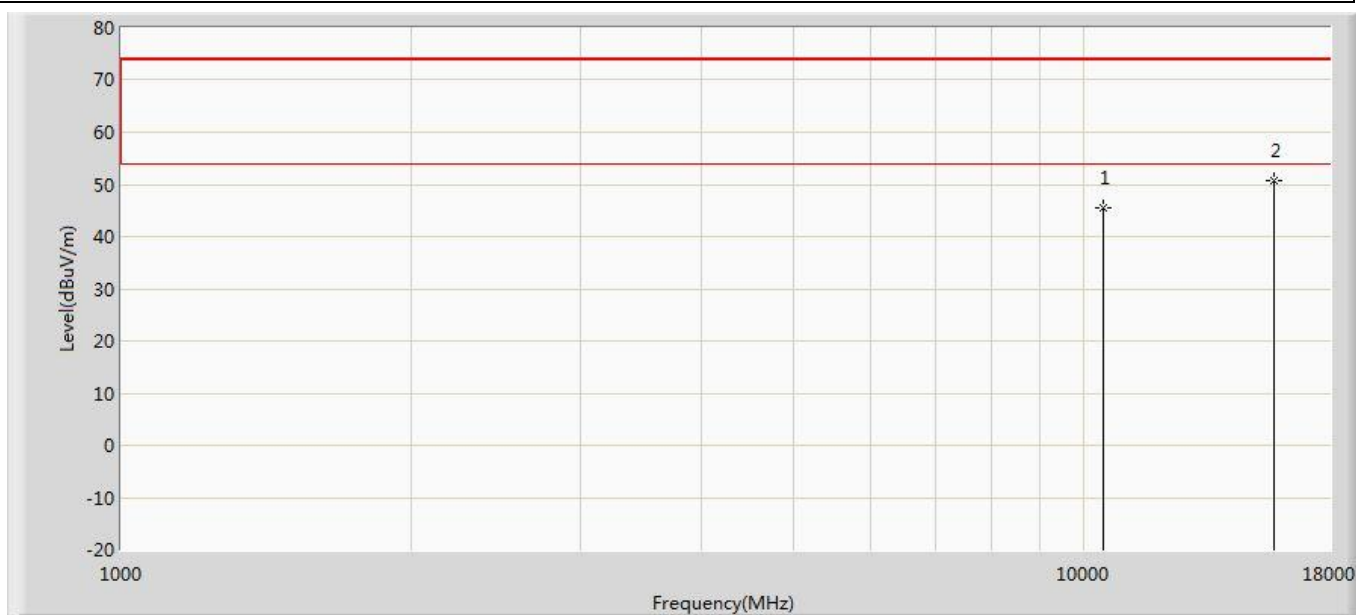


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	45.491	49.306	-28.509	74.000	-3.815	PK
2	*	15720.000	50.736	48.642	-23.264	74.000	2.094	PK

Profile: 2190372R	Page No.: 189
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5260MHz by 802.11ac(20MHz)	

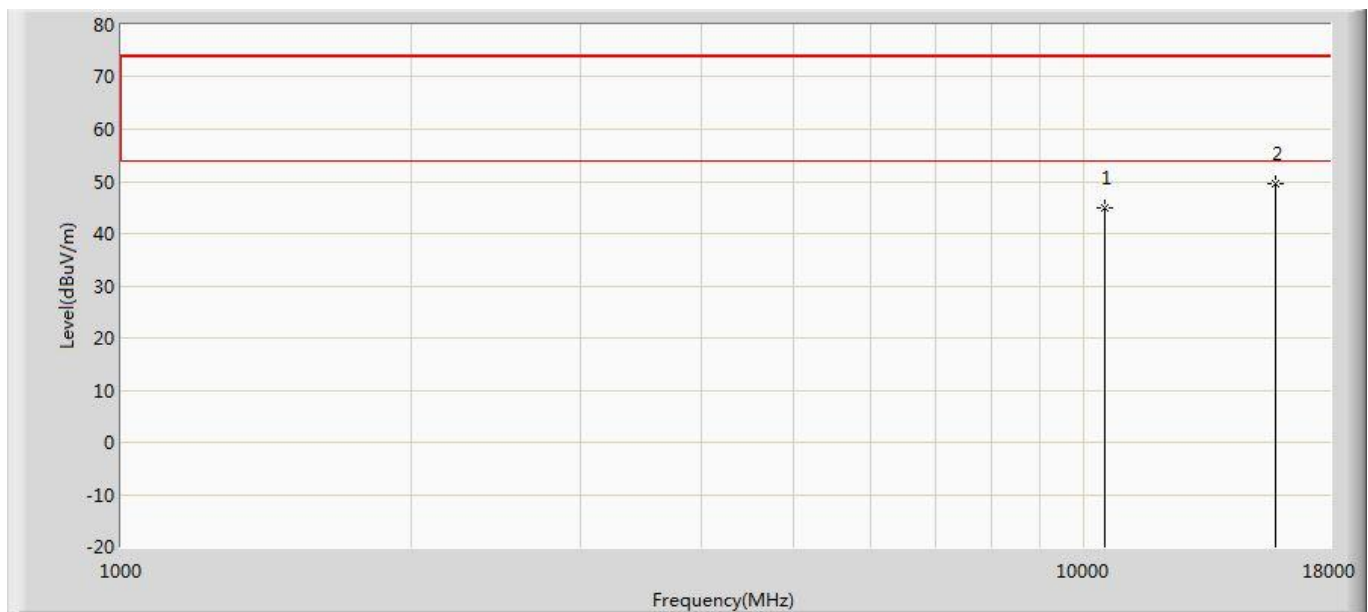


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.072	48.437	-28.928	74.000	-3.365	PK
2	*	15780.000	49.683	47.315	-24.317	74.000	2.369	PK

Profile: 2190372R	Page No.: 190
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5260MHz by 802.11ac(20MHz)	

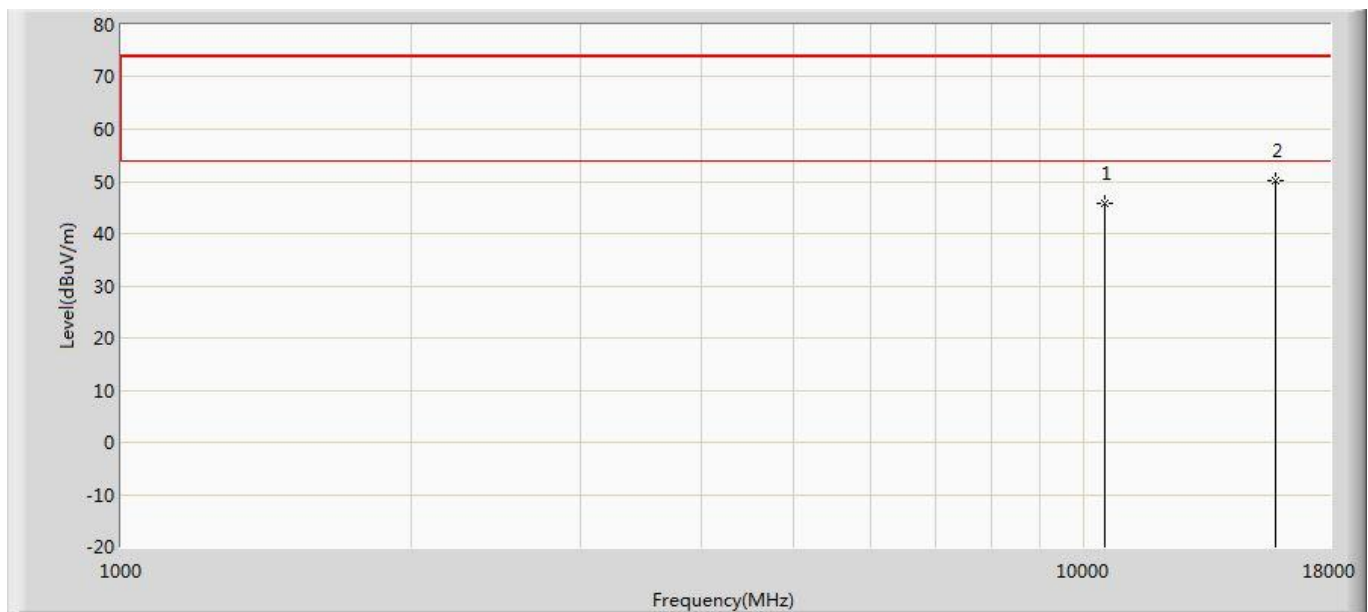


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	45.721	49.086	-28.279	74.000	-3.365	PK
2	*	15780.000	50.026	47.658	-23.974	74.000	2.369	PK

Profile: 2190372R	Page No.: 191
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5300MHz by 802.11ac(20MHz)	

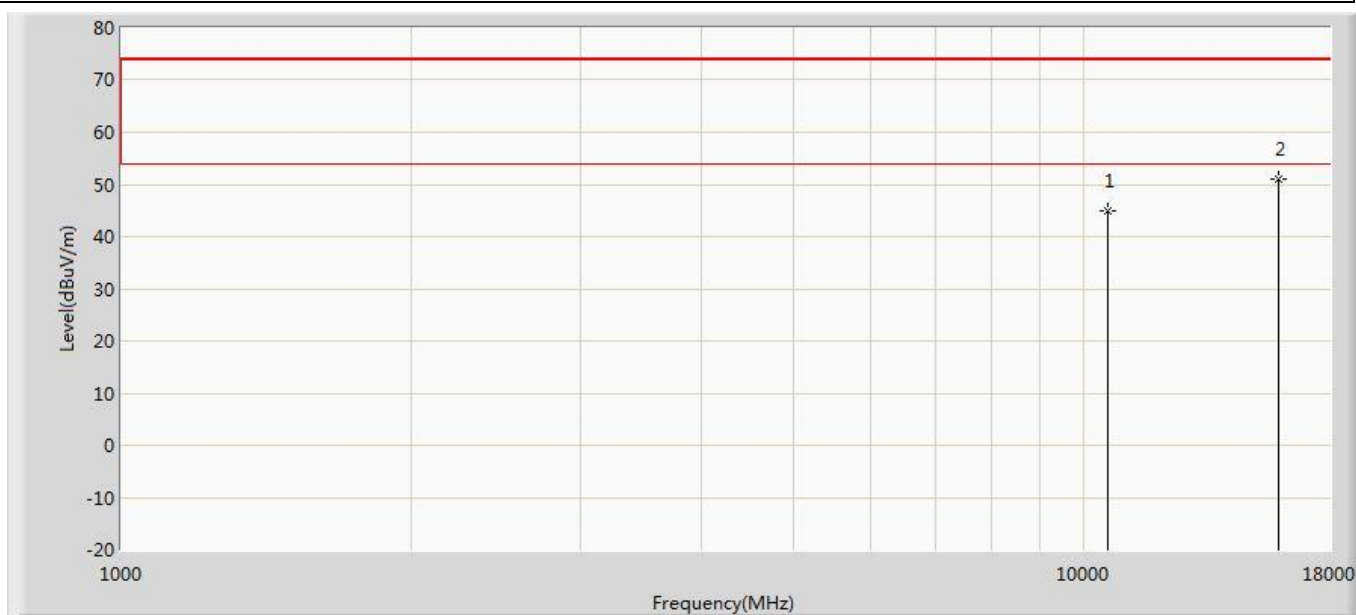


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	45.014	48.757	-28.986	74.000	-3.743	PK
2	*	15900.000	50.876	47.982	-23.124	74.000	2.894	PK

Profile: 2190372R	Page No.: 192
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5300MHz by 802.11ac(20MHz)	

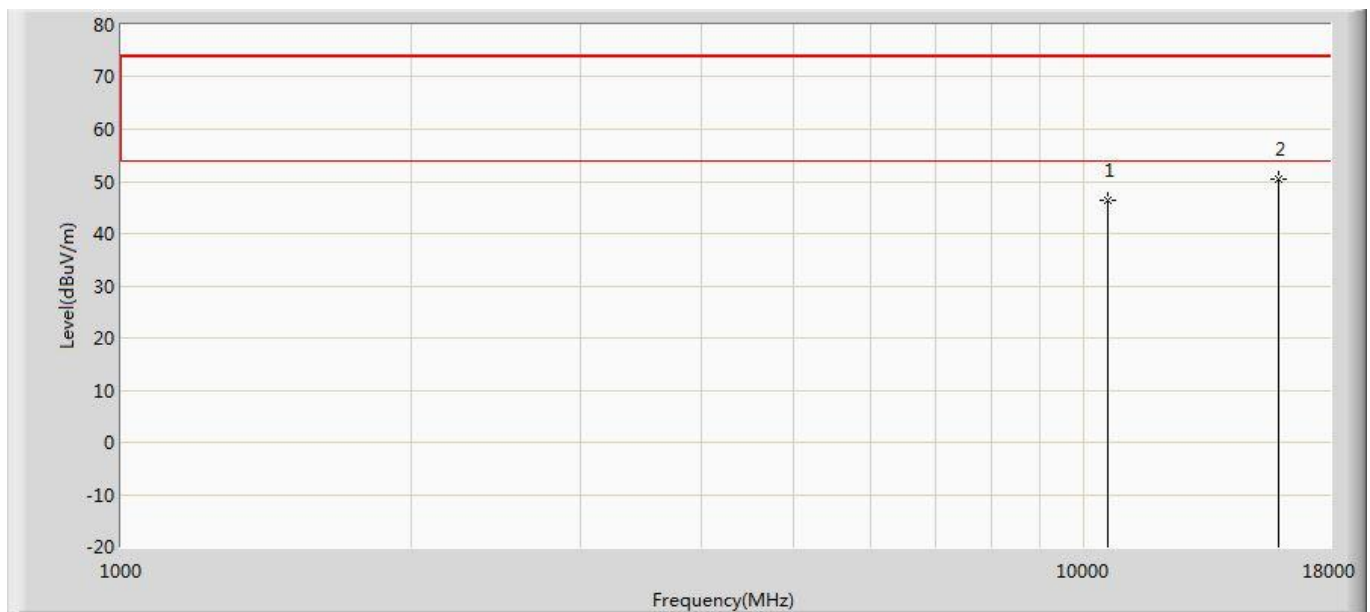


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	46.265	50.008	-27.735	74.000	-3.743	PK
2	*	15900.000	50.508	47.614	-23.492	74.000	2.894	PK

Profile: 2190372R	Page No.: 193
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	

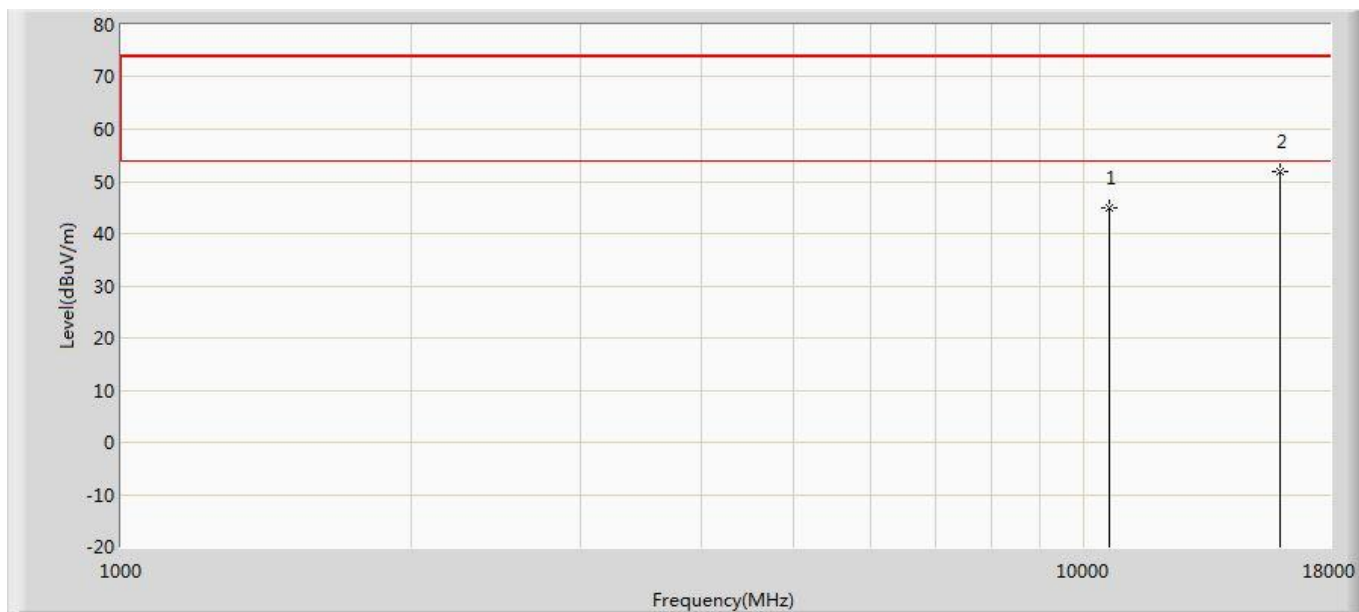


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	44.951	48.674	-29.049	74.000	-3.723	PK
2	*	15960.000	51.965	49.912	-22.035	74.000	2.053	PK

Profile: 2190372R	Page No.: 194
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	

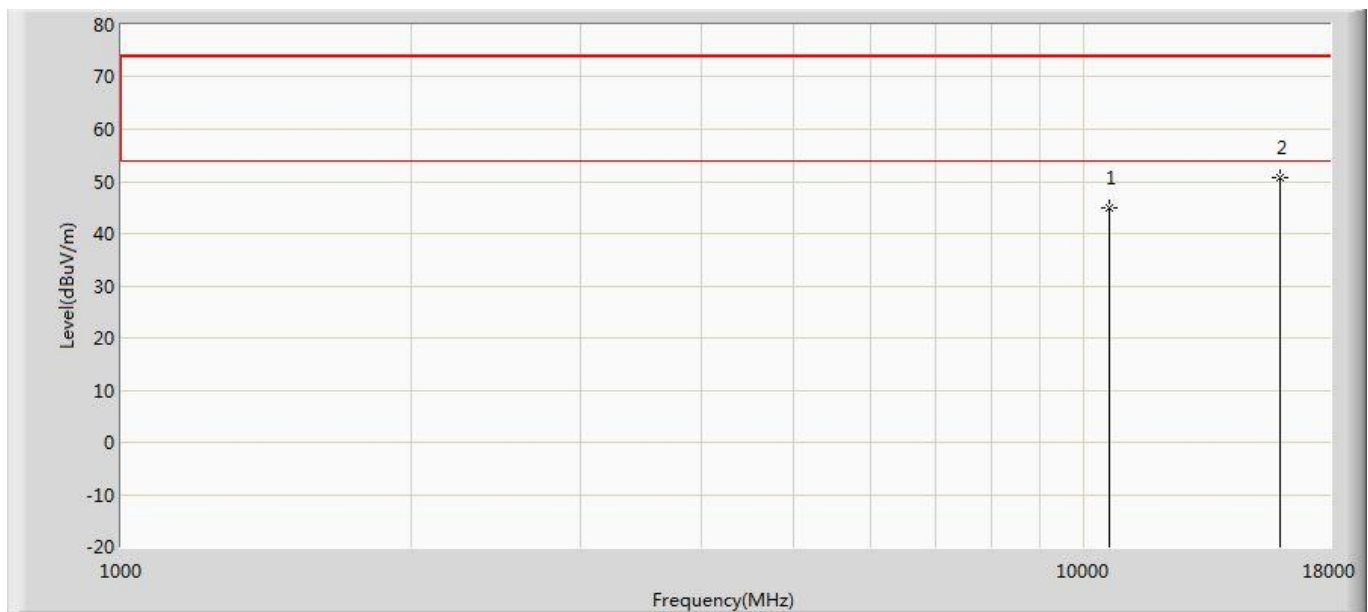


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	45.058	48.781	-28.942	74.000	-3.723	PK
2	*	15960.000	50.784	48.731	-23.216	74.000	2.053	PK

Profile: 2190372R	Page No.: 195
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5500MHz by 802.11ac(20MHz)	

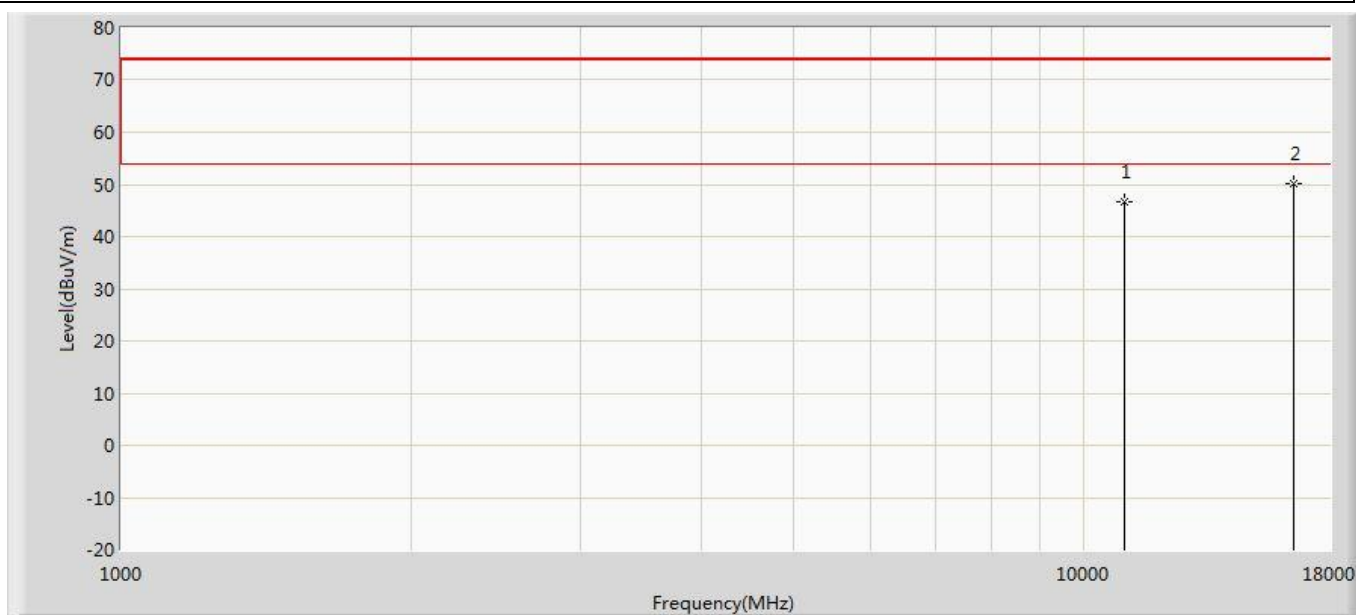


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	46.670	49.793	-27.330	74.000	-3.123	PK
2	*	16500.000	50.016	46.822	-23.984	74.000	3.195	PK

Profile: 2190372R	Page No.: 196
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5500MHz by 802.11ac(20MHz)	

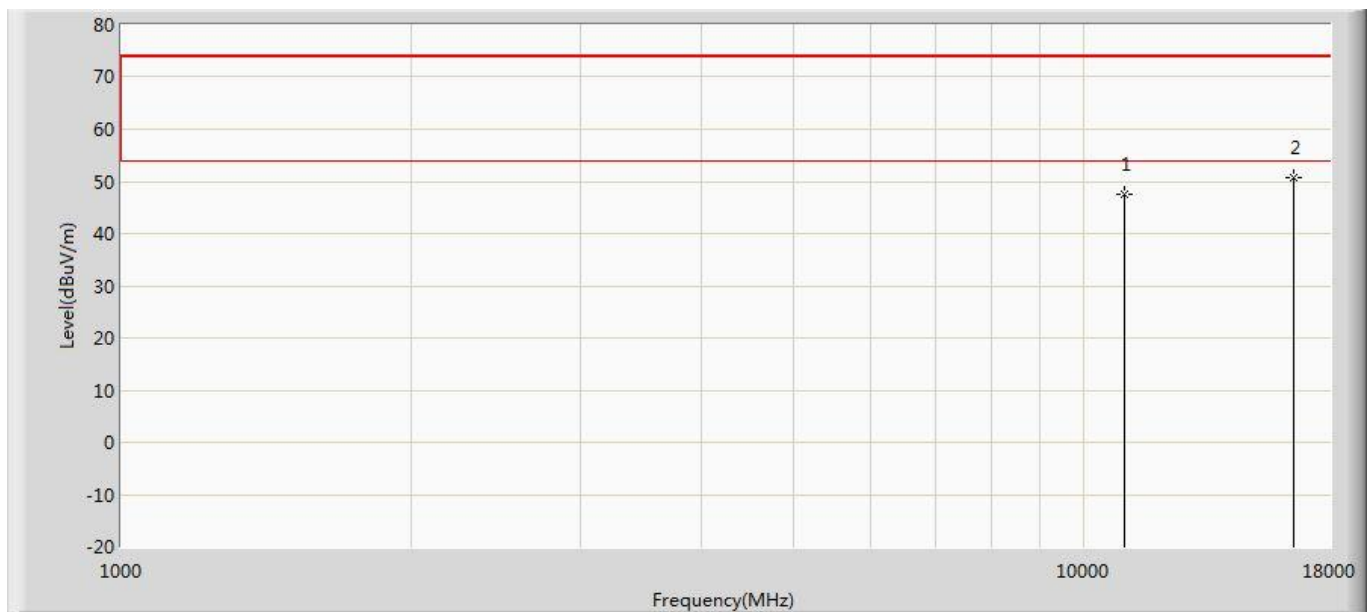


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	47.516	50.639	-26.484	74.000	-3.123	PK
2	*	16500.000	50.710	47.516	-23.290	74.000	3.195	PK

Profile: 2190372R	Page No.: 197
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5580MHz by 802.11ac(20MHz)	

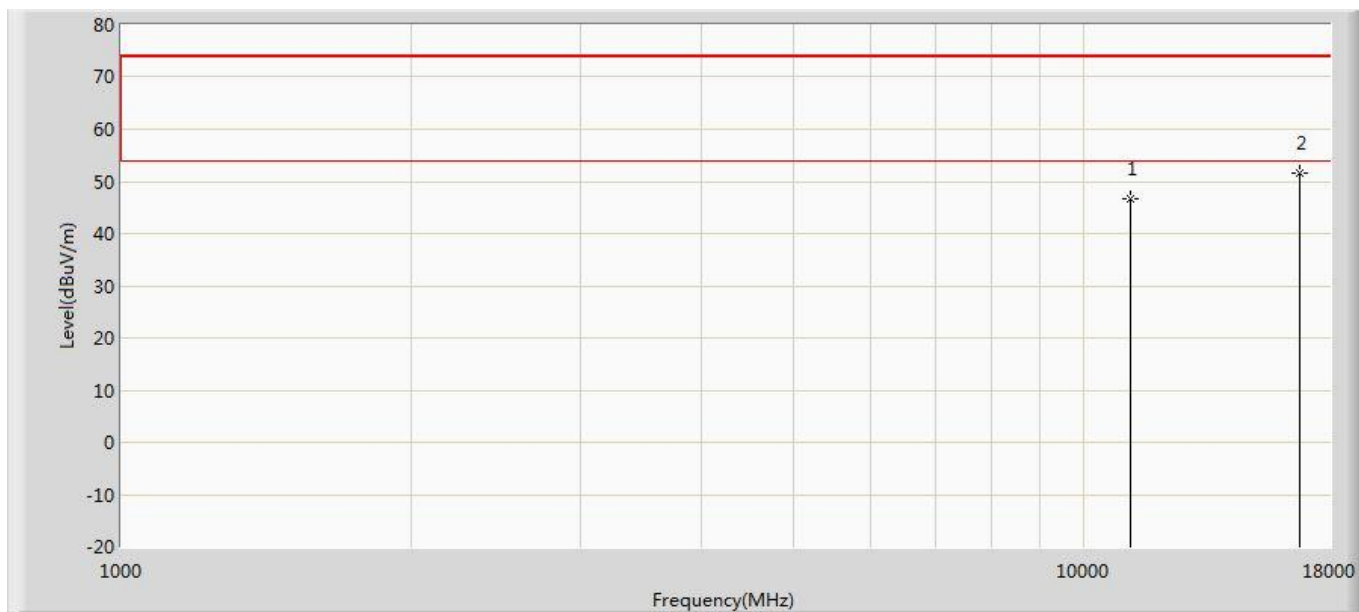


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.613	49.415	-27.387	74.000	-2.802	PK
2	*	16740.000	51.566	47.940	-22.434	74.000	3.626	PK

Profile: 2190372R	Page No.: 198
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5580MHz by 802.11ac(20MHz)	

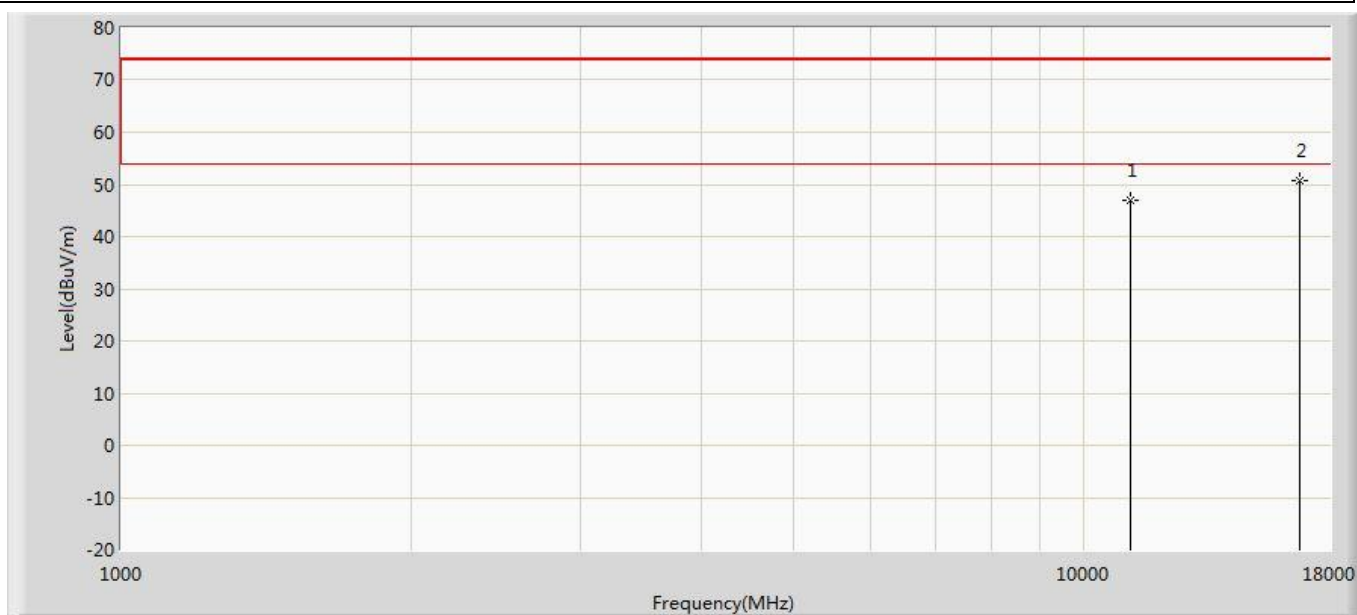


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.919	49.721	-27.081	74.000	-2.802	PK
2	*	16740.000	50.782	47.156	-23.218	74.000	3.626	PK

Profile: 2190372R	Page No.: 199
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5700MHz by 802.11ac(20MHz)	

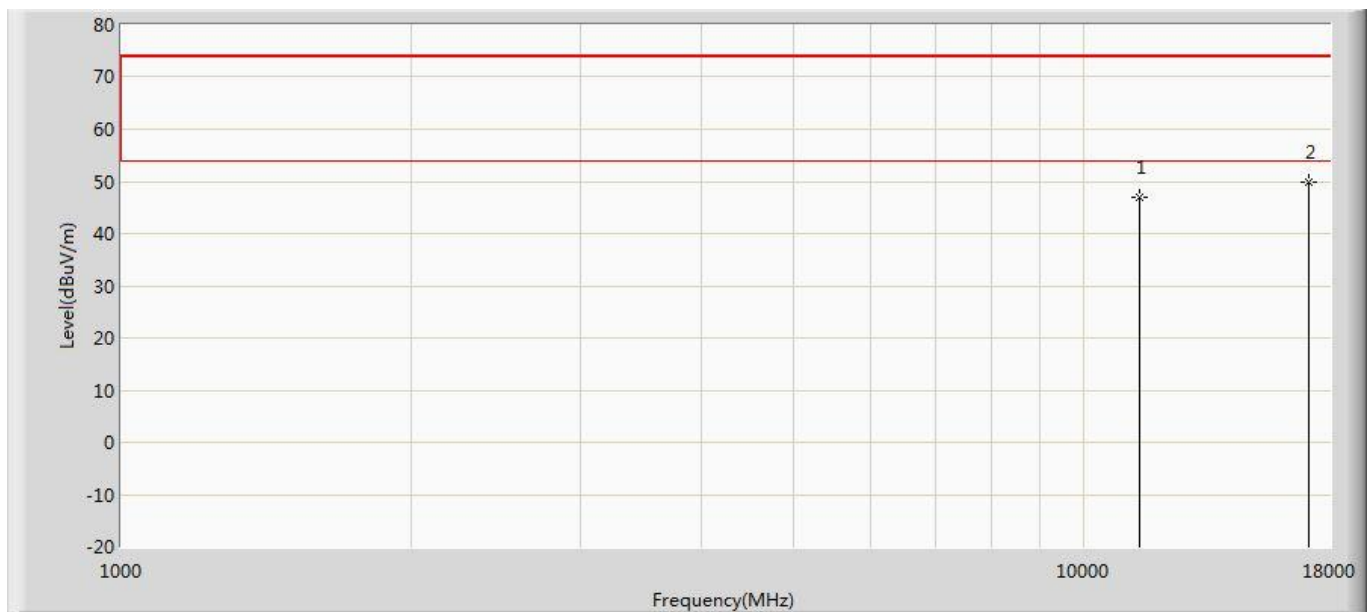


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	47.073	49.343	-26.927	74.000	-2.271	PK
2	*	17100.000	49.826	46.378	-24.174	74.000	3.448	PK

Profile: 2190372R	Page No.: 200
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5700MHz by 802.11ac(20MHz)	

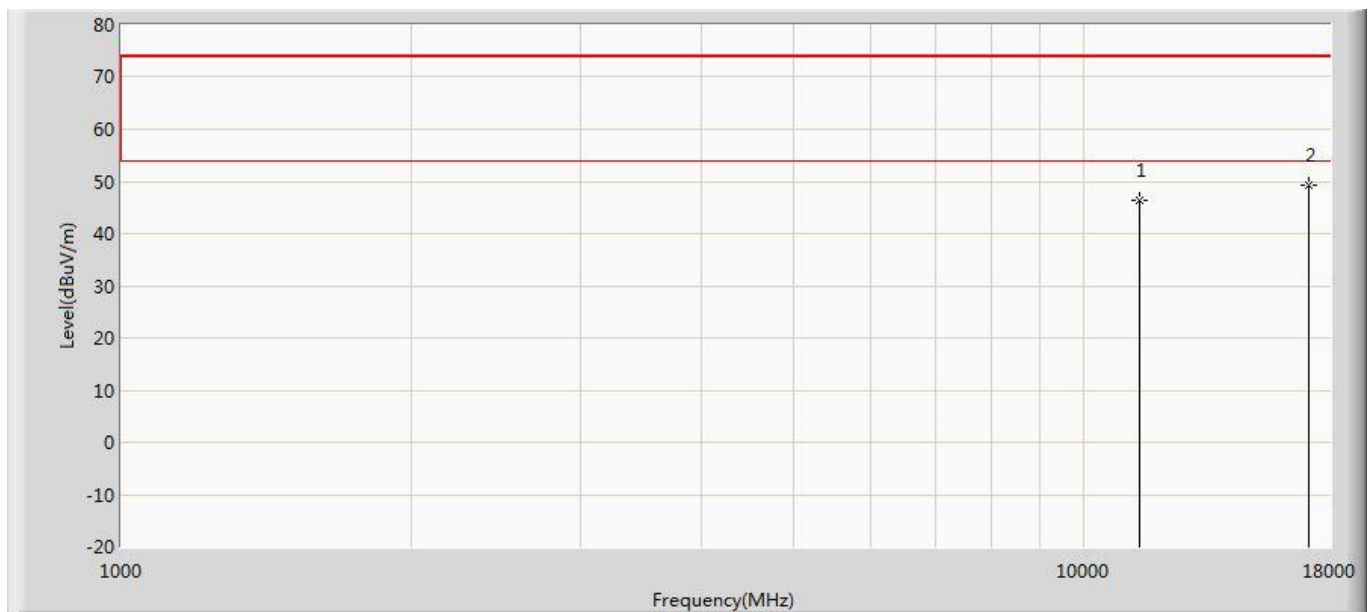


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	46.495	48.765	-27.505	74.000	-2.271	PK
2	*	17100.000	49.232	45.784	-24.768	74.000	3.448	PK

Profile: 2190372R	Page No.: 201
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	

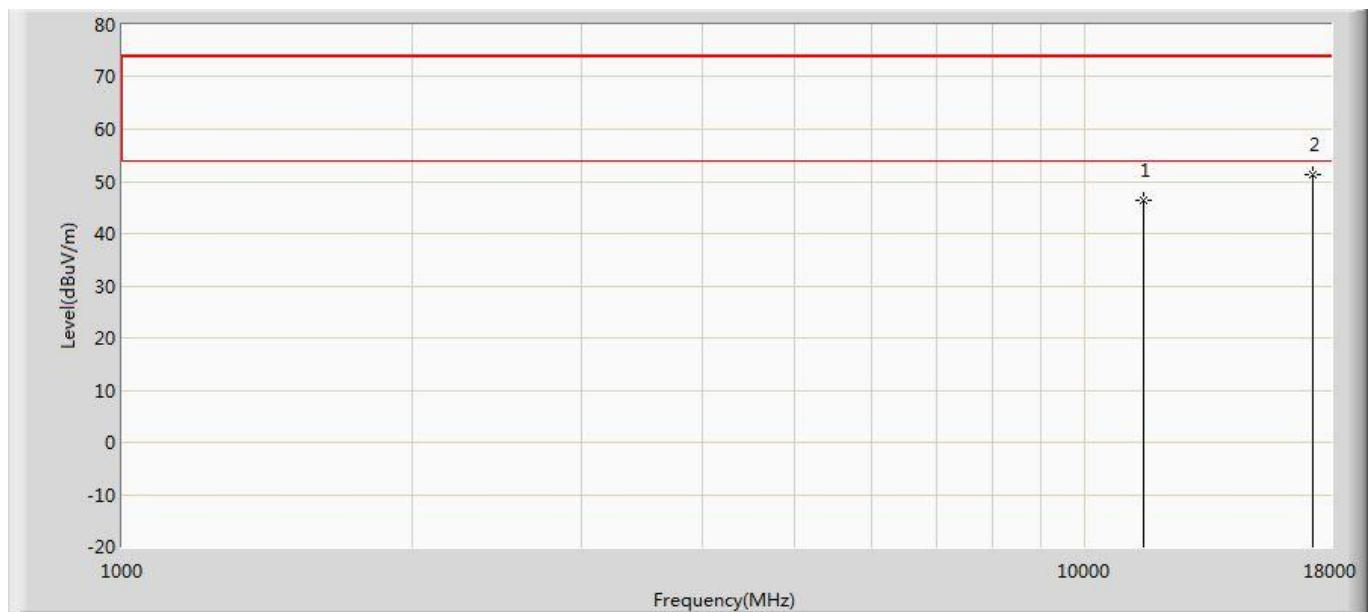


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	46.257	48.739	-27.743	74.000	-2.482	PK
2	*	17235.000	51.447	47.694	-22.553	74.000	3.753	PK

Profile: 2190372R	Page No.: 202
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	

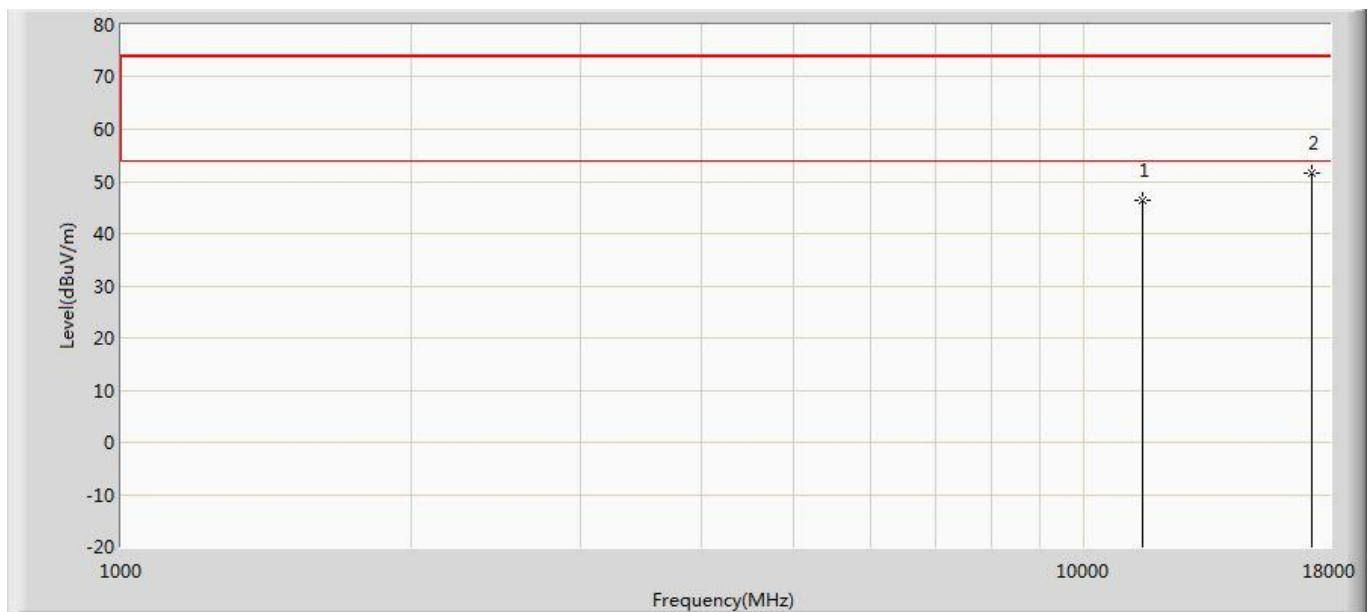


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	46.363	48.845	-27.637	74.000	-2.482	PK
2	*	17235.000	51.597	47.844	-22.403	74.000	3.753	PK

Profile: 2190372R	Page No.: 203
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	

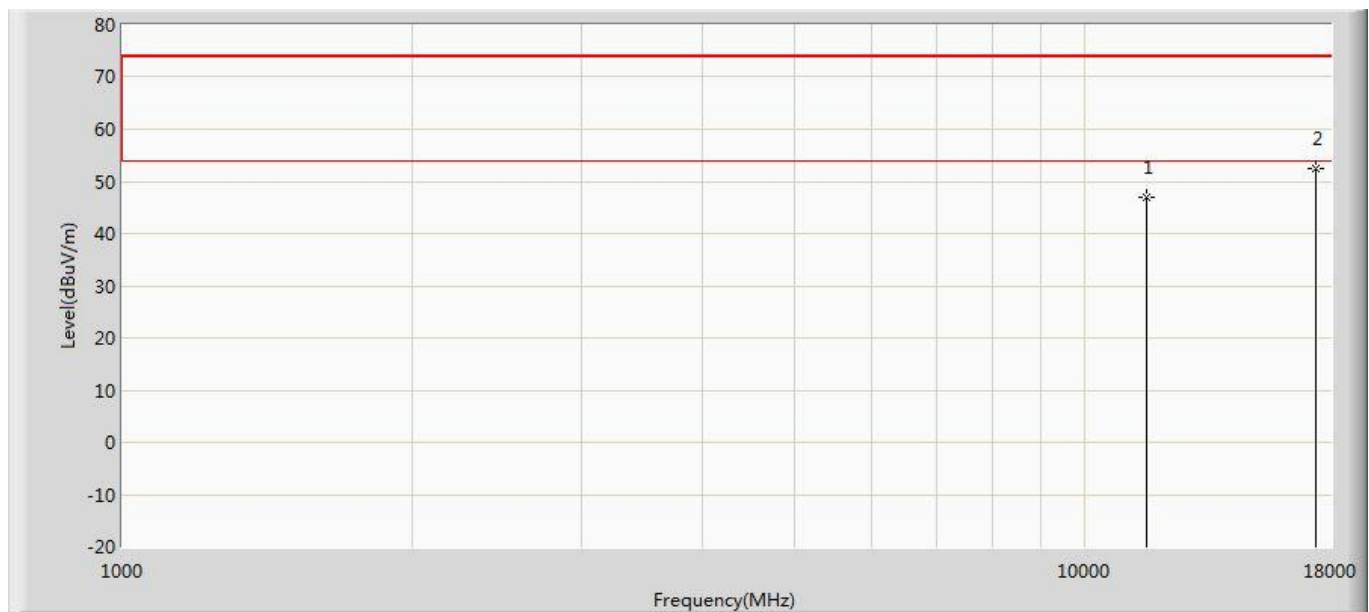


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.841	48.804	-27.159	74.000	-1.963	PK
2	*	17355.000	52.325	48.681	-21.675	74.000	3.643	PK

Profile: 2190372R	Page No.: 204
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	

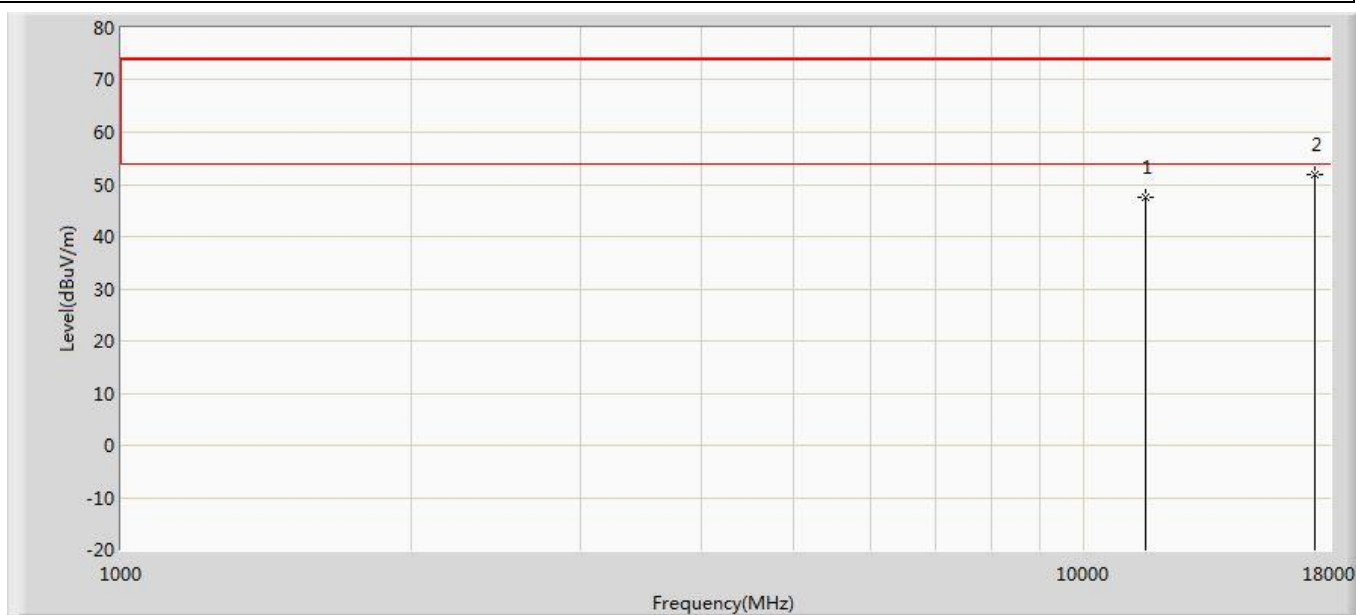


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	47.593	49.556	-26.407	74.000	-1.963	PK
2	*	17355.000	51.868	48.224	-22.132	74.000	3.643	PK

Profile: 2190372R	Page No.: 205
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	

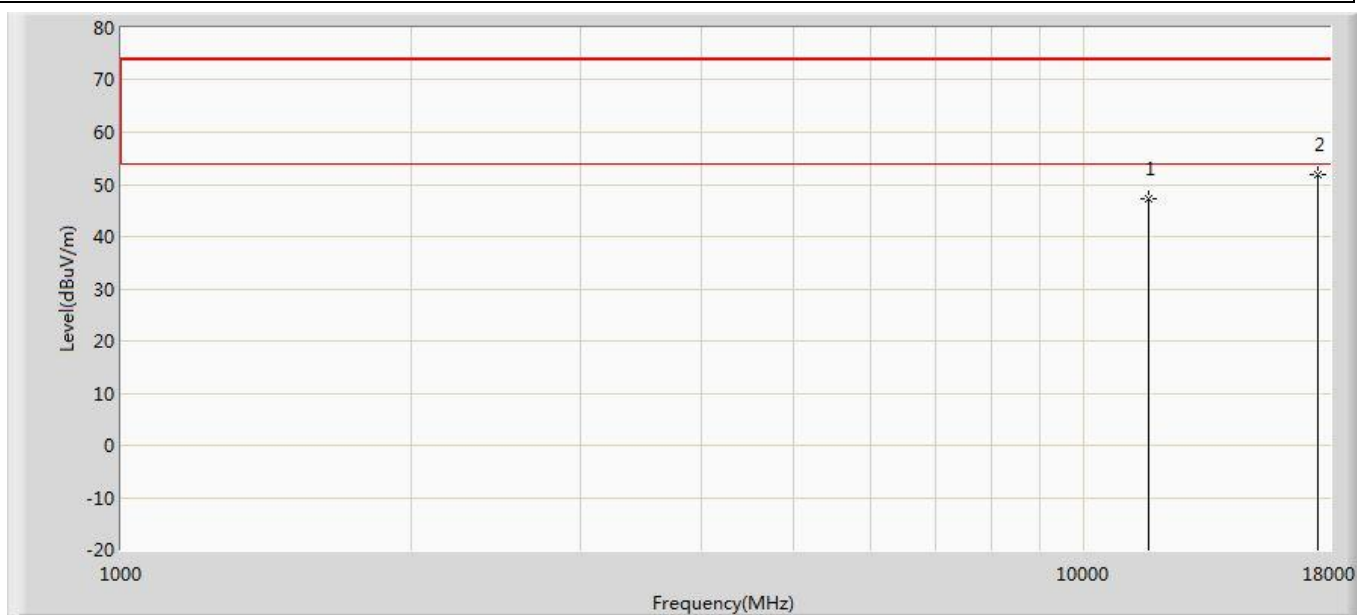


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	47.247	49.066	-26.753	74.000	-1.819	PK
2	*	17475.000	51.846	47.951	-22.154	74.000	3.895	PK

Profile: 2190372R	Page No.: 206
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	

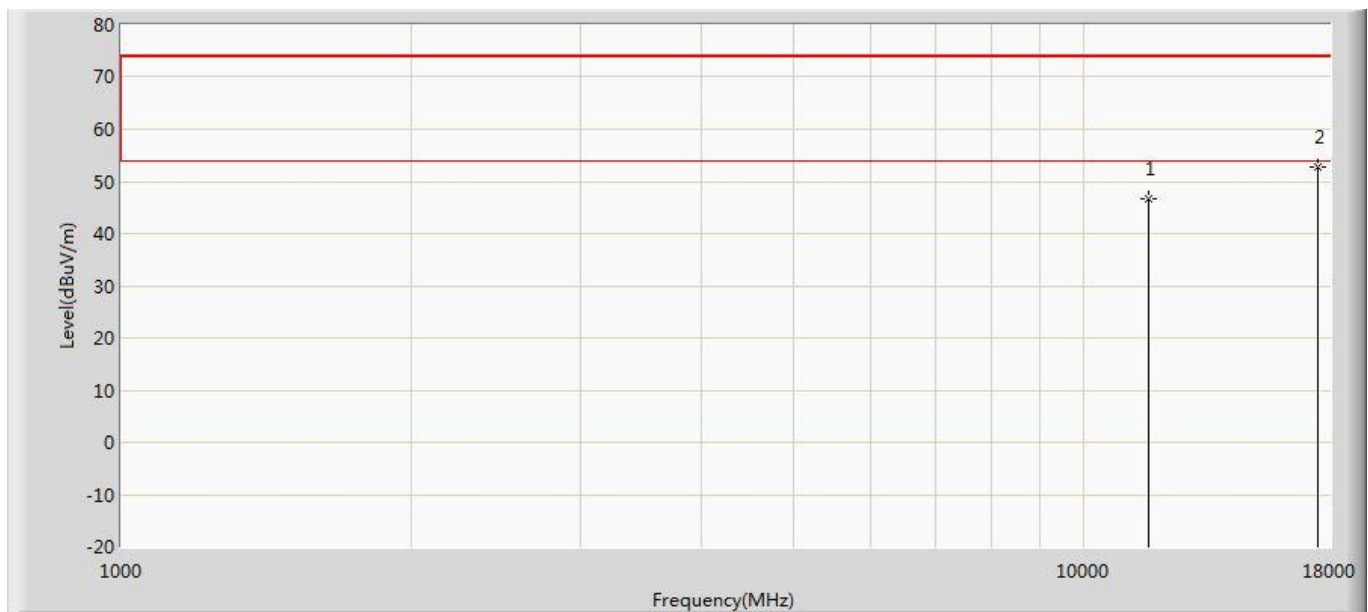


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.740	48.559	-27.260	74.000	-1.819	PK
2	*	17475.000	52.812	48.917	-21.188	74.000	3.895	PK

Profile: 2190372R	Page No.: 207
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5190MHz by 802.11ac(40MHz)	

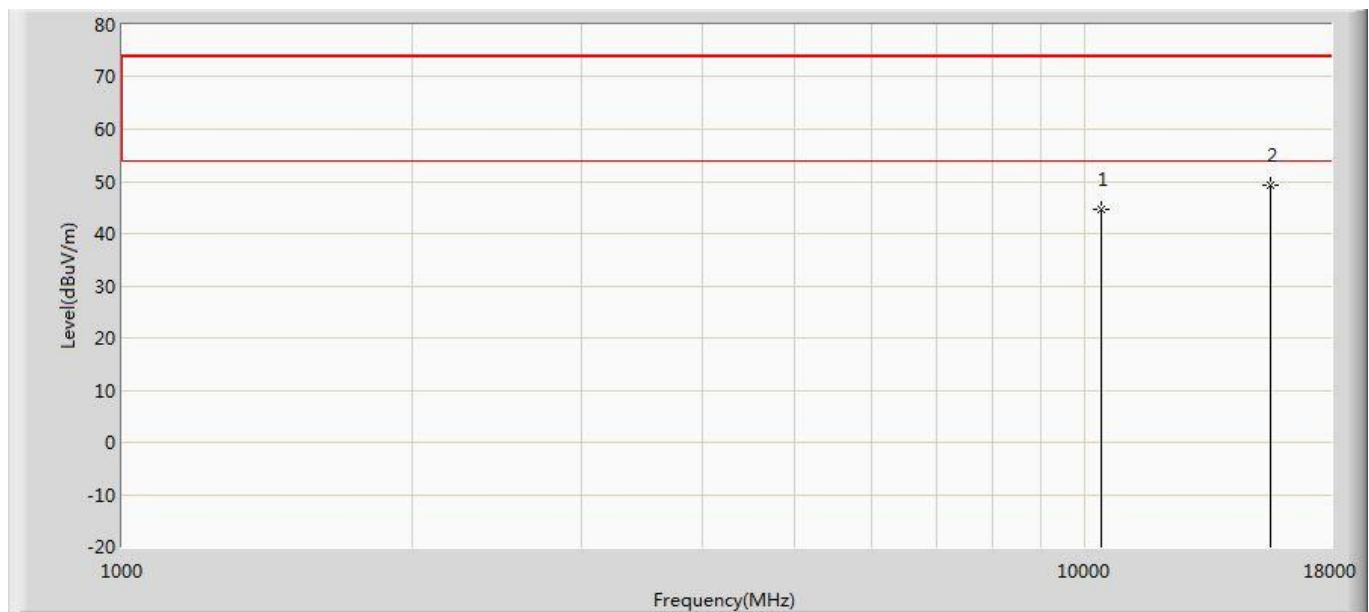


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	44.516	48.600	-29.484	74.000	-4.083	PK
2	*	15570.000	49.167	47.080	-24.833	74.000	2.086	PK

Profile: 2190372R	Page No.: 208
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5190MHz by 802.11ac(40MHz)	

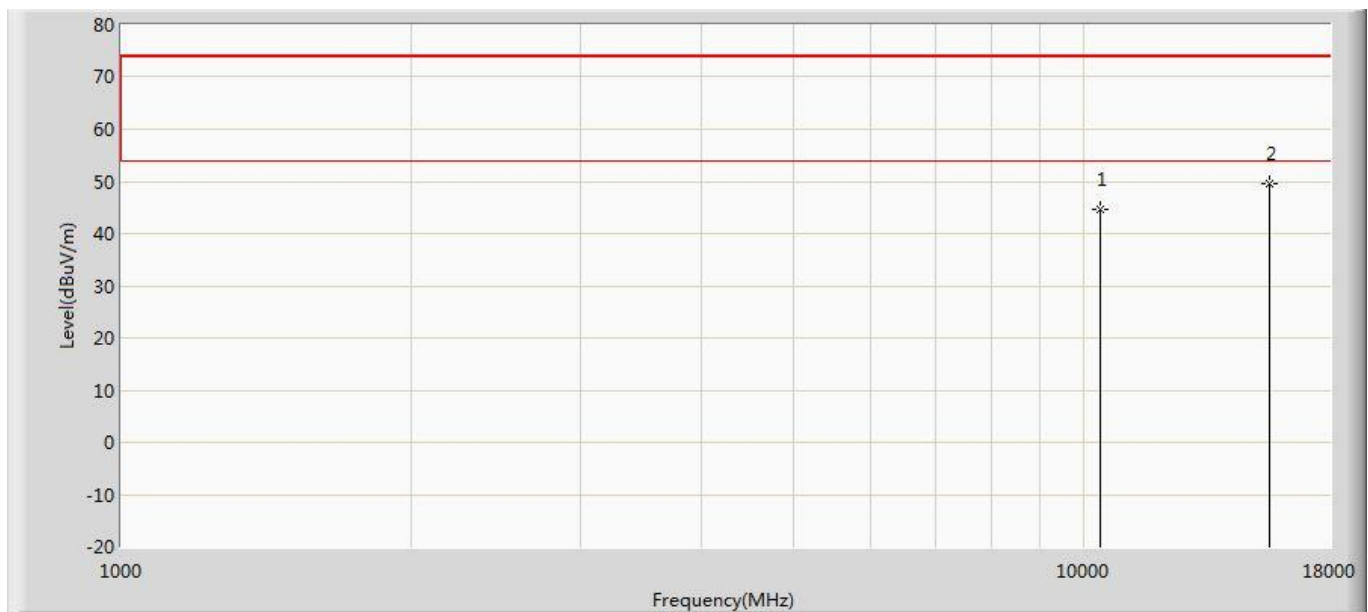


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	44.649	48.733	-29.351	74.000	-4.083	PK
2	*	15570.000	49.559	47.472	-24.441	74.000	2.086	PK

Profile: 2190372R	Page No.: 209
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5230MHz by 802.11ac(40MHz)	

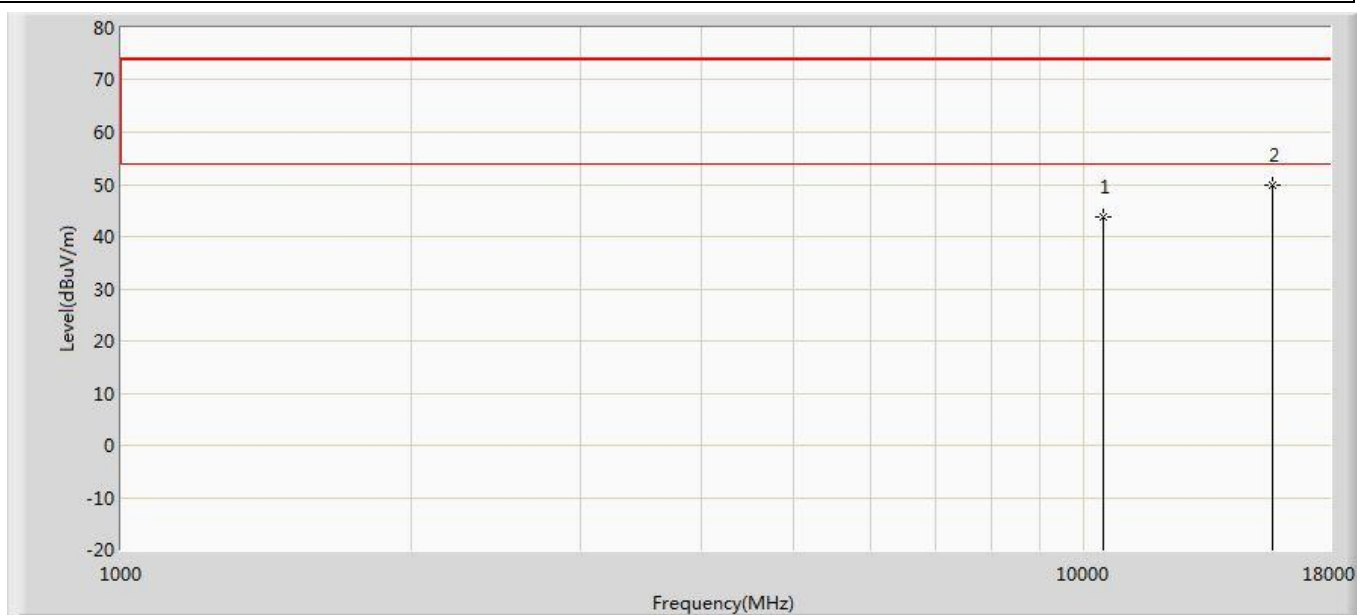


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	43.721	47.667	-30.279	74.000	-3.946	PK
2	*	15690.000	49.958	47.687	-24.042	74.000	2.271	PK

Profile: 2190372R	Page No.: 210
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5230MHz by 802.11ac(40MHz)	

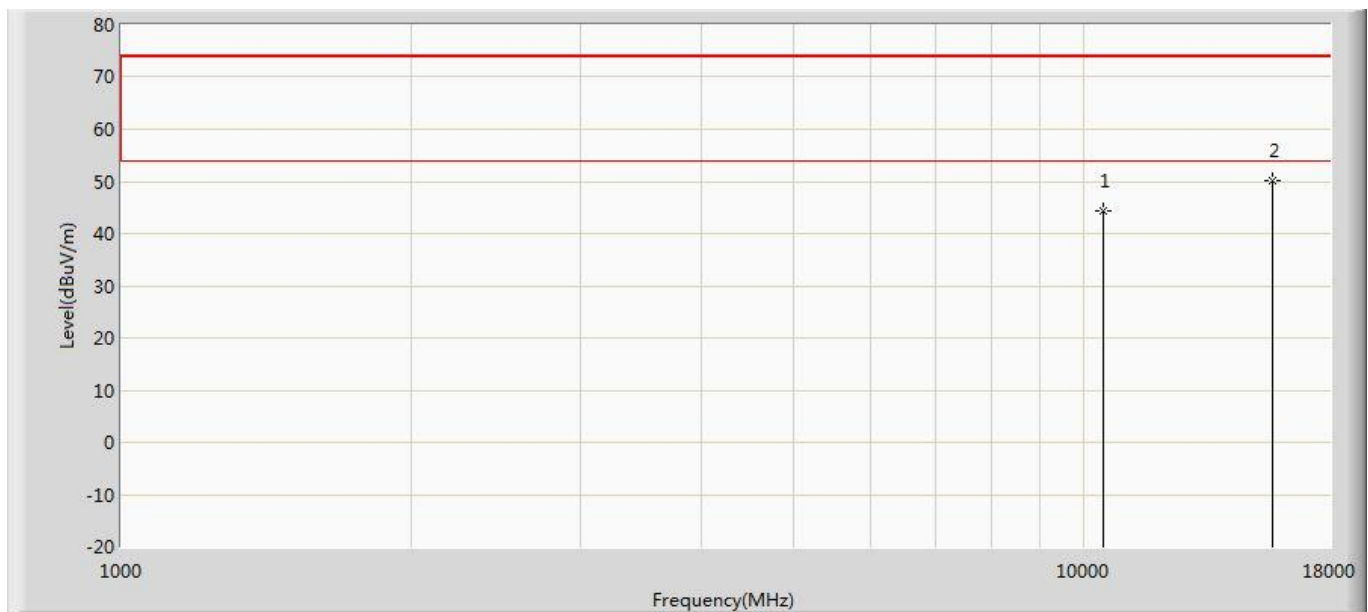


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	44.394	48.340	-29.606	74.000	-3.946	PK
2	*	15690.000	50.137	47.866	-23.863	74.000	2.271	PK

Profile: 2190372R	Page No.: 211
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5270MHz by 802.11ac(40MHz)	

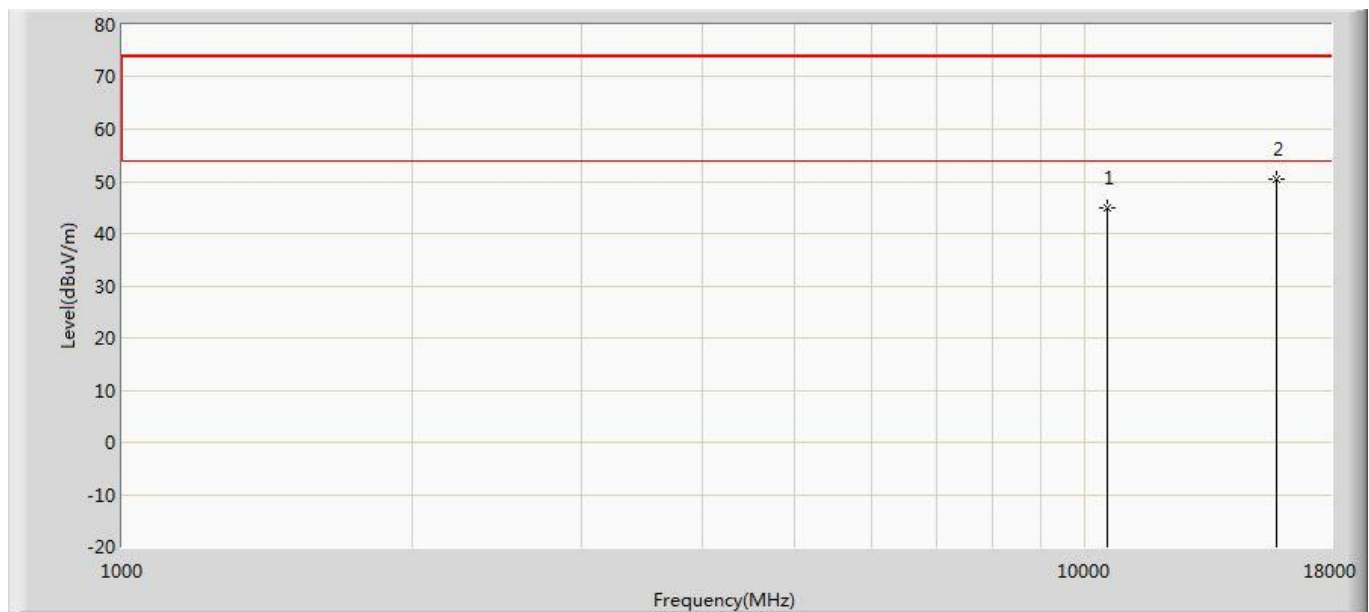


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	44.838	48.857	-29.162	74.000	-4.019	PK
2	*	15810.000	50.564	48.464	-23.436	74.000	2.100	PK

Profile: 2190372R	Page No.: 212
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5270MHz by 802.11ac(40MHz)	

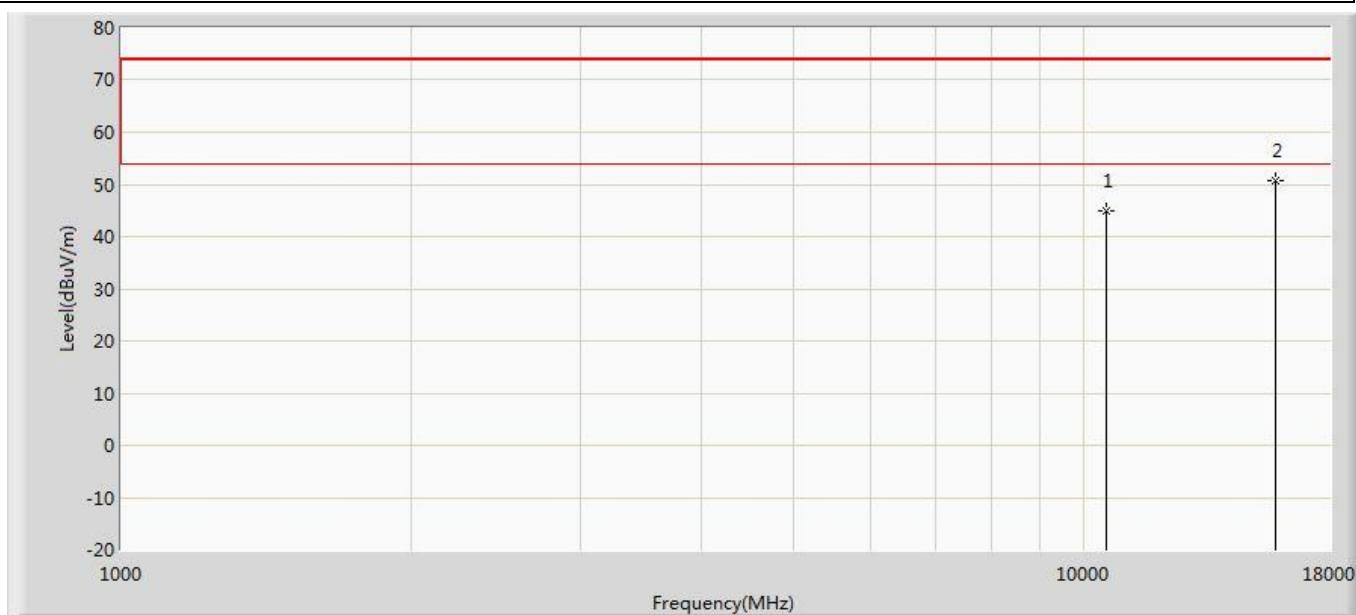


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	45.010	49.029	-28.990	74.000	-4.019	PK
2	*	15810.000	50.799	48.699	-23.201	74.000	2.100	PK

Profile: 2190372R	Page No.: 213
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5310MHz by 802.11ac(40MHz)	

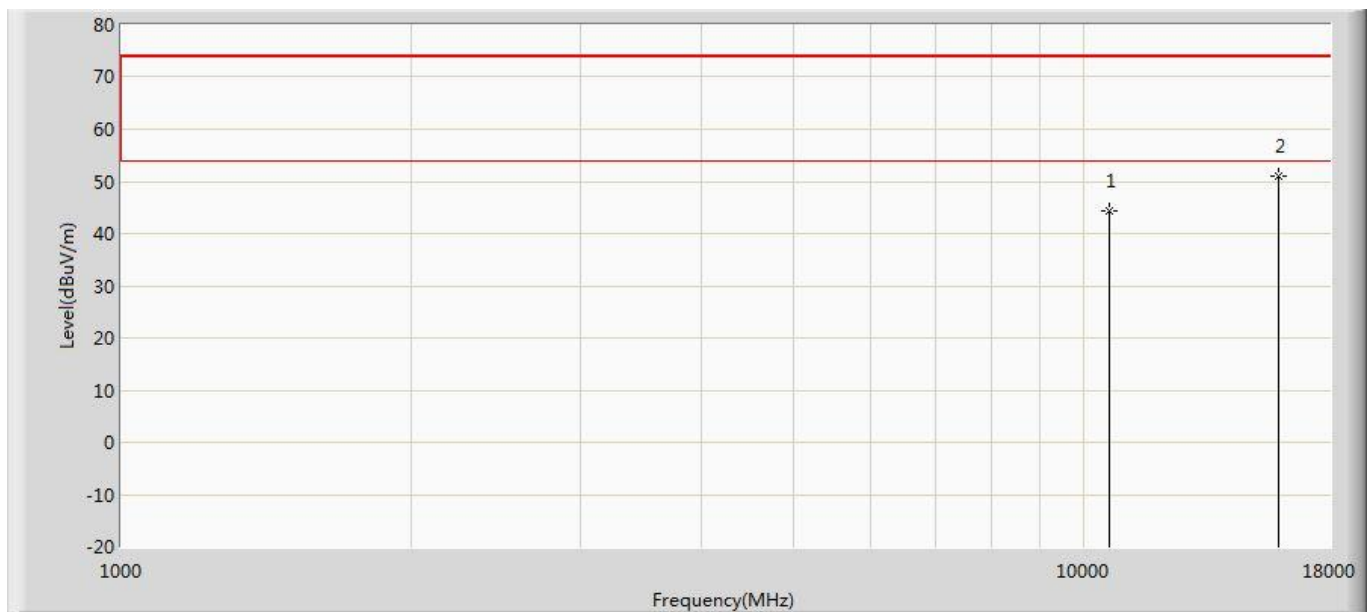


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	44.233	48.014	-29.767	74.000	-3.781	PK
2	*	15930.000	50.905	48.144	-23.095	74.000	2.762	PK

Profile: 2190372R	Page No.: 214
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5310MHz by 802.11ac(40MHz)	

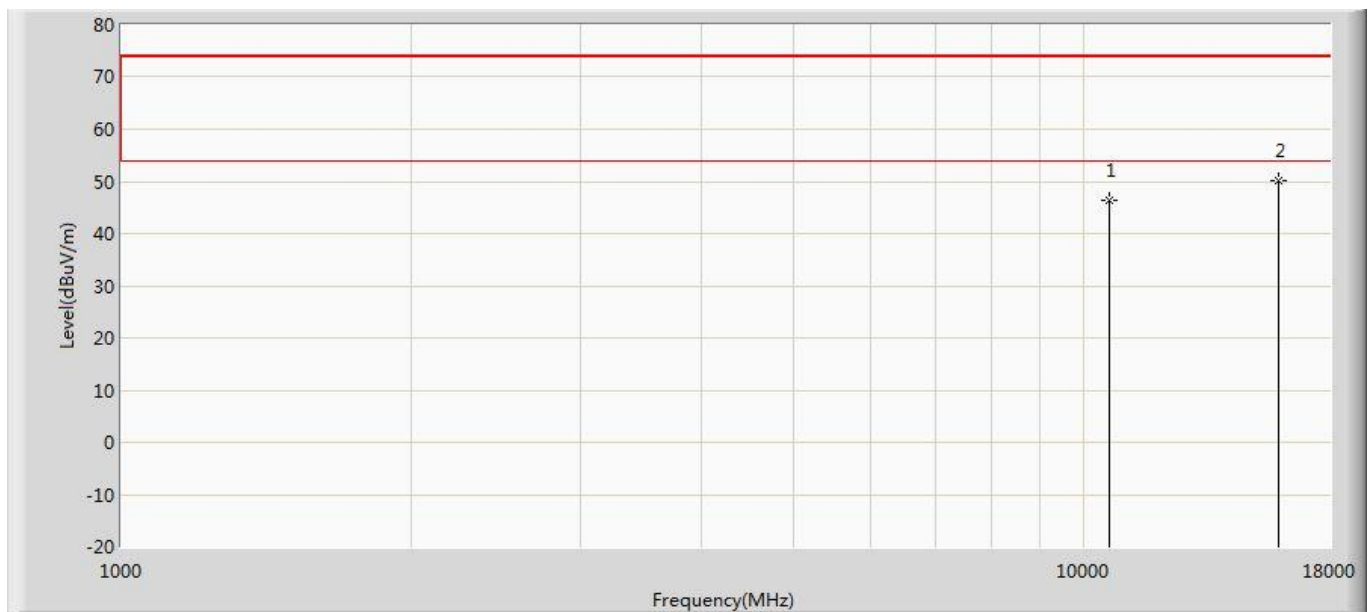


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	46.317	50.098	-27.683	74.000	-3.781	PK
2	*	15930.000	50.262	47.501	-23.738	74.000	2.762	PK

Profile: 2190372R	Page No.: 215
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5510MHz by 802.11ac(40MHz)	

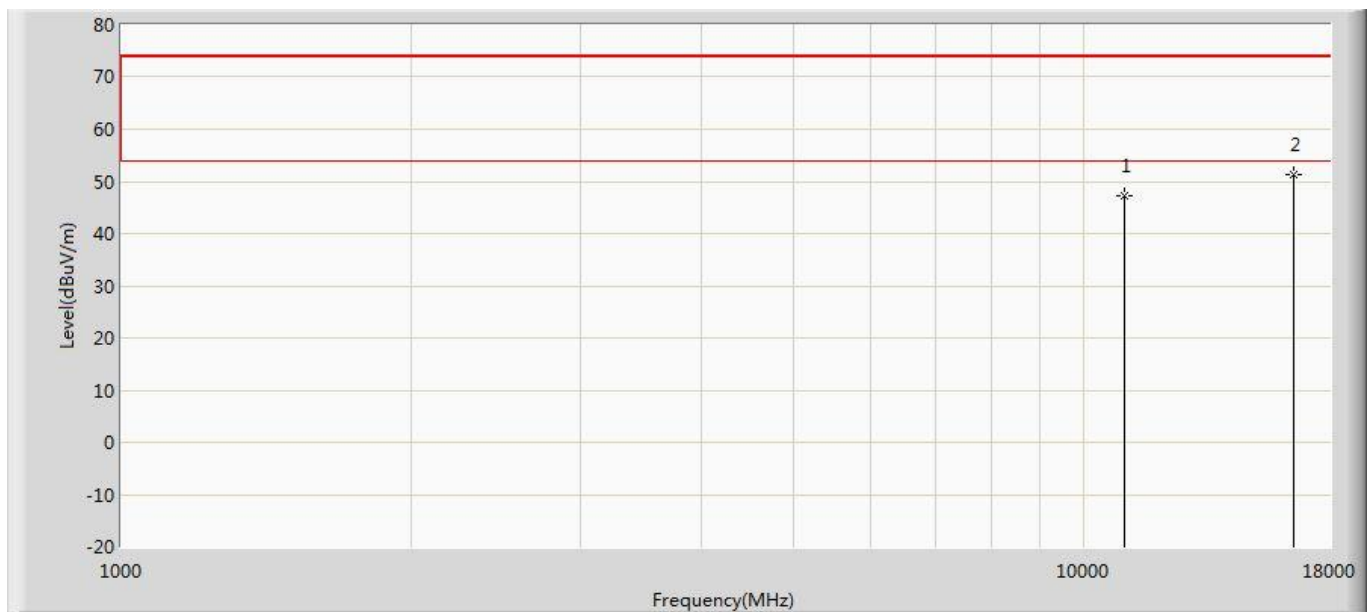


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	47.270	49.888	-26.730	74.000	-2.618	PK
2	*	16530.000	51.442	47.316	-22.558	74.000	4.126	PK

Profile: 2190372R	Page No.: 216
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5510MHz by 802.11ac(40MHz)	

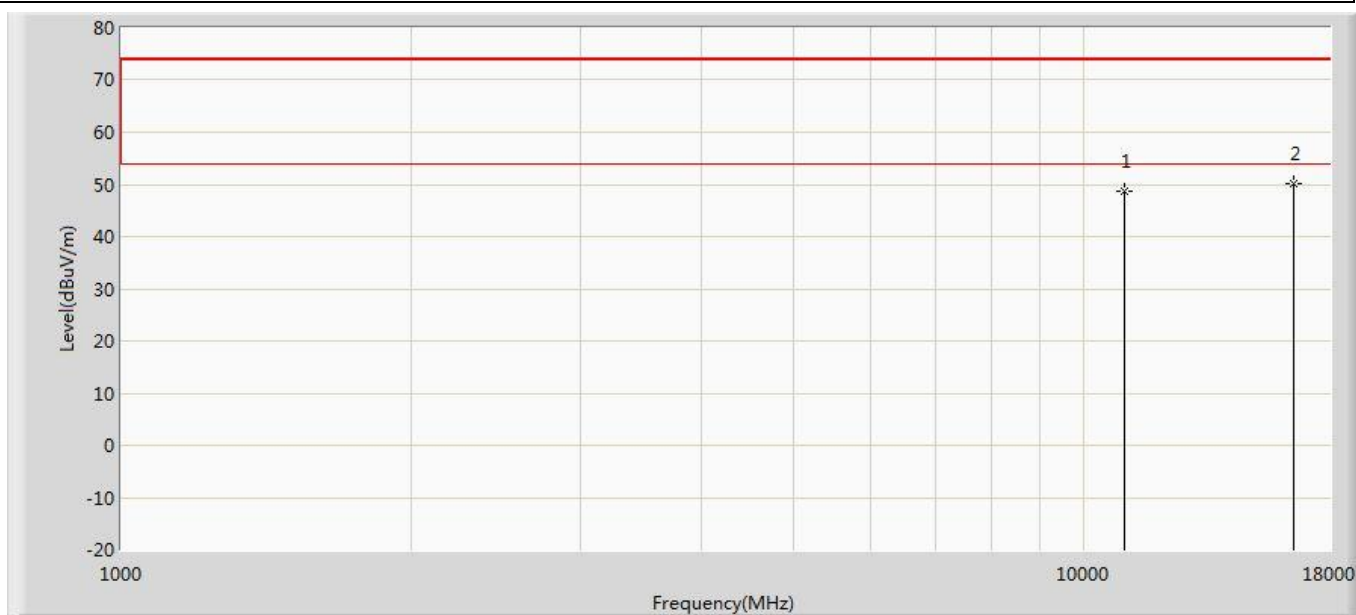


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	48.709	51.327	-25.291	74.000	-2.618	PK
2	*	16530.000	50.240	46.114	-23.760	74.000	4.126	PK

Profile: 2190372R	Page No.: 217
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5590MHz by 802.11ac(40MHz)	

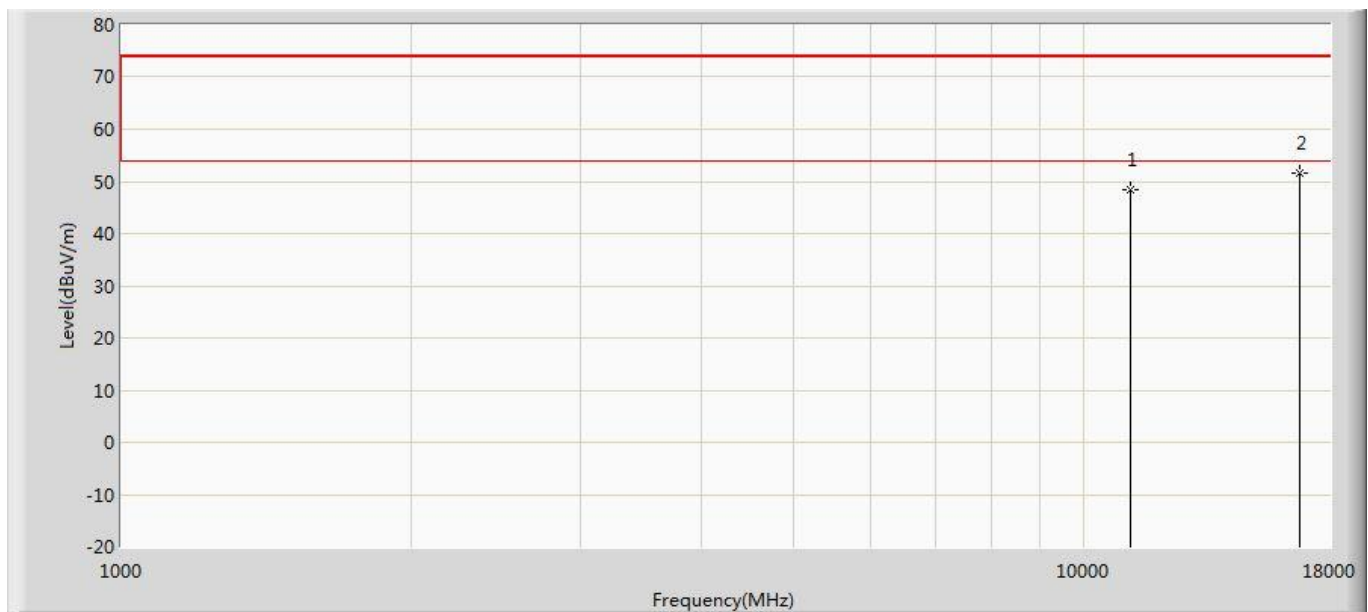


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	48.349	50.869	-25.651	74.000	-2.520	PK
2	*	16770.000	51.657	47.848	-22.343	74.000	3.809	PK

Profile: 2190372R	Page No.: 218
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5590MHz by 802.11ac(40MHz)	

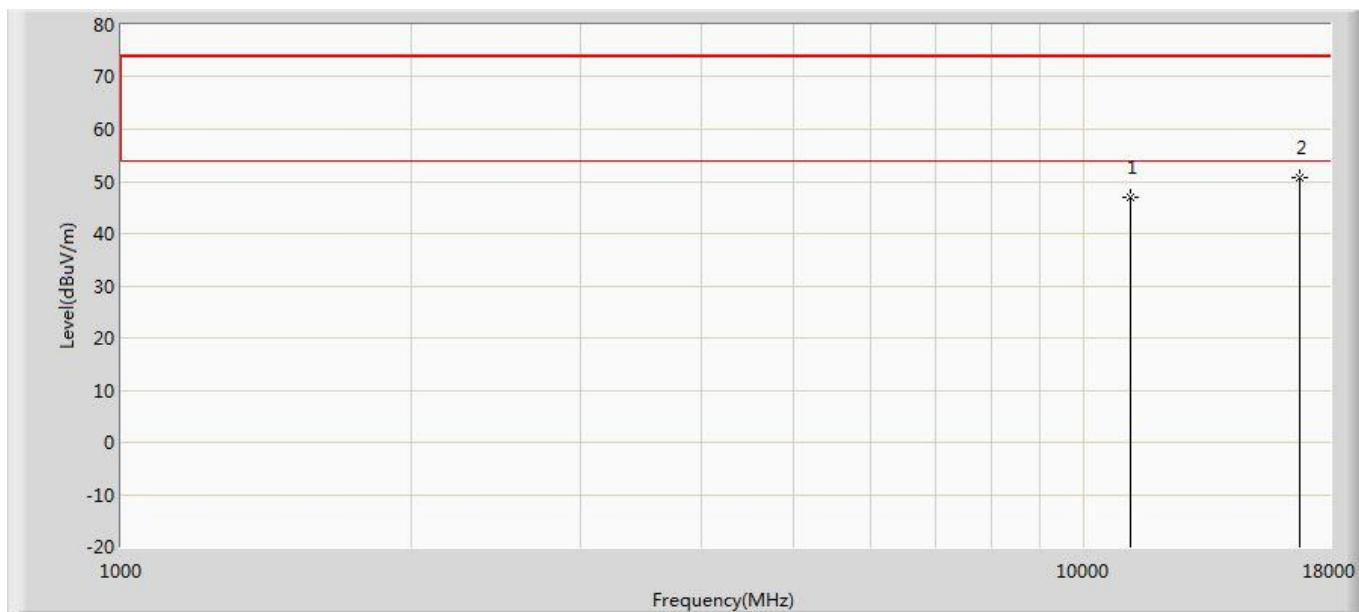


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.984	49.504	-27.016	74.000	-2.520	PK
2	*	16770.000	50.729	46.920	-23.271	74.000	3.809	PK

Profile: 2190372R	Page No.: 219
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5670MHz by 802.11ac(40MHz)	

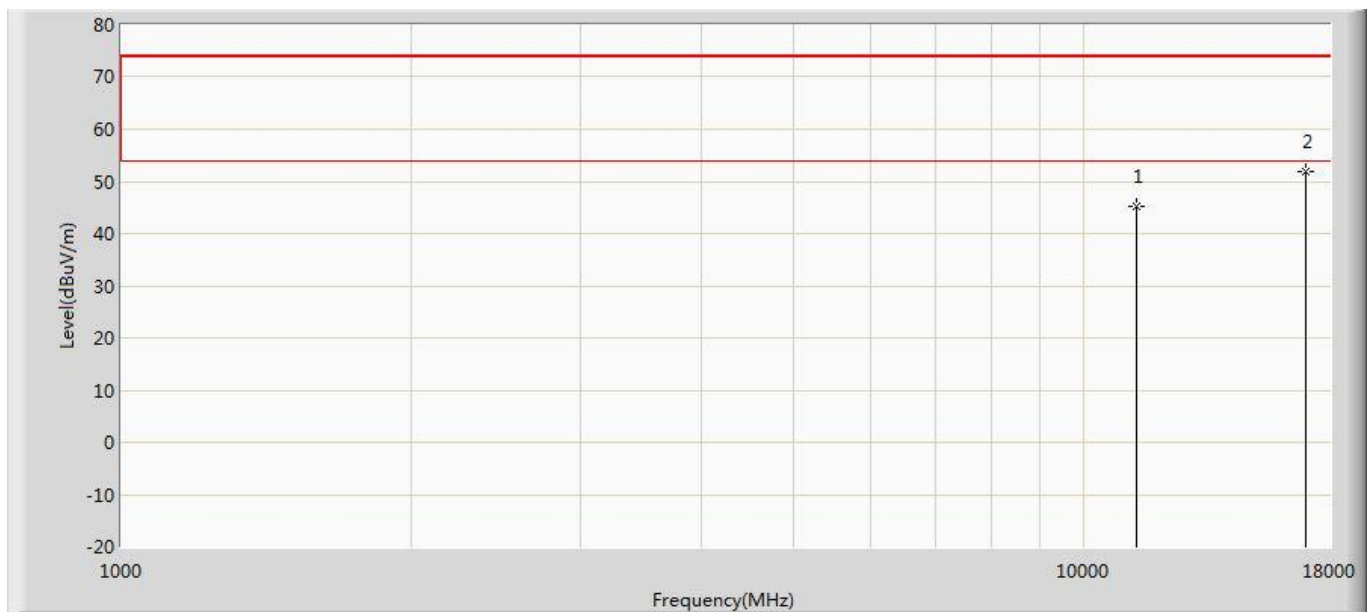


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.131	47.559	-28.869	74.000	-2.428	PK
2	*	17010.000	51.842	47.820	-22.158	74.000	4.023	PK

Profile: 2190372R	Page No.: 220
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Horizontal
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5670MHz by 802.11ac(40MHz)	

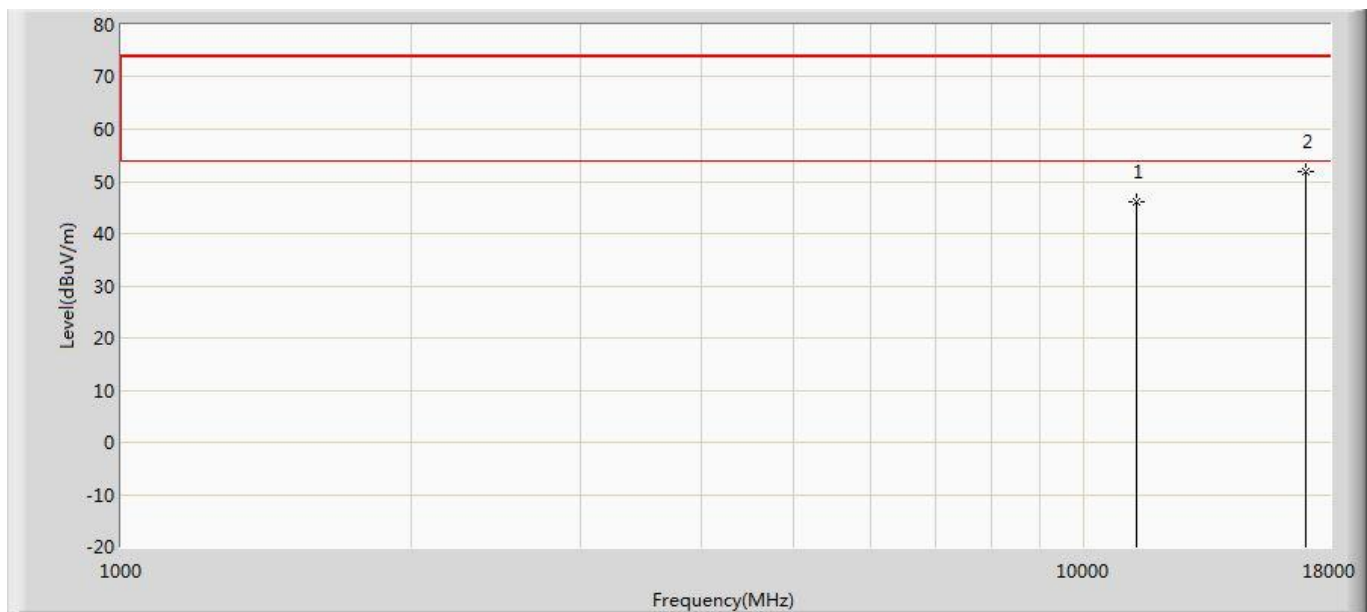

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	46.113	48.541	-27.887	74.000	-2.428	PK
2	*	17010.000	51.981	47.959	-22.019	74.000	4.023	PK

Profile: 2190372R	Page No.: 221
Engineer: YULIU	
Site: AC5	Time: 2021/12/17 - 15:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00165315_(1-18GHz)	Polarity: Vertical
EUT: M8 DESKPHONE	Power: AC 120V/60Hz
Note: Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	

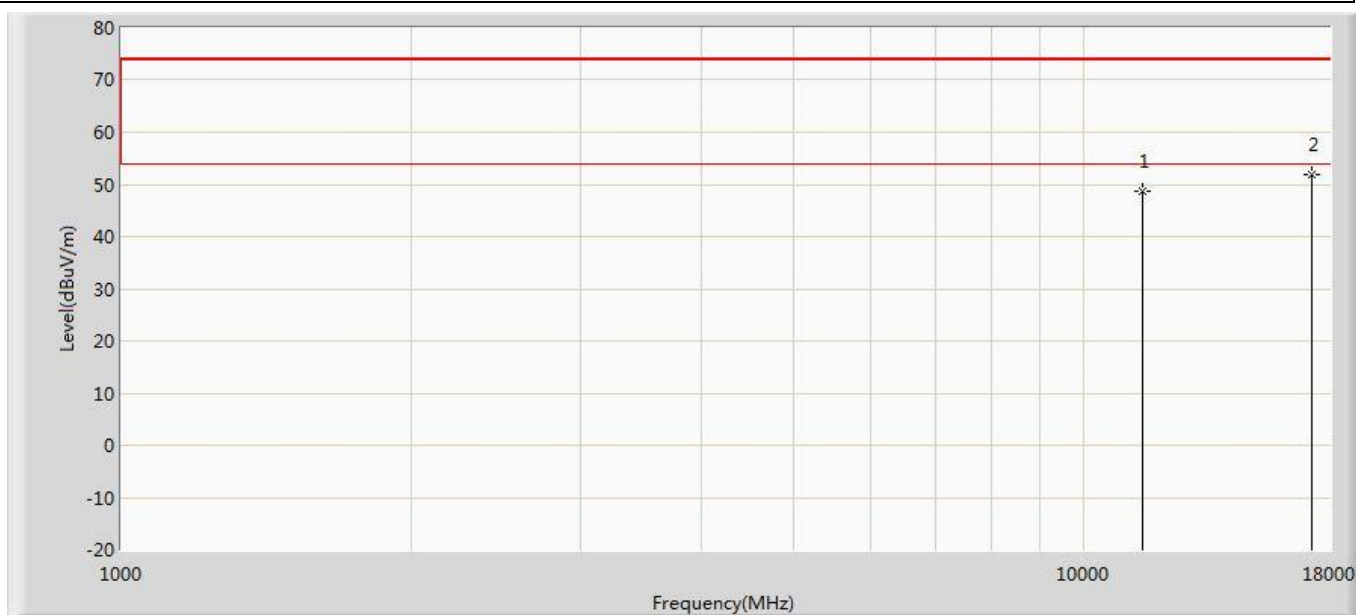

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	48.761	50.552	-25.239	74.000	-1.791	PK
2	*	17265.000	51.980	47.709	-22.020	74.000	4.271	PK