

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Security Proximeter Alarm

Model No. : DX148

FCC ID : OLA-DX148

Filing Type : Certification

Applicant : **WELLMIKE ENTERPRISE CO., LTD.**
3FL., NO. 2, LANE 497, CHUNG CHENG ROAD,
HSIN TIEN, TAIPEI HSIEN, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer.....	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test.....	3
2.1. Test Manner.....	3
2.2. Description of Test System	3
2.3. Connection Diagram of Test System.....	4
2.4. A plot shows the EUT meet the requirement of 15.231(c)	Error! Bookmark not defined.
3. Test Software	5
4. General Information of Test.....	6
4.1. Test Facility	6
4.2. Test Voltage	6
4.3. Standard for Methods of Measurement	6
4.4. Test in Compliance with.....	6
4.5. Frequency Range Investigated.....	6
4.6. Test Distance	6
5. Test of Conducted Powerline	7
6. Test of Radiated Emission	8
6.1. Major Measuring Instruments	8
6.2. Test Procedures.....	9
6.3. Typical Test Setup Layout of Radiated Emission.....	10
6.4. Test Result of Radiated Emission	11
7. Antenna Factor & Cable Loss.....	14
8. EMI Suppression Component List	15
9. List of Measuring Equipments Used	16
10. Uncertainty of Test Site	17

History of this test report

Original Report Issue Date: Aug. 11, 2003

! No additional attachment.

? Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Security Proximeter Alarm

Model No. : DX148

FCC ID : OLA-DX148

Filing Type : Certification

Applicant : **WELLMIKE ENTERPRISE CO., LTD.**
3FL., NO. 2, LANE 497, CHUNG CHENG ROAD,
HSIN TIEN, TAIPEI HSIEN, TAIWAN, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the energy emitted by this equipment was **passed** both radiated and conducted emission limits. Testing was carried out on Aug. 08, 2003 at **SPORTON International Inc.** LAB.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

WELLMIKE ENTERPRISE CO., LTD.
3FL., NO. 2, LANE 497, CHUNG CHENG ROAD,
HSIN TIEN, TAIPEI HSIEN, TAIWAN, R.O.C.

1.2. Manufacturer

WELLMIKE INDUSTRIES (Shen Zhen) LTD.
NO. 7, LANE 1, DAN FENG STREET, SILI ROAD, GUANLAN TOWN,
SHEN ZHEN CITY, GUANG DONG, CHINA

1.3. Basic Description of Equipment under Test

Equipment : Security Proximeter Alarm
Model No. : DX148
FCC ID : OLA-DX148
Trade Name : WELLMIKE
Power Supply Type : Battery (3V)
AC Power Cord : N/A

1.4. Feature of Equipment under Test

Product Feature & Specification	
1. Type of Modulation	ASK
2. Frequency Band	1MHz
3. Carrier Frequency of each channel	433.92MHz+/- 75kHz
4. Maximum Output Power to Antenna	-30dBm
5. IF & L.O. frequency	IF: 1.8MHz+/- 600kHz
6. Function Type	Transceiver, Receiver
7. Power Rating (DC/AC, Voltage)	DC 3V
8. Duty Cycle	1:3
9. Basic function of product	Article Guards

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included EUT for EMI test.
- c. The following test modes were performed for radiation test:
 - Mode 1: X axes
 - Mode 2: Y axes
 - Mode 3: Z axes
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 5000MHz.

2.2. Description of Test System

The EUT was tested alone. No support device is needed for testing.

2.3. Connection Diagram of Test System



3. Test Software

No test software was used during testing.

4. General Information of Test

4.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1St Road, Hwa Ya Technology Park,
Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
TEL : 886-3-3273456
FAX : 886-3-3180055
Test Site No. : 03CH03-HY

4.2. Test Voltage

DC 3V

4.3. Standard for Methods of Measurement

ANSI C63.4-2001

4.4. Test in Compliance with

FCC Part 15, Subpart C 15.209

4.5. Frequency Range Investigated

Radiation: from 30 MHz to 5000 MHz

4.6. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Test of Conducted Powerline

The power is from Battery.

Conduction Powerline test is not applicable for this EUT.

6. Test of Radiated Emission

Radiated emissions from 30 MHz to 5000 MHz were measured with a bandwidth of 120 kHz for 30MHz to 1 GHz and 1MHz for above 1GHz according to the methods defines in ANSI C63.4-2001. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz

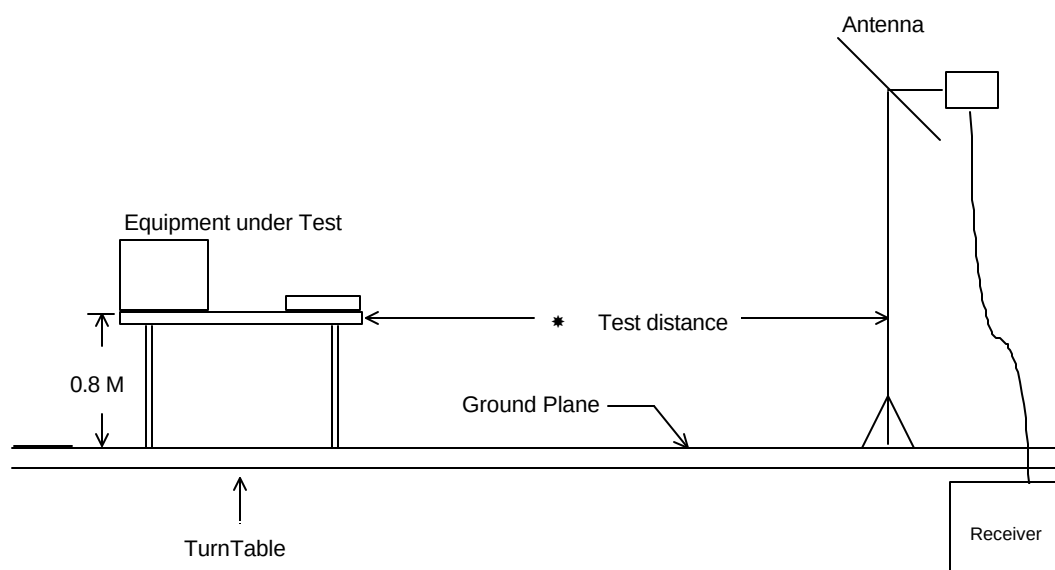
- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz

- Spectrum analyzer (R&S FSP40)
 - Attenuation 10 dB
 - Start Frequency 30 MHz
 - Stop Frequency 5 GHz
 - Resolution Bandwidth 1 MHz/ 120kHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 4 0 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K– 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was more 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

6.3. Typical Test Setup Layout of Radiated Emission

6.4. Test Result of Radiated Emission

6.4.1. Test Mode: Mode 1

- Test Distance: 3 M
- Temperature: 26°C
- Relative Humidity: 67 %
- Test Date : Aug. 04, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The Radiated Emission test was passed at minimum margin

The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 1 m, turn table degree is 210 °

Frequency	Antenna	Cable	Reading	Limits	Emission Level	Margin	Detect			
	Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode	
30.810	V	14.78	1.02	13.91	40.00	100.00	29.71	30.58	-10.29	Peak
63.210	V	4.92	1.46	14.00	40.00	100.00	20.38	10.45	-19.62	Peak
80.220	V	6.12	1.56	14.82	40.00	100.00	22.50	13.34	-17.50	Peak
433.940	H	15.11	3.54	23.71	46.00	199.53	42.36	131.22	-3.64	AV.
867.880	H	19.22	5.26	14.81	46.00	199.53	39.29	92.15	-6.71	Peak
433.940	V	15.11	3.54	17.55	46.00	199.53	36.20	64.57	-9.80	Peak
867.890	V	19.22	5.26	5.55	46.00	199.53	30.03	31.73	-15.97	Peak

➤ For 1GHz ~ 5GHz

Remark: Frequency from 1000MHz to 5000MHz, the emission emitted by the EUT is too low to be measured

Test Engineer:


Steve Chen

6.4.2. Test Mode: Mode 2

- Test Distance: 3 M
- Temperature: 26°C
- Relative Humidity: 67 %
- Test Date : Aug. 04, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The Radiated Emission test was passed at minimum margin

The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 1 m, turn table degree is 150°

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss		Limits		Emission Level		Margin	Detect
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
32.970	H	13.80	1.03	16.37	40.00	100.00	31.20	36.31	-8.80	Peak
37.290	H	11.96	1.07	12.03	40.00	100.00	25.06	17.91	-14.94	Peak
808.900	H	18.84	5.08	2.39	46.00	199.53	26.31	20.68	-19.69	Peak
30.810	V	14.78	1.02	10.50	40.00	100.00	26.30	20.65	-13.70	Peak
38.370	V	11.53	1.08	12.09	40.00	100.00	24.70	17.18	-15.30	Peak
82.650	V	6.83	1.59	12.46	40.00	100.00	20.88	11.07	-19.12	Peak
433.940	H	15.11	3.54	23.31	46.00	199.53	41.96	125.31	-4.04	Peak
867.880	H	19.22	5.26	9.11	46.00	199.53	33.59	47.81	-12.41	Peak
433.930	V	15.11	3.54	8.72	46.00	199.53	27.37	23.36	-18.63	Peak
867.890	V	19.22	5.26	7.10	46.00	199.53	26.78	21.83	-19.22	Q.P.

➤ For 1GHz ~ 5GHz

Remark: Frequency from 1000MHz to 5000MHz, the emission emitted by the EUT is too low to be measured

Test Engineer: Steve Chen

Steve Chen
Steve Chen

6.4.3. Test Mode: Mode 3

- Test Distance: 3 M
- Temperature: 26°C
- Relative Humidity: 67 %
- Test Date : Aug. 04, 2003
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The Radiated Emission test was passed at minimum margin

The test was passed at the minimum margin that marked under gray area in the following table, and its antenna height is 1 m, turn table degree is 198°

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss		Limits		Emission Level		Margin	Detect
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	Mode
37.290	H	11.96	1.07	10.80	40.00	100.00	23.83	15.54	-16.17	Peak
178.770	H	7.59	2.12	22.40	43.50	149.62	32.11	40.32	-11.39	Peak
511.400	H	16.17	3.86	5.88	46.00	199.53	25.91	19.75	-20.09	Peak
30.810	V	14.78	1.02	9.88	40.00	100.00	25.68	19.23	-14.32	Peak
82.650	V	6.83	1.59	12.92	40.00	100.00	21.34	11.67	-18.66	Peak
512.100	V	16.17	3.87	4.70	46.00	199.53	24.74	17.26	-21.26	Peak
433.950	H	15.11	3.54	24.16	46.00	199.53	42.81	138.20	-3.19	Peak
867.890	H	19.22	5.26	9.53	46.00	199.53	34.01	50.18	-11.99	Peak
433.940	V	15.11	3.54	26.73	46.00	199.53	45.38	185.78	-0.62	Peak
867.900	V	19.22	5.26	8.26	46.00	199.53	32.74	43.35	-13.26	Peak

➤ For 1GHz ~ 5GHz

Remark: Frequency from 1000MHz to 5000MHz, the emission emitted by the EUT is too low to be measured

Test Engineer: Steve Chen

Steve Chen
Steve Chen

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01
35	13.63	1.04
40	11.11	1.09
45	10.59	1.24
50	6.47	1.43
55	5.83	1.39
60	5.18	1.59
65	4.81	1.41
70	4.43	1.43
75	5.10	1.55
80	5.91	1.56
85	7.33	1.62
90	8.74	1.41
95	9.05	1.81
100	9.36	1.68
110	9.65	1.73
120	9.97	1.79
130	10.51	1.93
140	10.32	2.06
150	9.42	2.09
160	8.09	2.12
170	7.43	2.12
180	7.60	2.12
190	7.43	2.21
200	7.26	2.29
220	9.11	2.42
240	10.88	2.54
260	11.75	2.66
280	11.55	2.76
300	11.36	2.85
320	12.03	3.10
340	12.69	3.36
360	13.33	3.49
380	14.00	3.50
400	14.63	3.51
450	15.33	3.55
500	16.03	3.81
550	16.65	4.05
600	17.29	4.23
650	17.64	4.63
700	18.00	4.74
750	18.39	4.95
800	18.79	5.06
850	19.10	5.18
900	19.42	5.40
950	19.58	5.91
1000	19.75	5.58
1000	24.30	3.92
2000	31.10	5.66
3000	29.60	7.20
4000	30.80	9.36
5000	34.20	9.16

8. EMI Suppression Component List

No EMI suppression components.

9. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP30	100023/030	9KHZ~30GHz	Jul. 22, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz ~1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz ~ 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz ~2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	AFS44	879981	100MHz~26.5GHz	Aug. 12, 2002	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz ~ 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)

. Calibration Interval of instruments listed above is one year, except for Horn Antenna, BBHA9170.

10. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty Ue(y)	normal	±2.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.4

$$U=\sqrt{\{(1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2\}}=2.2 \text{ for 10m test distance}$$

$$U=\sqrt{\{(1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2\}}=2.7 \text{ for 3m test distance}$$

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.66
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.32

$$U=\sqrt{\{(0.3/2)^2+(2^2+1.5^2+0.2^2)/3+(0.2)^2/2\}}=1.66$$