



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Applicant : PARKTEL FZE

Address : WARE HOUSE NO: FF01,ROUND ABOUT NO: 05,
JEBEL ALI FREEZONE DUBAI U.A.E

Product Name : GSM Mobile Phone

Model Name : U-240-2, U-240-1

Brand Name : unnecto™

FCC ID : OLEU240

Report No. : STS130404F5

Date of Issue : April 25, 2013

Issued by : Shenzhen Super Test Service Technology Co., Ltd.

Address : No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan,
Shenzhen, Guangdong, China

Tel : 86-755-2795 8522

Fax : 86-755-2795 8022

The report consists 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by STS. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY.....	3
2. GENERAL INFORMATION.....	4
2.1 Product Information.....	4
2.2 Objective.....	5
2.3 Test Standards and Results.....	5
2.4 Environmental Conditions.....	5
3. TEST FACILITY.....	6
4. TEST EQUIPMENT LIST.....	8
5. 47 CFR Part 15 C 15.247 Requirements.....	9
5.1 6dB Bandwidth.....	9
5.2 Peak Output Power.....	16
5.3 Conducted Spurious Emission.....	22
5.4 Band Edge.....	24
5.5 Power Spectral Density (PSD).....	32
5.6 Conducted Emission.....	38
5.7 Radiated Emission.....	41
APPENDIX 1.....	53
PHOTOGRAPHS OF TEST SETUP.....	53
APPENDIX 2.....	55
PHOTOGRAPHS OF EUT.....	55

1. VERIFICATION OF CONFORMITY

Equipment Under Test: GSM Mobile Phone
Brand Name: unnecto ™
Model Number: U-240-2, U-240-1
Series Model Name: The same mainboard, but U-240-2 is dual SIM card, U-240-1 is single SIM card.
Difference description: OLEU240
FCC ID: PARKTEL FZE
Applicant: WARE HOUSE NO: FF01,ROUND ABOUT NO: 05, JEBEL ALI FREEZONE DUBAI U.A.E
Shenzhen Xiangyue Perfect Digital Science & Technology Co.,Ltd
Manufacturer: Building A1,Jiujutongxin Industrial Zone 11, Xinbu,Tongle, Longgang, Shenzhen, China
47 CFR Part 15 Subpart C
Technical Standards: STS130404F5
File Number: April 5, 2013-April 24, 2013
Date of test: None
Deviation: Normal
Condition of Test Sample: PASS
Test Result: GSM Mobile Phone

The above equipment was tested by *Shenzhen Super Test Service Technology Co., Ltd* for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.


The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):




Petter Ping April 25, 2013

Review by (+ signature):



July Wen April 25, 2013

Approved by (+ signature):



Terry Yang April 25, 2013

2. GENERAL INFORMATION

2.1 Product Information

EUT- Mobile Phone	
Description:	GSM Mobile Phone
Model Name:	U-240-2
Power Supply:	DC 5V by AC/DC adapter 100~240V 50/60Hz DC 3.7V by Lithium-ion Battery
Frequency Range:	2412MHz – 2462MHz
Number of Channels:	IEEE 802.11b/g/n mode: 11 Channels
Transmit Power	IEEE 802.11b mode: 11.5+/-2 dBm IEEE 802.11g mode: 11.5+/-2 dBm IEEE 802.11n-20 mode: 11.5+/-2 dBm
Modulation Technique:	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 13, 19.5, 26, 39, 52, 58.5, 65.0Mbps)
Antenna Gain:	2.5dBi
Temperature Range:	-20°C ~ +50°C

NOTE:

1. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

The objective of the report is to perform tests according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-11 Edition)	Radio Frequency Devices

2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.247(a)(2)	6dB Bandwidth	PASS	2013-4-11
2	15.247(b)(3)	Peak Output Power	PASS	2013-4-11
3	15.247(d)	conducted spurious emission	PASS	2013-4-11
4	15.247(d)	Band Edge	PASS	2013-4-11
5	15.247(e)	Power Spectral Density	PASS	2013-4-11
6	15.207	Conducted Emission	PASS	2013-4-11
7	15.247(d) 15.205 15.209	Radiated Emission	PASS	2013-4-11

Note: 1. The test result judgment is decided by the limit of measurement standard
 2. The information of measurement uncertainty is available upon the customer's request.

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST FACILITY

3.1 TEST FACILITY

Test Site: Most Technology Service Co., Ltd.

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR 16 requirements.

The FCC Registration Number is **490827**.

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

EUT Function and Test Mode

The EUT has been tested under normal operating (TX) and standby (RX) condition.

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of X axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2009, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2009.

3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi- peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

4. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1/ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2013/03/14	2014/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2013/03/14	2014/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2013/03/14	2014/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2013/03/14	2014/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2013/03/14	2014/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2013/03/14	2014/03/14
7	Bilog Antenna	Sunol	JB3	A121206	2013/03/14	2014/03/14
8	Test Antenna - Horn	Schwarzbeck	BBHA 9120C	--	2013/03/14	2014/03/14
9	Test Antenna - Horn	Schwarzbeck	BBHA 9170	--	2013/03/14	2014/03/14
10	Test Antenna - LOOP	Schwarzbeck	HFRA 5149	--	2013/03/14	2014/03/14
11	Cable	SchwarzBeck	N/A	NO.1	2013/03/14	2014/03/14
12	Cable	SchwarzBeck	N/A	NO.2	2013/03/14	2014/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2013/03/14	2014/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2013/03/14	2014/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2013/03/14	2014/03/14
16	Spectrum Analyzer	Agilent	4408B	MY41440460	2013/03/14	2014/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2013/03/14	2014/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2013/03/14	2014/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2013/03/14	2014/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2013/03/14	2014/03/14
21	Line Impedance Network	Kikusui	LIN40MA-PCR-L	LM002352	2013/03/14	2014/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2013/03/14	2014/03/14
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2013/03/14	2014/03/14
24	Signal Generator	IFR	2032	203002/100	2013/03/14	2014/03/14
25	Amplifier	A&R	150W1000	301584	2013/03/14	2014/03/14
26	CDN	FCC	FCC-801-M2-25	47	2013/03/14	2014/03/14
27	CDN	FCC	FCC-801-M3-25	107	2013/03/14	2014/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2013/03/14	2014/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2013/03/14	2014/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2013/03/14	2014/03/14
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2013/03/14	2014/03/14
32	Temperature Chamber	Guangzhou Gongwen	GDS-250	N/A	2013/03/14	2014/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15 C 15.247 Requirements

5.1 6dB Bandwidth

5.1.1 Definition

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.1.2 Test Description

The EUT is powered by the Battery, is coupled to the Spectrum Analyzer (SA) through the Attenuator/DC Block. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power. The RF load attached to the EUT antenna terminal is 500Ω.

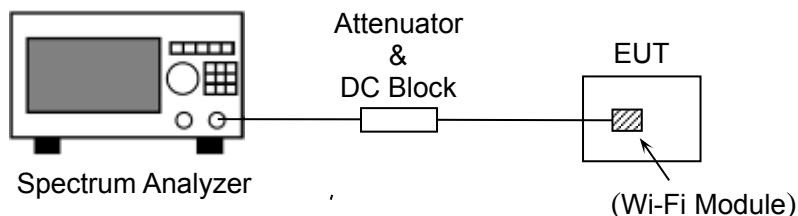


Figure 1: RF Test Setup

5.1.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.


5.1.3.1 802.11b Test Mode

The minimum occupied bandwidth for the fundamental frequency 2462MHz is 11.1MHz. This occupied bandwidth complies with the FCC requirement.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	10.5	≥500	PASS
6	2437	10.5	≥500	PASS
13	2462	11.1	≥500	PASS


B. Test Plot:

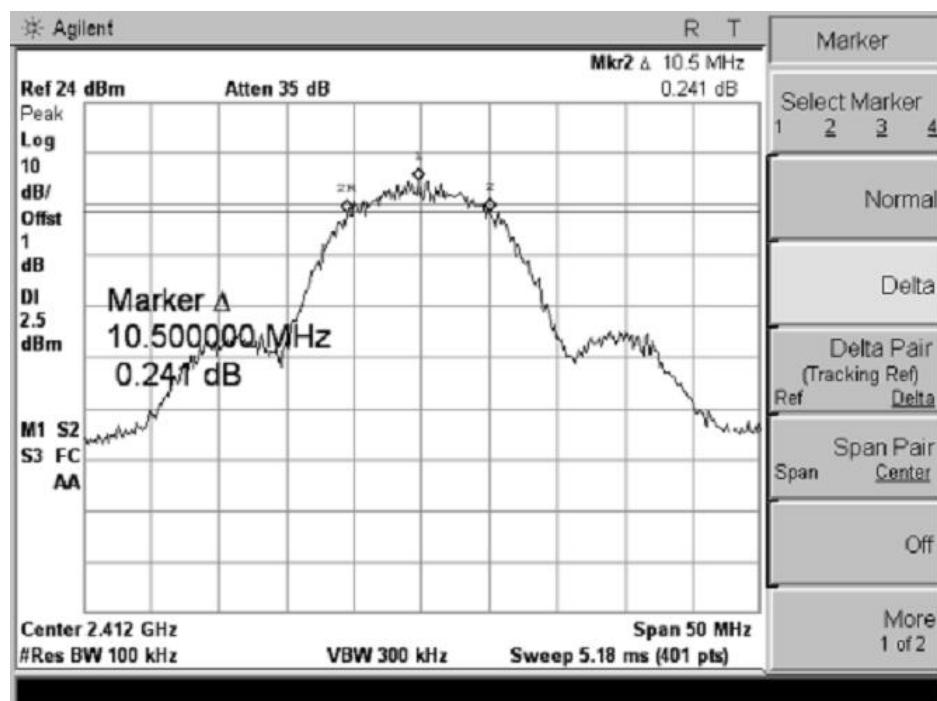

(CH Low)

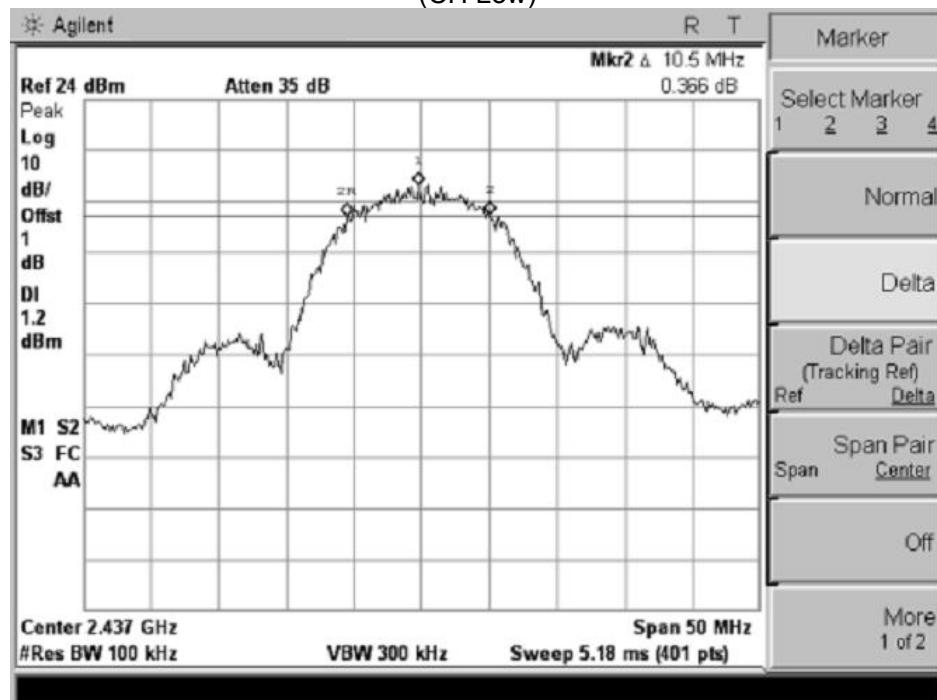

(CH Mid)

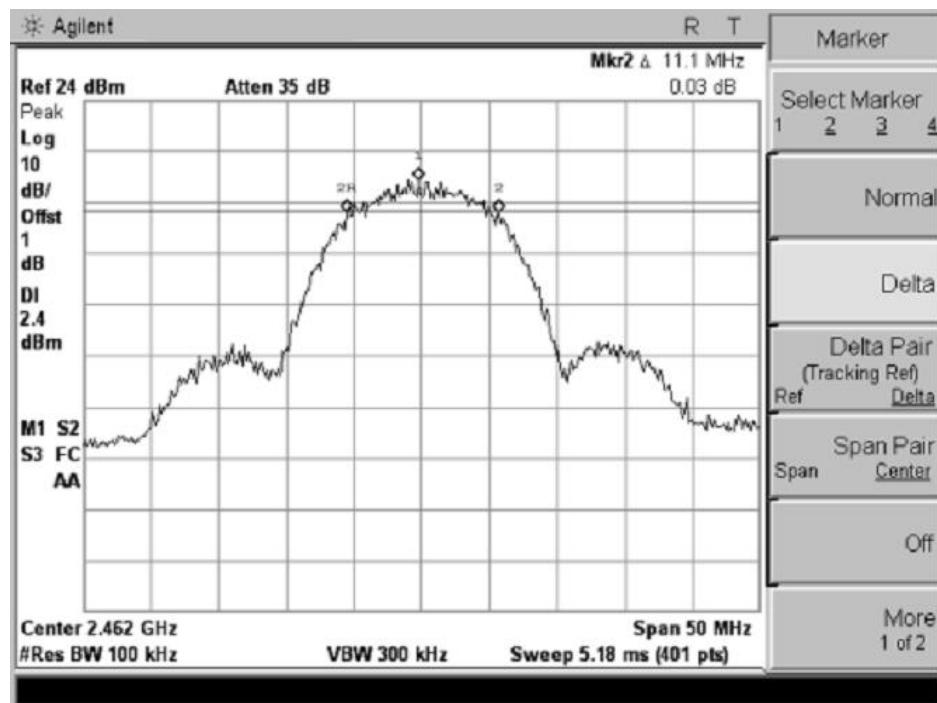

(CH High)


5.1.3.2 802.11g Test Mode

The minimum occupied bandwidth for the fundamental frequency 2412MHz is 16.6MHz. This occupied bandwidth complies with the FCC requirement.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.6	≥500	PASS
6	2437	16.6	≥500	PASS
11	2462	16.6	≥500	PASS


B. Test Plot:

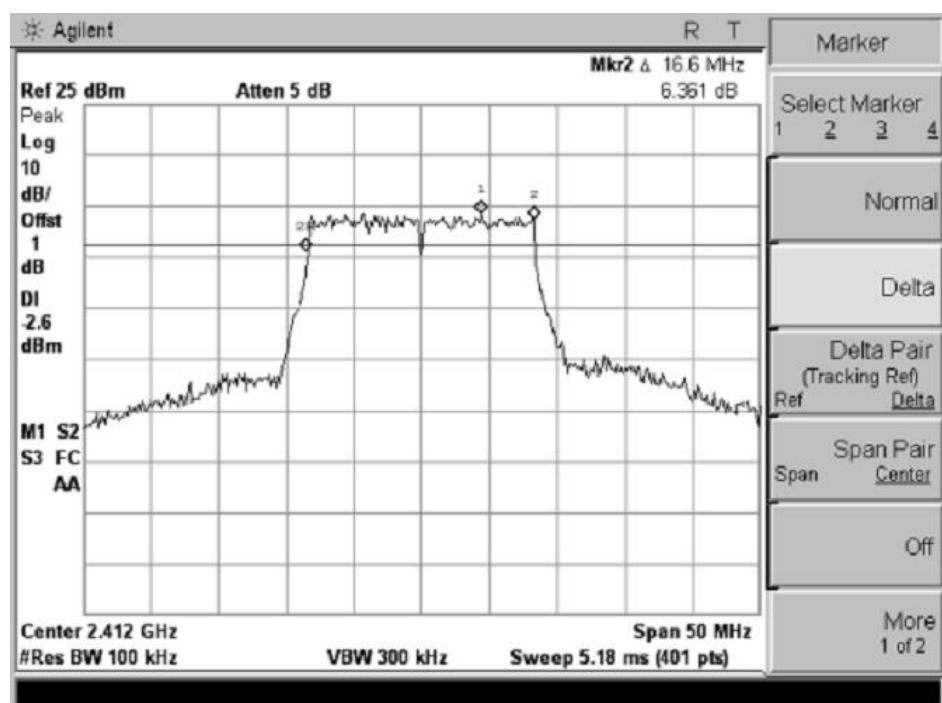

(CH Low)

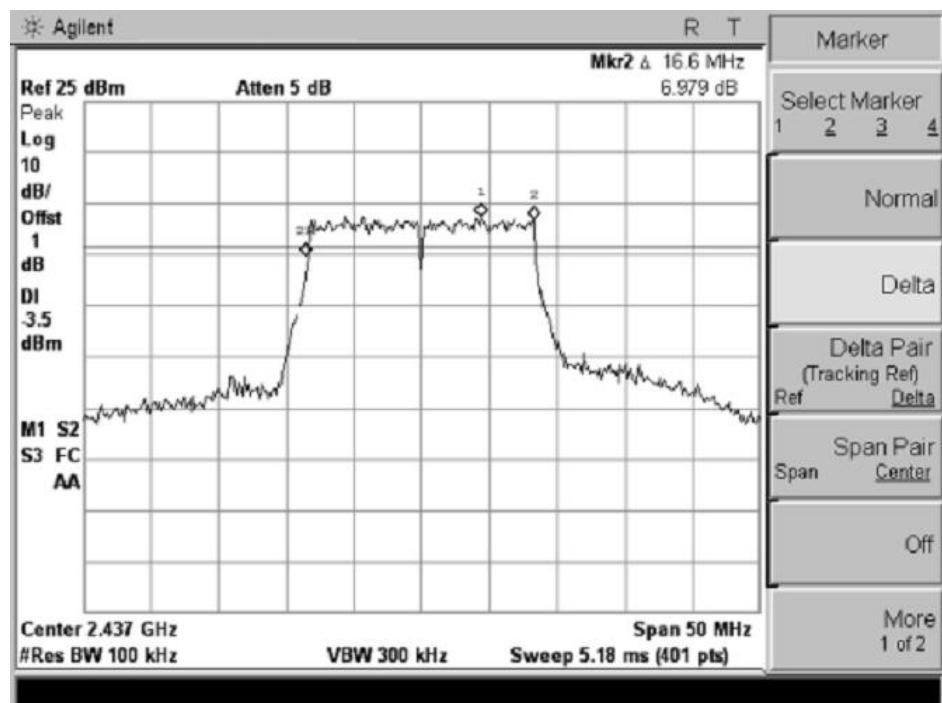

(CH Mid)

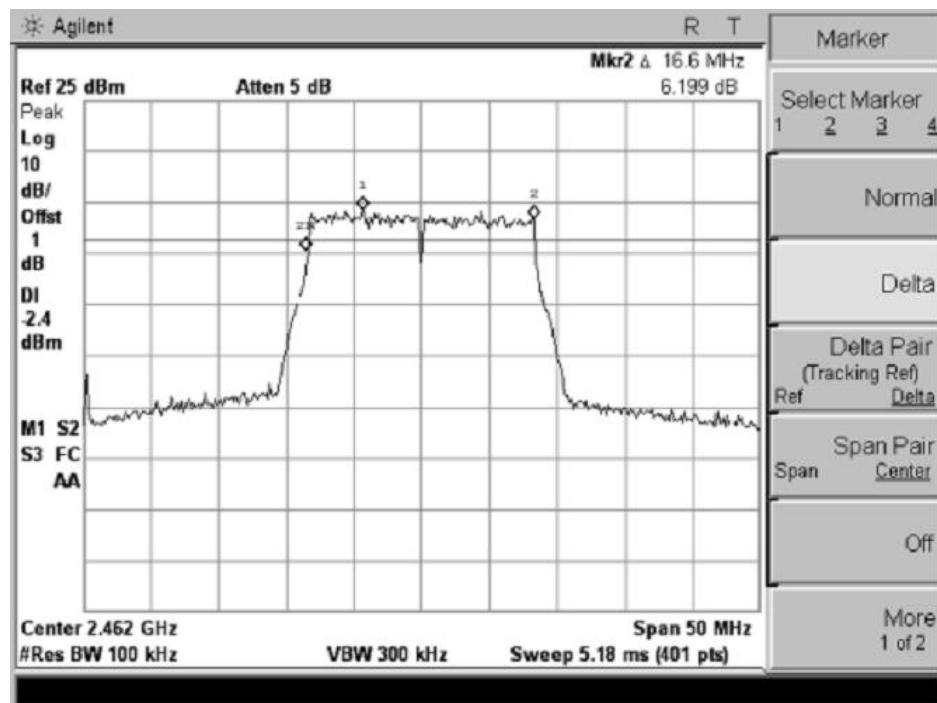

(CH High)


5.1.3.3 802.11n-20 Test Mode

The minimum occupied bandwidth for the fundamental frequency 2442MHz is 15.6MHz. This occupied bandwidth complies with the FCC requirement.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.1	≥500	PASS
6	2442	15.6	≥500	PASS
11	2462	15.4	≥500	PASS


B. Test Plot:

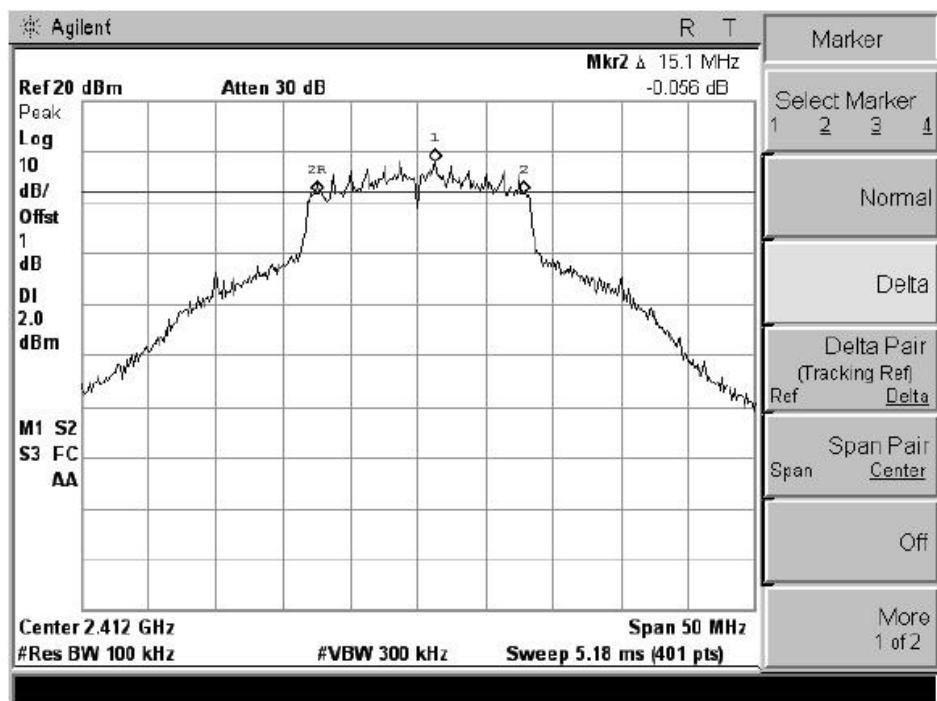

(CH Low)

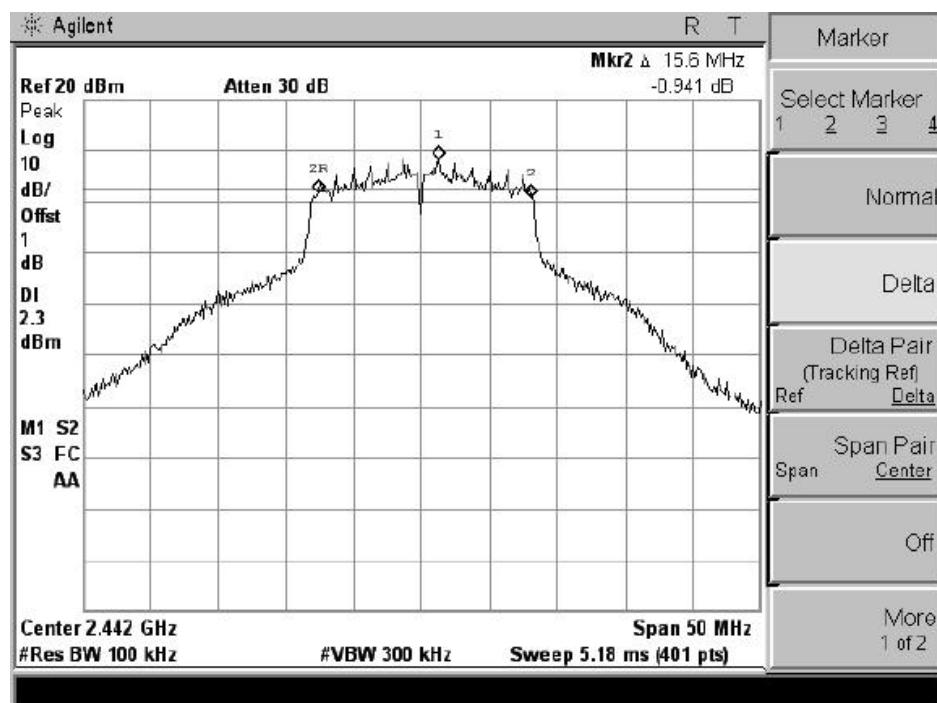

(CH Mid)

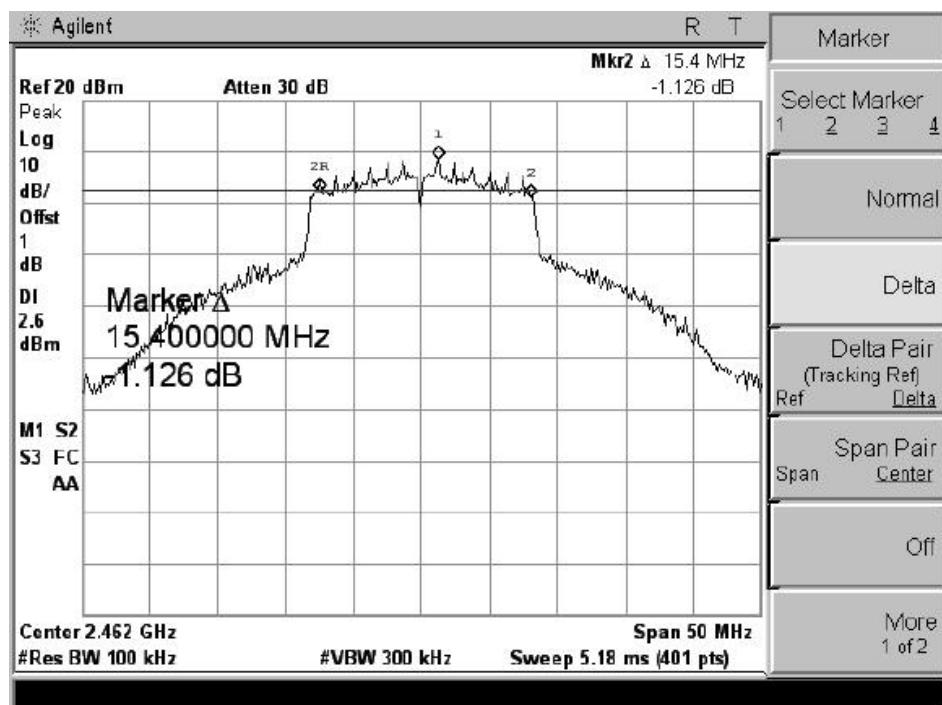

(CH High)

5.2 Peak Output Power

5.2.1 Definition

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

5.2.2 Test Description

See section 5.1.2 of this report.

5.2.3 Test Result

The EUT operates at maximum output power mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


5.2.3.1 802.11b Test Mode


The maximum output power for the fundamental frequency 2412MHz is 11.51dBm. This power complies with the FCC requirement.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.51	0.0142	30	1	PASS
6	2437	10.58	0.0114			PASS
11	2462	10.41	0.0110			PASS

B. Test Plot:

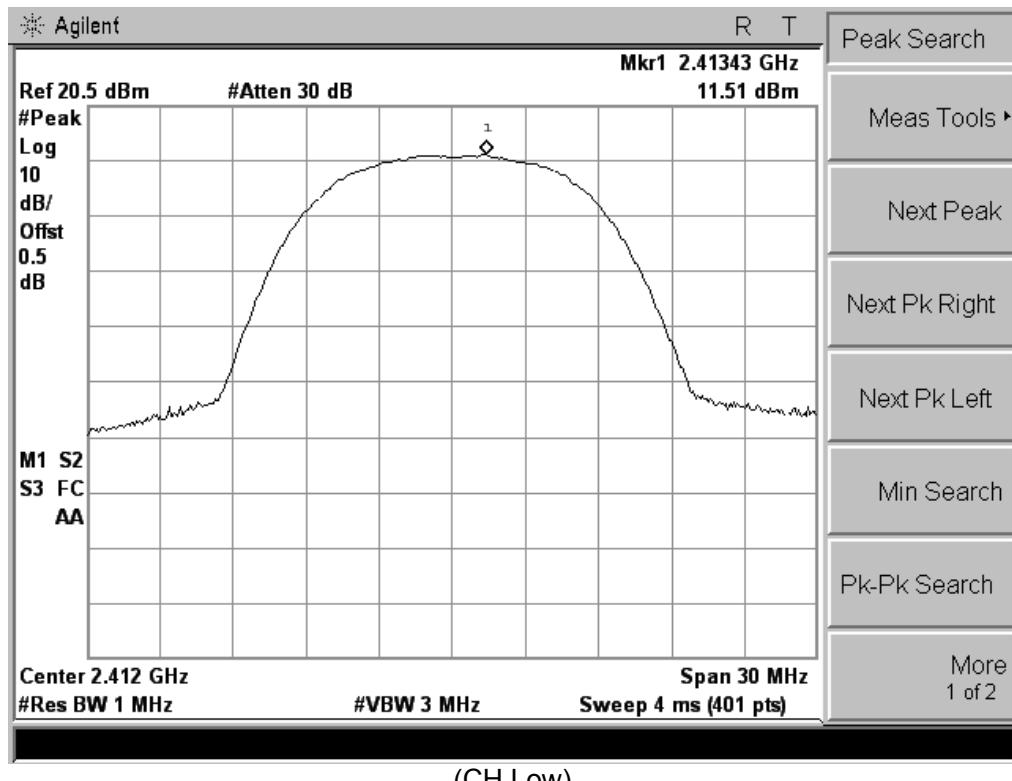

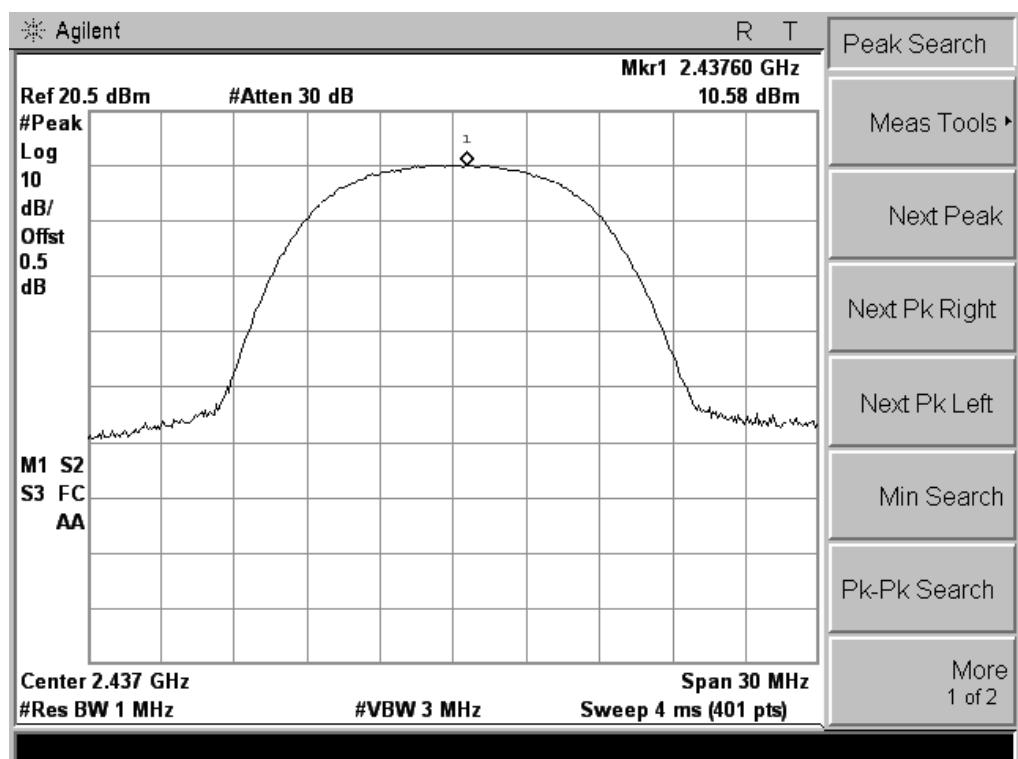

(CH Mid)

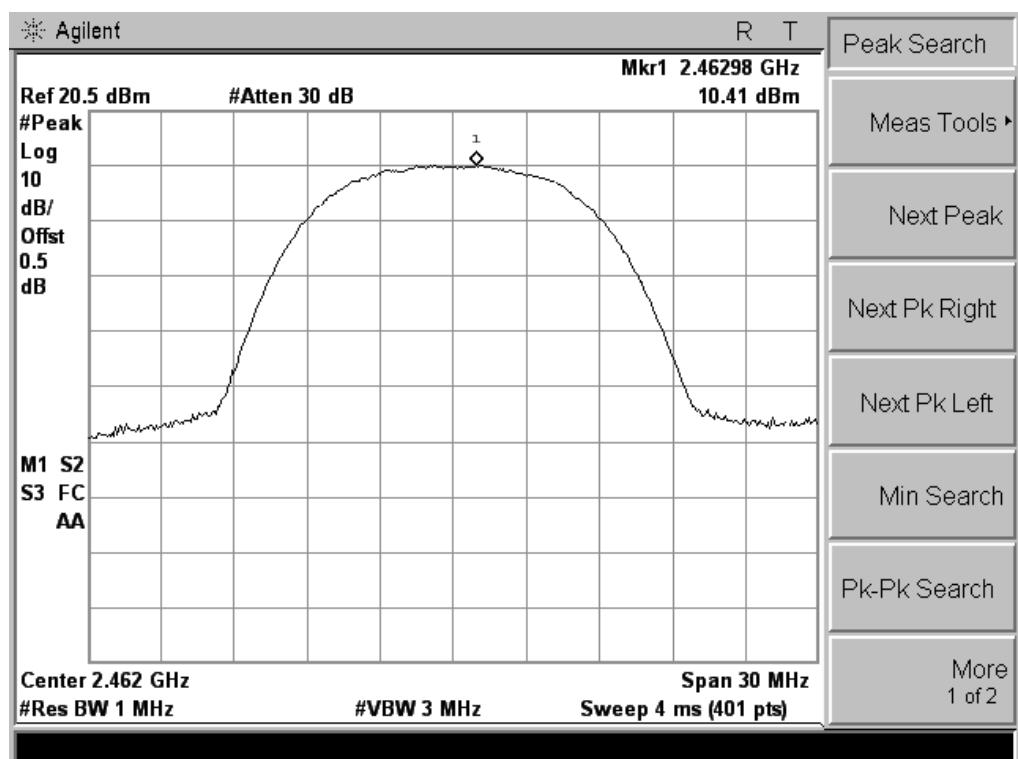

(CH High)


5.2.3.2 802.11g Test Mode

The maximum output power for the fundamental frequency 2412 MHz is 11.97dBm. This power complies with the FCC requirement.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.97	0.0157	30	1	PASS
6	2437	10.67	0.0117			PASS
11	2462	10.84	0.0121			PASS


B. Test Plot:

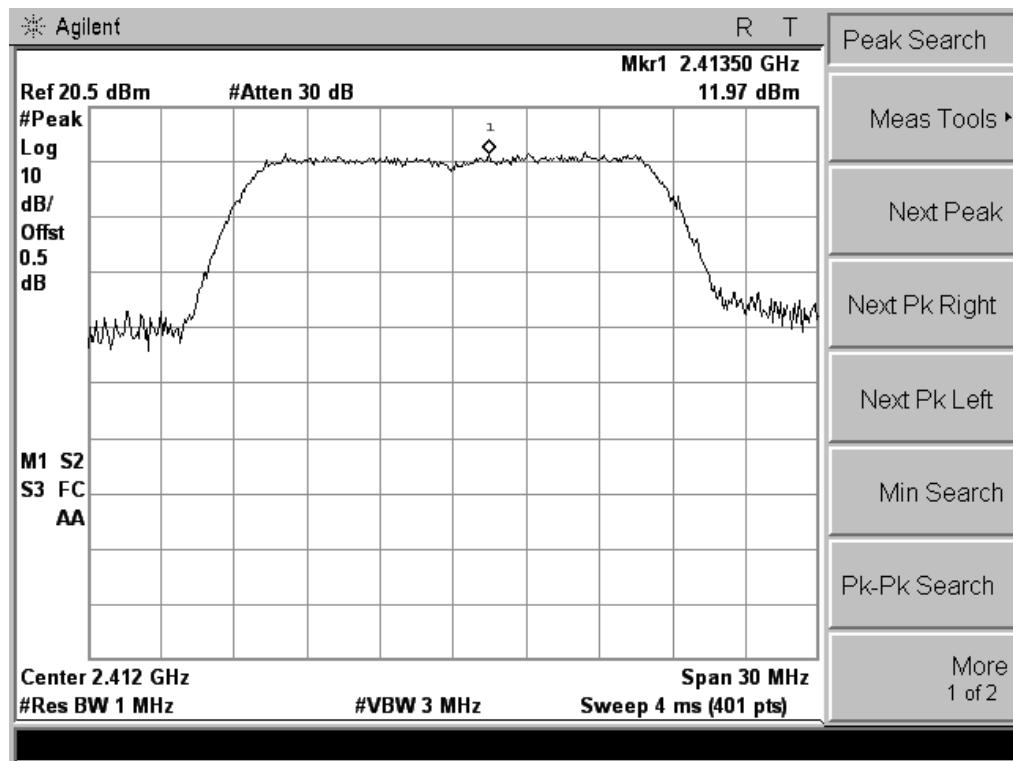

(CH Low)

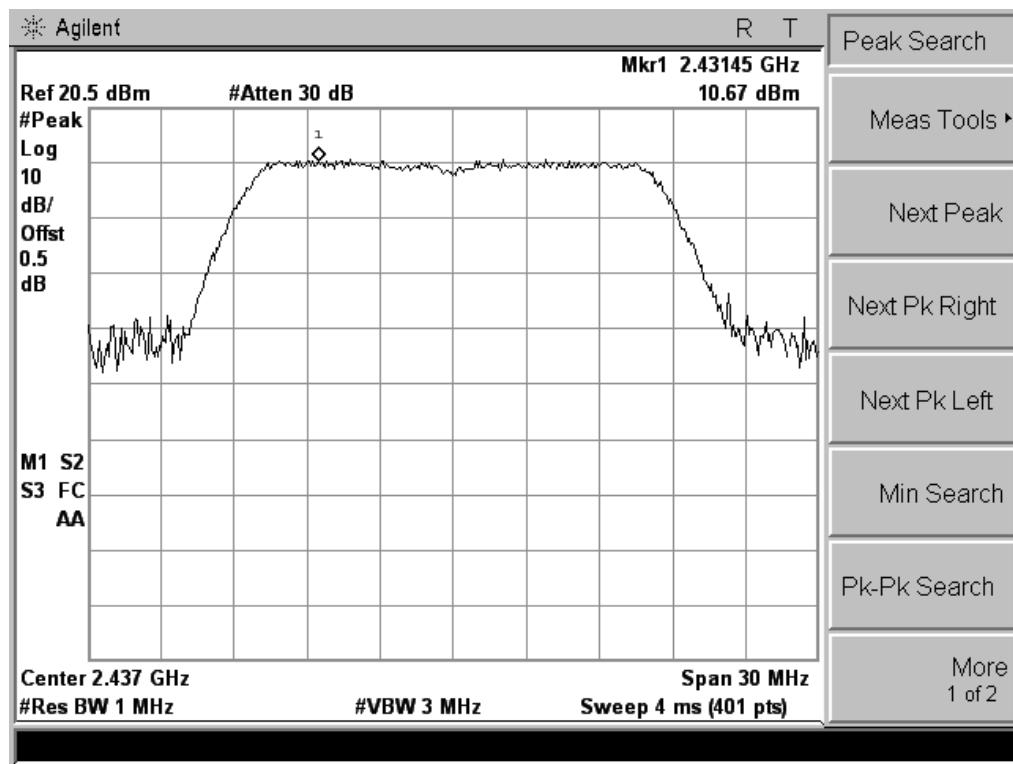

(CH Mid)

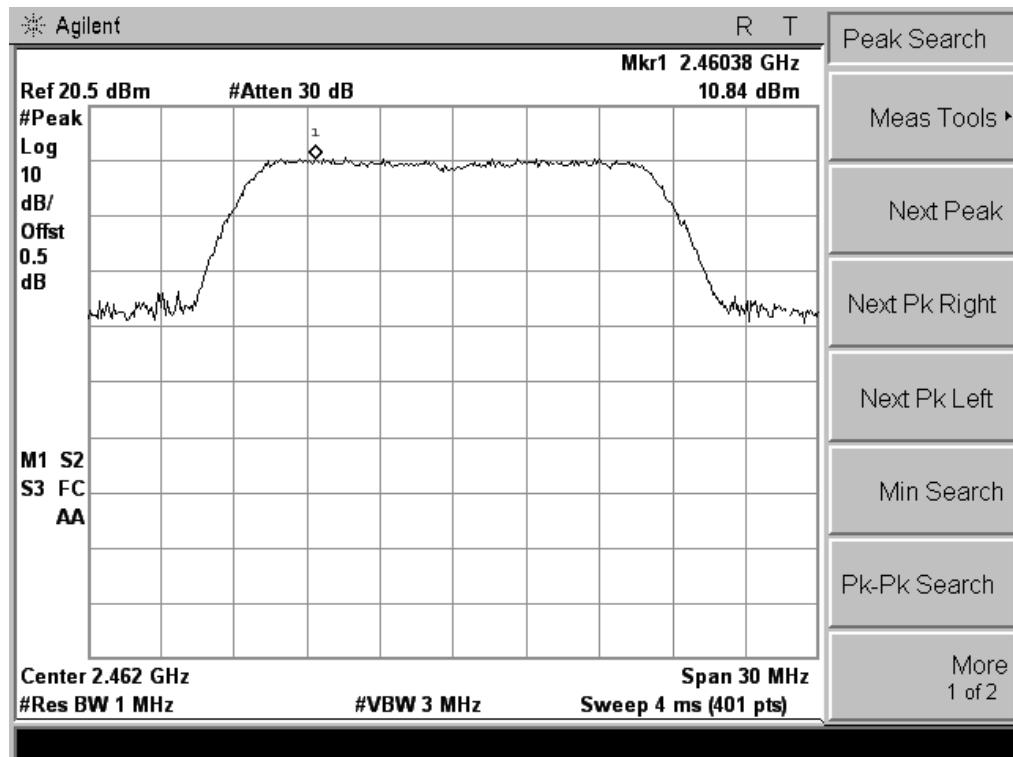

(CH High)


5.2.3.3 802.11n-20 Test Mode



The maximum output power for the fundamental frequency 2412 MHz is 11.92dBm. This power complies with the FCC requirement.

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.92	0.0156	30	1	PASS
6	2442	10.77	0.0119			PASS
11	2462	10.05	0.0101			PASS

B. Test Plot:

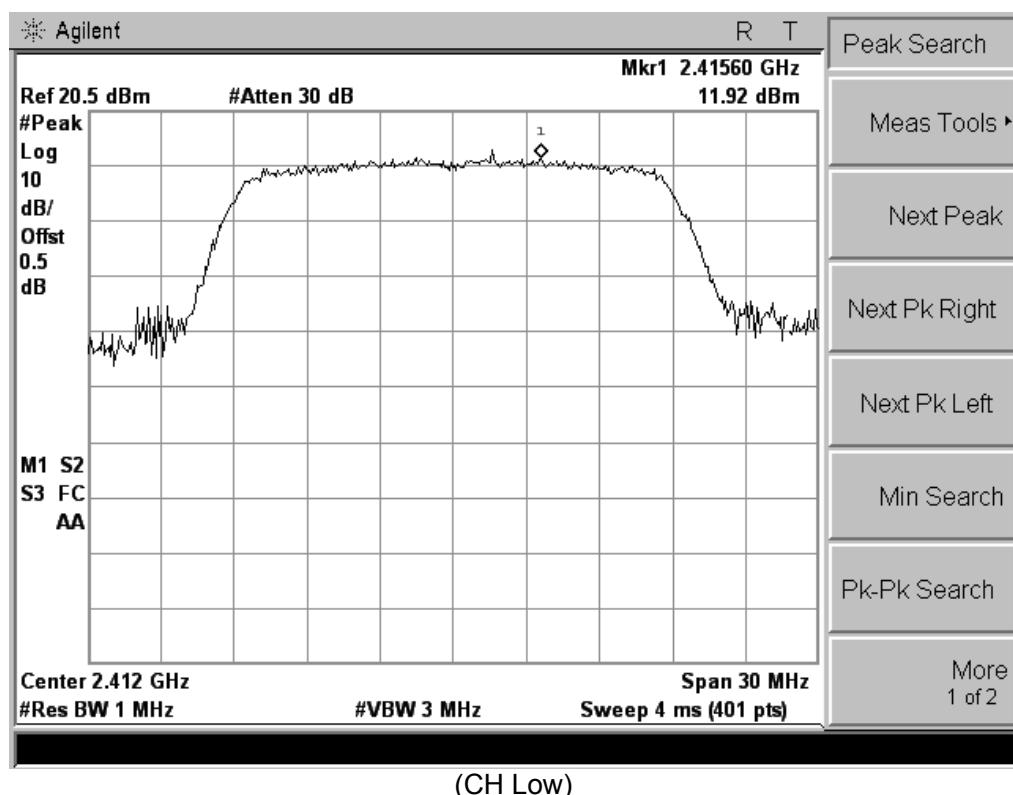

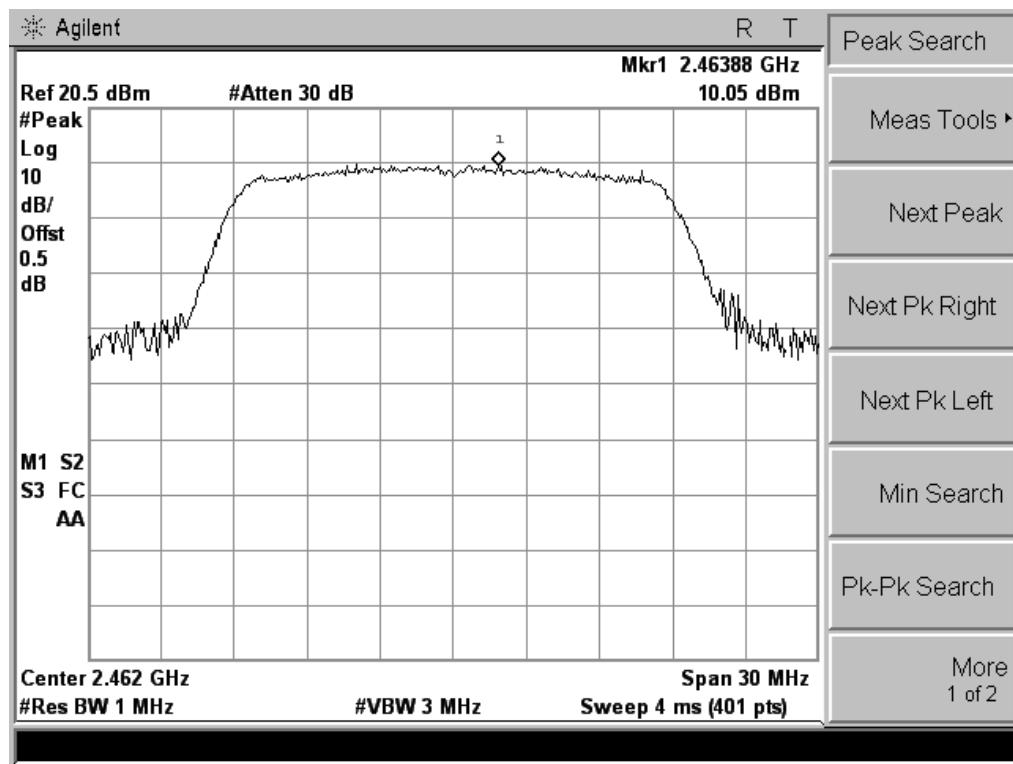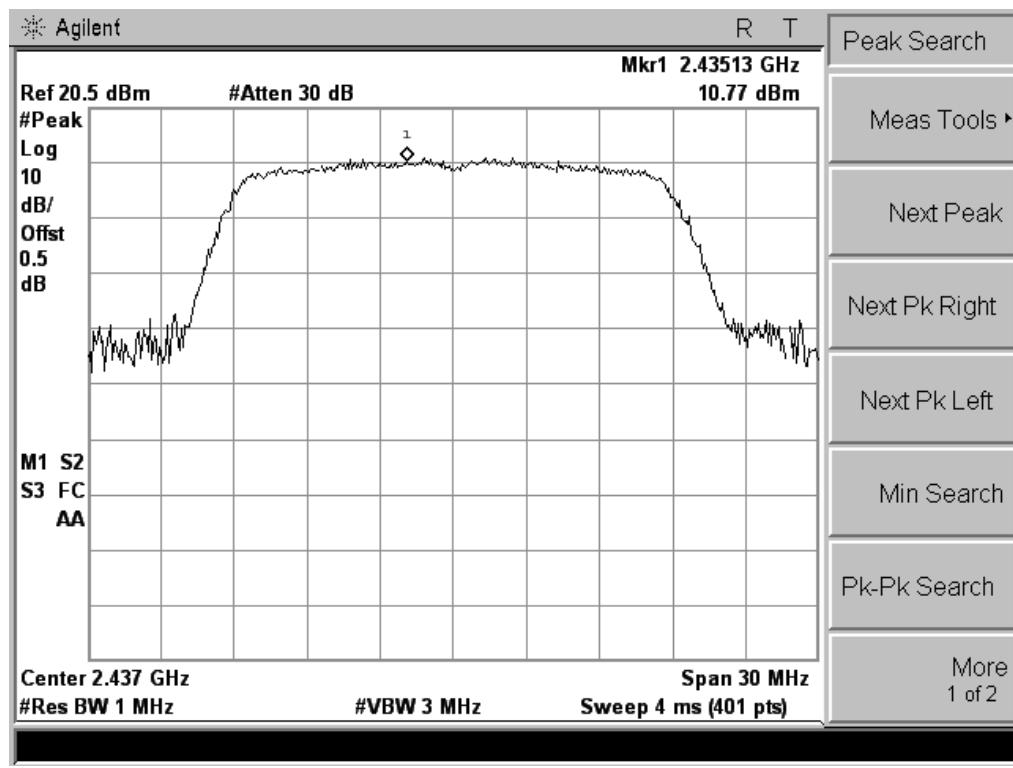

5.3 Conducted Spurious Emission

5.3.1 Definition

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

5.3.2 Test Description

See section 5.1.2 of this report.

5.3.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

5.3.3.1 802.11b Test Mode

1. Table for the Harmonics:

NOTE: “---” in the table following means that the emission power was too small to be measured and was at least 20dB below the limit.

No.	Frequency (MHz)	Emission Power (dBm)	Limit (dBm)
Low Channel			
1	4824.20	---	>20
2	7236.10	---	>20
3	9648.30	---	>20
4	12060.00	---	>20
5	other	---	>20
Middle Channel			
1	4874.20	---	>20
2	7311.10	---	>20
3	9748.30	---	>20
4	12185.00	---	>20
5	other	---	>20
High Channel			
1	4924.10	---	>20
2	7386.20	---	>20
3	9848.20	---	>20
4	12310.00	---	>20
5	other	---	>20

5.3.3.2 802.11g Test Mode

1. Table for the Harmonics:

NOTE: “---” in the table following means that the emission power was too small to be measured and was at least 20dB below the limit.

No.	Frequency (MHz)	Emission Power (dBm)	Limit (dBm)
Low Channel			
1	4824.20	---	>20
2	7236.10	---	>20
3	9648.30	---	>20
4	12060.00	---	>20
5	other	---	>20
Middle Channel			
1	4874.20	---	>20
2	7311.10	---	>20
3	9748.30	---	>20
4	12185.00	---	>20
5	other	---	>20
High Channel			
1	4924.10	---	>20
2	7386.20	---	>20
3	9848.20	---	>20
4	12310.00	---	>20
5	other	---	>20

5.3.3.3 802.11n-20 Test Mode

1. Table for the Harmonics:

NOTE: “---” in the table following means that the emission power was too small to be measured and was at least 20dB below the limit.


No.	Frequency (MHz)	Emission Power (dBm)	Limit (dBm)
Low Channel			
1	4824.20	---	>20
2	7236.10	---	>20
3	9648.30	---	>20
4	12060.00	---	>20
5	other	---	>20
Middle Channel			
1	4874.20	---	>20
2	7311.10	---	>20
3	9748.30	---	>20
4	12185.00	---	>20
5	other	---	>20
High Channel			
1	4924.10	---	>20
2	7386.20	---	>20
3	9848.20	---	>20
4	12310.00	---	>20
5	other	---	>20

5.4 Band Edge

5.4.1 Definition

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

5.4.2 Test Description

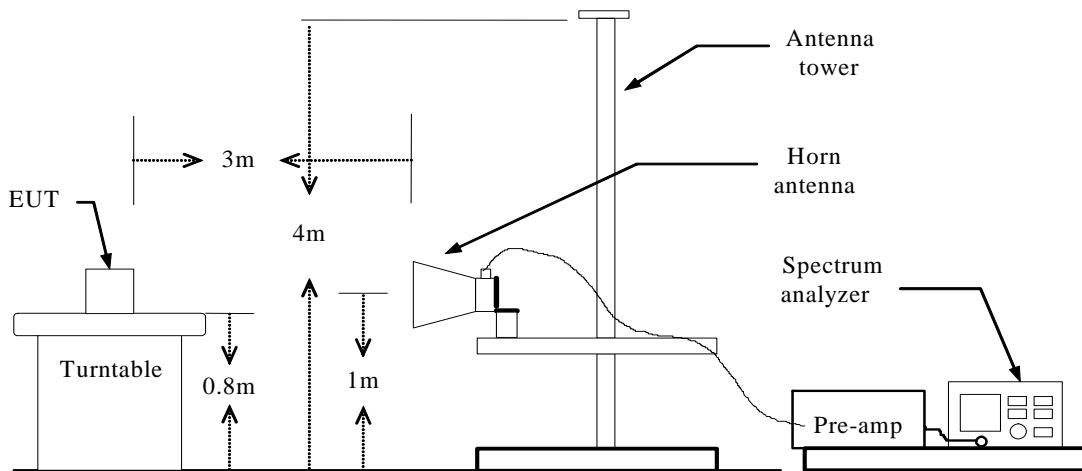


5.4.3 Test Result

The EUT operates at continuous transmit test mode. The lowest and highest channels are tested to verify the band edge emissions.


5.4.3.1 802.11b Test Mode

Test Mode		Channel Marked Frequency	Limit (dBuv/m)	Test Result Highest Emission (dBuv/m)			
				Vertical		Horizontal	
				Peak	Average	Peak	Average
WIFI	Low Channel	2390MHz	74(Peak) 54(Average)	56.15	36.78.	55.13	36.13
		2400MHz		69.58	45.59	68.92	45.07
	High Channel	2483.5MHz		54.03	35.37	56.49	37.14
		2500MHz		53.74	33.61	54.73	33.97


Test Plot:

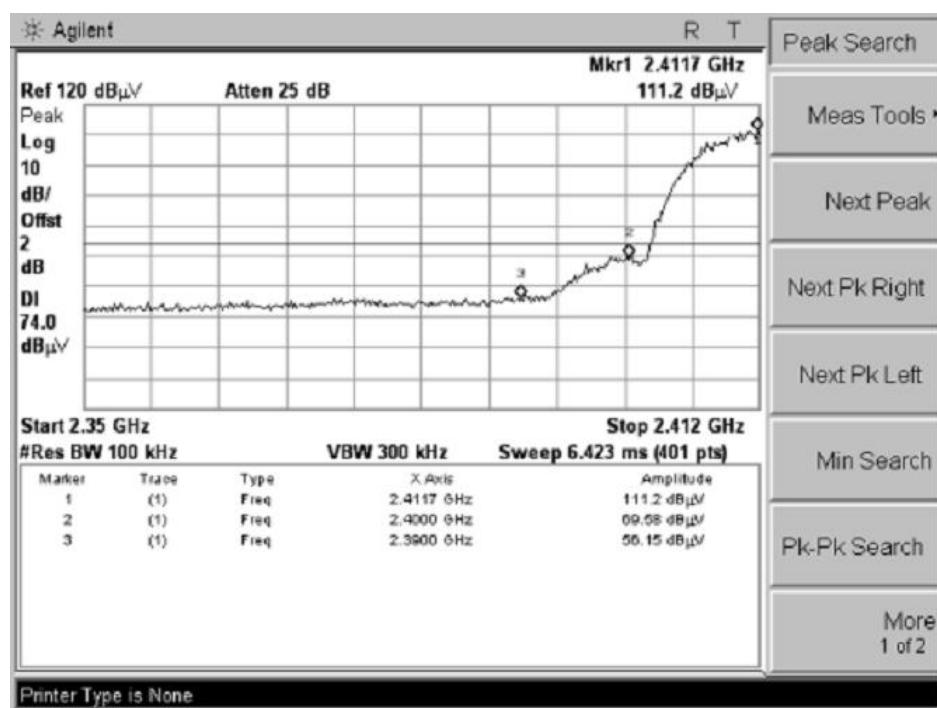


(CH Low, Vertical, Peak)

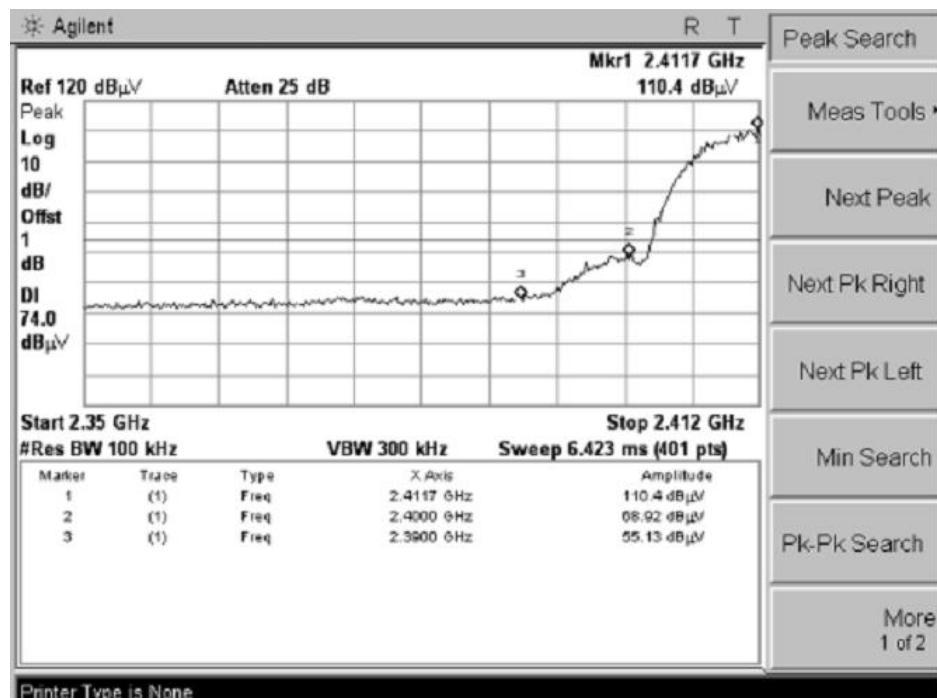

(CH Low, Horizontal, Peak)

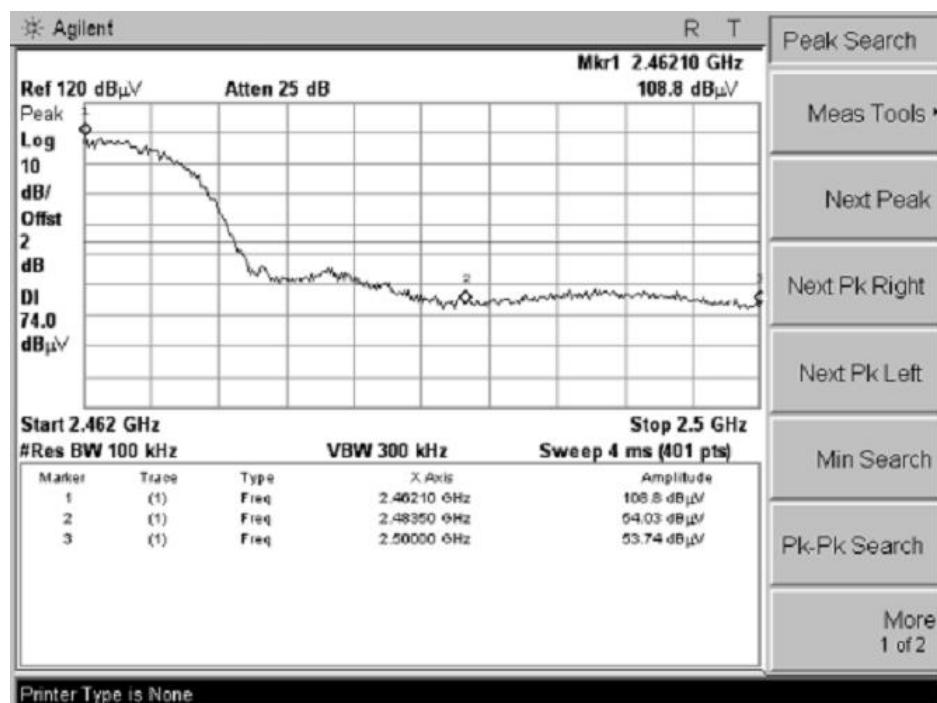

(CH High, Vertical, Peak)

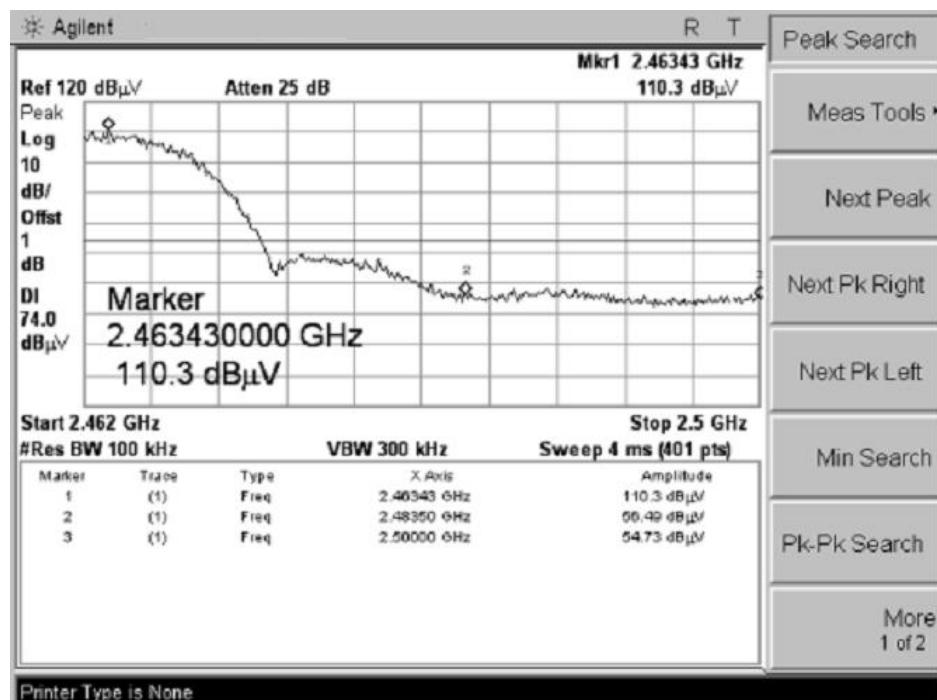


(CH High, Horizontal, Peak)


5.4.3.2 802.11g Test Mode

Test Mode		Channel Marked Frequency	Limit (dBuv/m)	Test Result Highest Emission (dBuv/m)			
				Vertical		Horizontal	
				Peak	Average	Peak	Average
WIFI	Low Channel	2390MHz	74(Peak) 54(Average)	65.06	43.92	62.75	40.86
		2400MHz		70.63	51.84	69.81	49.63
	High Channel	2483.5MHz		61.29	42.87	60.98	41.54
		2500MHz		54.65	38.77	54.05	39.02


Test Plot:

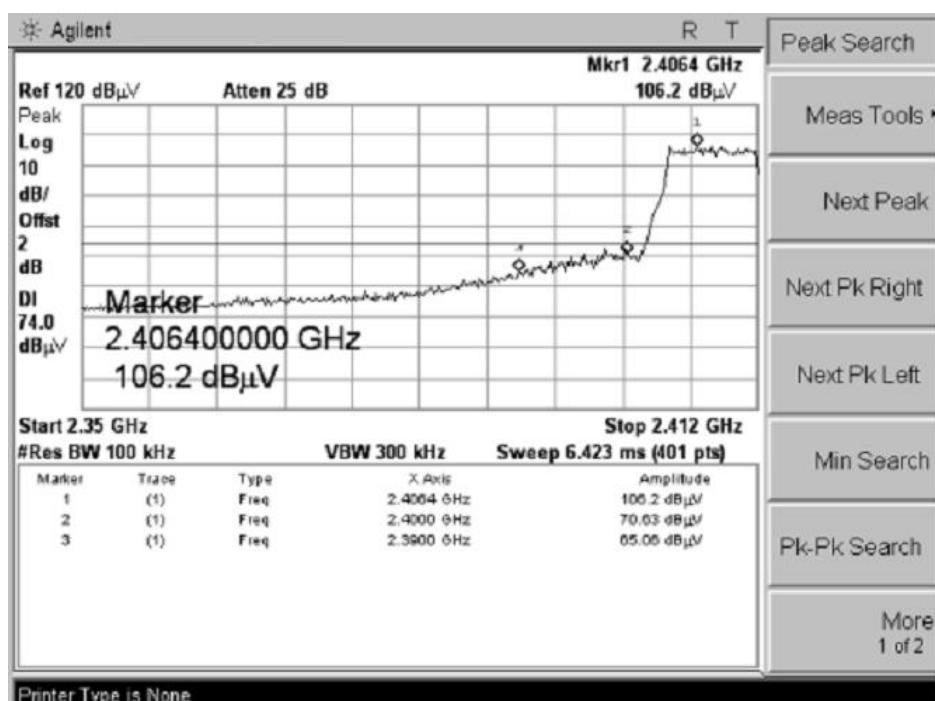


(CH Low, Vertical, Peak)

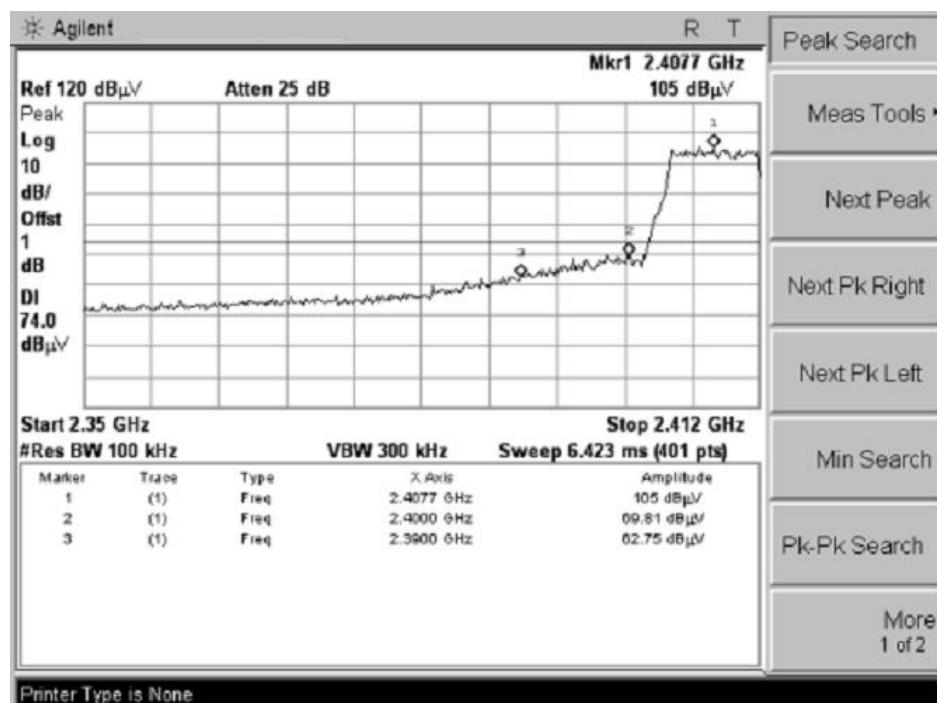

(CH Low, Horizontal, Peak)

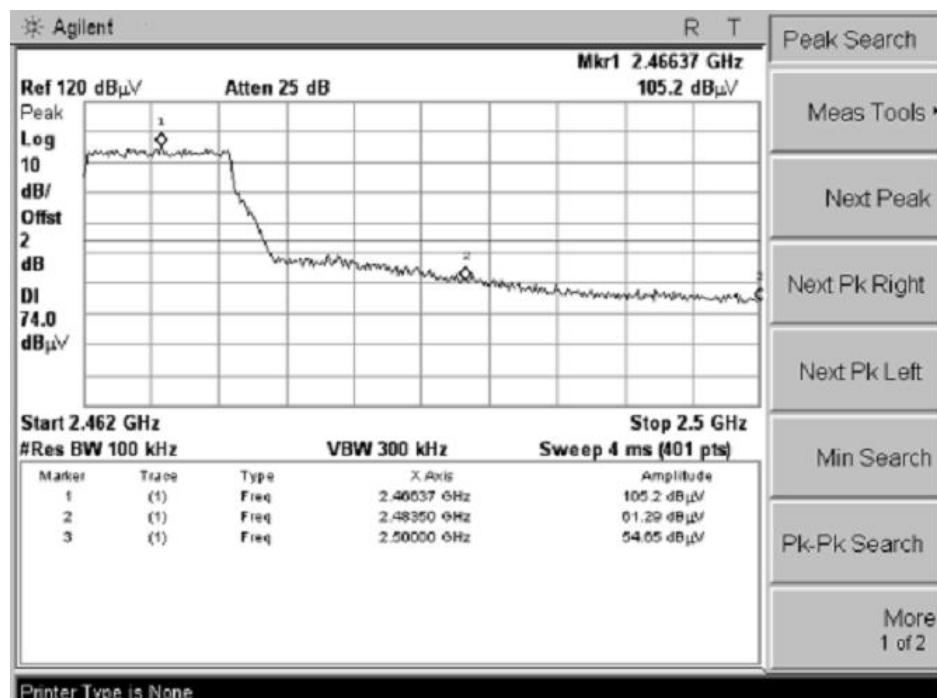

(CH High, Vertical, Peak)

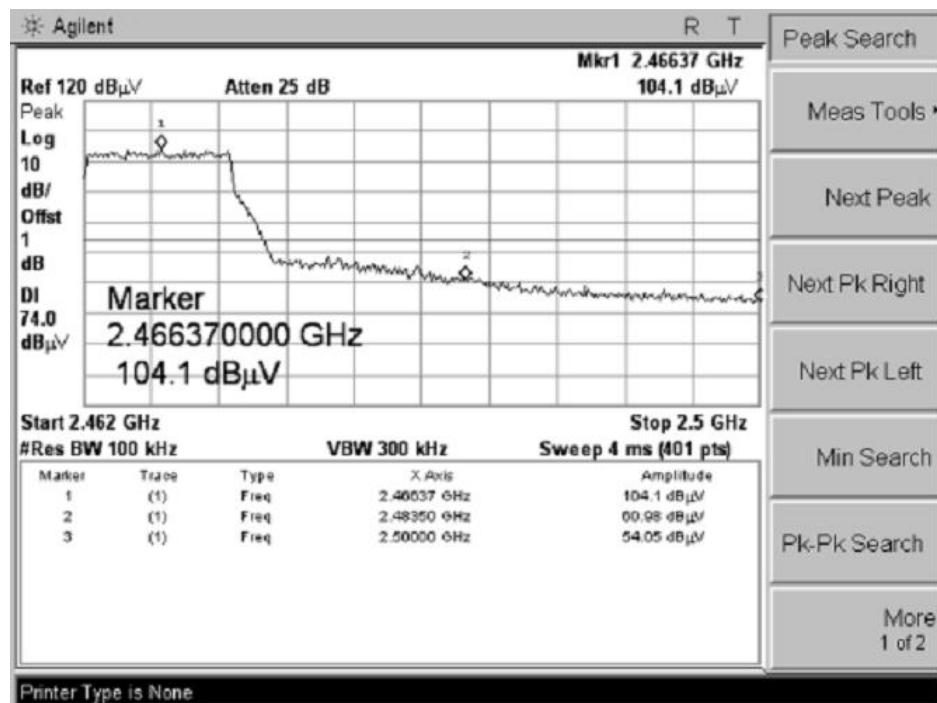


(CH High, Horizontal, Peak)


5.4.3.3 802.11n-20 Test Mode

Test Mode		Channel Marked Frequency	Limit (dB μ V/m)	Test Result Highest Emission (dB μ V/m)			
				Vertical		Horizontal	
				Peak	Average	Peak	Average
WIFI	Low Channel	2390MHz	74(Peak) 54(Average)	60.73	36.57	61.18	37.17
		2400MHz		72.21	50.25	71.55	50.53
	High Channel	2483.5MHz		72.79	49.08	71.16	48.38
		2500MHz		60.27	39.73	59.77	38.14


Test Plot:

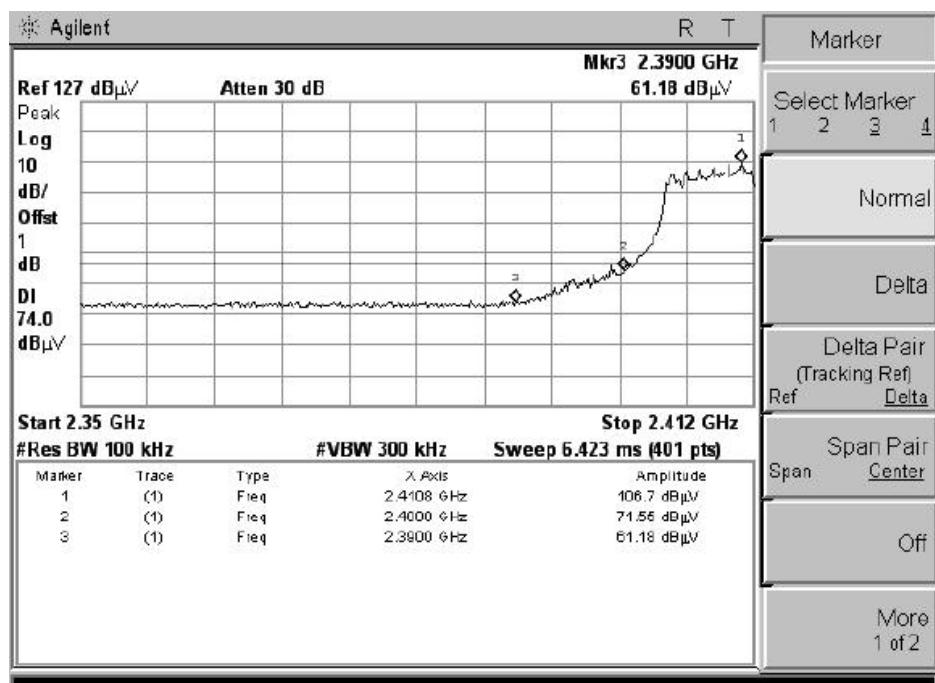


(CH Low, Vertical, Peak)

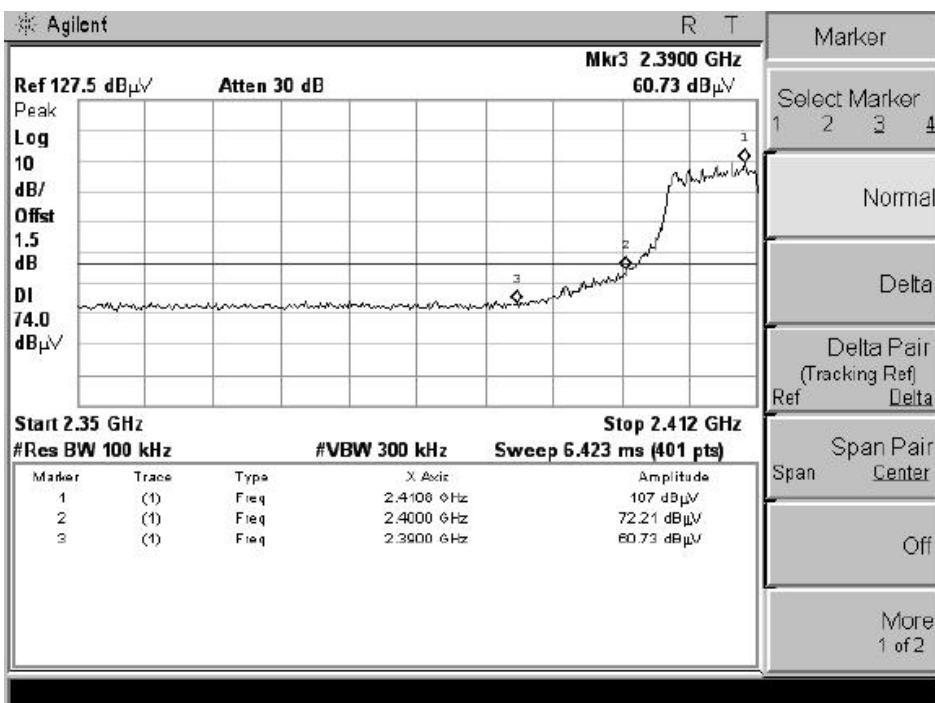

(CH Low, Horizontal, Peak)

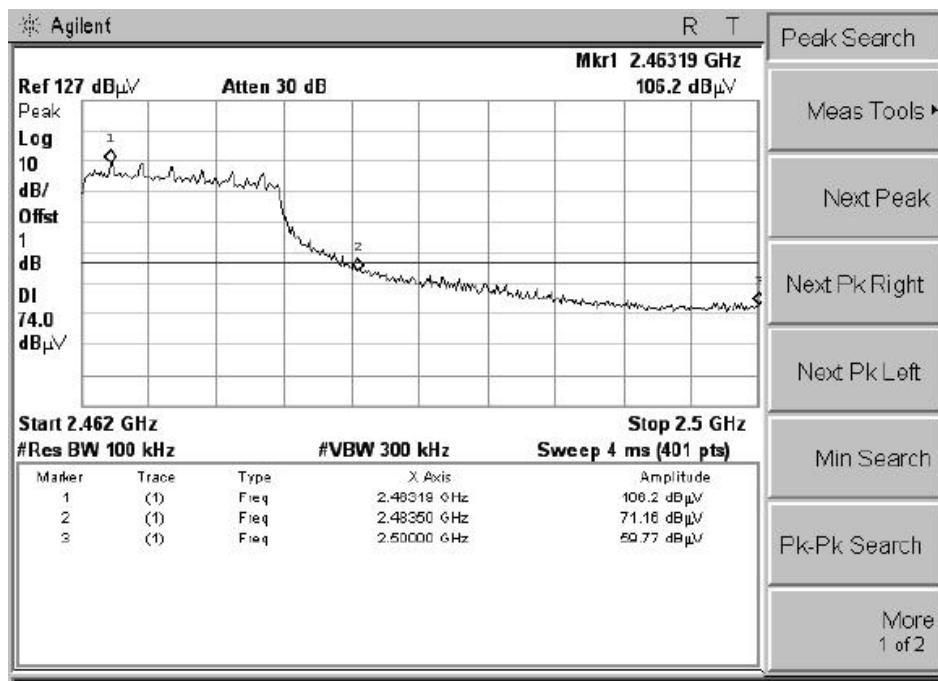

(CH High, Vertical, Peak)

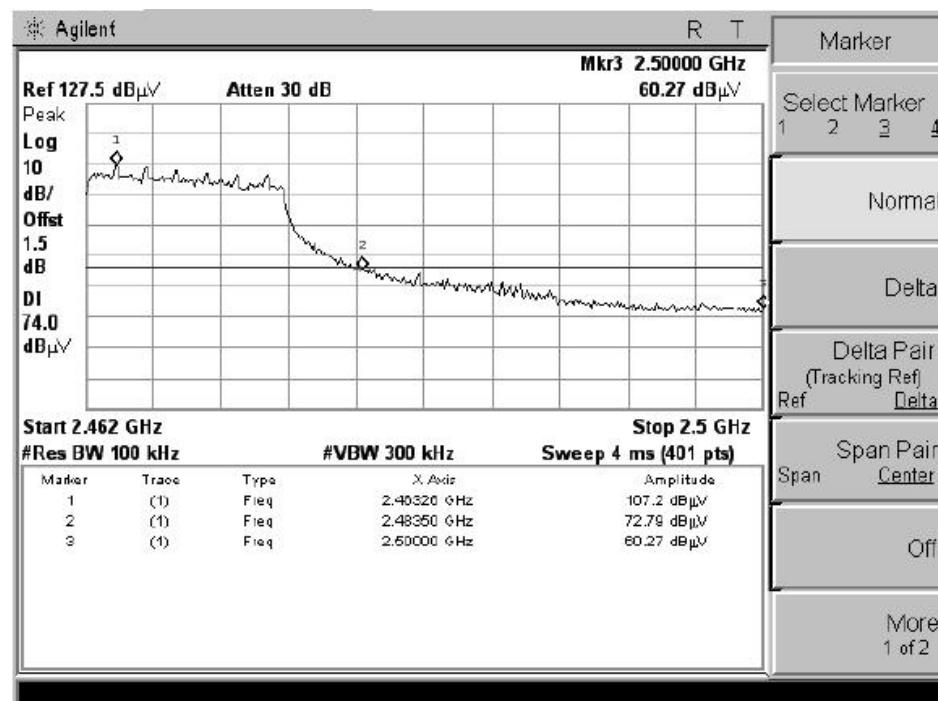

(CH High, Horizontal, Peak)

5.5 Power Spectral Density (PSD)

5.5.1 Definition

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.5.2 Test Description

See section 5.1.2 of this report.

5.5.3 Test Result


The lowest, middle and highest channels are tested to verify the power spectral density.


5.5.3.1 802.11b Test Mode

A. Test Verdict:


Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	5.486	≤8	PASS
6	2437	3.712	≤8	PASS
11	2462	3.849	≤8	PASS

B. Test Plot:

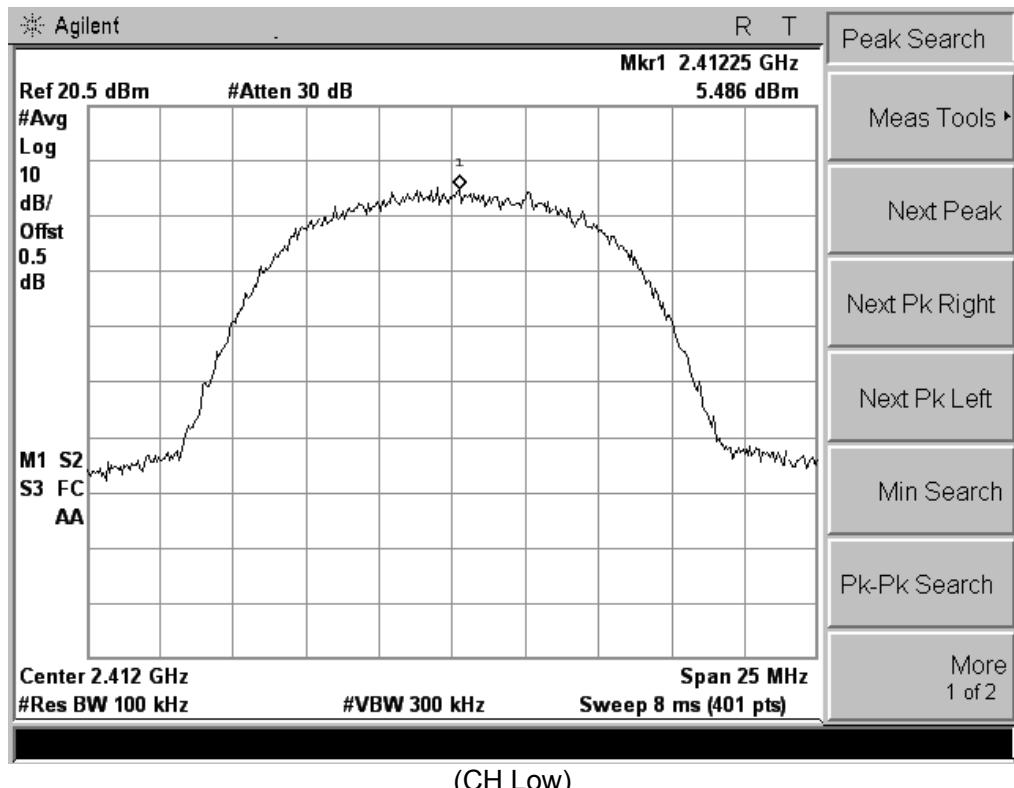

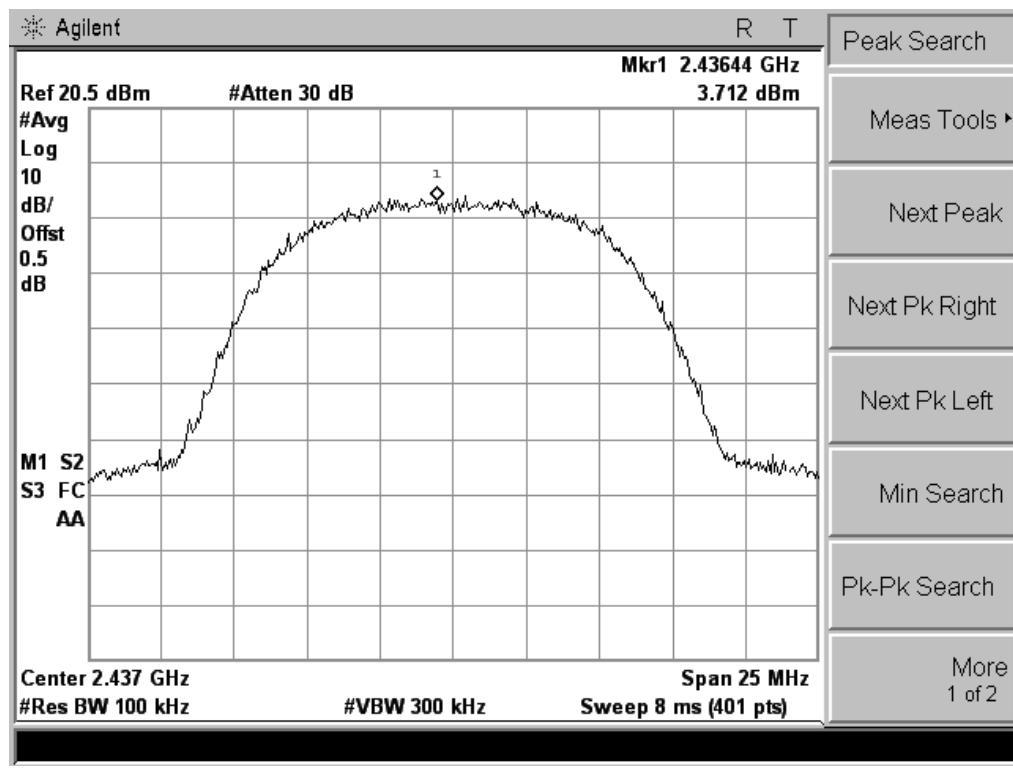

(CH Mid)

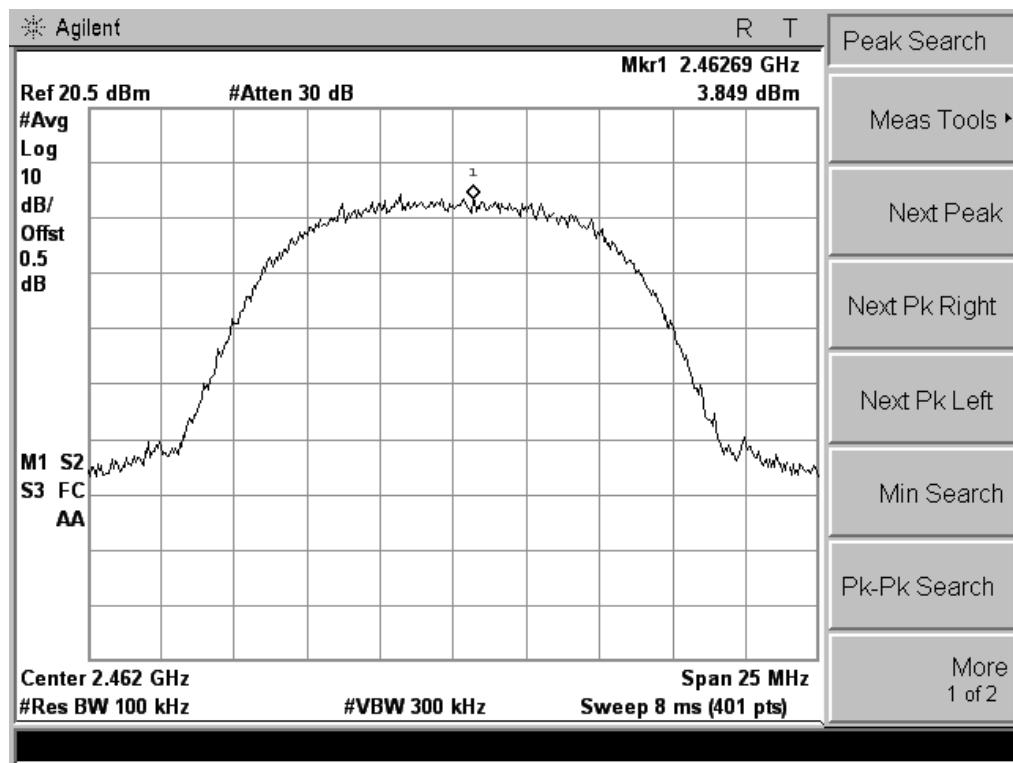


(CH High)


5.5.3.2 802.11g Test Mode

A. Test Verdict:


Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	3.339	≤8	PASS
6	2437	3.379	≤8	PASS
11	2462	2.402	≤8	PASS

B. Test Plot:

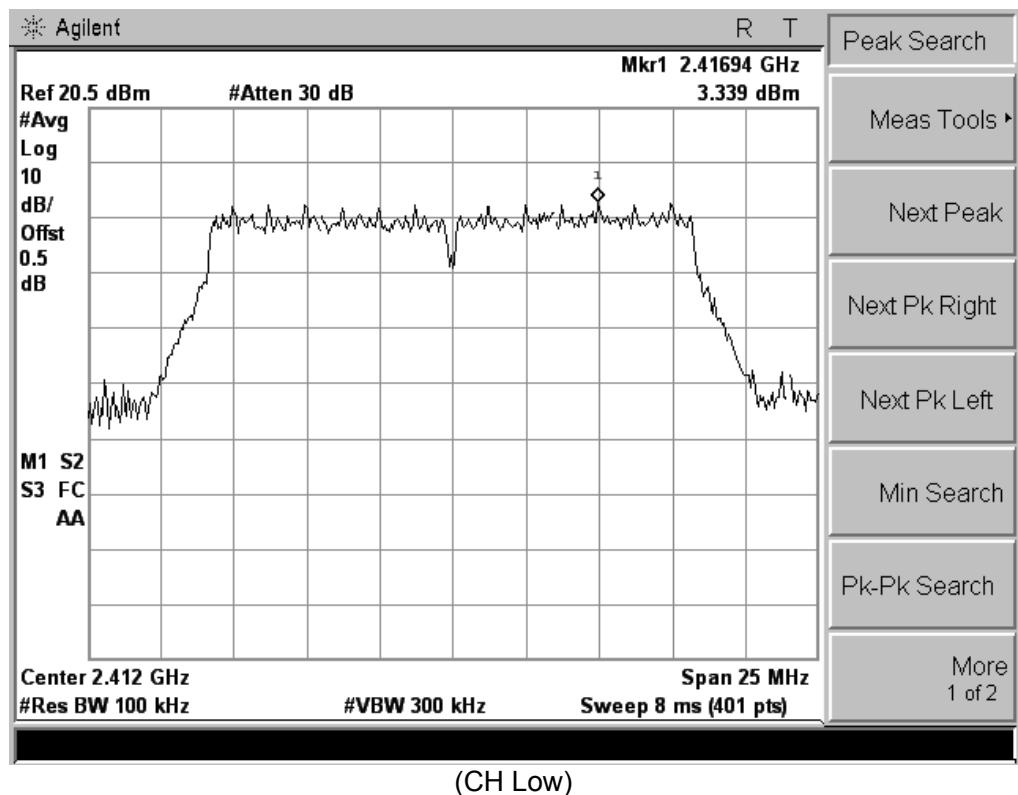

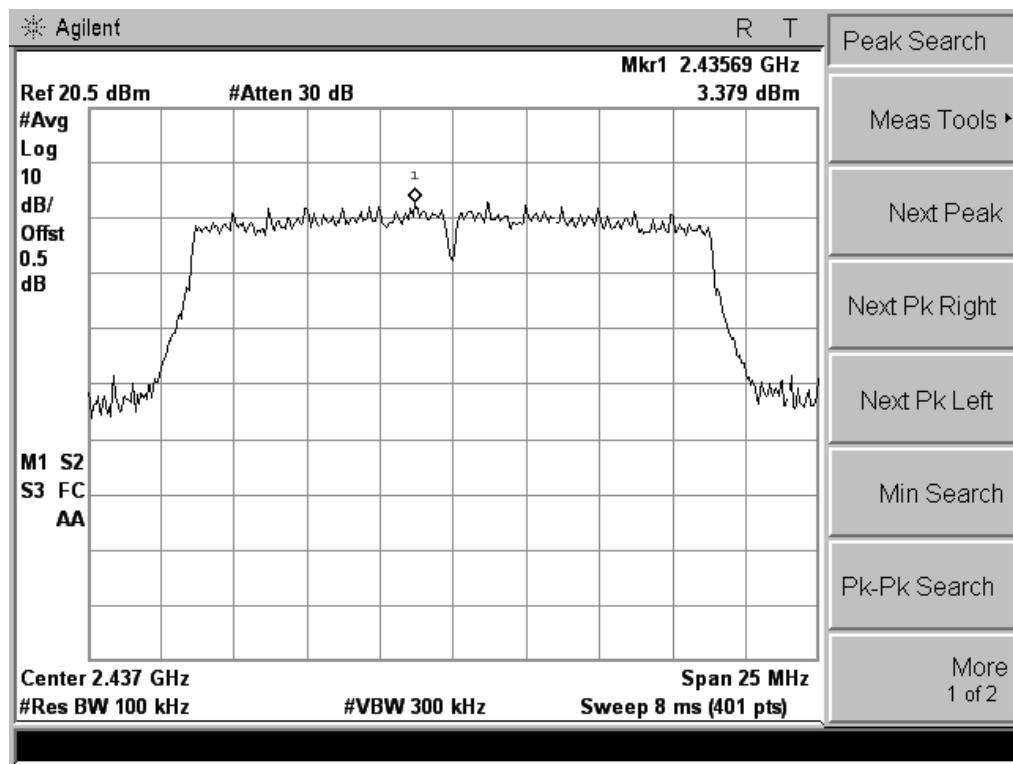

(CH Mid)

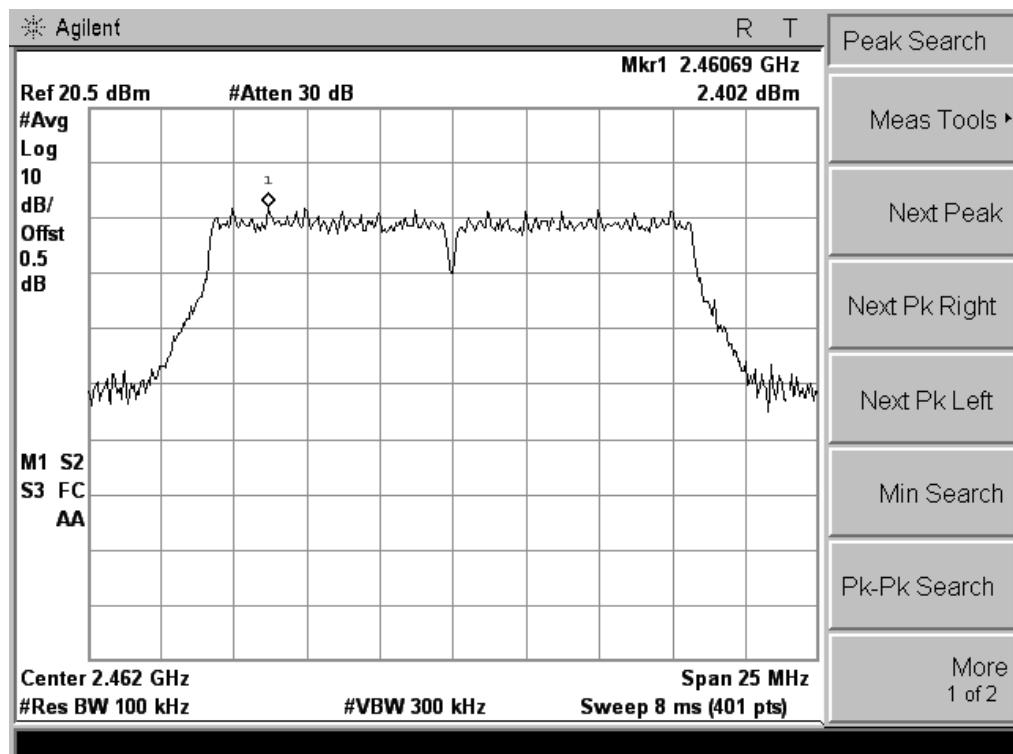


(CH High)


5.5.3.3 802.11n-20 Test Mode

A. Test Verdict:


Channel	Frequency (MHz)	PSD (dBm)	Limits(dBm)	Result
1	2412	3.756	≤8	PASS
6	2437	2.897	≤8	PASS
11	2462	2.663	≤8	PASS

B. Test Plot:

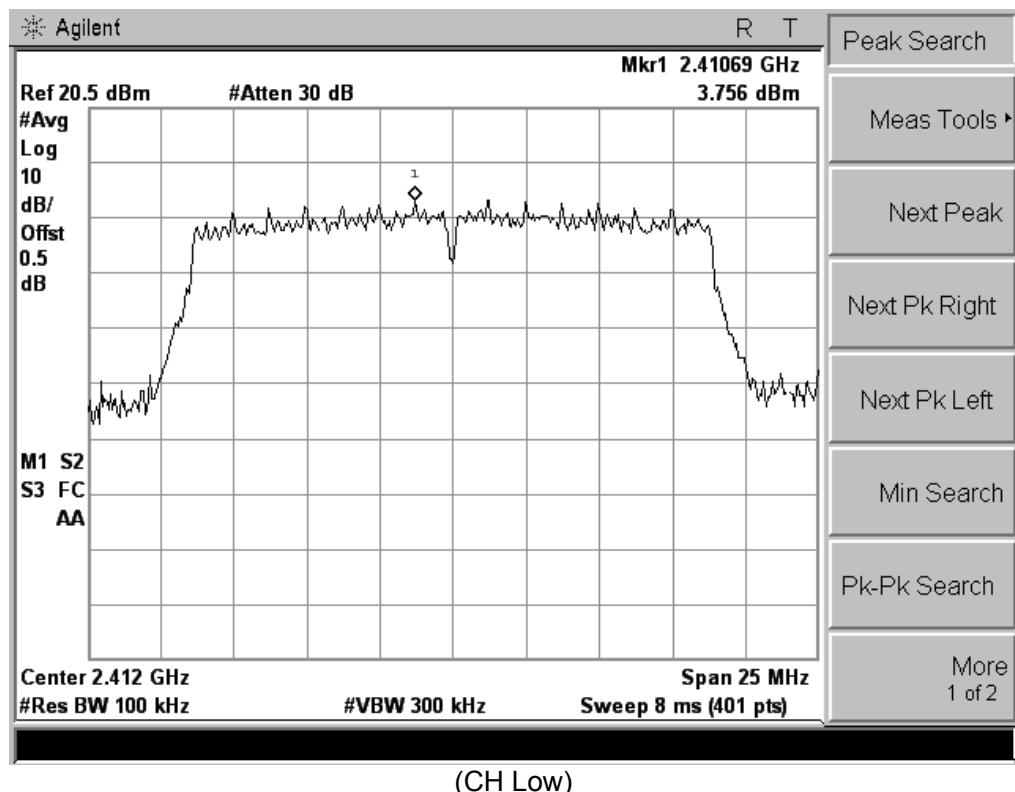

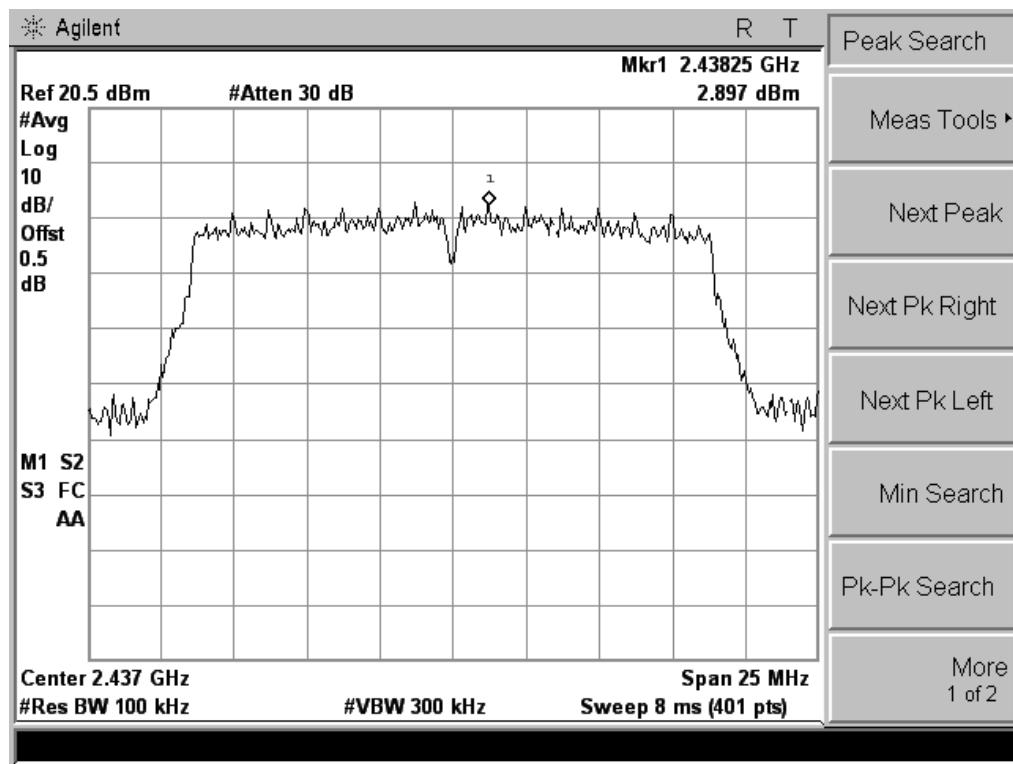

(CH Mid)

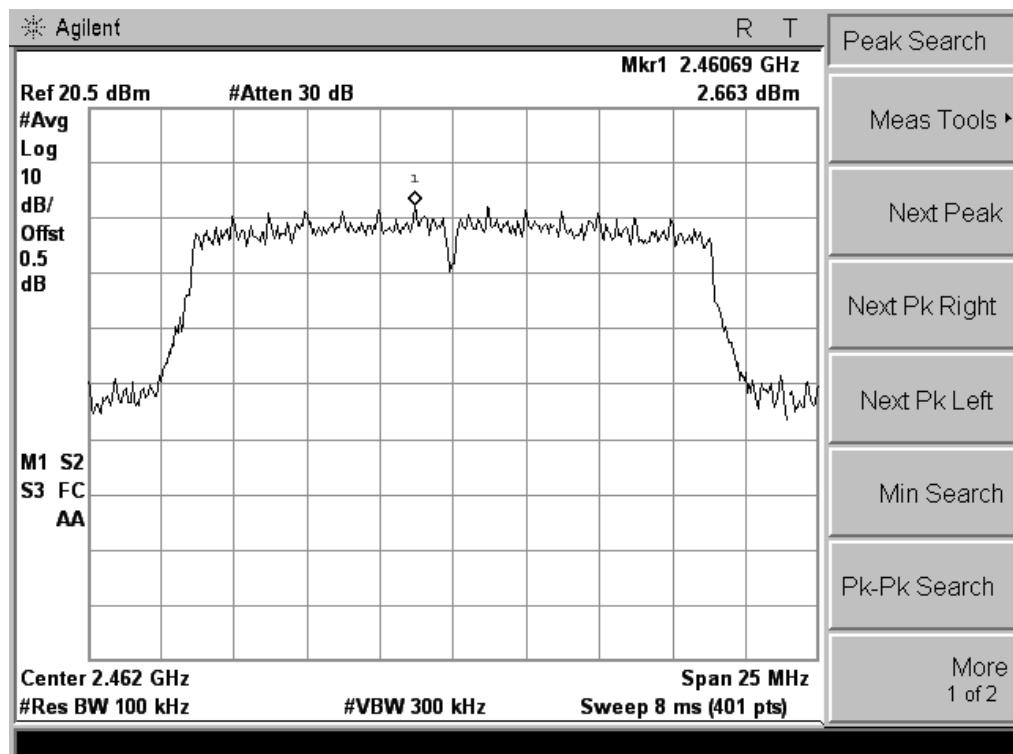

(CH High)

5.6 Conducted Emission

5.6.1 Definition

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).


Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.6.2 Test Description

The EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The path loss as the factor is calibrated to correct the reading. During the measurement, the EUT is activated and is set to operate at maximum power.

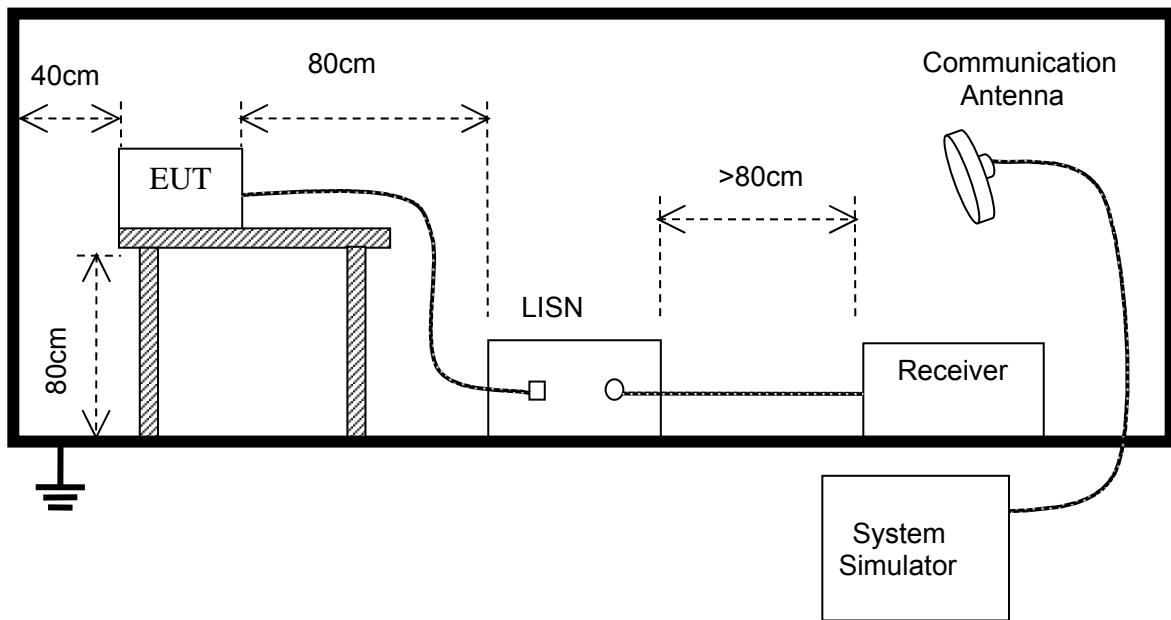

5.6.3 Test Result

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: U-2

Data #:1

Date: 2013-4-11

Time: 20:13:06

80.0 dBuV

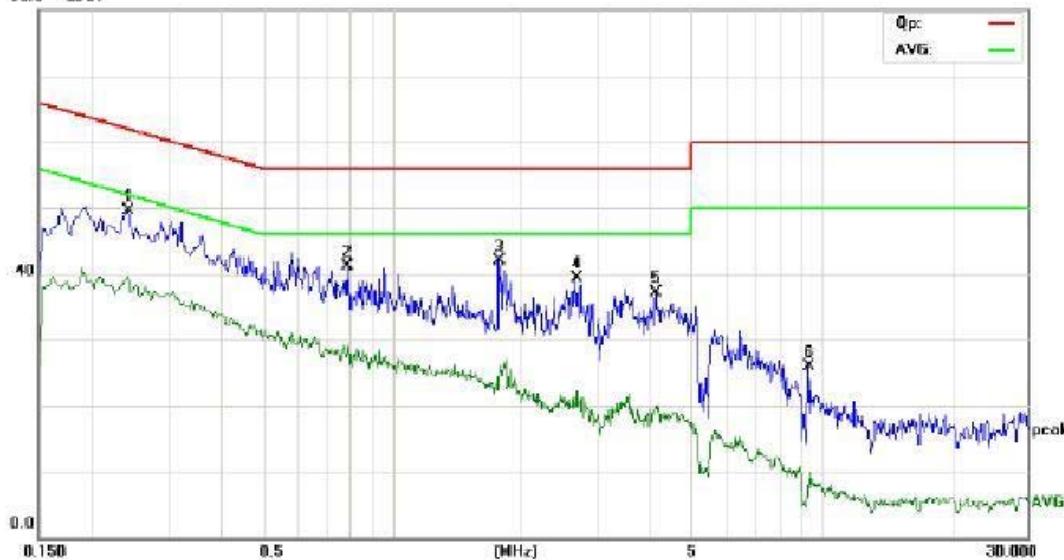

Site: site #1

Phase: L1

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: GSM MOBILE PHONE

MVN: U-240-2

Mode:

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Over	
								Detector	Comment
1	*	0.2420	37.83	11.72	49.55	62.03	-12.48	peak	
2		0.7860	31.06	10.00	41.06	56.00	-14.94	peak	
3		1.7660	32.74	9.23	41.97	56.00	-14.03	peak	
4		2.6740	29.59	9.67	39.26	56.00	-16.74	peak	
5		4.0940	26.02	11.09	37.11	56.00	-18.89	peak	
6		9.3020	16.55	9.42	25.97	60.00	-34.03	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Conducted Emission Measurement

File: U-2
80.0 dBuV

Data #2

Date: 2013-4-11

Time: 20:14:58

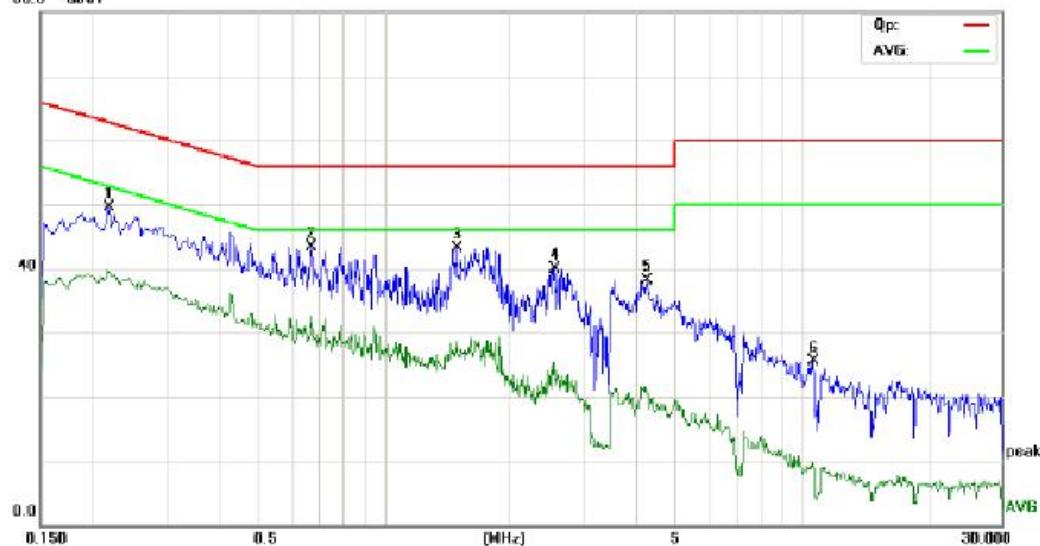

Site: site #1

Phase: *N*

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: GSM MOBILE PHONE

MN: U-240-2

Mode:

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over		Comment
						Detector		
1	0.2180	37.72	11.88	49.60	62.89	-13.29	peak	
2 *	0.6660	33.38	10.00	43.38	56.00	-12.62	peak	
3	1.4940	33.63	9.51	43.14	56.00	-12.86	peak	
4	2.5500	30.32	9.55	39.87	56.00	-16.13	peak	
5	4.2300	26.92	11.23	38.15	56.00	-17.85	peak	
6	10.5940	16.44	9.00	25.44	60.00	-34.56	peak	

*:Maximum data x:Over limit !:over margin

5.7 Radiated Emission

5.7.1 Definition

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.


5.7.2 Test Description

A. Test Setup:

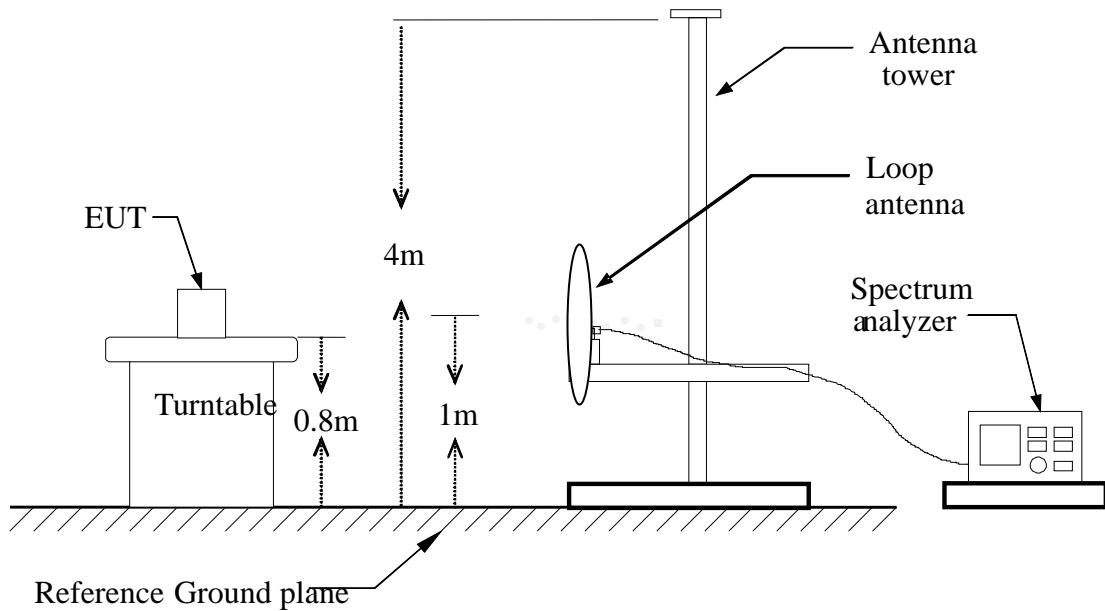

Blow 1GHz:

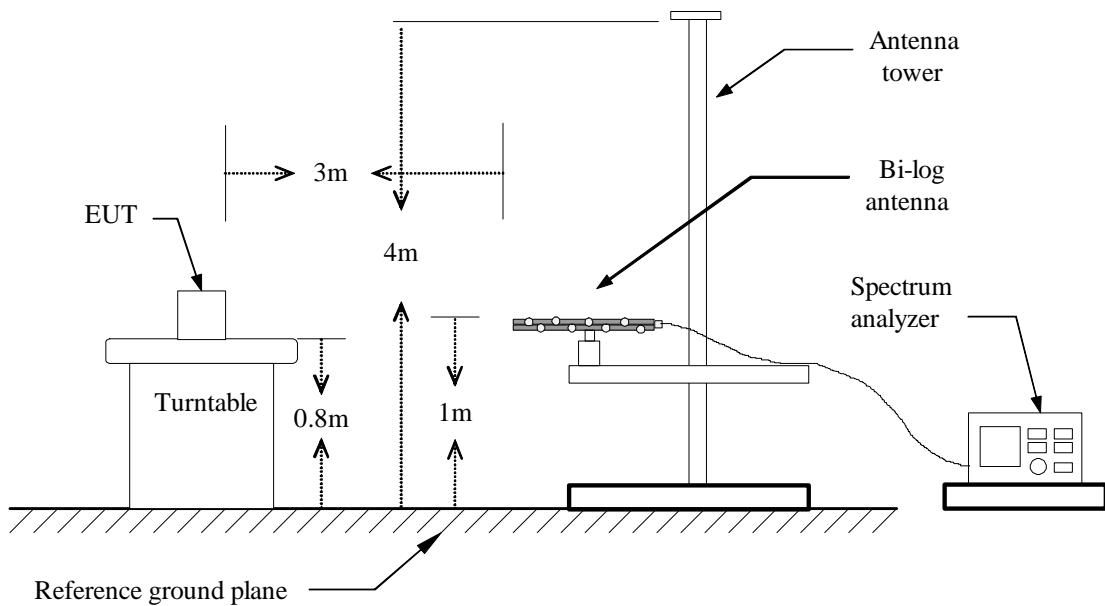

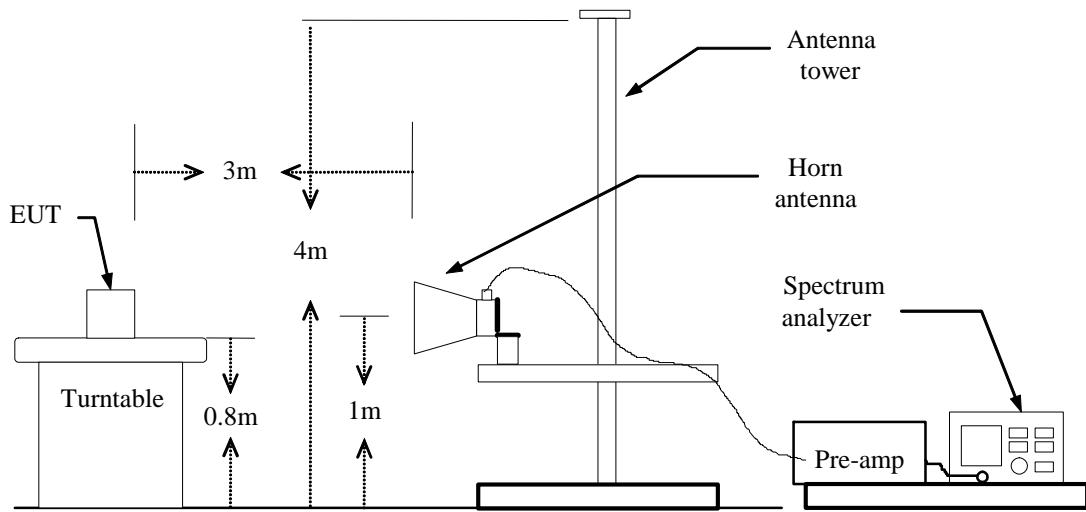Above 1GHz:**B. Test procedures**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
 - Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO
 - Above 1GHz : (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

5.7.3 Test Result

Form 9 KHz to 30MHz:

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
N/A	H								>20
N/A	V								>20


Note: No test data was detected in below 30MHz.

Form 30MHz to 1000MHz:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

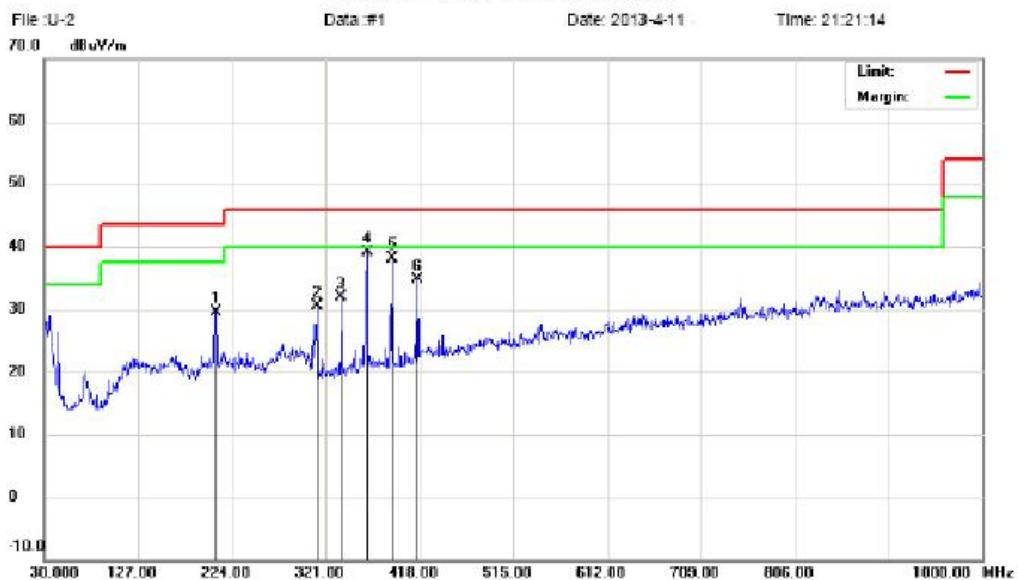

Site: site MOST 3M

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: GSM MOBILE PHONE

Distance:

MN: U-240-2

Mode:

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		207.5100	12.94	16.53	29.47	43.50	-14.03	peak		
2		312.2700	13.88	16.69	30.57	46.00	-15.43	peak		
3		337.4900	14.84	17.07	31.91	46.00	-14.09	peak		
4	*	363.6800	20.83	18.26	39.09	46.00	-6.91	peak		
5		389.8700	19.83	18.30	38.13	46.00	-7.87	peak		
6		416.0600	15.11	19.57	34.68	46.00	-11.32	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Radiated Emission Measurement

File: U-2

Data: #2

Date: 2013-4-11

Time: 21:22:33

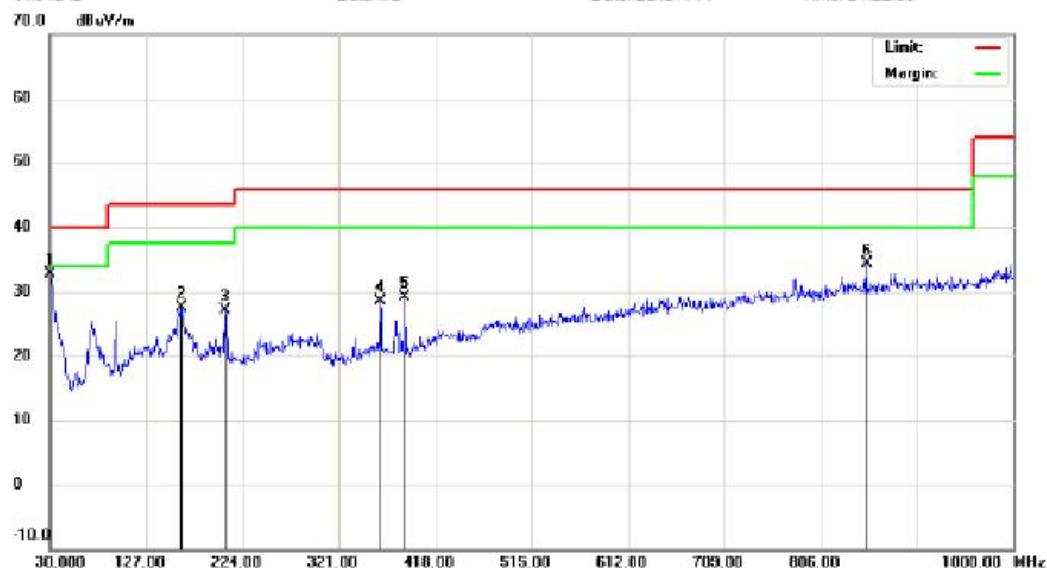

Site: site MOST 3M

Polarization: Vertical

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: GSM MOBILE PHONE

Distance:

MN: U-240-2

Mode:

Note:

No. Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
		Level dBuV	Factor dB	ment dBuV/m					
1 *	30.9700	8.65	24.05	32.70	40.00	-7.30	peak		
2	161.9200	10.20	17.26	27.46	43.50	-16.04	peak		
3	206.5400	10.38	16.77	27.15	43.50	-16.35	peak		
4	362.7100	10.18	18.27	28.45	46.00	-17.55	peak		
5	387.9300	10.79	18.26	29.05	46.00	-16.95	peak		
6	852.5600	7.10	27.12	34.22	46.00	-11.78	peak		

*:Maximum data x:Over limit !:over margin

5.7.3.2 Above 1 GHz

Operation Mode: TX/ IEEE 802.11b/CH Low **Test Date:** April 11,2013
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF	Actual Fs		Peak	AV	AV
							Peak (dBuV/m)	AV (dBuV/m)	Limit
4824.5	✓	44.98	25.69	23.05	68.03	48.74	74.00	54.00	-5.26
N/A	✓								
4824.5	H	45.37	26.38	23.05	68.42	49.43	74.00	54.00	-4.57
N/A	H								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11b/CH Mid **Test Date:** April 11,2013
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
							Peak (dBuV/m)	AV (dBuV/m)	
4874.5	V	43.52	23.83	23.31	66.83	47.14	74.00	54.00	-6.86
N/A	V								
4874.5	H	44.60	24.42	23.31	67.91	47.73	74.00	54.00	-6.27
N/A	H								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11b/CH High **Test Date:** April 11,2013
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs (dBuV/m) (dBuV/m)		Peak Limit	AV Limit	AV Margin
							Peak (dBuV/m)	AV (dBuV/m)	(dB)
4924.5	V	46.08	25.19	23.53	69.61	48.72	74.00	54.00	-5.28
N/A	V								
4924.5	H	45.65	24.08	23.53	69.18	47.61	74.00	54.00	-6.39
N/A	H								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11g/CH Low **Test Date:** April 11,2013
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak	AV	AV
							Limit (dBuV/m)	Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4824.5	V	43.71	23.61	23.05	66.76	46.66	74.00	54.00	-7.34
N/A	V								
4824.5	H	44.97	25.08	23.05	68.02	48.13	74.00	54.00	-5.87
N/A	H								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11g/CH Mid **Test Date:** April 11,2013
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak (dBuV)	AV (dBuV)	Ant. / CL CF	Actual Fs		Peak	AV	AV
							Limit	Limit	Margin
					(dBuV/m)	(dBuV/m)			
4874.5	V	45.84	24.23	23.31	69.15	47.54	74.00	54.00	-6.46
N/A	V								
4874.5	H	44.17	25.79	23.31	67.48	49.10	74.00	54.00	-4.90
N/A	H								

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX/ IEEE 802.11g/CH High **Test Date:** April 11,2013
Temperature: 20°C **Tested by:** Habby Guo
Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak (dBuV)	AV (dBuV)	Ant. / CL CF	Actual Fs		Peak	AV	AV
							Limit	Limit	Margin
					(dBuV/m)	(dBuV/m)			
4924.5	V	46.29	25.34	23.53	69.82	48.87	74.00	54.00	-5.13
N/A	V								
4924.5	H	44.35	24.20	23.53	67.88	47.73	74.00	54.00	-6.27
N/A	H								

Notes:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

CE TEST SETUP



RE TEST SETUP

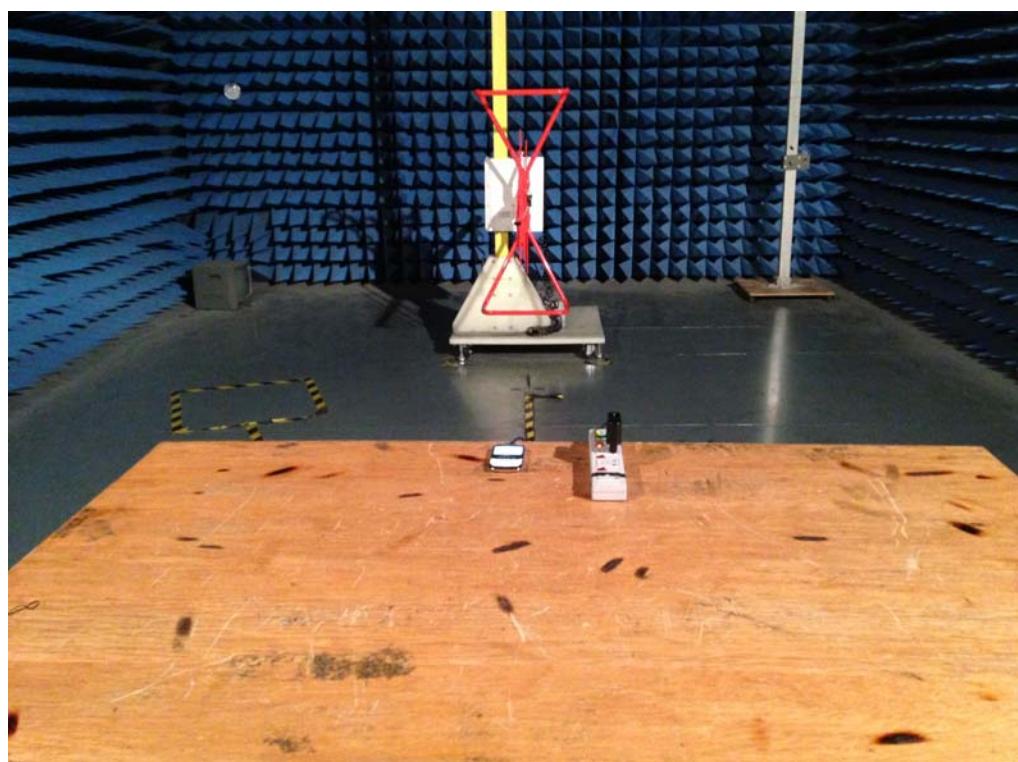

APPENDIX 2
PHOTOGRAPHS OF EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE

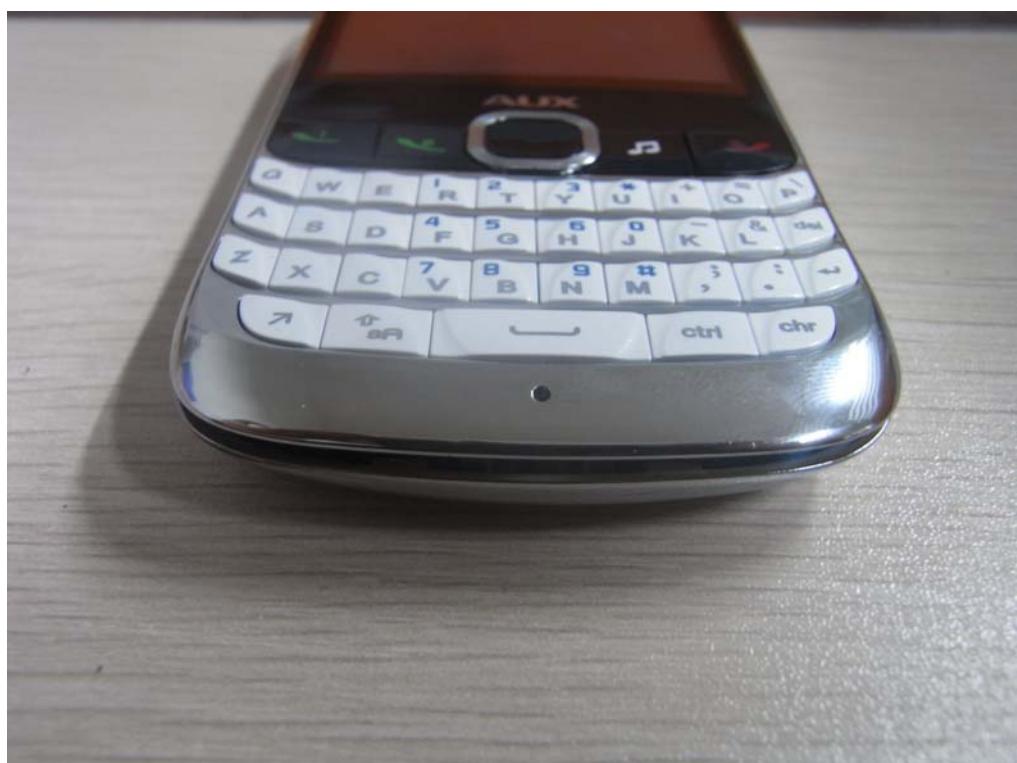


PHOTO OF EARPHONE



PHOTO OF USB CABLE



PHOTO OF POWER SUPPLY




PHOTO OF BATTERY



INTERNAL PHOTO OF SAMPLE – 1



INTERNAL PHOTO OF SAMPLE – 2

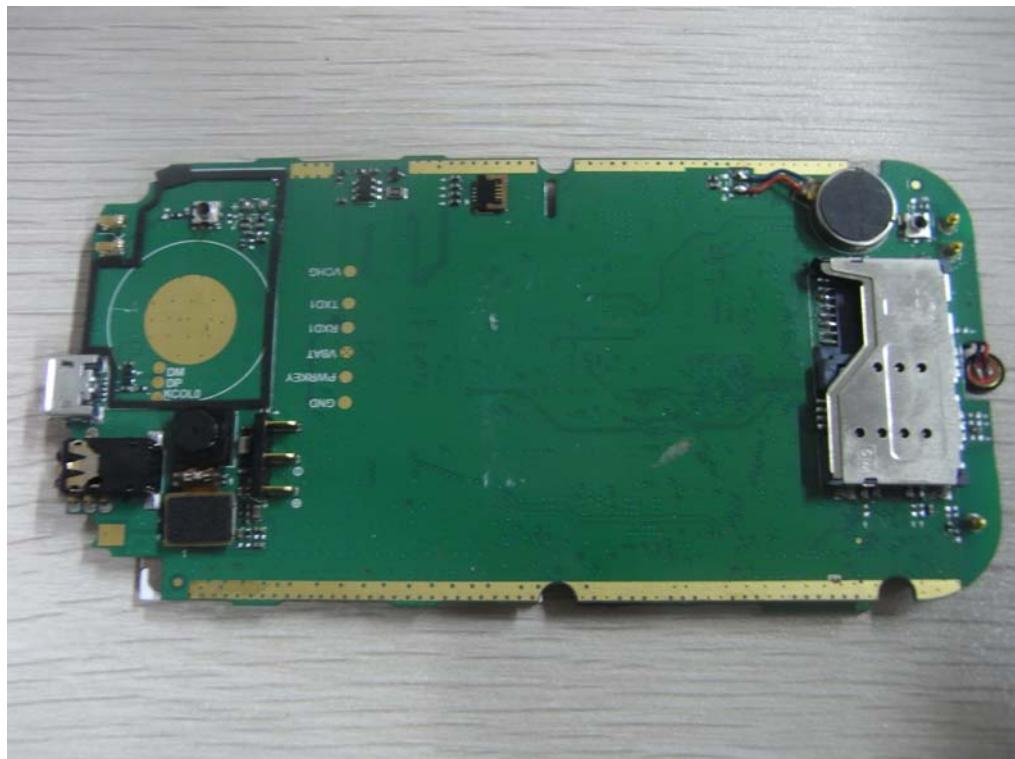

INTERNAL PHOTO OF SAMPLE –3



INTERNAL PHOTO OF SAMPLE -4




INTERNAL PHOTO OF SAMPLE -5




INTERNAL PHOTO OF SAMPLE -6



INTERNAL PHOTO OF SAMPLE -7

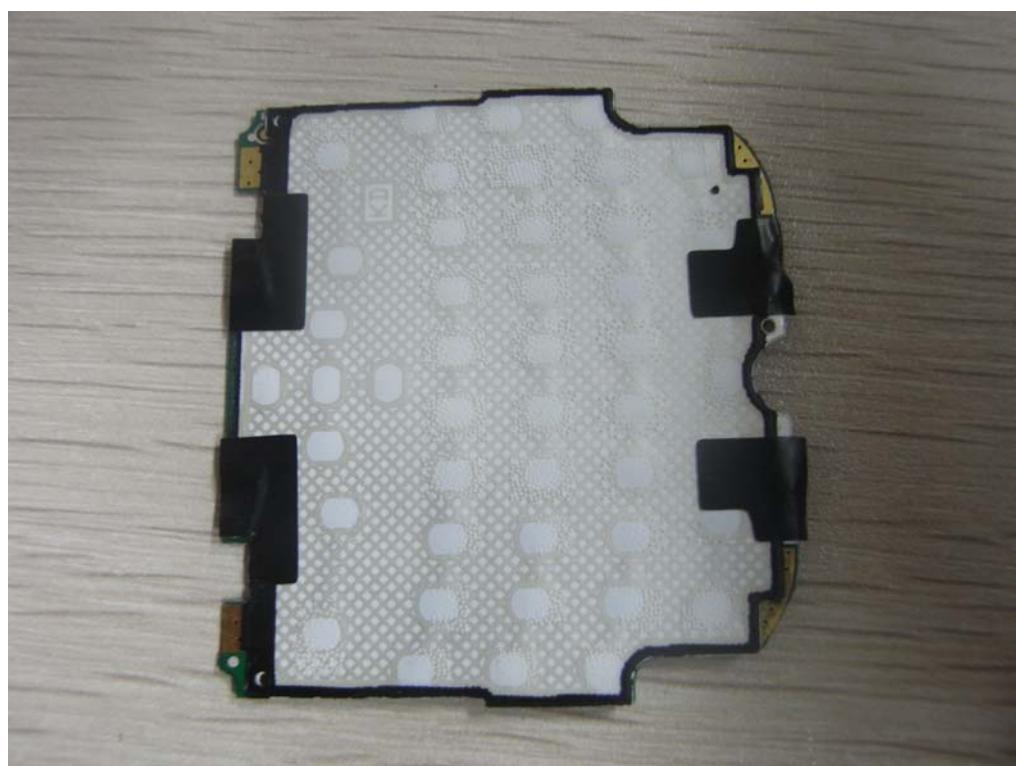

SERIES MODEL INTERNAL SIM CARD PHOTO (U-240-1)

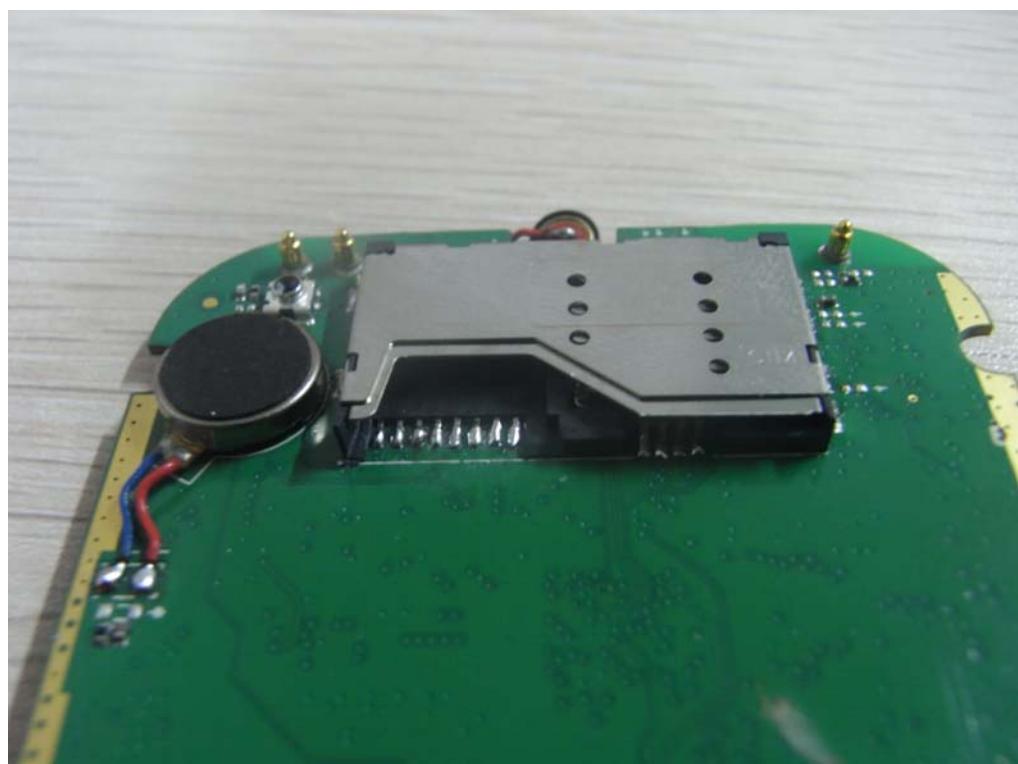

-----END OF REPORT-----