



FCC 47 CFR PART 24 SUBPART E

TEST REPORT

For

Applicant : PARKTEL FZE

**Address : WARE HOUSE NO: FF01,ROUND ABOUT NO: 05,
JEBEL ALI FREEZONE DUBAI U.A.E**

Product Name : WCDMA Mobile Phone

Model Name : U-720-2

Brand Name : unnecto TM

FCC ID : OLEU720

Report No. : STS140333F3

Date of Issue : April 04,2014

Issued by : Shenzhen Super Test Service Technology Co., Ltd.

**Address : No.5, Langshan 2nd Rd., North Hi-Tech Industrial Park ,
Nanshan, Shenzhen, Guangdong ,China**

Tel : 86-755-2795 8522

Fax : 86-755-2795 8022

The report consists 72 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by STS. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION.....	5
2.1 Product Information	5
2.2 Objective	6
2.3 Test Standards and Results.....	6
2.4 Environmental Conditions.....	6
3. TEST FACILITY	7
4. TEST EQUIPMENT LIST	8
5. 47 CFR Part 2, Part 24E Requirements	9
5.1 General Information.....	9
5.1.1 Conducted Related Tests	9
5.1.2 Radiated Power and Spurious Emission Tests	10
5.1.3 Frequency Stability Test.....	11
6. FREQUENCIES	12
6.1. Requirement.....	12
6.2 Test Procedure	12
6.3 Test Result.....	12
7. Conducted RF Output Power	13
7.1 Requirement.....	13
7.2 Test Procedure	13
7.3 Test Result.....	14
8. OCCUPIED BANDWIDTH	15
8.1 Occupied Bandwidth Definition.....	15
8.2 Test Procedure	15
8.3 Test Result.....	15
9. CONDUCTED SPURIOUS EMISSION	27
9.1 Requirement.....	25
9.2 Test Procedure	25
9.3 Test Result.....	26
10. Transmitter Radiated Power (EIRP/ERP).....	44
10.1 Requirement.....	44
10.2 Test Procedure	44
10.3 Test Result.....	44
11. Radiated Spurious Emission	46
11.1 Requirement.....	46
11.2 Test Procedure	46

11.3 Test Result.....	47
12. Frequency Stability	59
12.1 Frequency Stability Requirement.....	59
12.2 Test Procedure	59
12.3 Test Result.....	60
APPENDIX 1	61
PHOTOGRAPHS OF TEST SETUP	61
APPENDIX 2	64
PHOTOGRAPHS OF EUT	64


1. VERIFICATION OF CONFORMITY

Equipment Under Test: WCDMA Mobile Phone
Brand Name: unnecto TM
Model Number: U-720-2
Series Model Name: N/A
Series Model Difference description: N/A
FCC ID: OLEU720
Applicant: PARKTEL FZE
WARE HOUSE NO: FF01, ROUND ABOUT NO: 05,
JEBEL ALI FREEZONE DUBAI U.A.E
Shenzhen Xiangyue Perfect Digital Science&Technology Co.,Ltd
Manufacturer: Building A1, Jiujutongxin Industrial Zone11, Xinbu, Tongle, Longgang,
shenzhen
Technical Standards: 47 CFR Part 2
47 CFR Part 24 Subpart E
File Number: STS140333F3
Date of test: March 24, 2014- April 04, 2014
Deviation: None
Condition of Test Sample: Normal
Test Result: PASS

The above equipment was tested by Shenzhen Super Test Service Technology Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.


Tested by (+ signature):



Petter Ping

April 04, 2014


Review by (+ signature):



July Wen

April 04, 2014

Approved by (+ signature):



Terry Yang

April 04, 2014

2. GENERAL INFORMATION

2.1 Product Information

EUT1- Mobile Phone	
Description:	WCDMA Mobile Phone
Model Name:	U-720-2
IMEI No.:	N/A
Frequency Range:	GSM 850: 824.2-848.8MHz GSM1900:1850.2-1909.8MHz WCDMA Band II:1852.4-1907.6MHz WCDMA BandV:826.4-846.6MHz Bluetooth:2402-2480MHz
Hardware Version:	V965M-02
Software Version:	N/A
EUT2- Battery	
Description:	Lithium-ion Battery
Model Name:	BU-720
Brand Name:	unnecto TM
Manufacturer:	ShenZhen EAST Electronics co.,Ltd
Capacitance:	1500 mAh
Rated Voltage:	3.8V
Charge Limit:	4.35V
EUT3 – Power Supply	
Description:	Travel Charger
Model Name:	CU-720
Brand Name:	unnecto TM
Manufacturer:	SHENZHEN SAMSON POWER TECHNOLOGY CO., LTD.
Rated Input:	AC 100-240V, 50/60Hz, 0.4A
Rated Output:	DC 5V, 0.8A
Length of USB cable:	1.0m

NOTE:

1. The EUT is a Mobile Station, here only PCS 1900MHz band was tested in this report.
2. The normal, high and low voltage supply for the Battery of the EUT is separately 3.8V, 4.35V and 3.6V, which are specified by the applicant.
3. Please refer to Appendix 2 for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual

2.2 Objective

The objective of the report is to perform tests according to 47 CFR Part 2, Part 24 for FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-11 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 24 (10-1-11 Edition)	Personal Communications Services

2.3 Test Standards and Results

Test items and the results are as bellow:

No.	Rules	Test Type	Result	Date of Test
1	§2.106 §24.229	Frequencies	PASS	2014-04-02
2	§2.1046	Conducted RF Output Power at Antenna Terminal	PASS	2014-04-02
3	§2.1049	Occupied Bandwidth	PASS	2014-04-02
4	§2.1051 §2.1057 §24.238	Conducted Spurious Emission at Antenna Terminal	PASS	2014-04-02
5	§24.232	Transmitter Radiated Power (EIPR/ERP)	PASS	2014-04-02
6	§2.1053 §2.1057 §24.238	Radiated Spurious Emission	PASS	2014-04-02
7	§2.1055 §24.235	Frequency Stability	PASS	2014-04-02

*Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.*

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST FACILITY

Test Site:	Compliance Certification Services Inc. (Kun shan) Laboratory
Location:	No.10 Weiye Rd, Innovation park, Eco&Tec,Development Zone, Kunshan City, Jiangsu, China
Description:	There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4 and CISPR 16 requirements. The FCC Registration Number is 238958. The CNAS Registration Number is CNAS L4354.
Site Filing:	The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
Instrument Tolerance:	All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.
Ground Plane:	Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

4. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at CCS for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	calibration interval
Spectrum Analyzer	Agilent	E4446A	MY44020154	2014-5-12	1 year
EMI Test Receiver	R&S	ESCI	1166.5950.03	2014-8-13	1 year
Pre-Amplifier	Miteq	NSP4000-NF	870629	2014-5-12	1 year
Bilog Antenna	Sunol	JB1	A110204-2	2014-5-12	1 year
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2014-6-07	1 year
Horn-antenna	SCHWARZBECK	BBHA9170	D:171	2014-4-28	1 year
Loop-antenna	ZHINAN	ZN30900A	N/A	2014-6-07	1 year
Turn Table	CT	CT123	4165	N.C.R	1 year
Antenna Tower	CT	CTERG23	3256	N.C.R	1 year
Controller	CT	CT100	95637	N.C.R	1 year
EMI TEST RECEIVER	R&S	ESCI	100781	2015-3-14	1 year
V (V-LISN)	R&S	ENV216	101604	2014-5-21	1 year
Pulse Limiter	R&S	ESH3-Z2	100524	2014-9-24	1 year
Temperature Chamber	Guangzhou Gongwen	GDS-250	N/A	2014-9-24	1 year
Test Software	EZ-EMC				


NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 2, Part 24E Requirements

5.1 General Information

5.1.1 Conducted Related Tests

Based on ANSI/TIA-603-C-2004

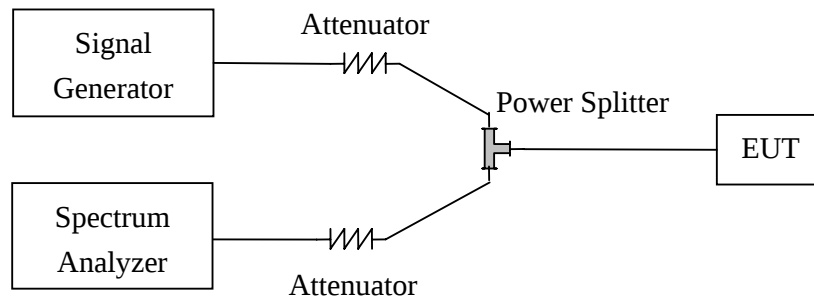


1. The EUT is coupled to the Spectrum Analyzer and the System Simulator with the suitable Attenuators through the Power Splitter; the path loss is calibrated to correct the reading.
2. The EUT is configured here as MS + Battery.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Set the signal generator to a known output power and record the path loss in dB (LOSS) for frequencies up to the tenth harmonic of the EUT's carrier frequency. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
5. Replace the signal generator with the EUT.
6. Adjust the settings of the Digital Radio communication Tester (DRT) to set the EUT to its maximum power at the required channel.
7. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
8. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
10. If necessary steps 7 and 8 may be performed with the spectrum analyzer set to average detector.

Note: Step 4 above is performed prior to testing and LOSS is recorded by test software. Steps 3, 7, and 8 above are performed with test software.

5.1.2 Radiated Power and Spurious Emission Tests

Based on ANSI/TIA-603-C-2004

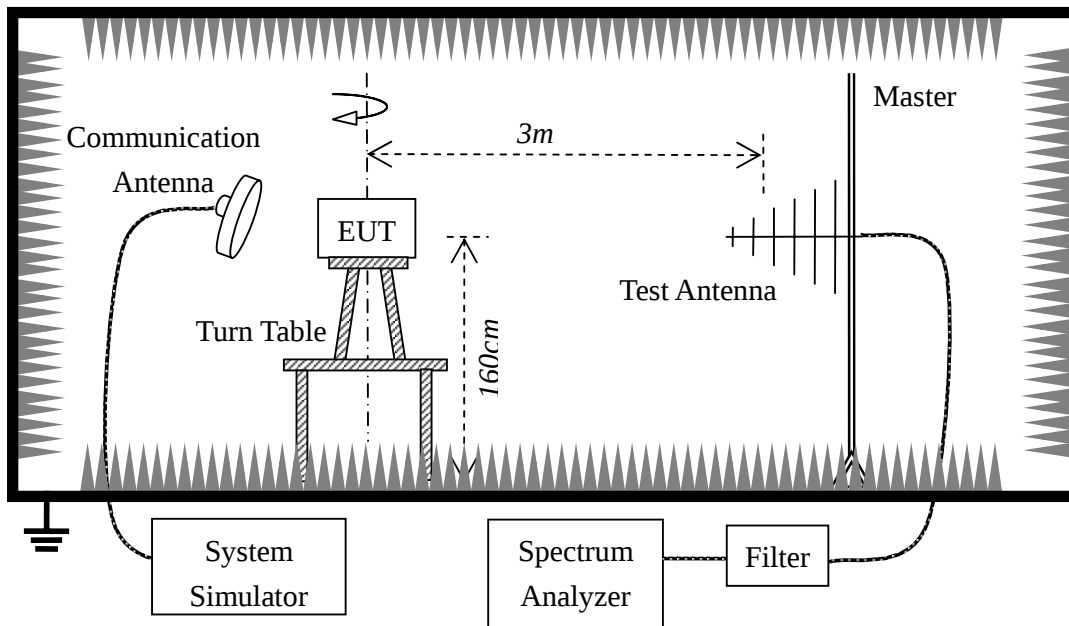


1. The test is performed in a full-Anechoic Chamber; the air loss of the site and the factors of the test system are pre-calibrated using the substitution method.
2. Connect the equipment as shown in the above diagram with the EUT'S antenna in a vertical orientation.
3. Adjust the setting of System Simulator to set the EUT to its maximum power at the require channel.
4. Set the Spectrum Analyzer to the channel frequency, set the analyzer to measure peak hold with the required setting.
5. Rotate the EUT 360 degree, recorded the peak level in dBm(LVL).
6. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
7. Connect the antenna to a signal generator with known output power and record the path loss in dB (Loss), $\text{Loss} = \text{Generator Output Power(dBm)} - \text{Spectrum Analyzer reading Power(dBm)}$.
8. Determine the ERP using the following equation:

$$\text{ERP(dBm)} = \text{LVL(dBm)} + \text{Loss(dB)}$$
9. Determine the EIRP using the following equation:

$$\text{EIRP(dBm)} = \text{ERP(dBm)} + 2.14(\text{dB})$$
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

Note: Steps 6 and 7 above are performed prior to setting and Loss is recorded by test software.

5.1.3 Frequency Stability Test

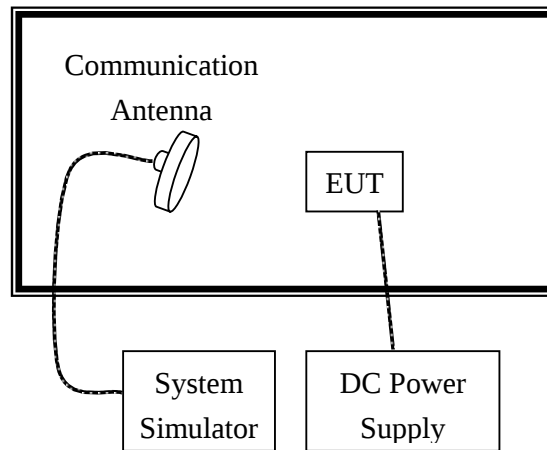

1. The test is performed in a Temperature Chamber.
2. The EUT is configured as MS + DC Power Supply.
3. The BCCH number of the SS used here is 520.

5.1.4 Test Mode Description

SIM 1 and SIM 2 are tested during all the items, According to the test data, we got the worst mode is SIM1, So we only put the worst data on the report.

6. FREQUENCIES

6.1. Requirement

According to FCC §24.229, the frequencies available in the Broadband PCS services are listed as below, in accordance with the frequency allocations table of FCC §2.106.

(a) The following frequency blocks are available for assignment on an MTA basis:

Block A: 1850 - 1865MHz paired with 1930 - 1945MHz;

Block B: 1870 - 1885MHz paired with 1950 - 1965MHz.

(b) The following frequency blocks are available for assignment on a BTA basis:

Block C: 1895 - 1910 MHz paired with 1975 - 1990MHz;

Block D: 1865 - 1870 MHz paired with 1945 - 1950MHz;

Block E: 1885 - 1890 MHz paired with 1965 - 1970MHz;

Block F: 1890 - 1895 MHz paired with 1970 - 1975MHz.

6.2 Test Procedure

1. Perform test system setup as section 5.1.1.
2. The resolution bandwidth of the Spectrum Analyzer is set to at least one percent of the emission bandwidth of the fundamental emission of the transmitter, e.g. for GSM modulated signal (here used): $RBW=VBW=3kHz$, for CDMA modulated signal: $RBW=VBW=30kHz$.
3. The lowest and the highest channels are selected to perform tests respectively. Set the TCH number to 512 via the SS as the lowest channel.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the plot.
5. Set the TCH number to 810 as the highest channel, then repeat step 4.
6. For WCDMA, Set the TCH number to 9262 and 4538 as the low, middle, high channel, then repeat step 4.

6.3 Test Result

Frequency Band	Channel Number	Frequency (MHz)
GSM1900 (GPRS class 8)	512	1850.218
	810	1909.829
GSM1900 (EDGE class 8)	512	1850.215
	810	1909.811
WCDMA Band II (RMC 12.2Kbps)	9262	1852.412
	9538	1907.587

7. Conducted RF Output Power

7.1 Requirement

According to FCC §2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

7.2 Test Procedure

1. Perform test system setup as section 5.1.1 (the radio frequency load attached to the EUT antenna terminal is 50Ω).
2. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used): RBW=VBW=1MHz, for CDMA modulated signal: RBW=VBW=3MHz.
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 512 as the low channel.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the peak and the plot.
5. Set the TCH number to 661 as the middle channel, then repeat step 4.
6. Set the TCH number to 810 as the high channel, then repeat step 4.
7. For WCDMA, Set the TCH number to 9262, 9400 and 9538 as the low, middle, high channel, then repeat step 4.

7.3 Test Result

Frequency Band	Channel Number	Frequency (MHz)	Measured Power		Rated Power	
			dBm	W	dBm	W
GSM1900	512	1850.2	28.44	0.698	30	1
	661	1880.0	28.45	0.699	30	1
	810	1909.8	28.32	0.679	30	1
GSM1900 (GPRS class 8)	512	1850.2	28.40	0.692	30	1
	661	1880.0	28.42	0.695	30	1
	810	1909.8	28.29	0.675	30	1
GSM1900 (EDGE class 8)	512	1850.2	28.31	0.678	30	1
	661	1880.0	28.34	0.682	30	1
	810	1909.8	28.28	0.673	30	1
WCDMA Band II (RMC 12.2Kbps)	9262	1852.4	22.72	0.187	30	1
	9400	1880.0	22.40	0.174	30	1
	9538	1907.6	22.15	0.164	30	1
HSDPA Band II	9262	1852.4	21.64	0.146	30	1
	9400	1880.0	21.44	0.139	30	1
	9538	1907.6	21.24	0.133	30	1
HSUPA Band II	9262	1852.4	20.30	0.107	30	1
	9400	1880.0	20.13	0.103	30	1
	9538	1907.6	19.83	0.096	30	1

Note: Maximum burst average power for GSM, and maximum burst average power for WCDMA.

8. OCCUPIED BANDWIDTH

8.1 Occupied Bandwidth Definition

According to FCC §2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\%$ is equal to 20dB) taking the total RF output power as reference.

8.2 Test Procedure


1. Perform test system setup as section 5.1.1
2. The resolution bandwidth of the Spectrum Analyzer is set to at least one percent of the emission bandwidth, e.g. for GSM modulated signal (here used): $RBW=VBW=3$ kHz, for CDMA modulated signal: $RBW=VBW=30$ kHz.
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 512 as the low channel.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak; make a line whose value is 20dB lower than the peak; mark two points which the line intersected the waveform at; finally record the delta of the two points as the occupied bandwidth and the plot.
5. Set the TCH number to 661 as middle channel, then repeat step 4.
6. Set the TCH number to 810 as high channel, then repeat step 4.

8.3 Test Result


Band	Channel	Frequency (MHz)	Measured Occupied Bandwidth (kHz)	
			99% Emission Bandwidth	26dB Emission Bandwidth
GSM1900	512	1850.2	244.89	315.72
	661	1880.0	248.15	314.56
	810	1909.8	245.63	308.00
GSM1900 (GPRS class 8)	512	1850.2	250.41	312.24
	661	1880.0	248.54	313.95
	810	1909.8	245.03	305.28
GSM1900 (EDGE class 8)	512	1850.2	249.81	304.39
	661	1880.0	242.41	318.79
	810	1909.8	243.54	319.38
WCDMA Band II (RMC 12.2Kbps)	9262	1852.4	4166.0	4702.0
	9400	1880.0	4149.0	4714.0
	9538	1907.6	4184.0	4692.0
HSDPA Band II	9262	1852.4	4163.0	4699.0
	9400	1880.0	4149.0	4688.0
	9538	1907.6	4158.0	4687.0
HSUPA Band II	9262	1852.4	4163.0	4702.0
	9400	1880.0	4174.0	4712.0
	9538	1907.6	4166.0	4700.0

GSM1900 Band:


1. Occupied Bandwidth when the TCH number set to 512:

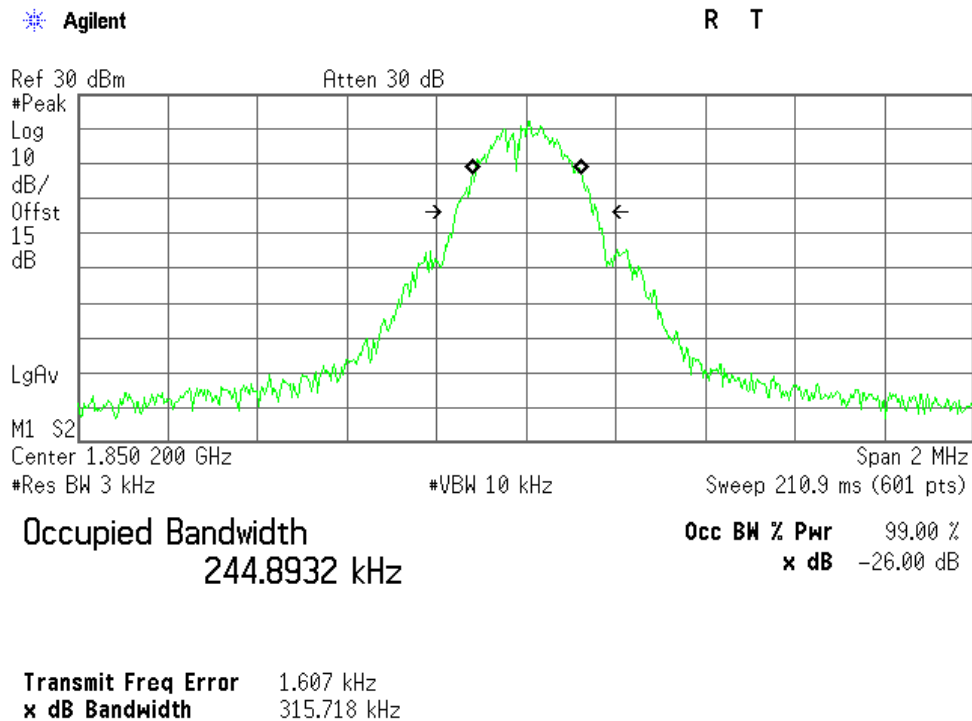

2. Occupied Bandwidth when the TCH number set to 661:

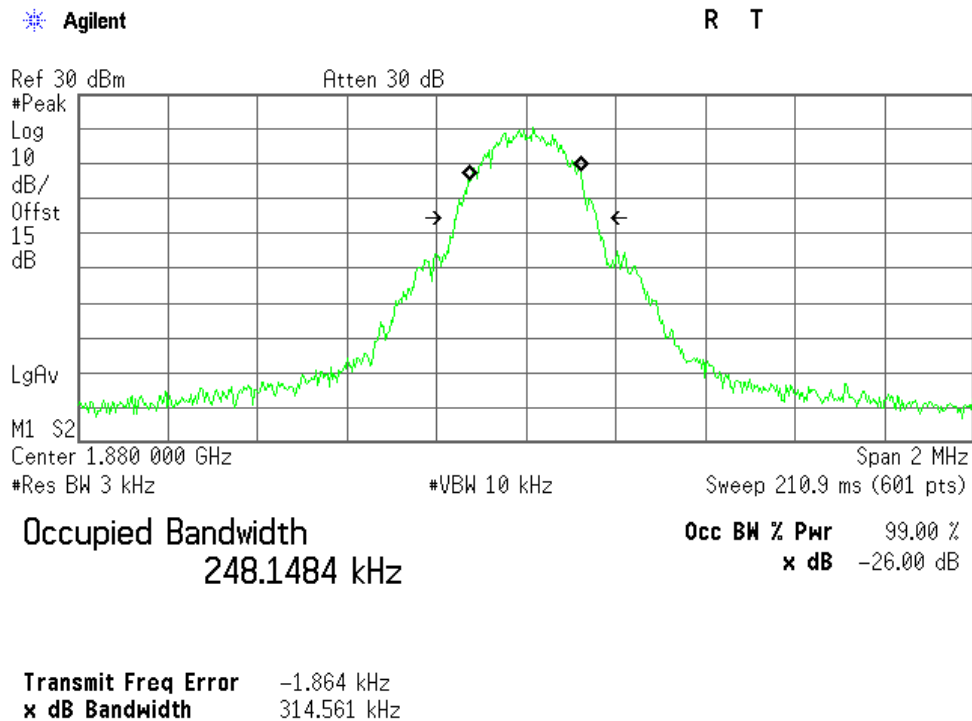


3. Occupied Bandwidth when the TCH number set to 810:

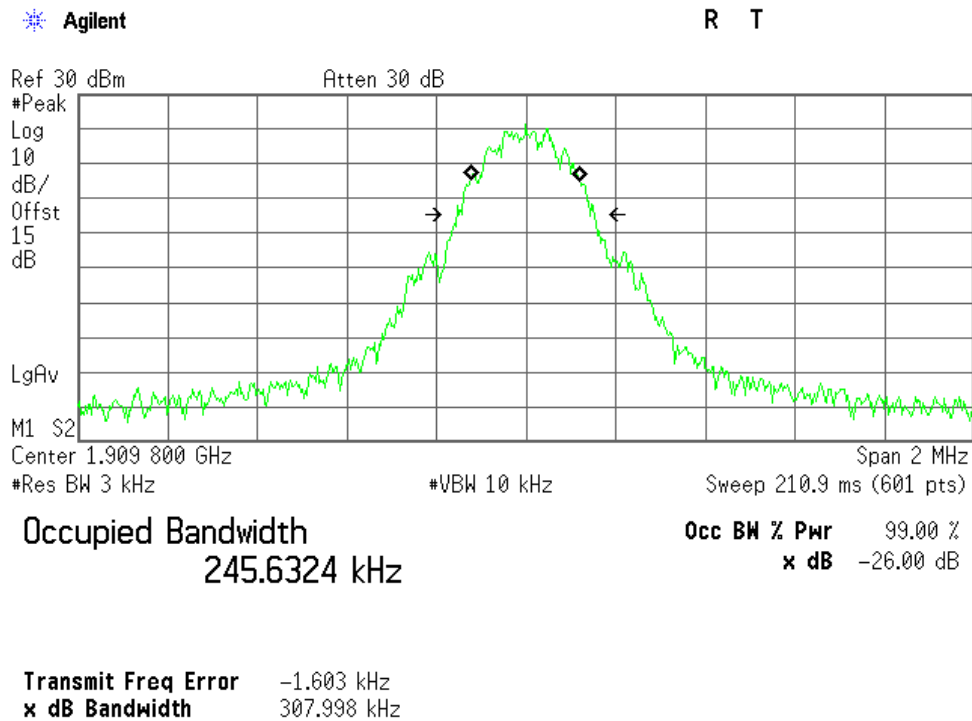


GSM1900 (GPRS class 8) Band:


1. Occupied Bandwidth when the TCH number set to 512:

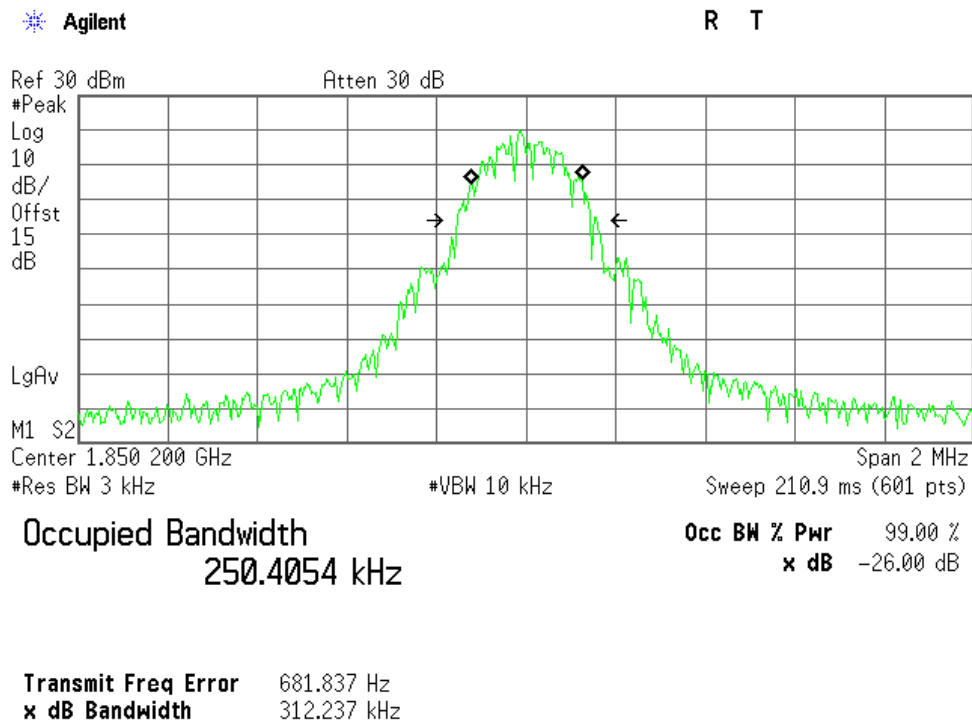

2. Occupied Bandwidth when the TCH number set to 661:

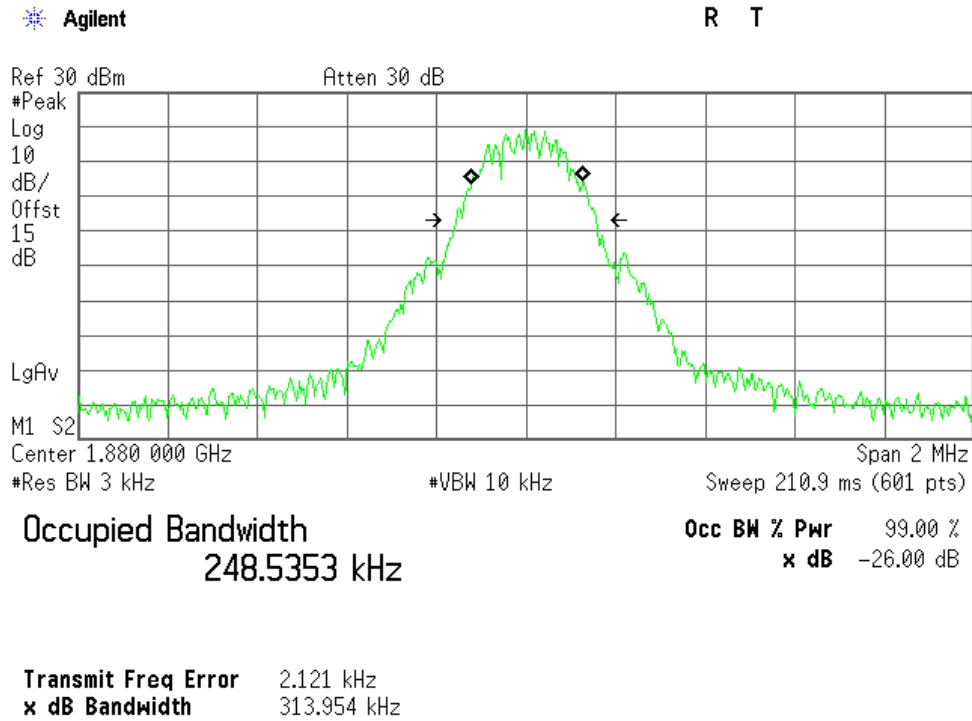


3. Occupied Bandwidth when the TCH number set to 810:

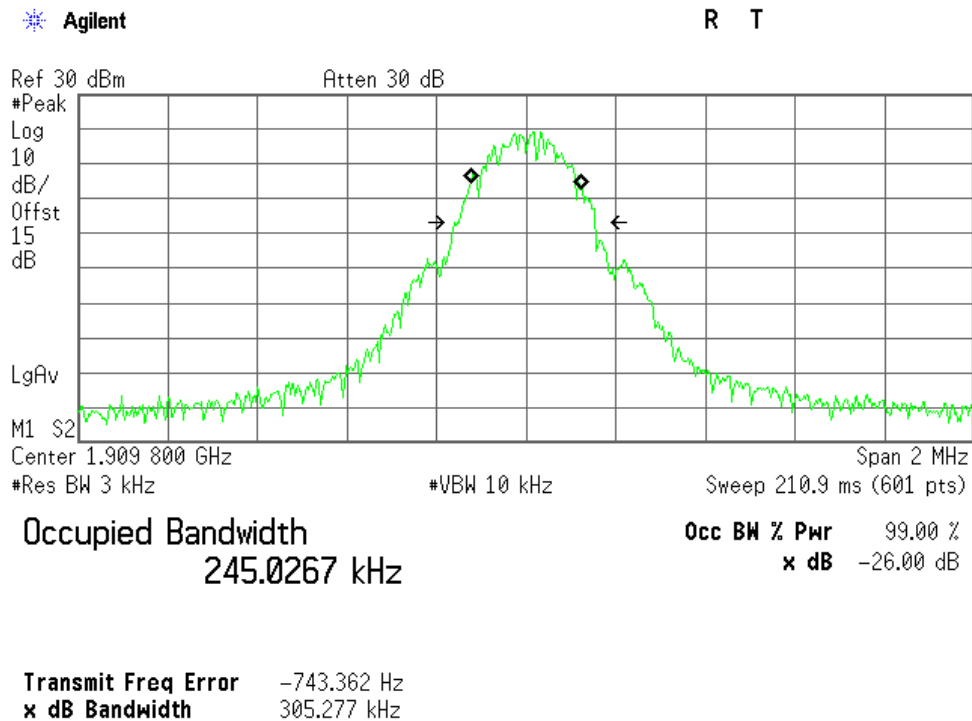


GSM1900 (EDGE class 8) Band:


1. Occupied Bandwidth when the TCH number set to 512:

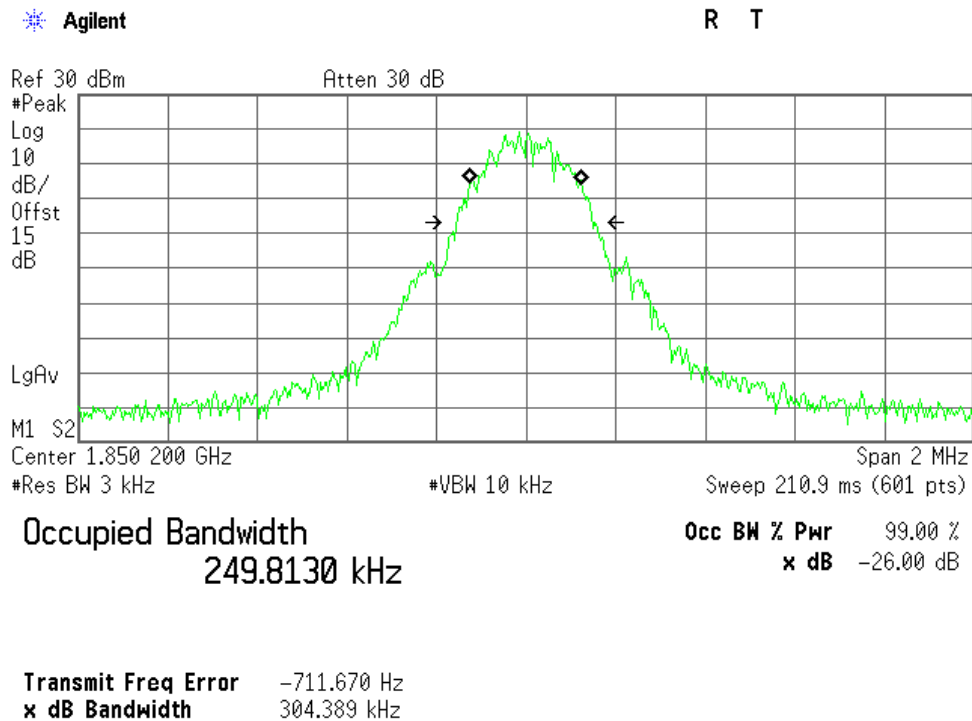

2. Occupied Bandwidth when the TCH number set to 661:

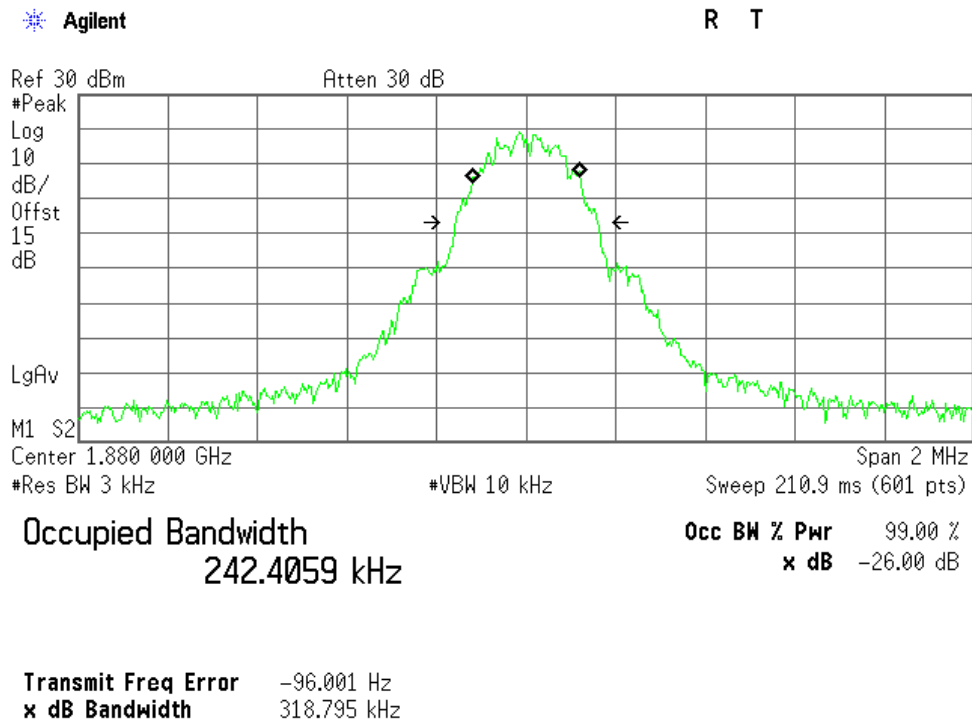


3. Occupied Bandwidth when the TCH number set to 810:

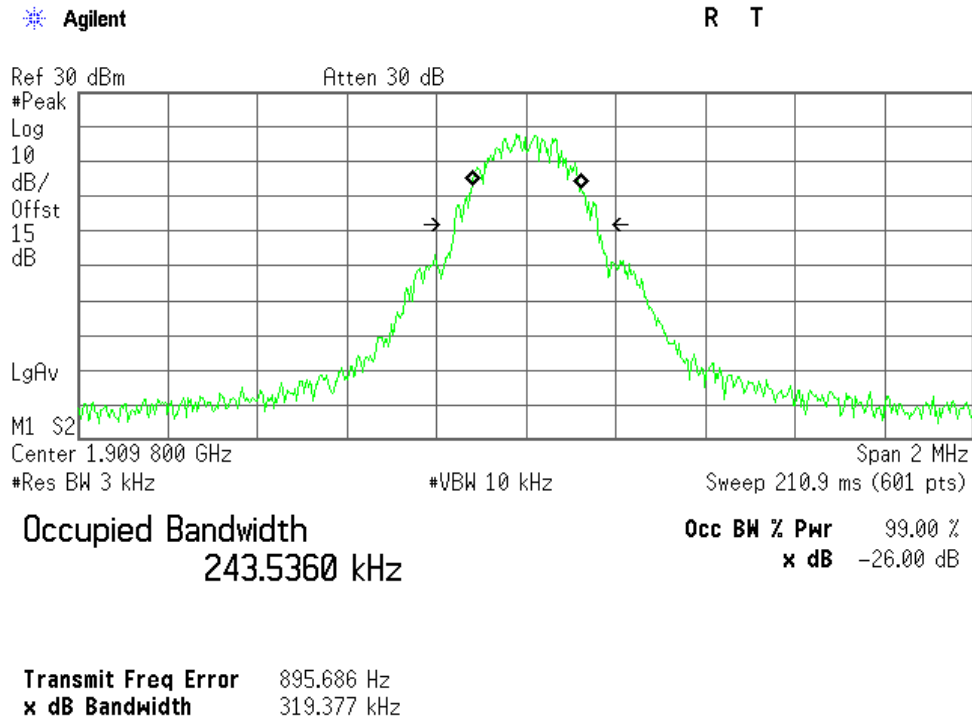


WCDMA Band II:


1. Occupied Bandwidth when the TCH number set to 9262:

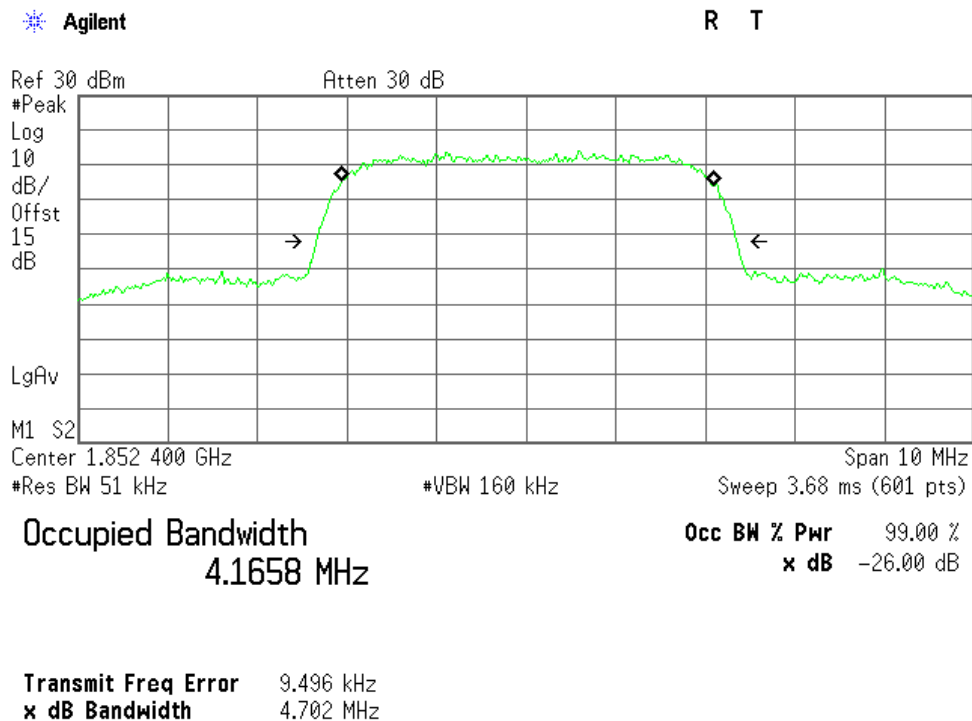

2. Occupied Bandwidth when the TCH number set to 9400:

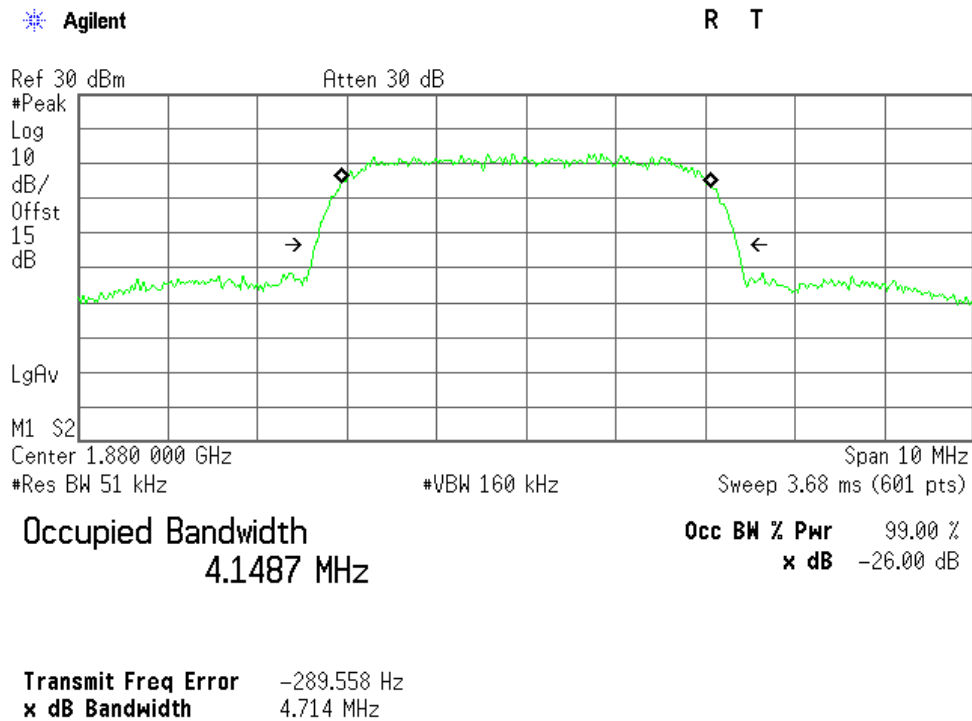


3. Occupied Bandwidth when the TCH number set to 9538:

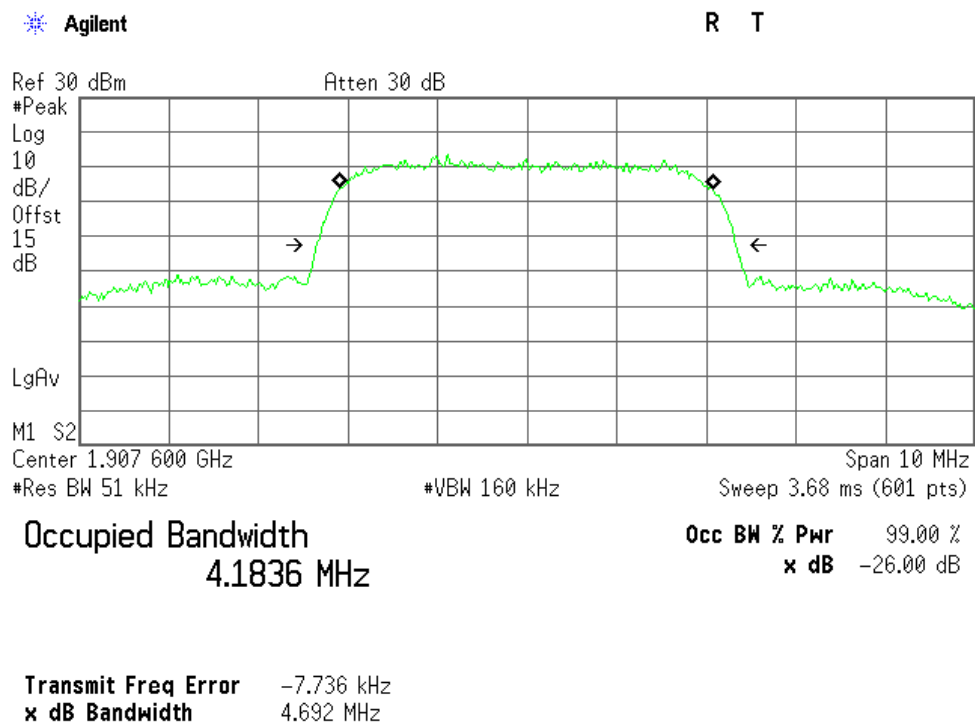


HSDPA Band II:


1. Occupied Bandwidth when the TCH number set to 9262:

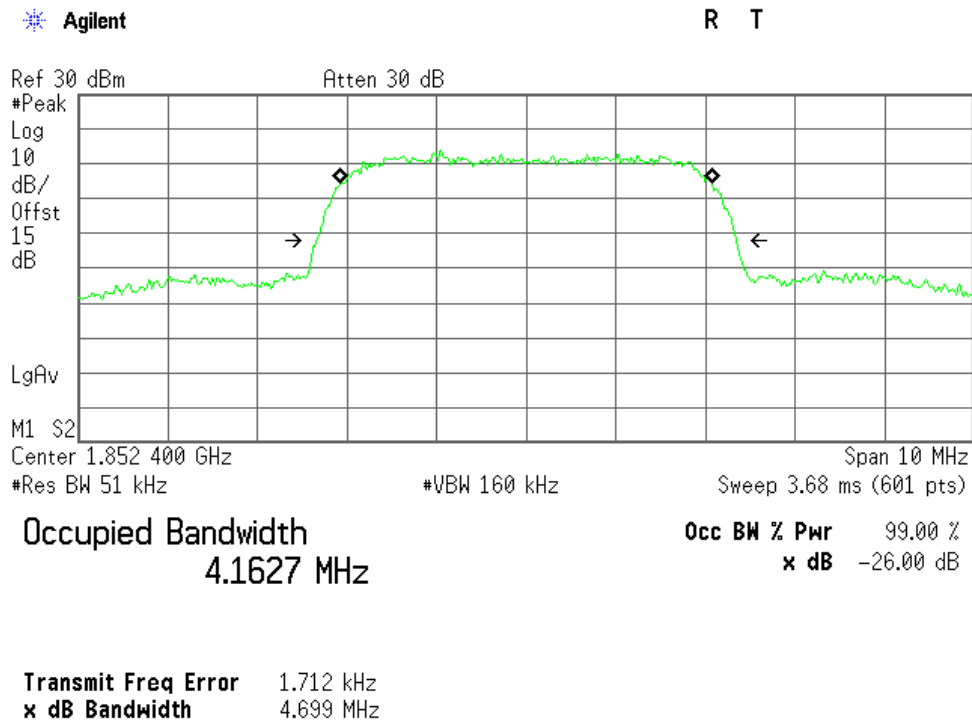

2. Occupied Bandwidth when the TCH number set to 9400:

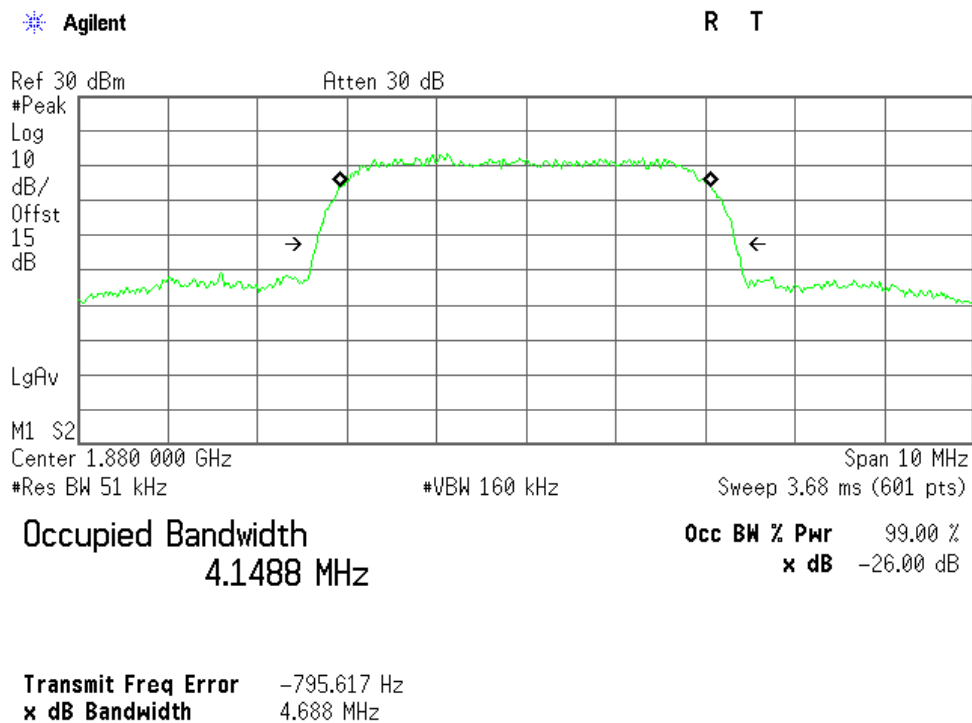


3. Occupied Bandwidth when the TCH number set to 9538:

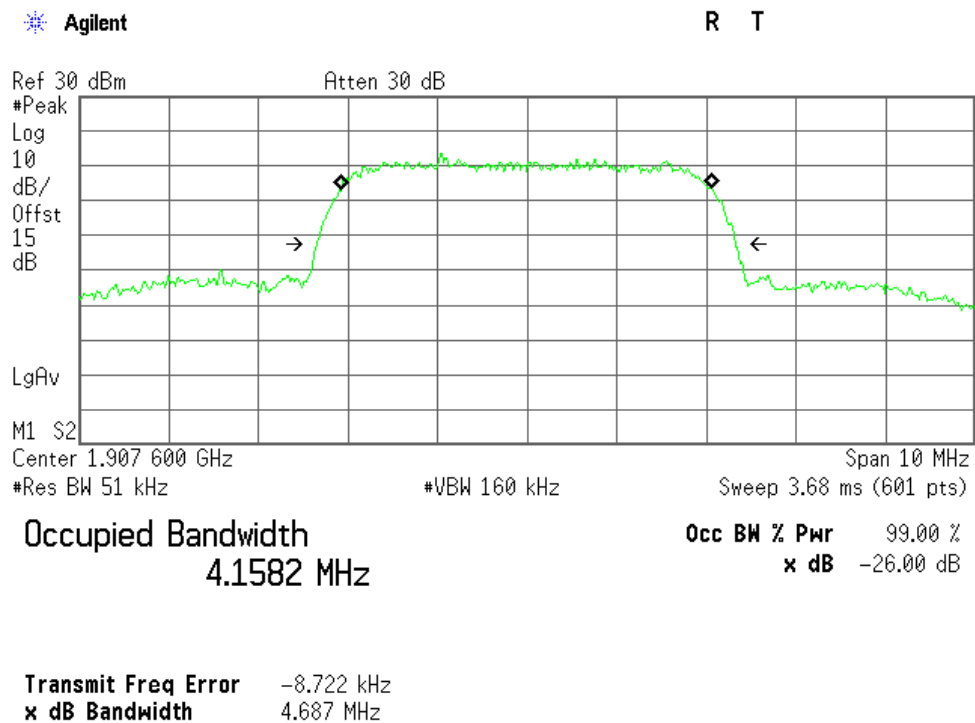


HSUPA Band II:


1. Occupied Bandwidth when the TCH number set to 9262:

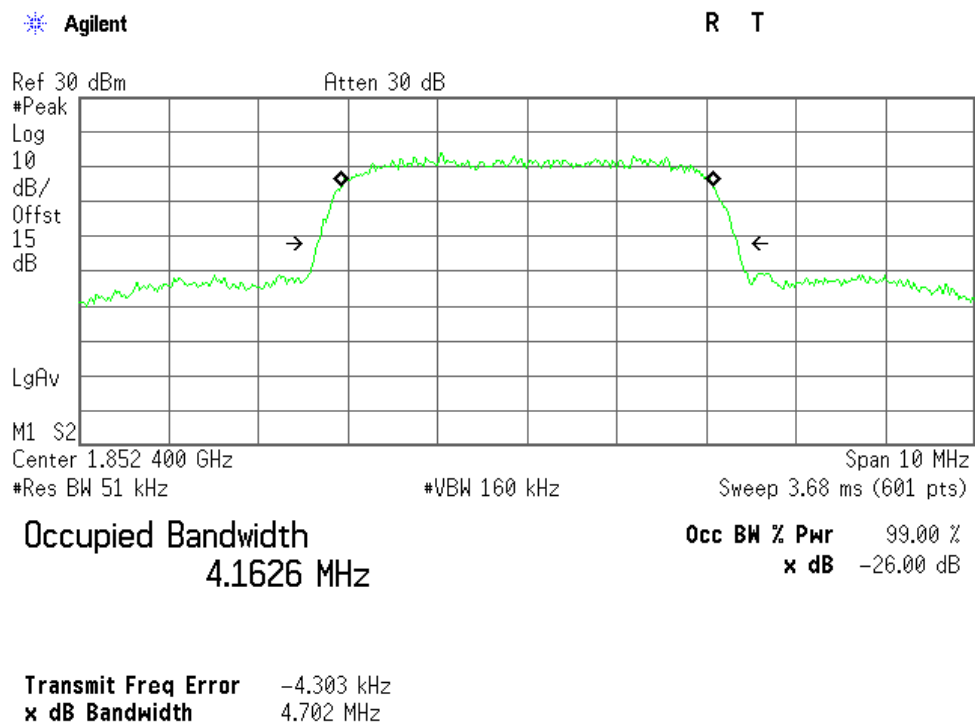

2. Occupied Bandwidth when the TCH number set to 9400:

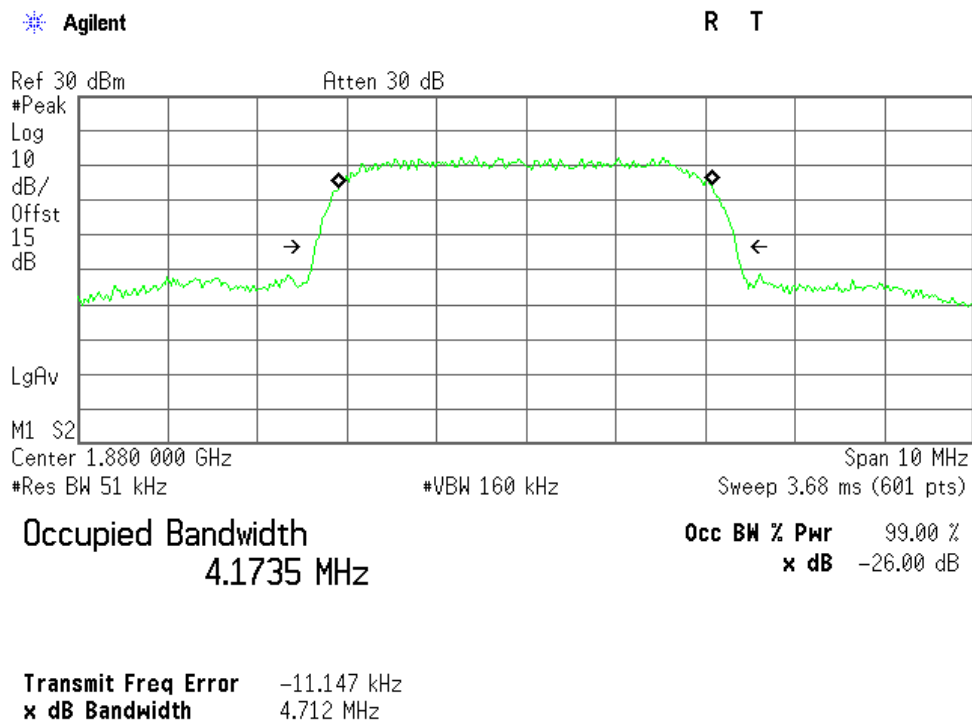

3. Occupied Bandwidth when the TCH number set to 9538:

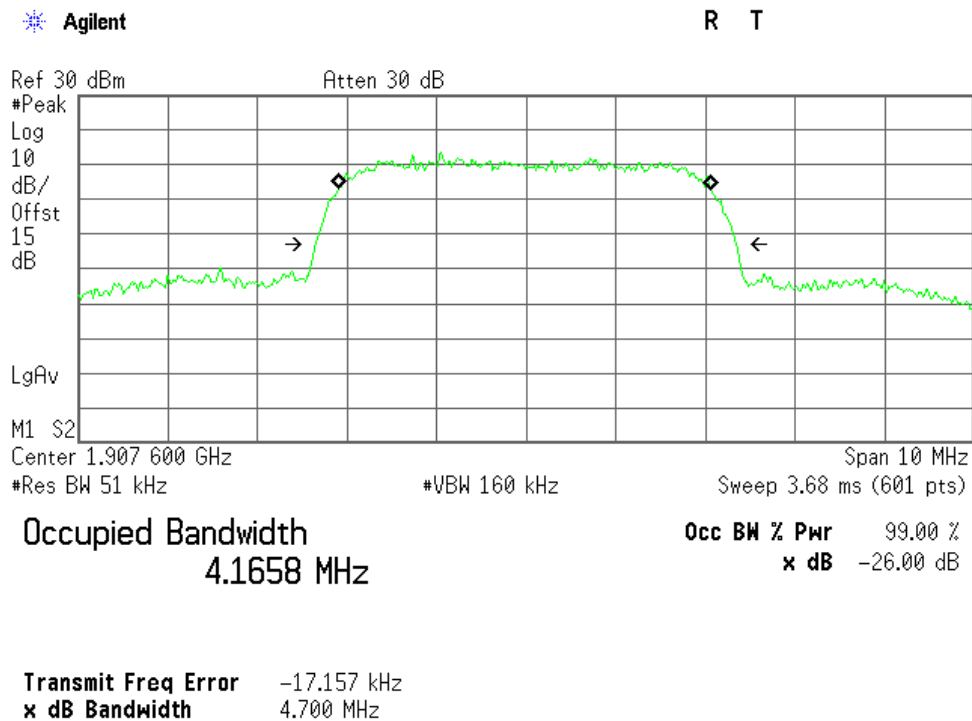

9. CONDUCTED SPURIOUS EMISSION

9.1 Requirement

1. According to FCC §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.
2. According to FCC §24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Thus the 26dB emission bandwidth is measurement for showing compliance at the band-edge.


9.2 Test Procedure

1. Perform test system setup as section section 5.1.1.
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer.
3. The lowest, middle and the highest channels are selected to perform tests respectively. Set the TCH number to 512 as the lowest channel.
4. Set the RBW of the Spectrum Analyzer to 1MHz, and the measuring frequency range from 9kHz to 10th harmonic of the fundamental frequency (here used 26.5GHz); mark the fundamental frequency and the harmonics thereof; finally record the harmonics and the plot. Note, the measuring frequency range can be divided into several parts to perform tests.
5. In the 1MHz bands immediately outside and adjacent to the frequency black, the RBW of the Spectrum Analyzer was set to at least one percent of the emission bandwidth of the fundamental emission of the transmitter, e.g. for GSM modulated signal (here used): RBW=3kHz, for CDMA modulated signal: RBW=30kHz.
6. Set the TCH number to 661 as the middle channel, then repeat step 4.
7. Set the TCH number to 810 as the highest channel, then repeat step 4 and 5.
8. For WCDMA, Set the TCH number to 9262, 9400 and 9538 as the low, middle, high channel, then repeat step 4 and 5.


9.3 Test Result

1. GSM1900 Band:

Plot when the TCH number set to 512:

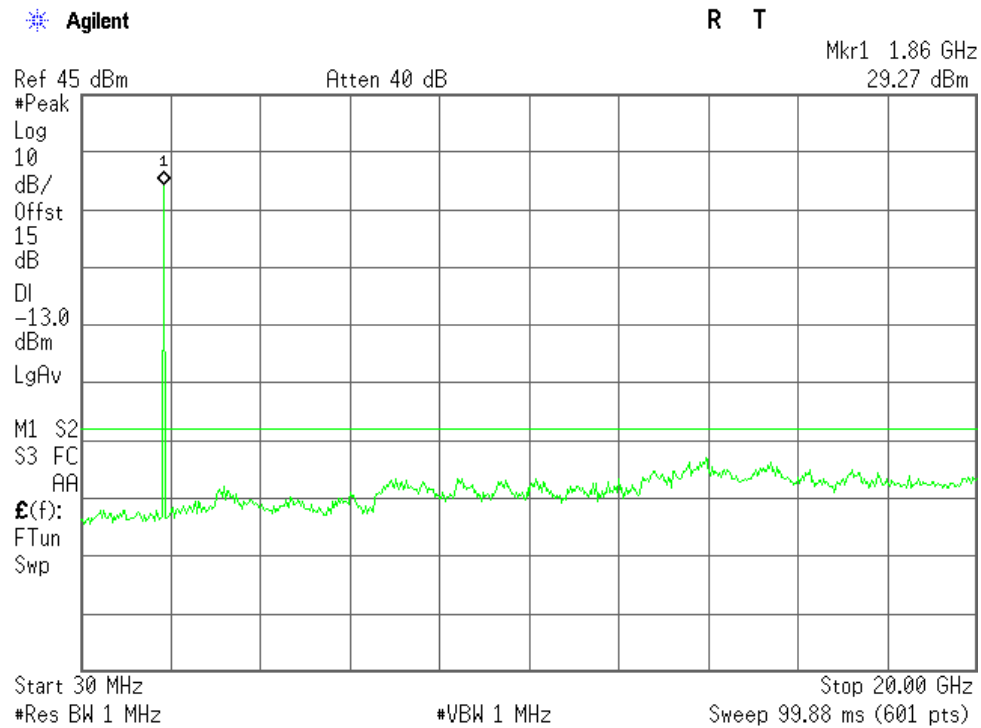

Plot when the TCH number set to 661:

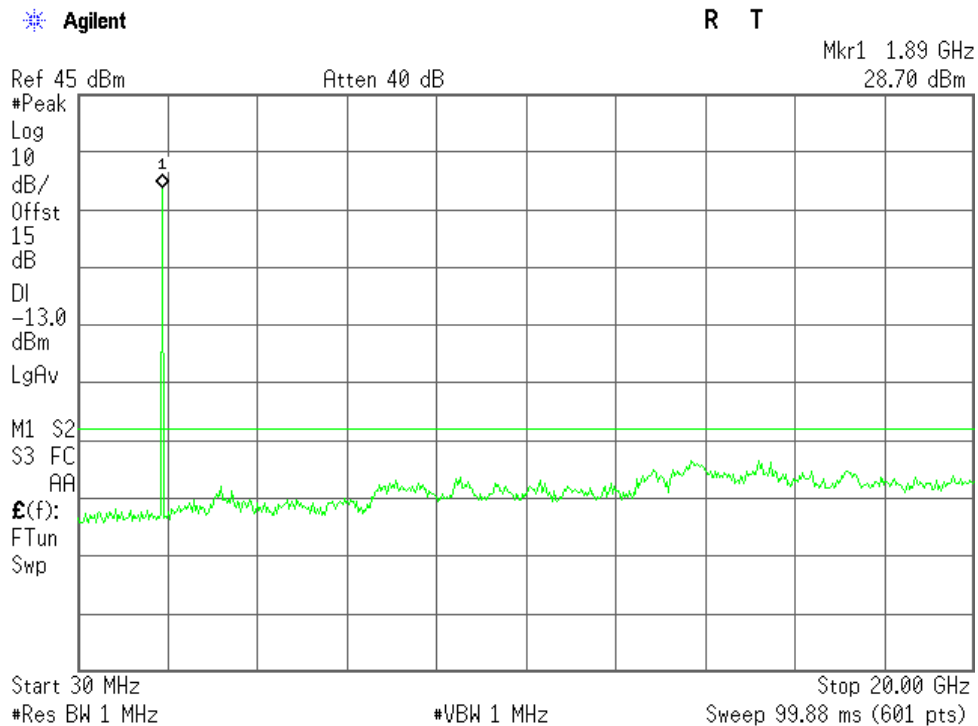

Plot when the TCH number set to 810:

Agilent

R T

Mkr1 1.89 GHz
28.40 dBm

Ref 45 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offset

15

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

E(f):

FTun

Swp


Start 30 MHz

#Res BW 1 MHz

#VBW 1 MHz


Stop 20.00 GHz

Sweep 99.88 ms (601 pts)

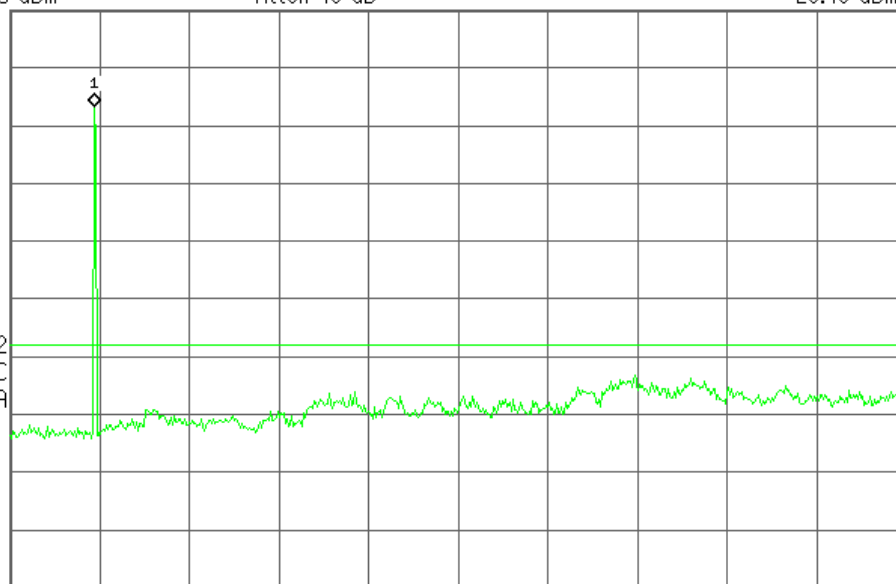


2. GSM1900 (GPRS class 8) Band:


Plot when the TCH number set to 512:

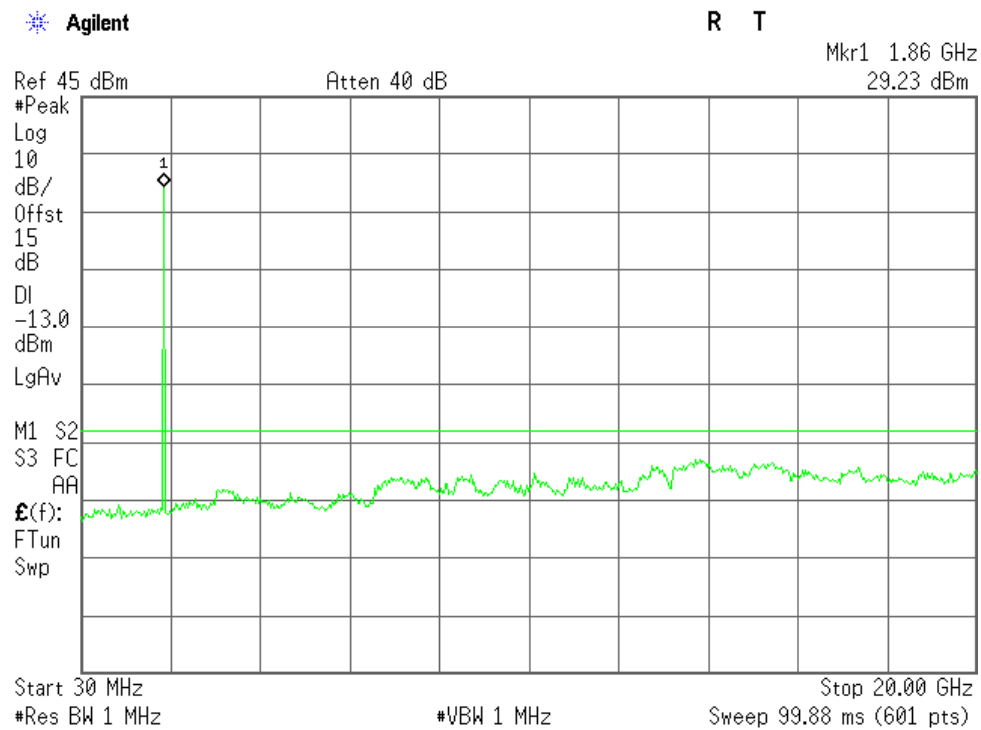

Plot when the TCH number set to 661:

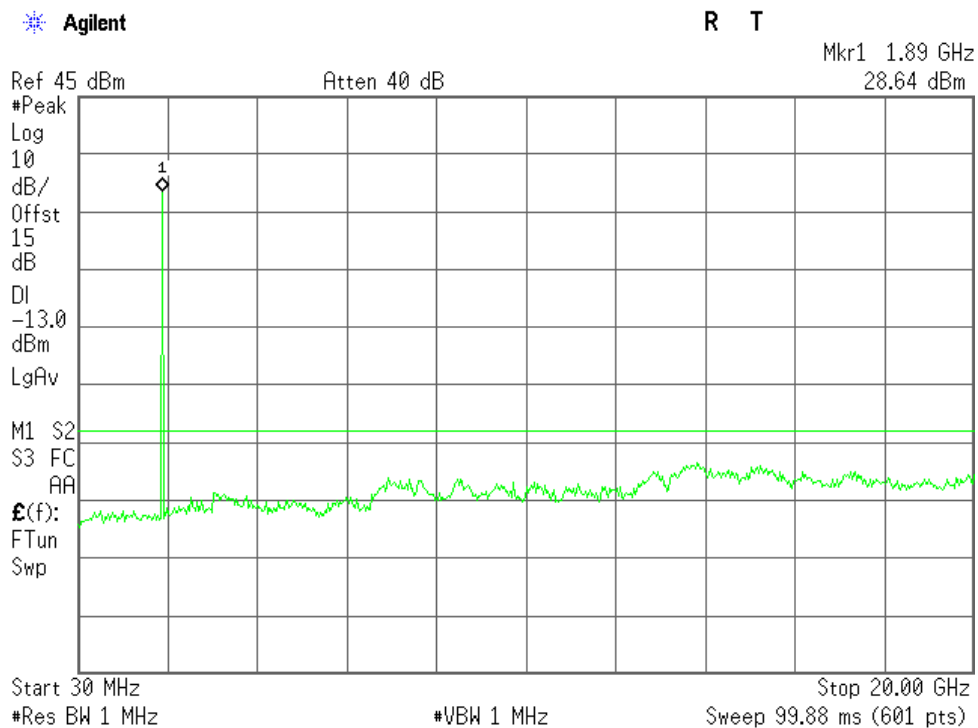


Plot when the TCH number set to 810:

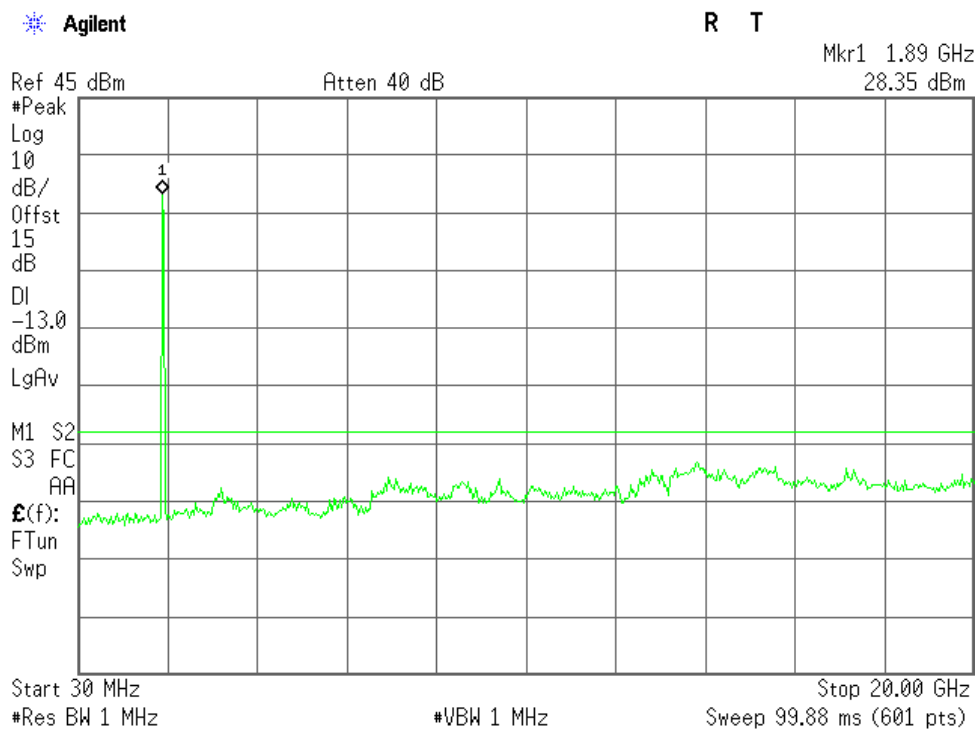


2. GSM1900 (EDGE class 8) Band:


Plot when the TCH number set to 512:

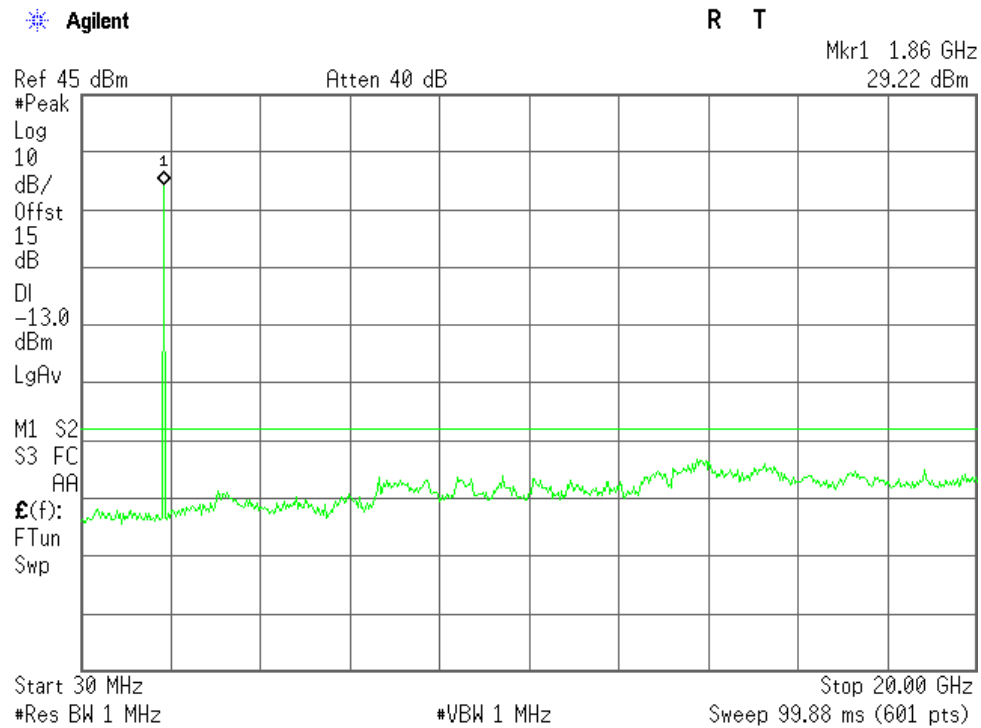

Plot when the TCH number set to 661:

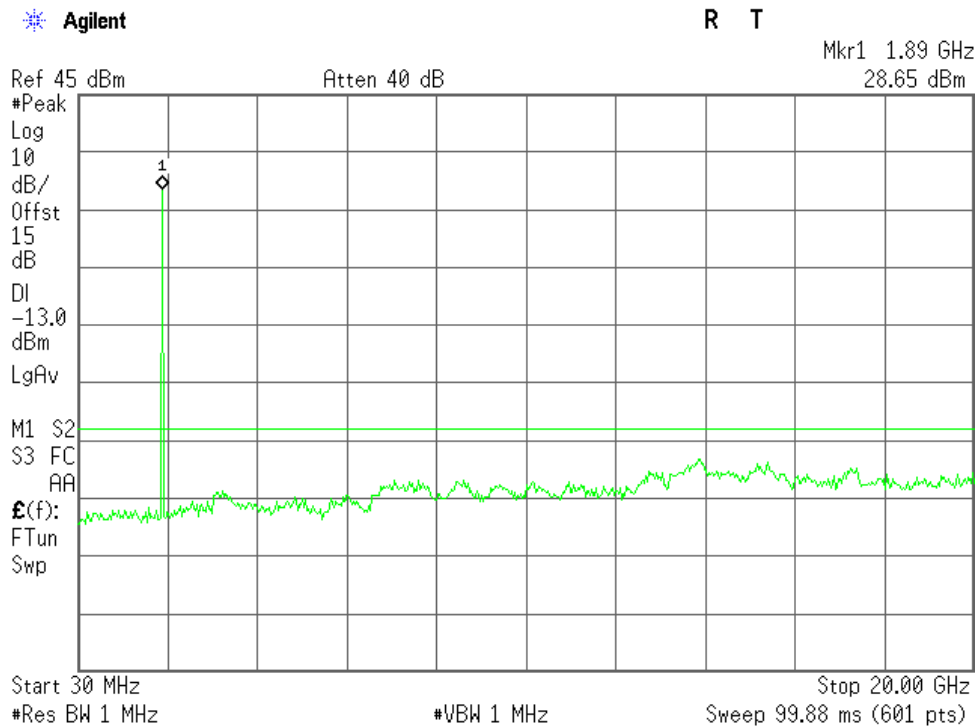


Plot when the TCH number set to 810:

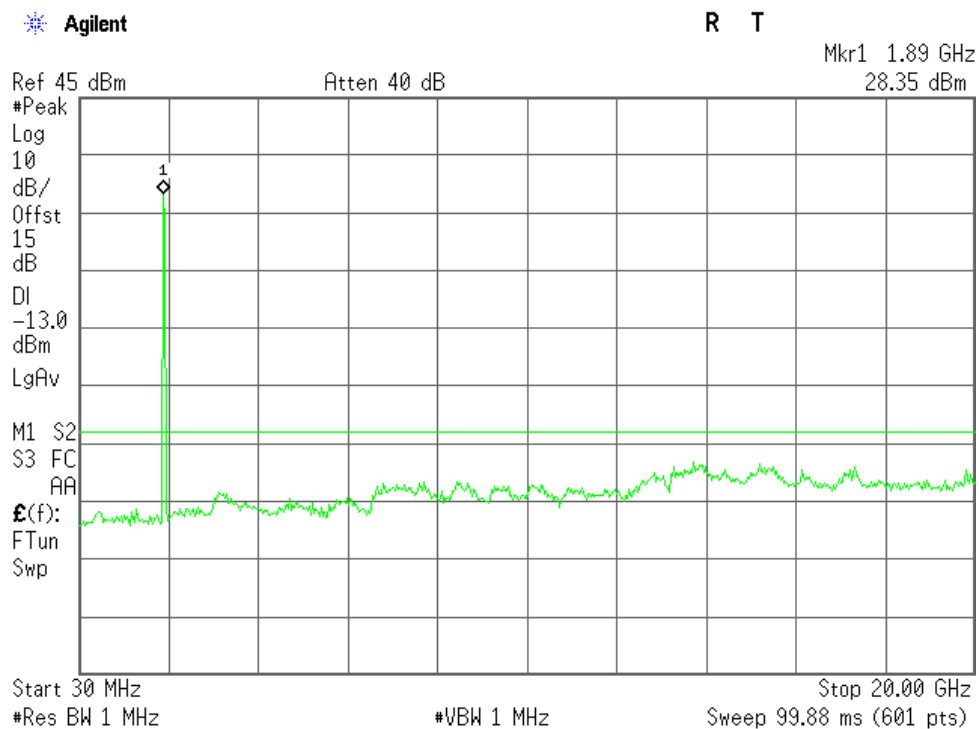


3. WCDMA Band II:


Occupied Bandwidth when the TCH number set to 9262:

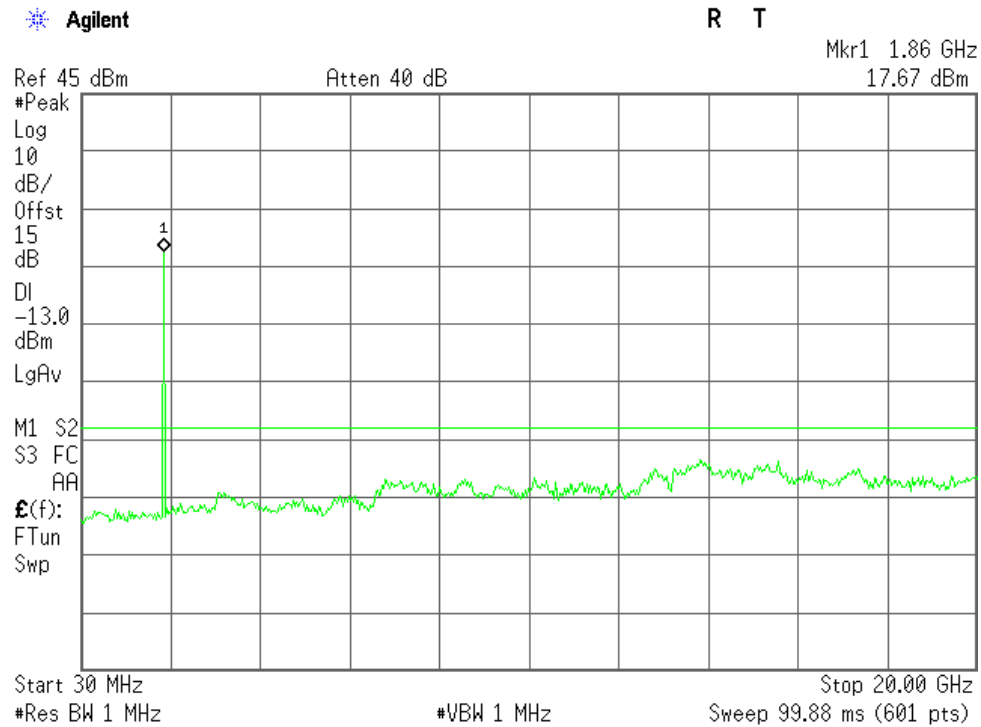

Occupied Bandwidth when the TCH number set to 9400:

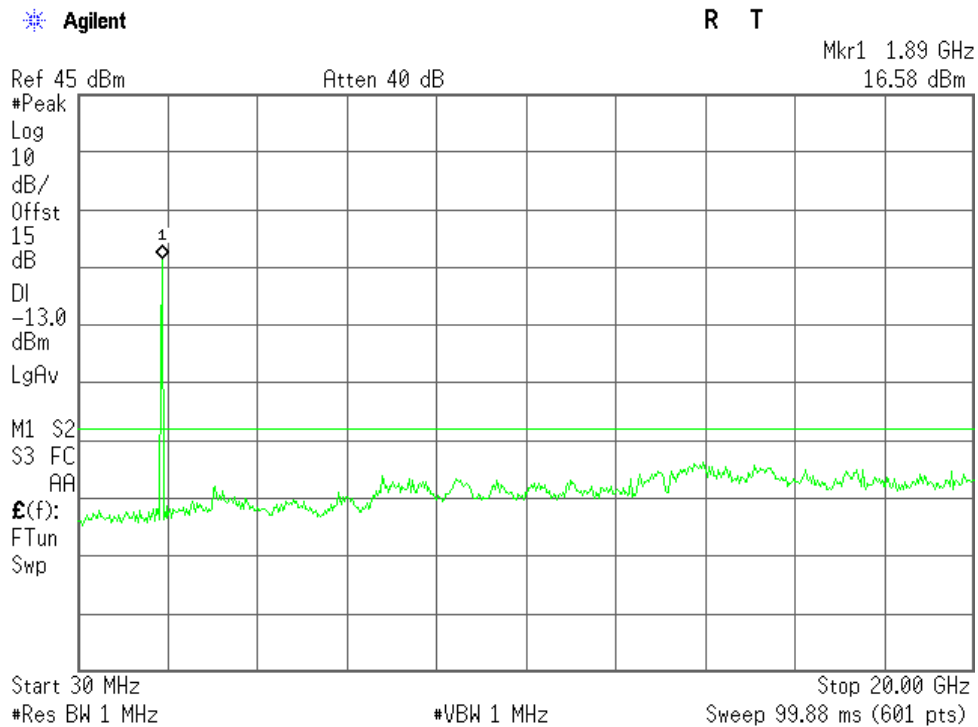


Occupied Bandwidth when the TCH number set to 9538:

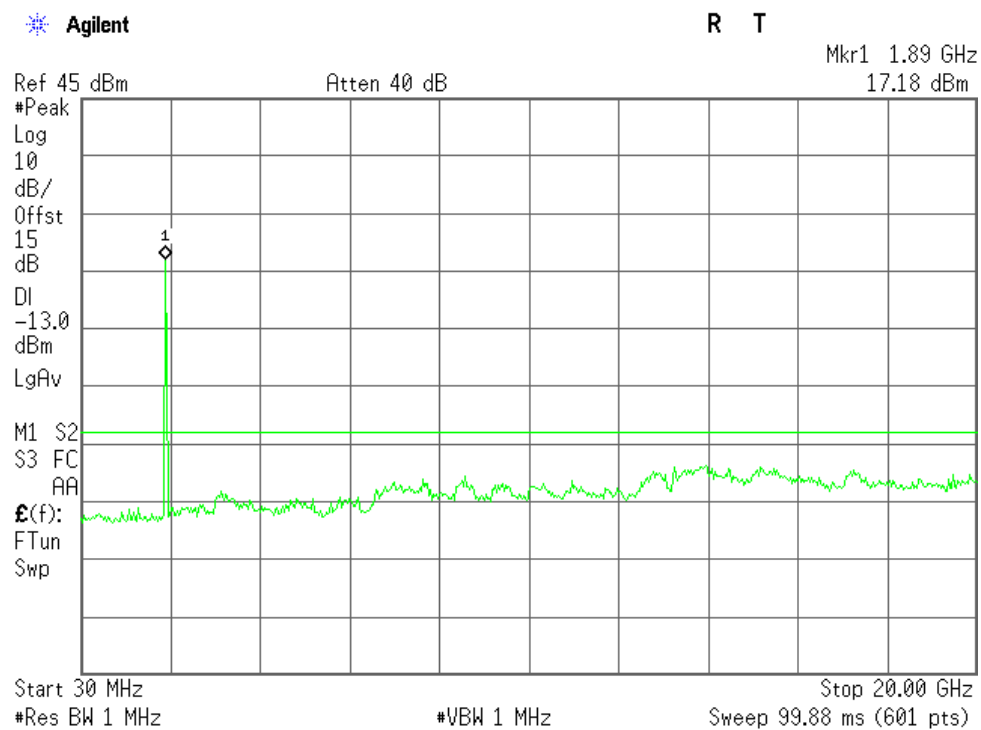


4. HSDPA Band II:


Occupied Bandwidth when the TCH number set to 9262:

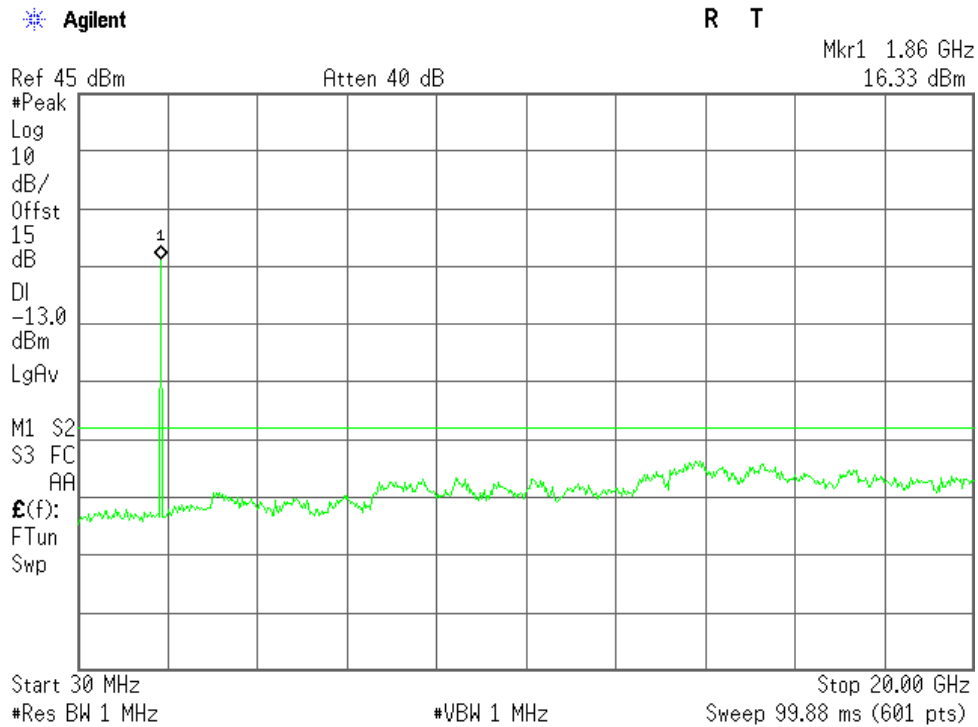

Occupied Bandwidth when the TCH number set to 9400:

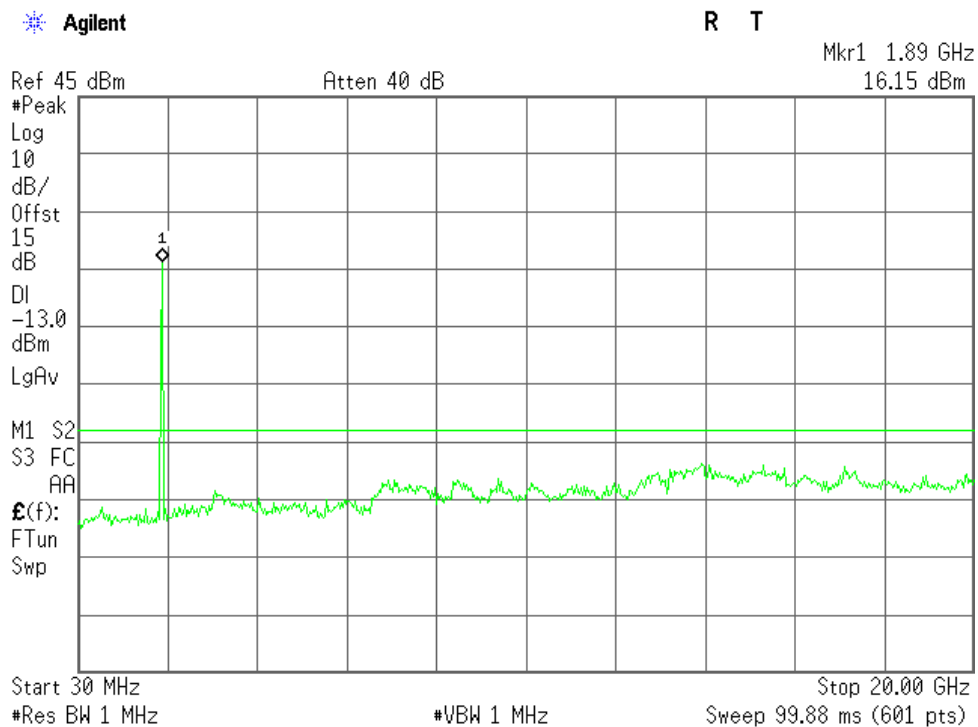


Occupied Bandwidth when the TCH number set to 9538:

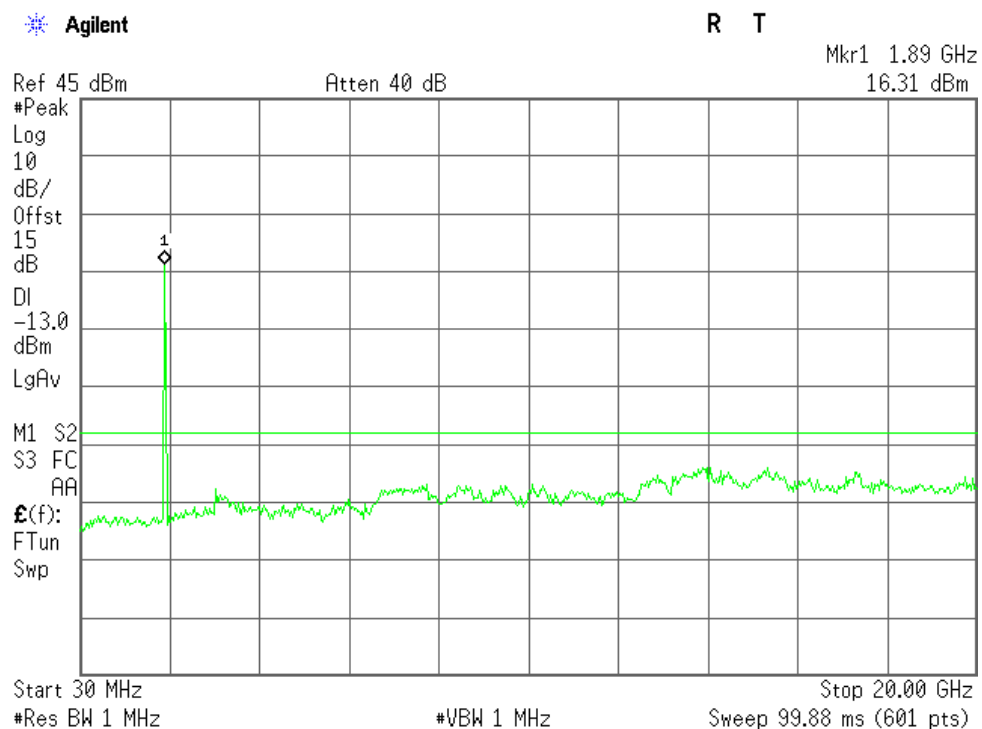


5. HSUPA Band II:


Occupied Bandwidth when the TCH number set to 9262:

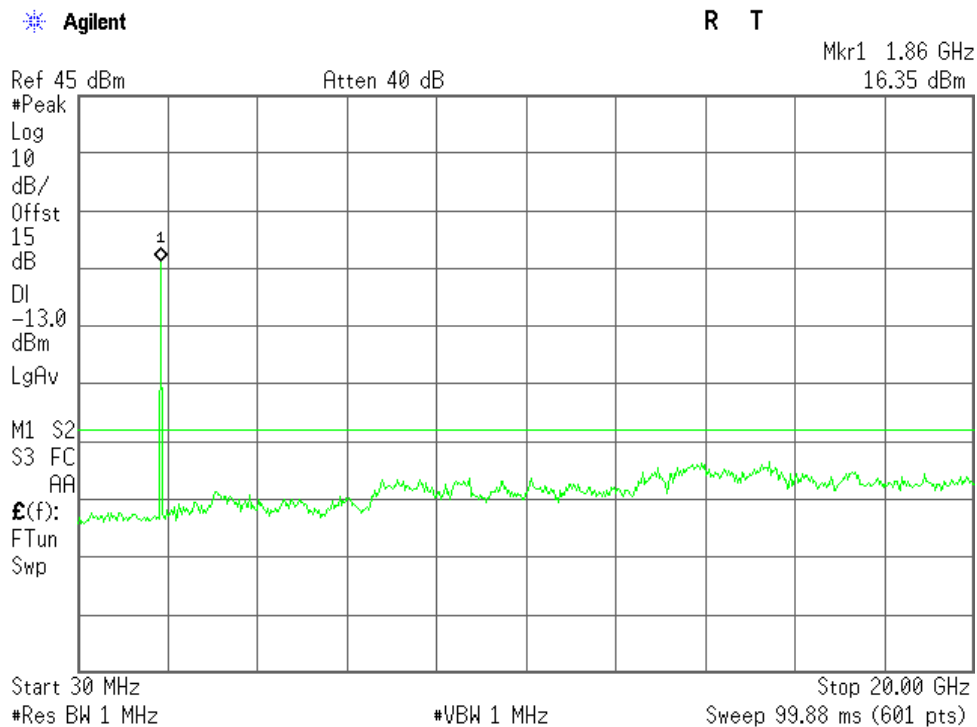

Occupied Bandwidth when the TCH number set to 9400:

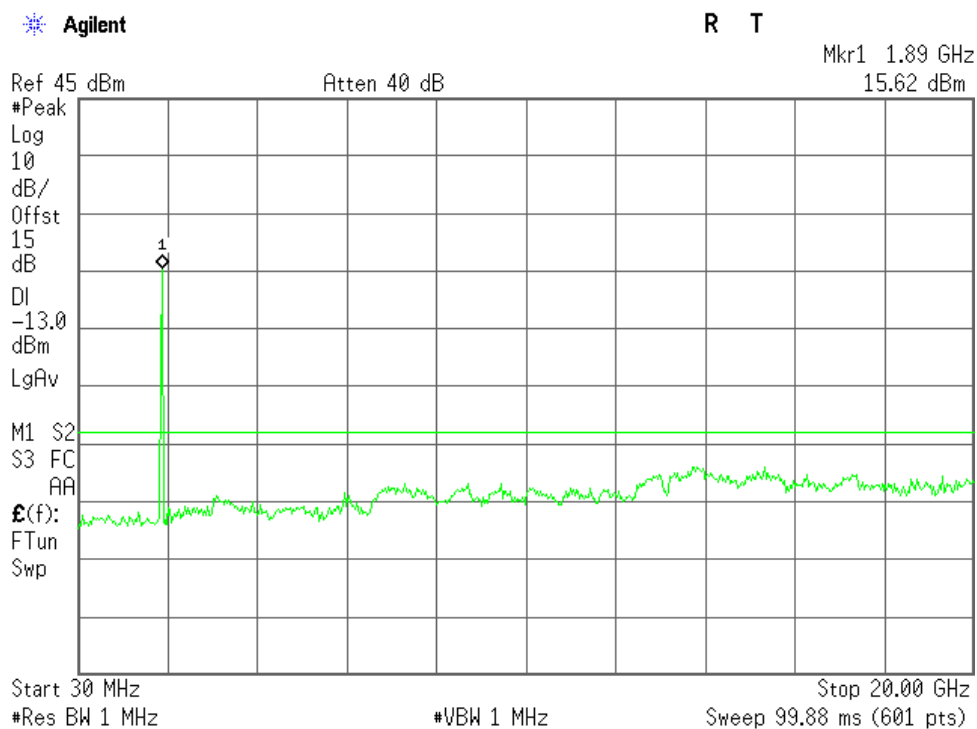


Occupied Bandwidth when the TCH number set to 9538:

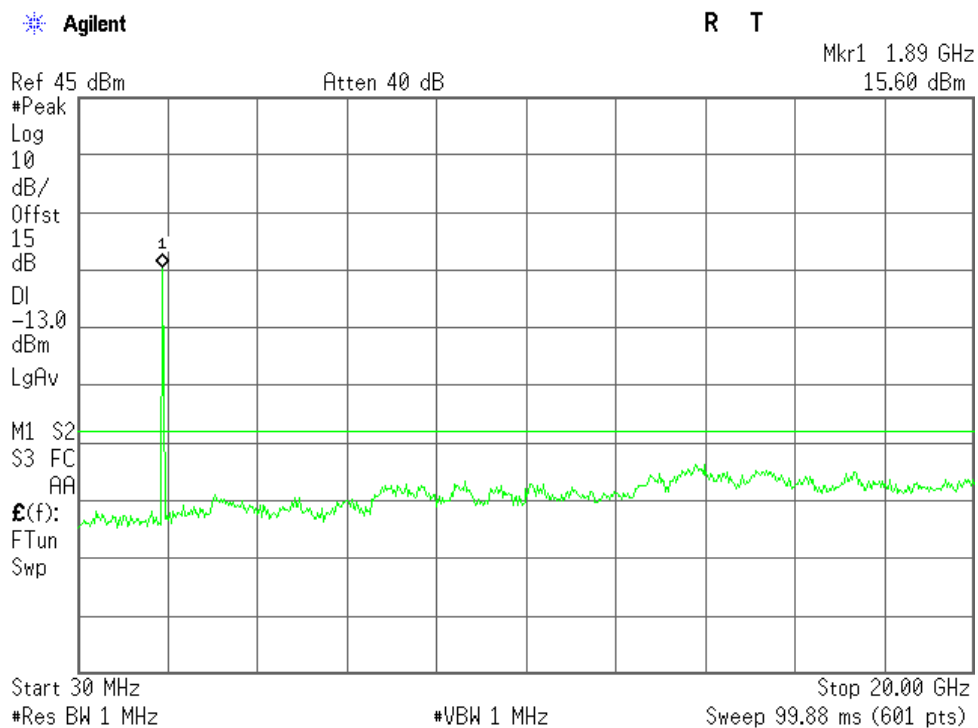


3. Plot for Band-edge

GSM1900 Band:

Plot when the TCH number set to 512:

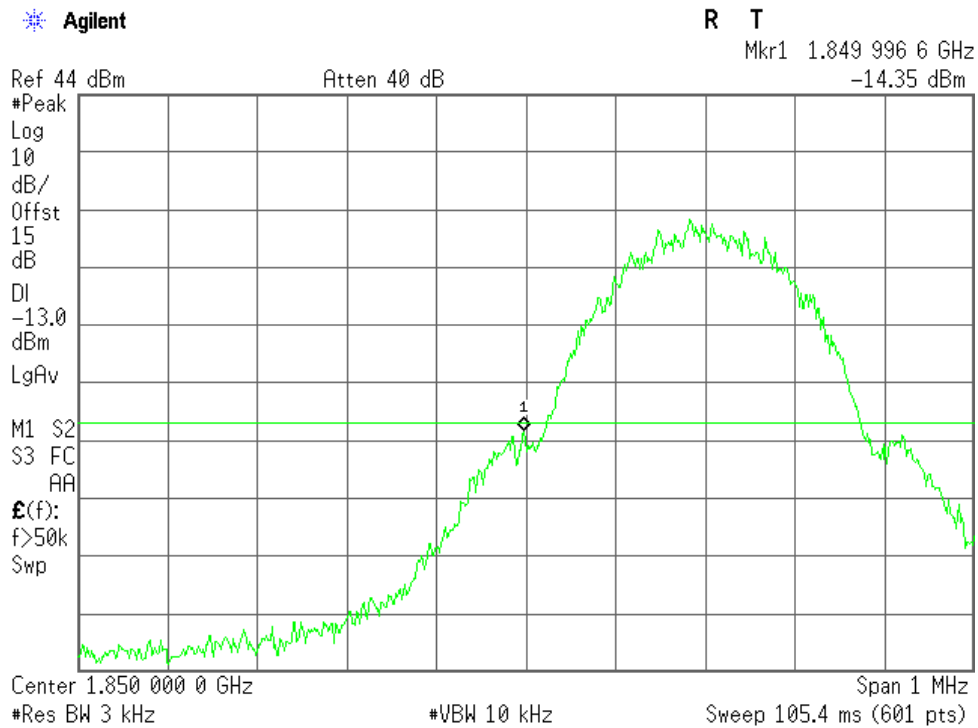


Plot when the TCH number set to 810:

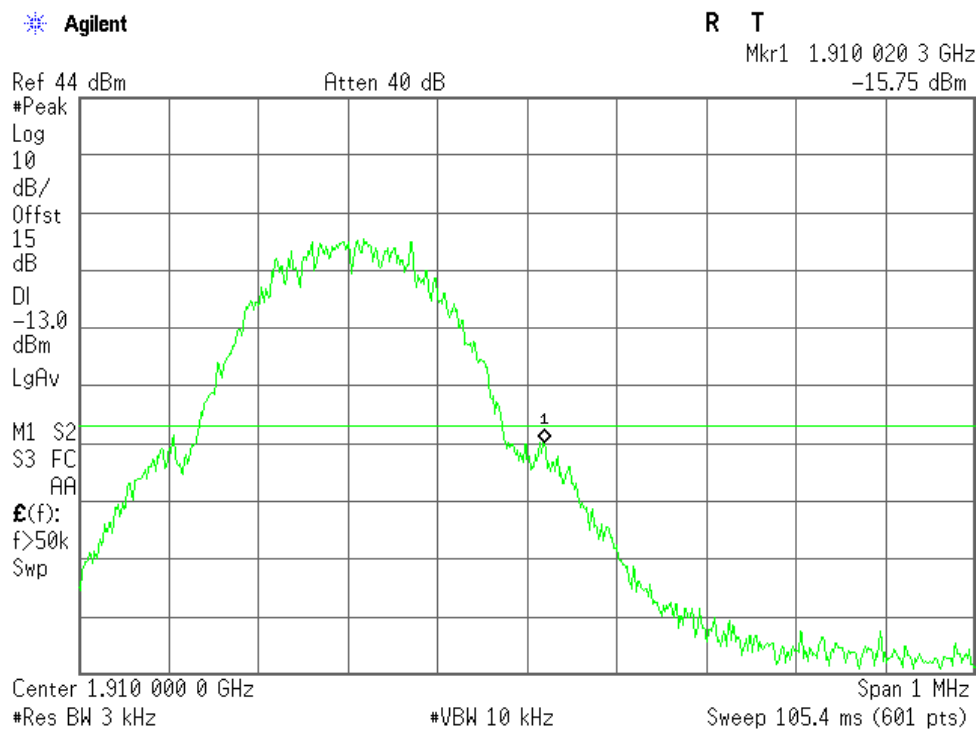


GSM1900 (GPRS class 8) Band:

Plot when the TCH number set to 512:

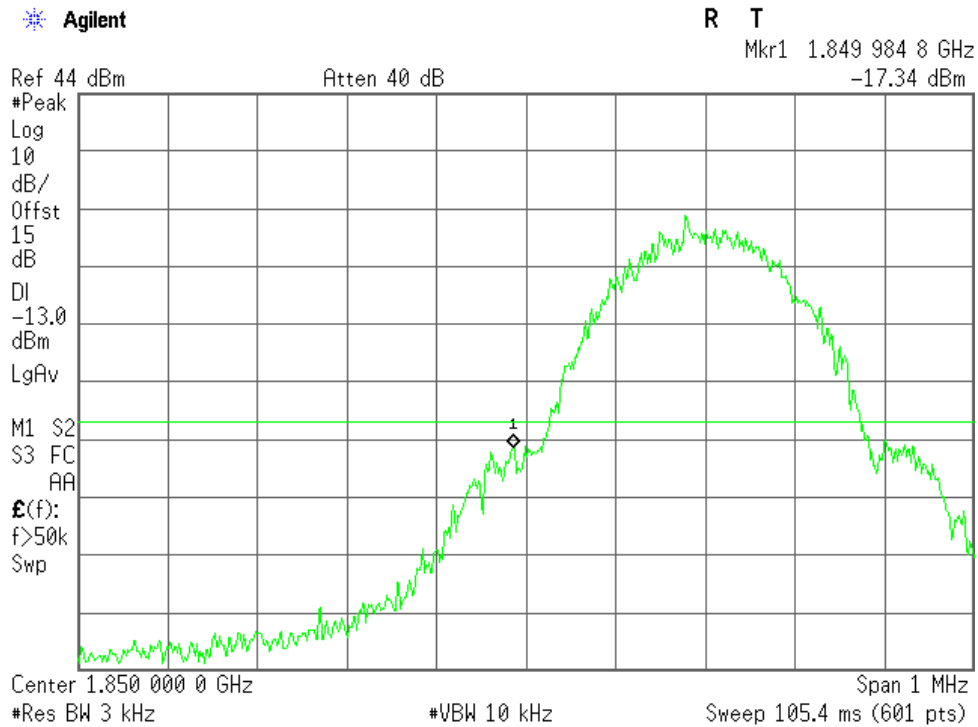


Plot when the TCH number set to 810:

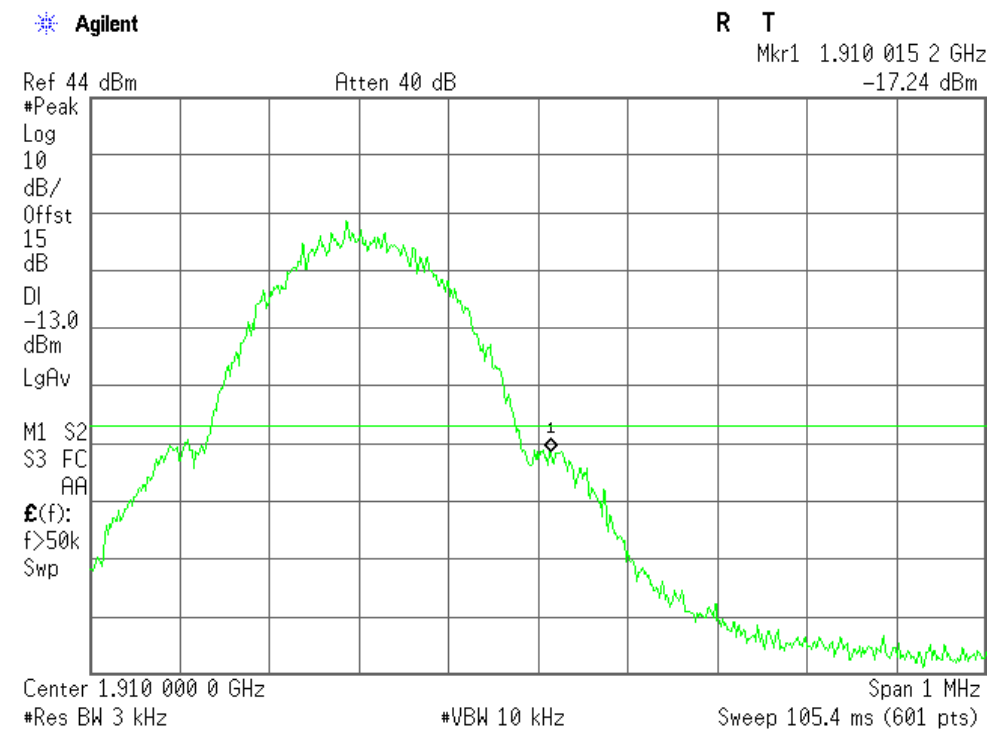


GSM1900 (EDGE class 8) Band:

Plot when the TCH number set to 512:

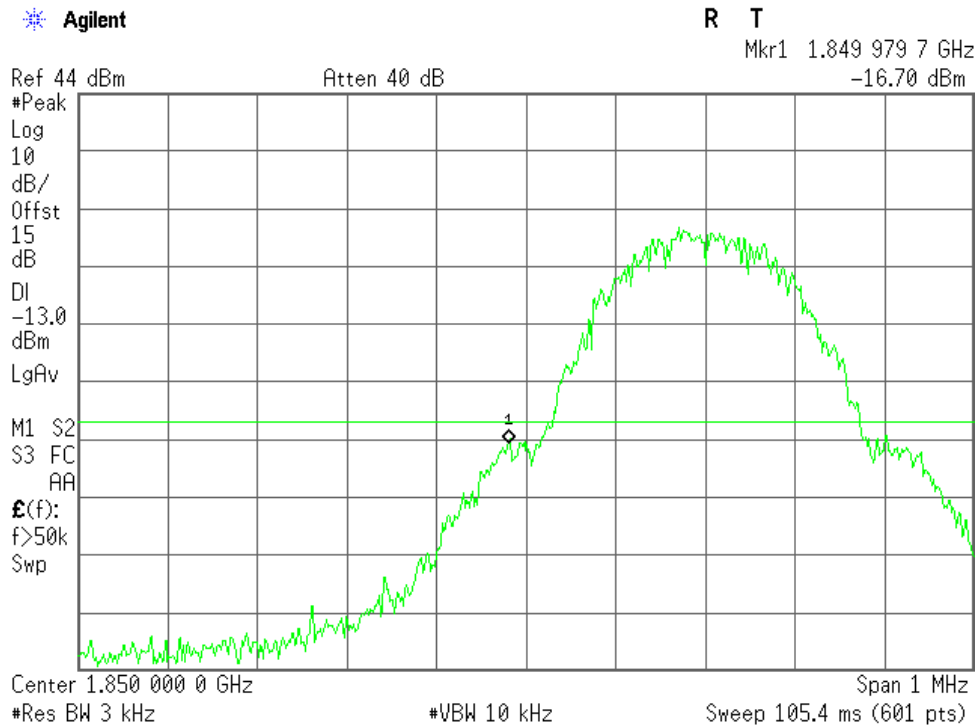


Plot when the TCH number set to 810:

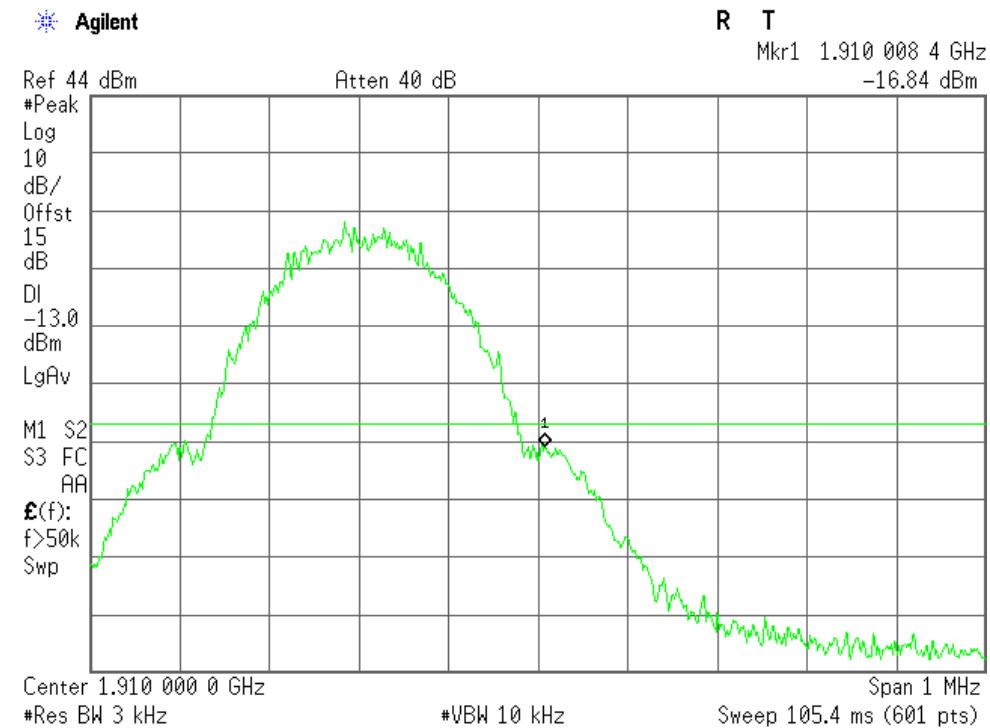


WCDMA Band II Band:

Occupied Bandwidth when the TCH number set to 9262:

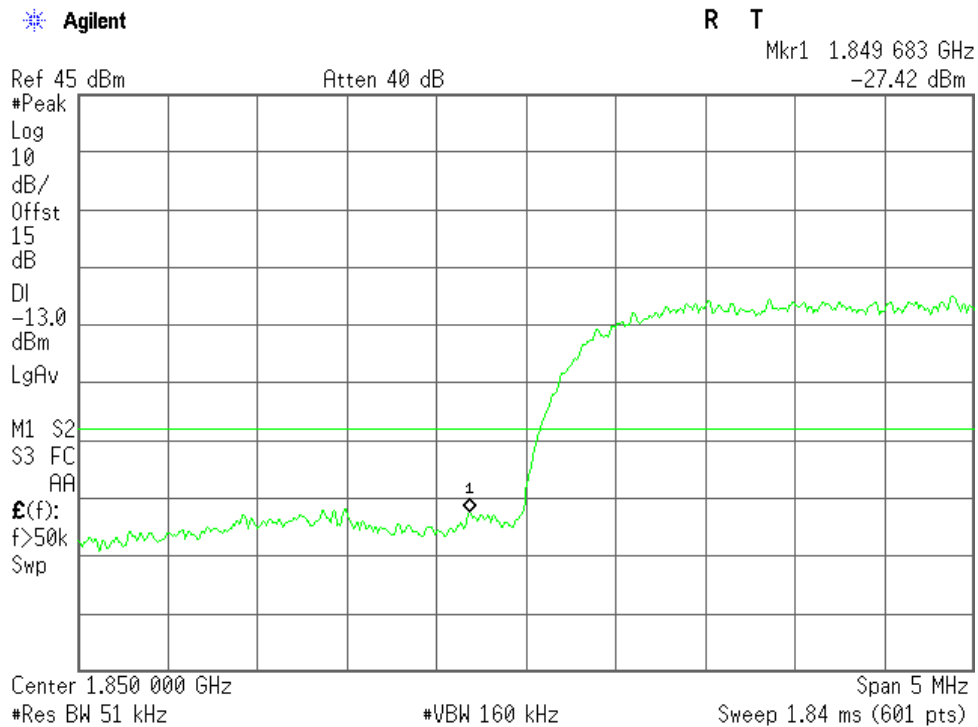


Occupied Bandwidth when the TCH number set to 9538:

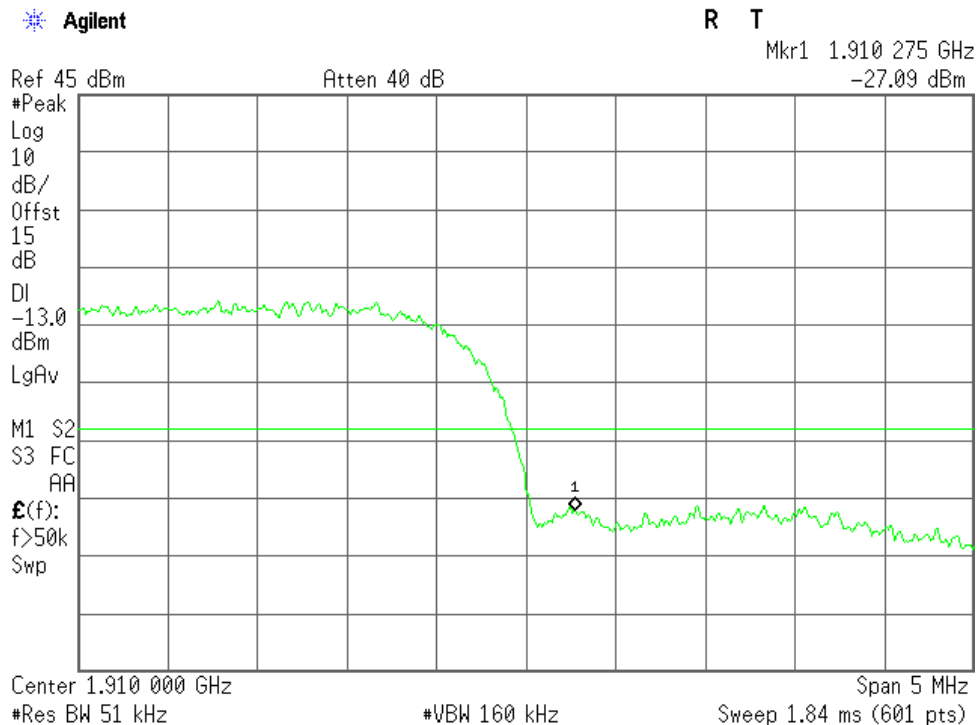


HSDPA Band II Band:

Occupied Bandwidth when the TCH number set to 9262:

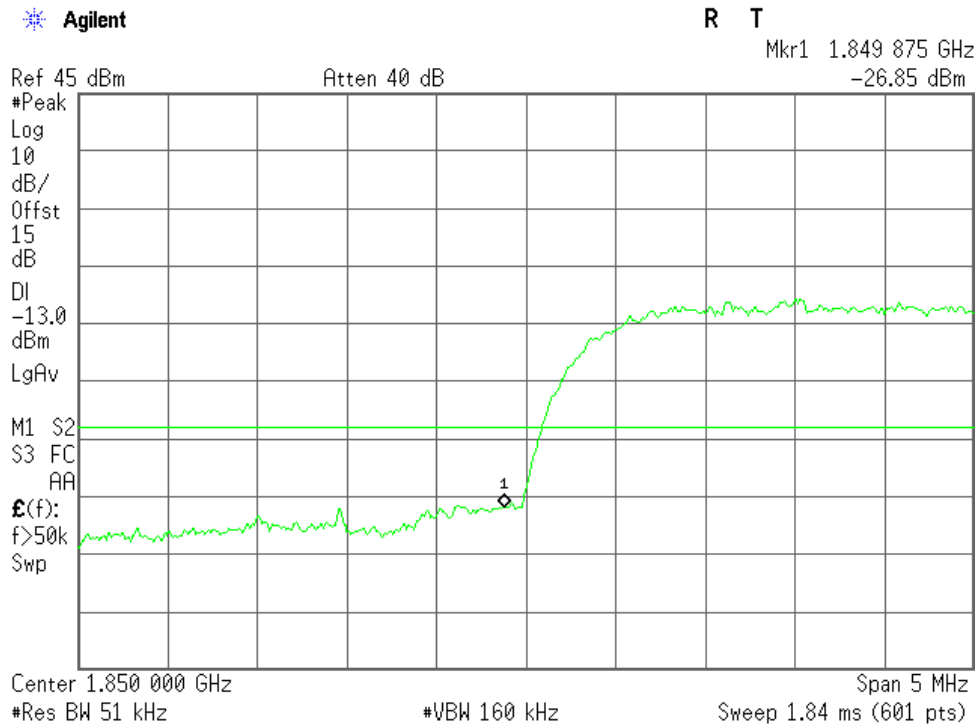


Occupied Bandwidth when the TCH number set to 9538:

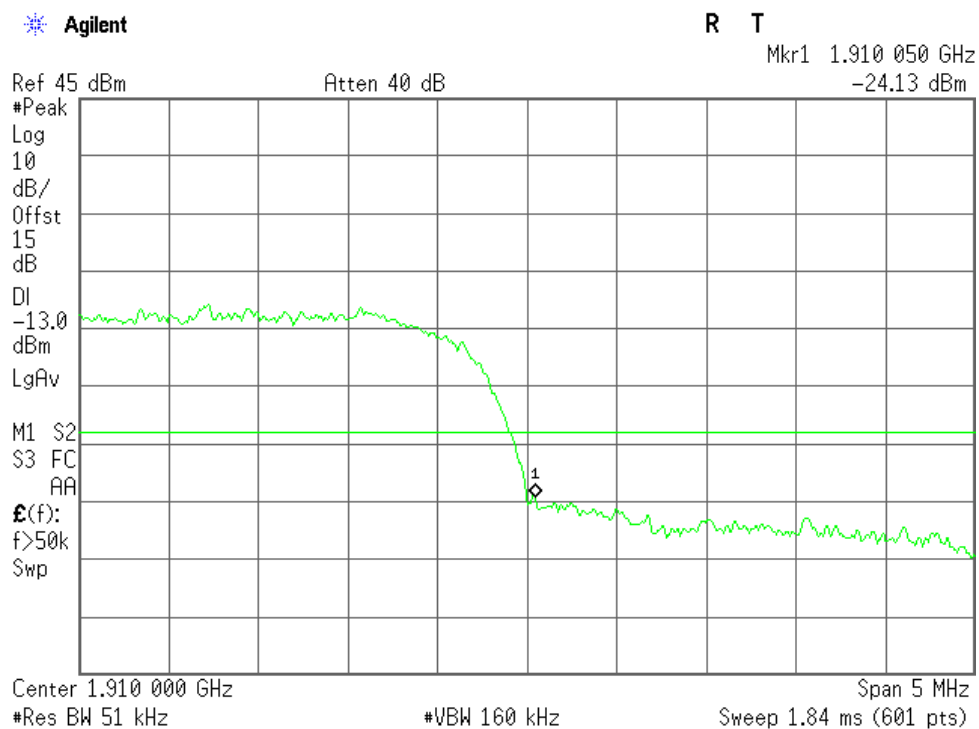


HSUPA Band II Band:

Occupied Bandwidth when the TCH number set to 9262:

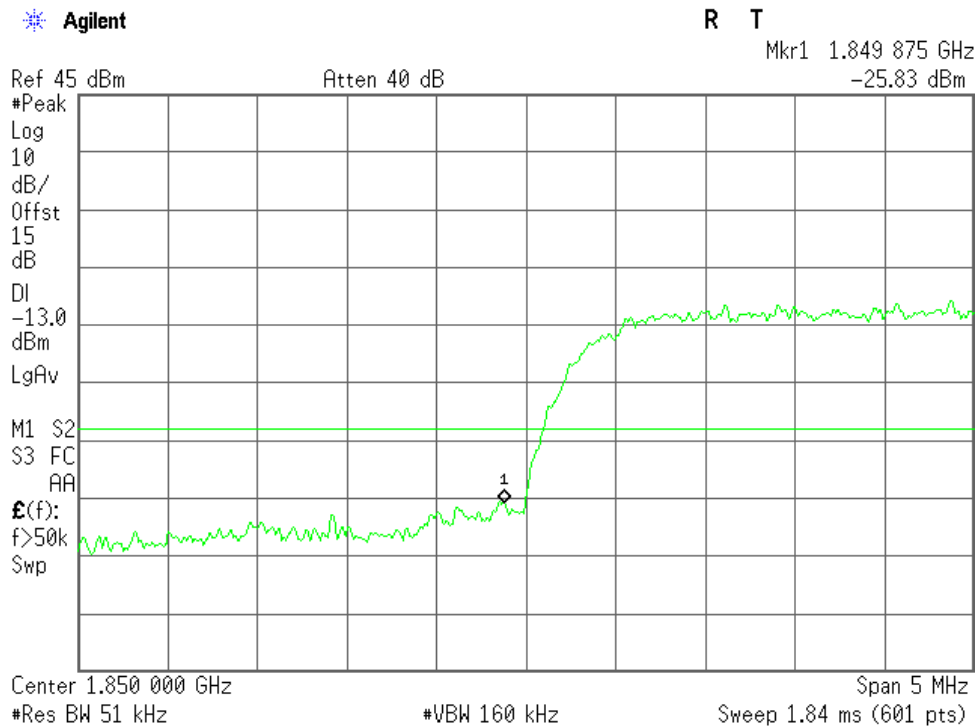

Occupied Bandwidth when the TCH number set to 9538:

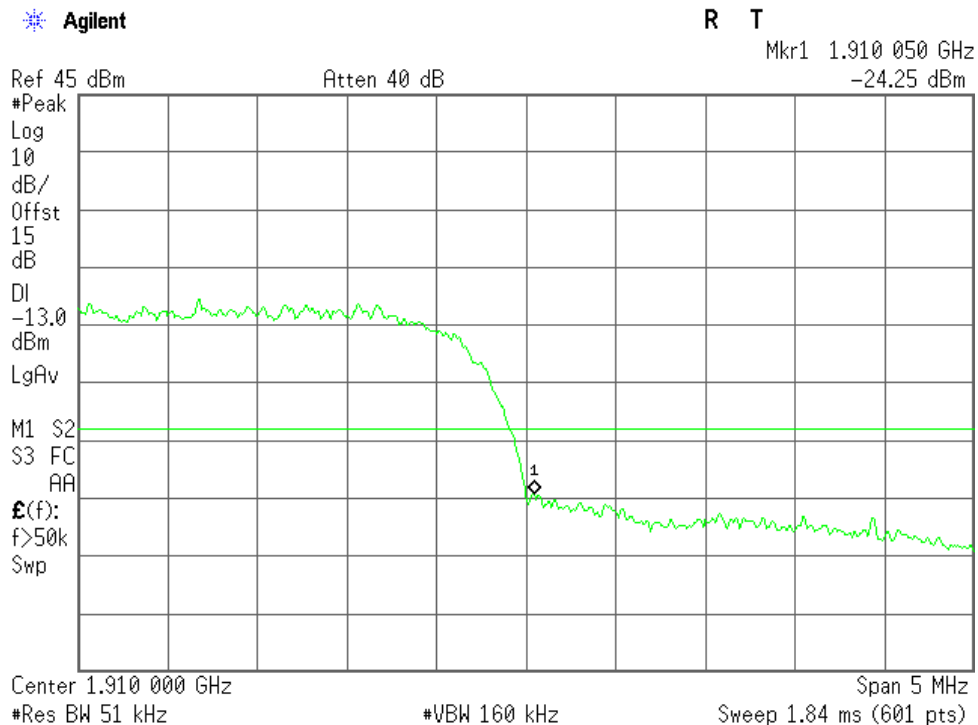

10. Transmitter Radiated Power (EIRP/ERP)

10.1 Requirement

According to FCC §24.232, the EIRP of Cellular mobile transmitters must not exceed 2 Watts (33dBm) e.i.r.p peak power.

10.2 Test Procedure

1. Perform test system setup as section 5.1.1.
2. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used): RBW=VBW=1MHz, for CDMA modulated signal: RBW=VBW=3MHz.
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 512 as the low channel.
4. Employ the bi-log Test Antenna as the test system receiving antenna; set the polarization of the Test Antenna to be the same as that of the EUT transmitting antenna.
5. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the peak; finally record the peak and the plot.
6. Set the TCH number to 661 as the middle channel, then repeat step 5.
7. Set the TCH number to 810 as the high channel, then repeat step 5.
8. For WCDMA, Set the TCH number to 9262, 9400 and 9538 as the low, middle, high channel, then repeat step 4 and 5.

10.3 Test Result

Band	Channel	Frequency (MHz)	Measured EIRP	Limit EIRP	Antenna	Result
			dBm	dBm	Pol.	
GSM1900	512	1850.20	26.89	< 33.0	H	PASS
			28.28	< 33.0	V	PASS
	661	1880.00	27.02	< 33.0	H	PASS
			28.32	< 33.0	V	PASS
	810	1909.80	26.76	< 33.0	H	PASS
			28.09	< 33.0	V	PASS
GSM1900 (GPRS class 8)	512	1850.20	26.05	< 33.0	H	PASS
			27.96	< 33.0	V	PASS
	661	1880.00	26.13	< 33.0	H	PASS
			27.88	< 33.0	V	PASS
	810	1909.80	25.92	< 33.0	H	PASS
			27.71	< 33.0	V	PASS
GSM1900 (EDGE class 8)	512	1850.20	26.01	< 33.0	H	PASS
			27.57	< 33.0	V	PASS
	661	1880.00	26.16	< 33.0	H	PASS
			27.68	< 33.0	V	PASS
	810	1909.80	26.24	< 33.0	H	PASS
			27.85	< 33.0	V	PASS

Band	Channel	Frequency (MHz)	Measured EIRP	Limit EIRP	Antenna	Result
			dBm	dBm	Pol.	
WCDMA Band II (RMC 12.2Kbps)	9262	1852.4	20.23	< 33.0	H	PASS
			22.08	< 33.0	V	PASS
	9400	1880.0	20.65	< 33.0	H	PASS
			22.52	< 33.0	V	PASS
	9538	1907.6	20.46	< 33.0	H	PASS
			22.19	< 33.0	V	PASS
HSDPA Band II	9262	1852.4	20.34	< 33.0	H	PASS
			22.06	< 33.0	V	PASS
	9400	1880.0	20.49	< 33.0	H	PASS
			21.92	< 33.0	V	PASS
	9538	1907.6	20.12	< 33.0	H	PASS
			21.87	< 33.0	V	PASS
HSUPA Band II	9262	1852.4	19.65	< 33.0	H	PASS
			21.67	< 33.0	V	PASS
	9400	1880.0	19.34	< 33.0	H	PASS
			21.28	< 33.0	V	PASS
	9538	1907.6	18.72	< 33.0	H	PASS
			20.14	< 33.0	V	PASS

11. Radiated Spurious Emission

11.1 Requirement

According to FCC §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

11.2 Test Procedure

8. Perform test system setup as section 5.1.2.
9. Make a limit line whose value is -13dBm on the Spectrum Analyzer, and set the RBW of the Spectrum Analyzer to 1MHz.
10. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 512 as the low channel.
11. Employ the bi-log Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 30MHz to 3GHz.
12. The measurement is performed with the Test Antenna at both horizontal and vertical polarization respectively. Set the polarization of the Test Antenna to be horizontal.
13. Actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the fundamental frequency and the harmonics thereof, after then record the harmonics and the plot.
14. Set the polarization of the Test Antenna to be vertical, then repeat step 6.
15. Employ the horn Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 3GHz to 10th harmonic of the fundamental frequency (here used 10GHz), then repeat step 5 to 7.
16. Set the TCH number to 661 as the middle channel, then repeat step 4 to 8.
17. Set the TCH number to 810 as the high channel, then repeat step 4 to 8.
18. For WCDMA, Set the TCH number to 9262, 9400 and 9538 as the low, middle, high channel, then repeat step 4 and 8.


11.3 Test Result

Form 9KHz to 1000MHz:

The low frequency, which started from 9 kHz to 1000MHz, was pre-scanned and the result which was 20dB lower than the limit line, it need not be reported, per FCC Part2.1057(c).


Form 1000MHz to 20000MHz:

1. GSM1900 Band:

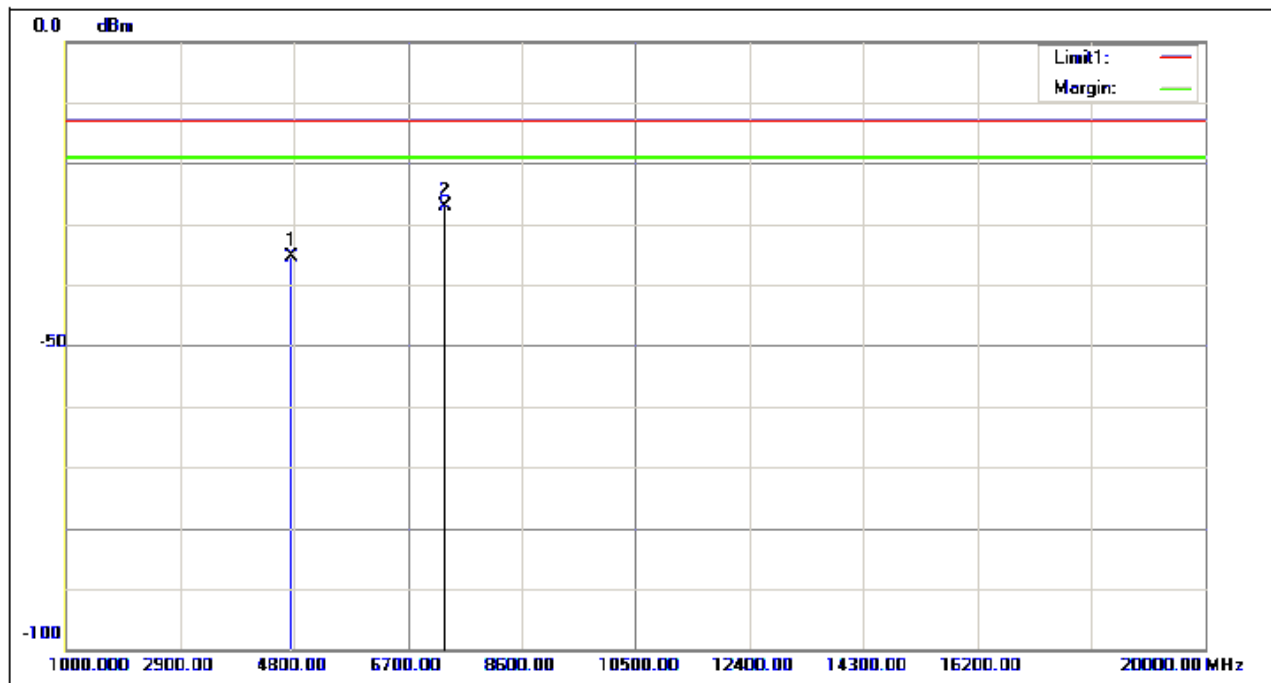

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4762.000	-40.63	5.22	-35.41	-13.00	-22.41			peak
2	7327.000	-38.10	11.10	-27.00	-13.00	-14.00			peak

Channel 512_Horizontal

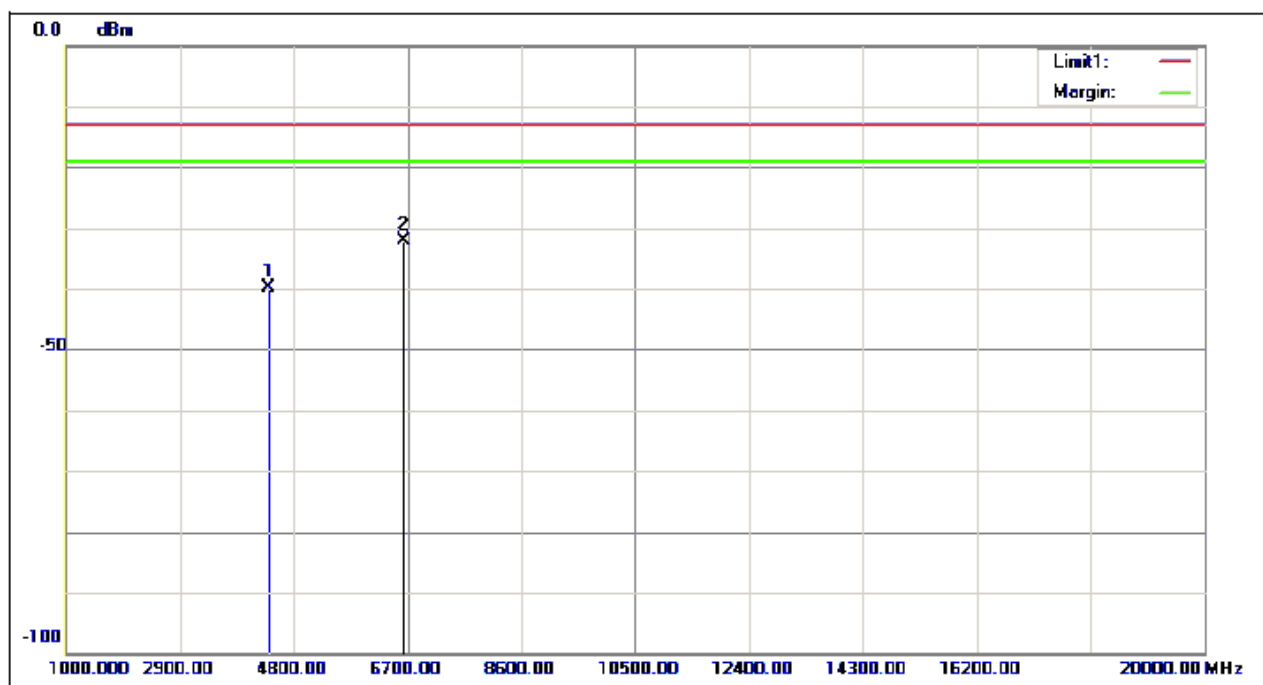


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4382.000	-40.73	0.89	-39.84	-13.00	-26.84	250	145	peak
2	6643.000	-40.42	8.35	-32.07	-13.00	-19.07	250	40	peak

Channel 512_Vertical


Note: Only the worst test data (GSM1900 Channel 512 Mode) was display on the test report according to the recorded data for all the test channel modes.

2. GSM1900(GPRS class 8) Band:

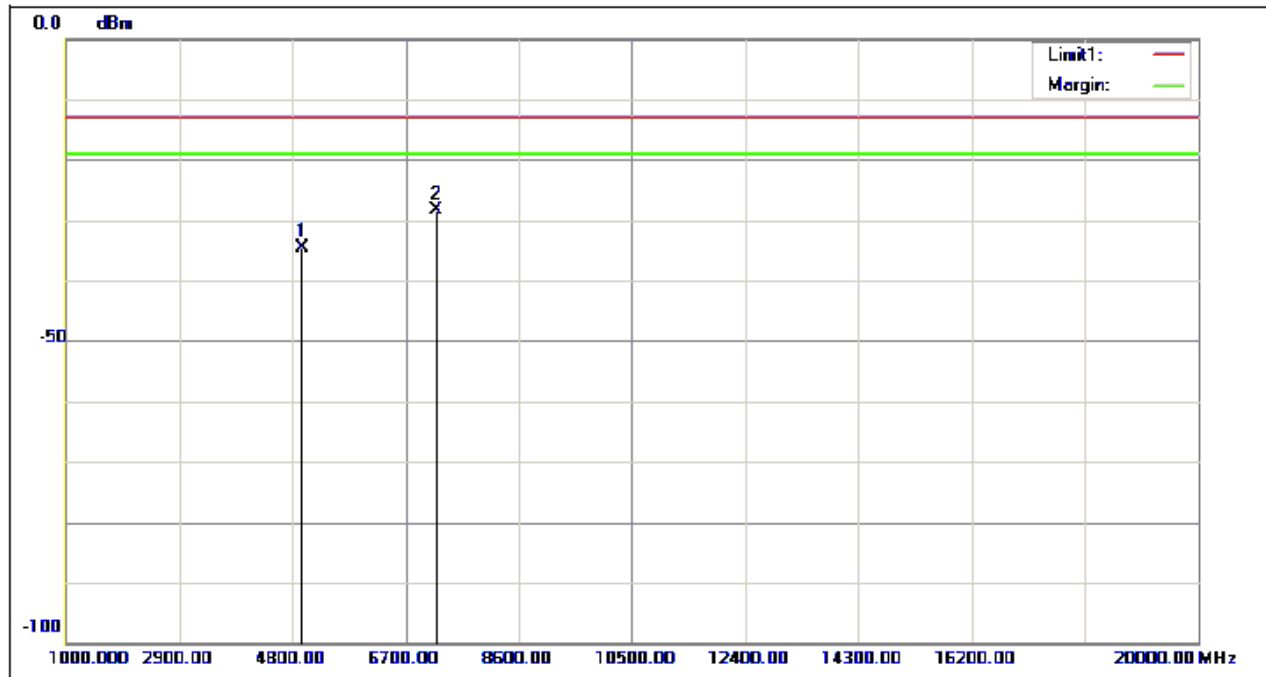

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4971.000	-40.28	5.72	-34.56	-13.00	-21.56	250	278	peak
2	7213.000	-38.57	10.23	-28.34	-13.00	-15.34	250	114	peak

Channel 512_Horizontal

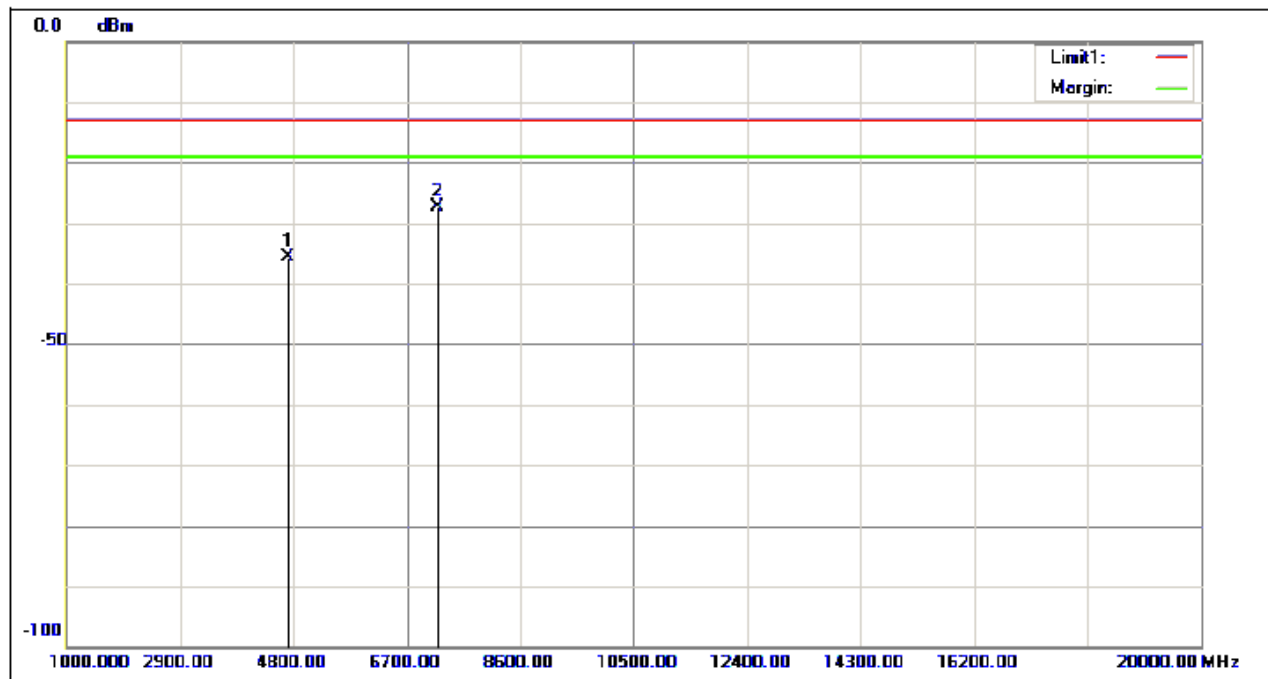


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4705.000	-40.04	4.48	-35.56	-13.00	-22.56	250	197	peak
2	7213.000	-37.62	10.18	-27.44	-13.00	-14.44	250	69	peak

Channel 512_Vertical


Note: Only the worst test data (GSM1900 Channel 512 Mode) was display on the test report according to the recorded data for all the test channel modes.

3. GSM1900(EDGE class 8) Band:

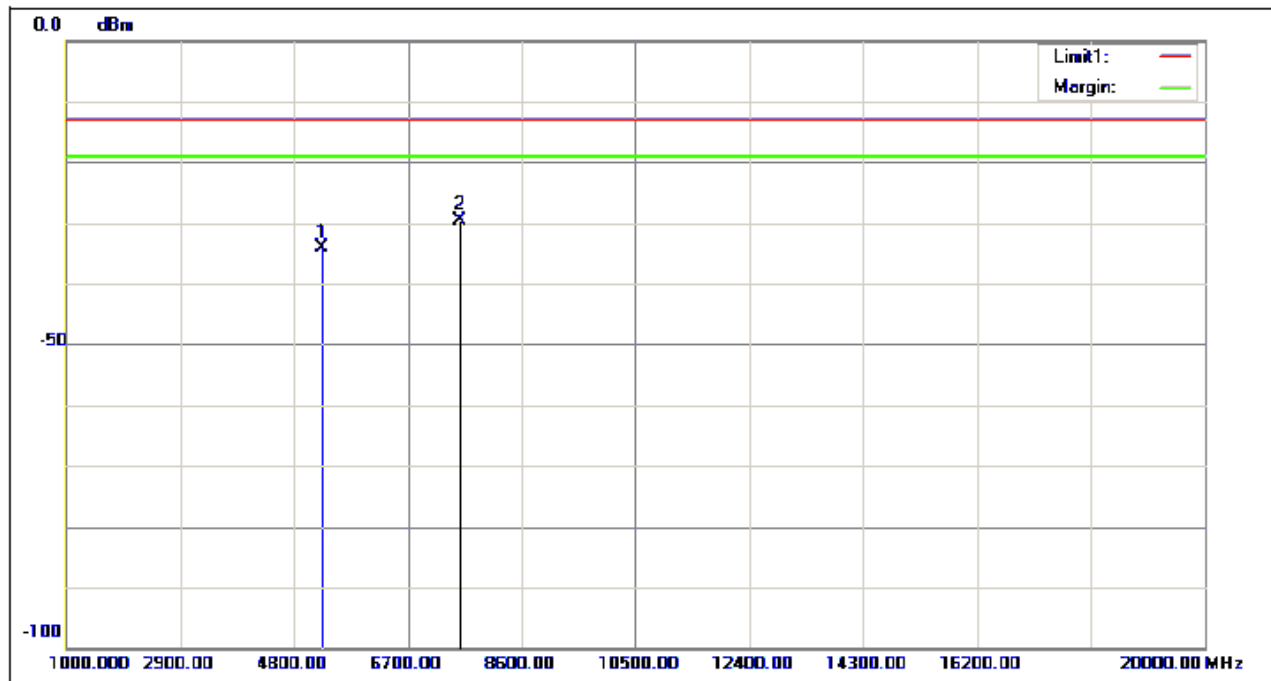

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5275.000	-40.68	6.54	-34.14	-13.00	-21.14	250	198	peak
2	7574.000	-39.33	9.80	-29.53	-13.00	-16.53	250	211	peak

Channel 512_Horizontal

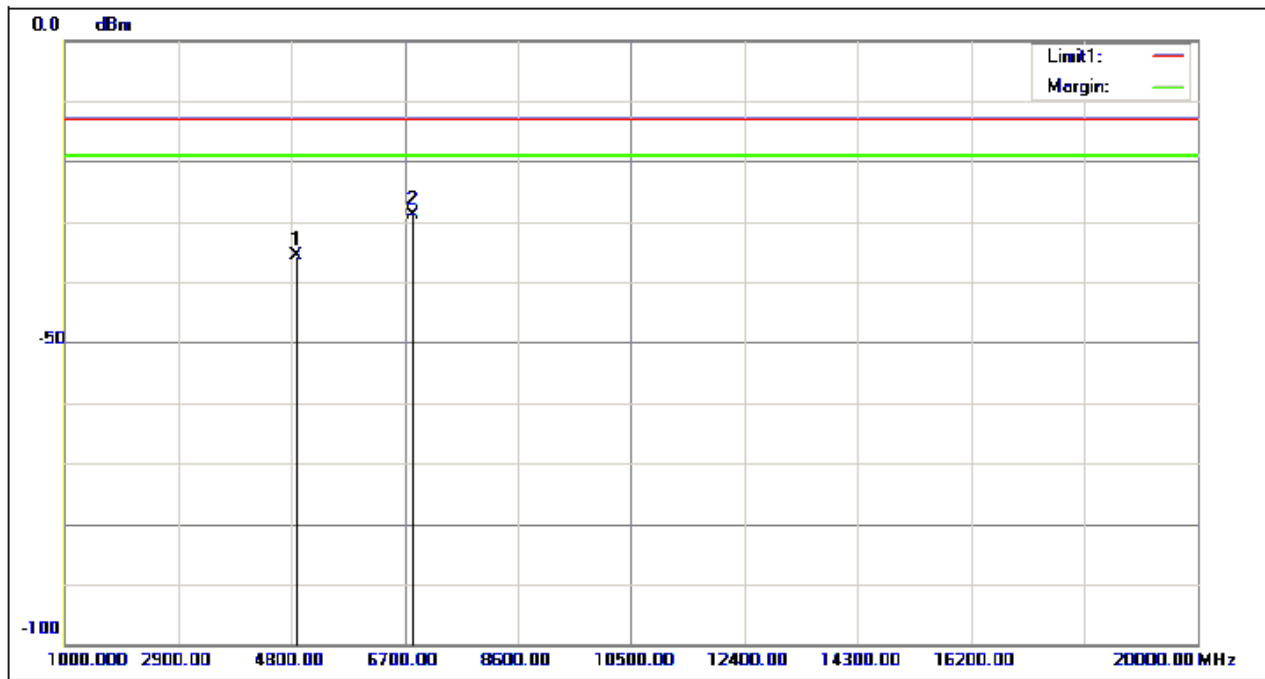


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBm)	Factor(dB)	(dBm)	(dBm)	(dB)	(cm)	(deg.)	
1	4895.000	-40.59	4.97	-35.62	-13.00	-22.62	250	77	peak
2	6833.000	-36.86	7.94	-28.92	-13.00	-15.92	250	33	peak

Channel 512_Vertical


Note: Only the worst test data (GSM1900 Channel 512 Mode) was display on the test report according to the recorded data for all the test channel modes.

4. WCDMA Band II:

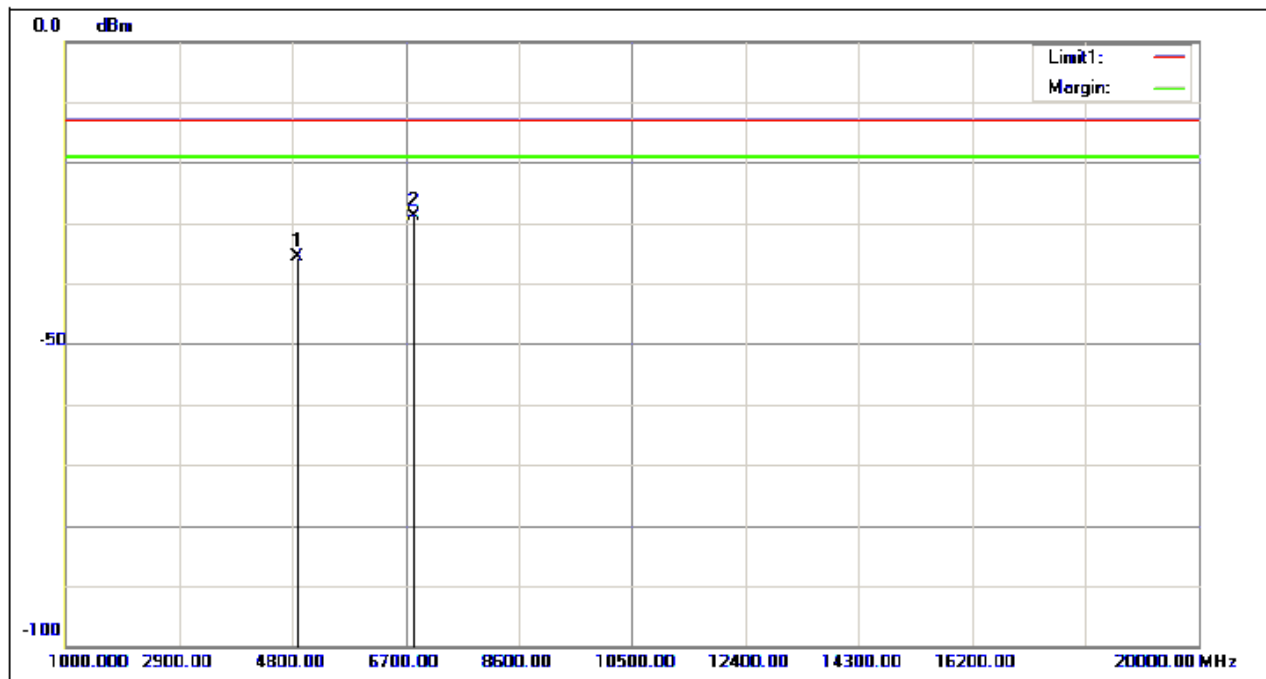

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4895.000	-40.59	4.97	-35.62	-13.00	-22.62	250	77	peak
2	6833.000	-36.86	7.94	-28.92	-13.00	-15.92	250	33	peak

Channel 9262_Horizontal

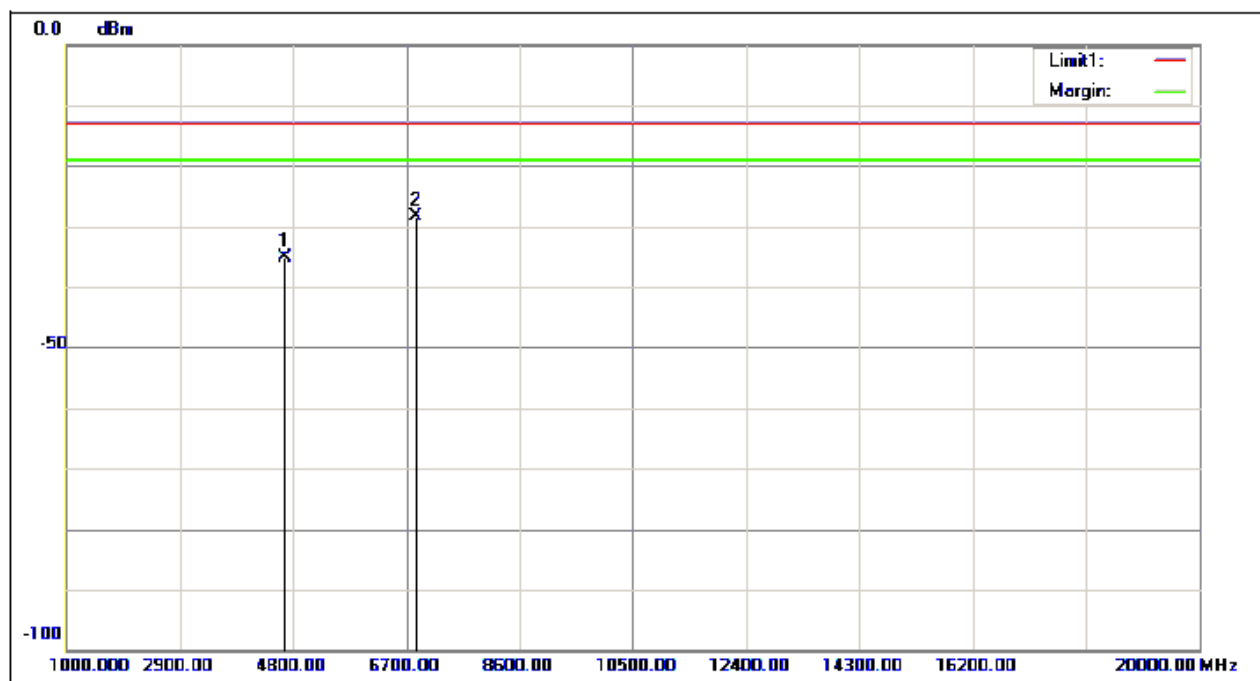


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4667.000	-38.63	3.59	-35.04	-13.00	-22.04	250	12	peak
2	6871.000	-36.03	7.70	-28.33	-13.00	-15.33	250	95	peak

Channel 9262_Vertical


Note: Only the worst test data (WCDMA Band II Channel 9262 Mode) was display on the test report according to the recorded data for all the test channel modes.

5. HSDPA Band II:

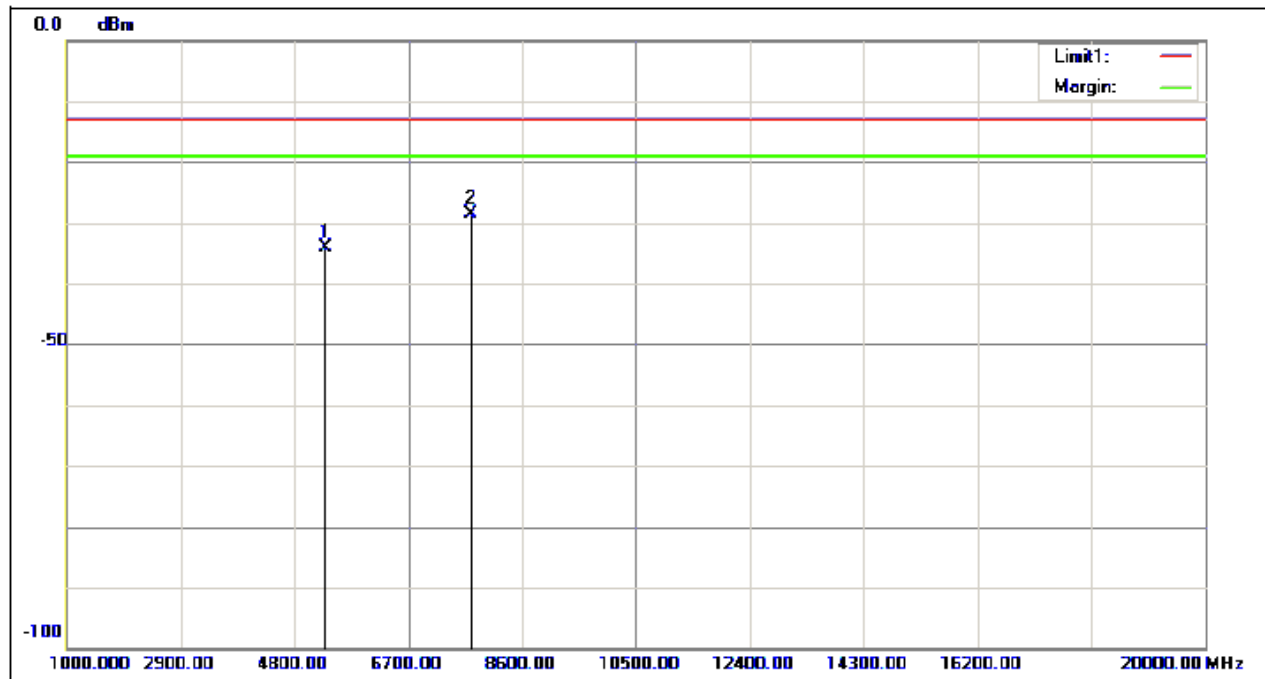

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5313.000	-40.33	6.10	-34.23	-13.00	-21.23	199	207	peak
2	7745.000	-36.40	7.72	-28.68	-13.00	-15.68	199	92	peak

Channel 9262_Horizontal

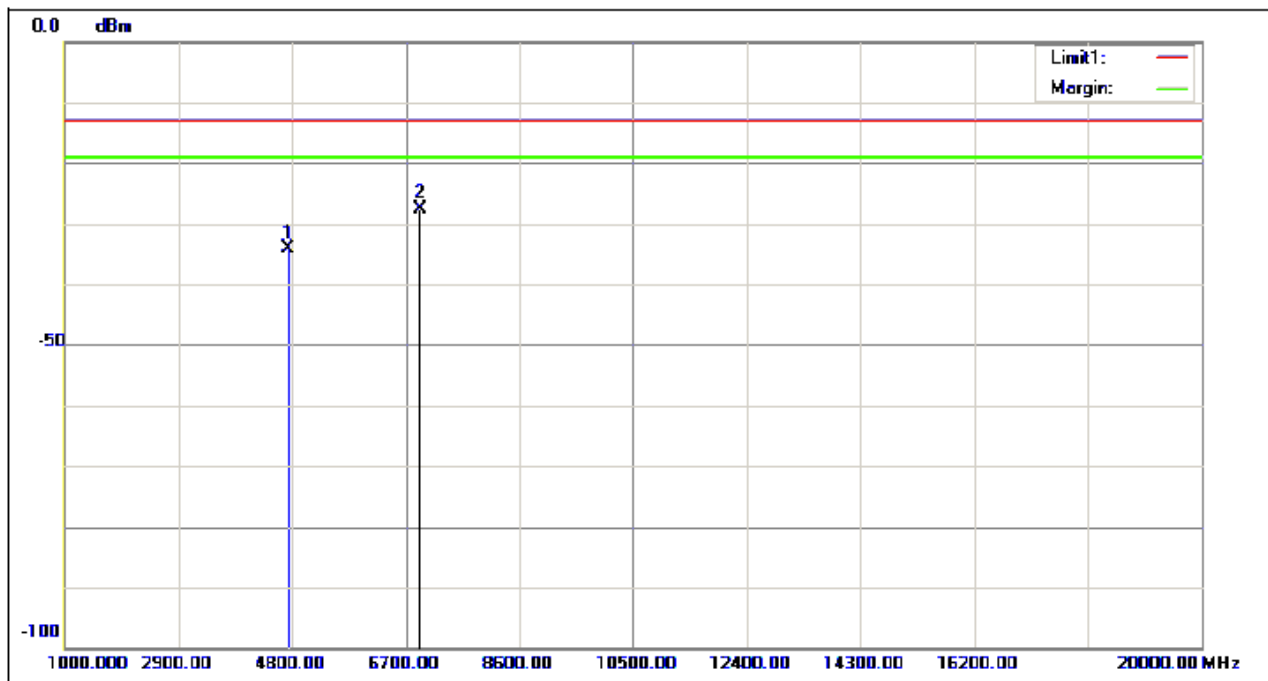


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4743.000	-38.99	4.80	-34.19	-13.00	-21.19	250	73	peak
2	6947.000	-35.15	7.56	-27.59	-13.00	-14.59	250	352	peak

Channel 9262_Vertical


Note: Only the worst test data (HSDPA Band II Channel 9262 Mode) was display on the test report according to the recorded data for all the test channel modes.

6. HSUPA Band II:

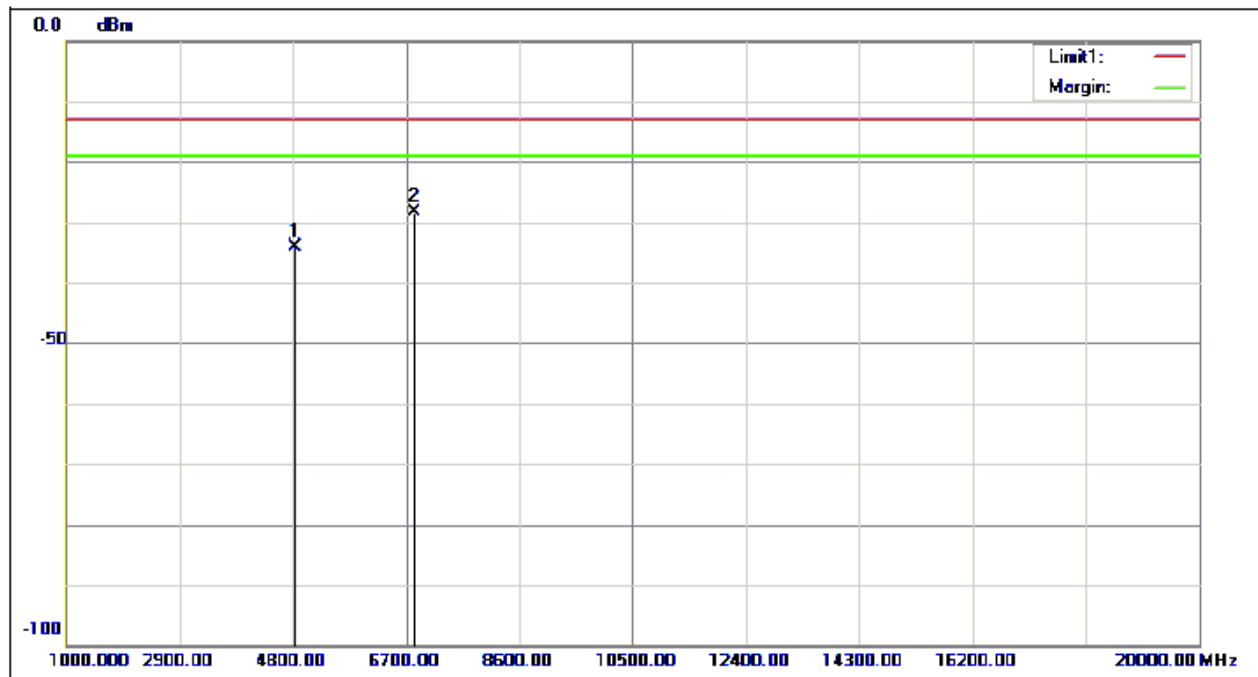

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4838.000	-39.91	5.73	-34.18	-13.00	-21.18	199	220	peak
2	6833.000	-35.99	7.67	-28.32	-13.00	-15.32	199	357	peak

Channel 9262_Horizontal

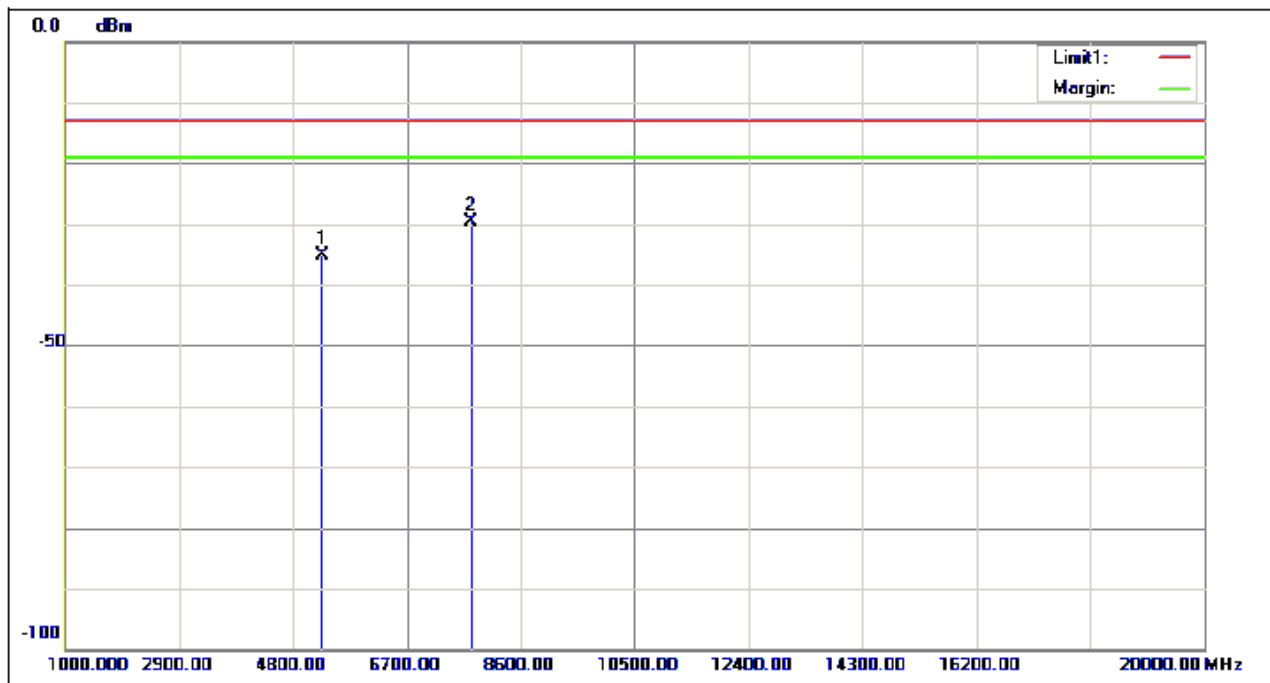

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5294.000	-41.17	6.16	-35.01	-13.00	-22.01	250	220	peak
2	7783.000	-37.79	8.22	-29.57	-13.00	-16.57	250	229	peak

Channel 9262_Vertical

Note: Only the worst test data (HSUPA Band II Channel 9262 Mode) was display on the test report according to the recorded data for all the test channel modes.

12. Frequency Stability

12.1 Frequency Stability Requirement

According to FCC §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to FCC §2.1055, the test conditions are:

(a) Temperature:

The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.

(b) Primary Supply Voltage:

For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

12.2 Test Procedure

1. Perform test system setup as section 5.1.3.
2. Set the voltage of the DC Power Supply to normal supply voltage (here used 3.7V) and the temperature of the Temperature Chamber to vary from -30°C to +50°C at intervals of 10°C.
3. At each temperature level, the EUT is powered off and kept in the Temperature Chamber for two hours.
4. After sufficient stabilization, turn on the EUT, command it via the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 0 and Power Class = 1, and then establish a communication link between the EUT and the SS.
5. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 512 as the low channel.
6. The frequency deviation is measured (directly read from the SS, which can report the parameter) within three minutes.
7. Set the TCH number to 661 as the middle channel, then repeat step 5.
8. Set the TCH number to 810 as the high channel, then repeat step 5.
9. Adjust the temperature of the Temperature Chamber as specified in step 2, then repeat step 3 to 7.
10. Set the voltage of the DC Power Supply to high extreme supply voltage (here used 4.2V) and the temperature of the Temperature Chamber to normal (here used +22°C), then repeat step 3 to 8.
11. Set the voltage of the DC Power Supply to low extreme supply voltage (here used 3.6V) and the temperature of the Temperature Chamber to normal (here used +22°C), then repeat step 3 to 8.

12.3 Test Result

1. Tablet for GSM1900 band:


No.	Test Conditions		Frequency Deviation (Hz) at Channels Used			
	Voltage	Temperature	512	661	810	Limit (±1ppm)
1	V-nor	-30°C	-49.45	-51.22	-54.78	1. ±1850Hz at 512 Channel 2. ±1880Hz at 661 Channel 3. ±1910Hz at 810 Channel
2		-20°C	-46.13	-44.56	-42.39	
3		-10°C	-38.36	-39.29	-36.62	
4		0°C	-30.24	-31.52	-29.43	
5		+10°C	-32.51	-28.48	-26.72	
6		+20°C	-35.42	-26.02	-29.44	
7		+30°C	-38.26	-39.55	-34.86	
8		+40°C	-42.50	-44.92	-39.63	
9		+50°C	-49.12	-48.16	-47.54	
10	V-high	+22°C	-37.24	-39.48	-35.46	
11	V-low	+22°C	-36.48	-42.33	-38.29	
Result: PASS						

2. Tablet for WCDMA Band II band:


No.	Test Conditions		Frequency Deviation (Hz) at Channels Used			
	Voltage	Temperature	9262	9400	9538	Limit (±1ppm)
1	V-nor	-30°C	-49.21	-50.03	-49.45	4. ±1850Hz at 9262 Channel 5. ±1880Hz at 9400 Channel 6. ±1910Hz at 9538 Channel
2		-20°C	-42.14	-45.45	-42.26	
3		-10°C	-37.86	-39.16	-39.72	
4		0°C	-34.52	-31.89	-34.26	
5		+10°C	-30.33	-29.01	-29.91	
6		+20°C	-31.65	-30.84	-31.53	
7		+30°C	-34.79	-35.12	-34.76	
8		+40°C	-39.90	-40.51	-40.64	
9		+50°C	-46.56	-45.43	-44.26	
10	V-high	+22°C	-40.24	-39.79	-39.05	
11	V-low	+22°C	-39.19	-40.68	-42.56	
Result: PASS						


APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

CONDUCTED TEST SETUP

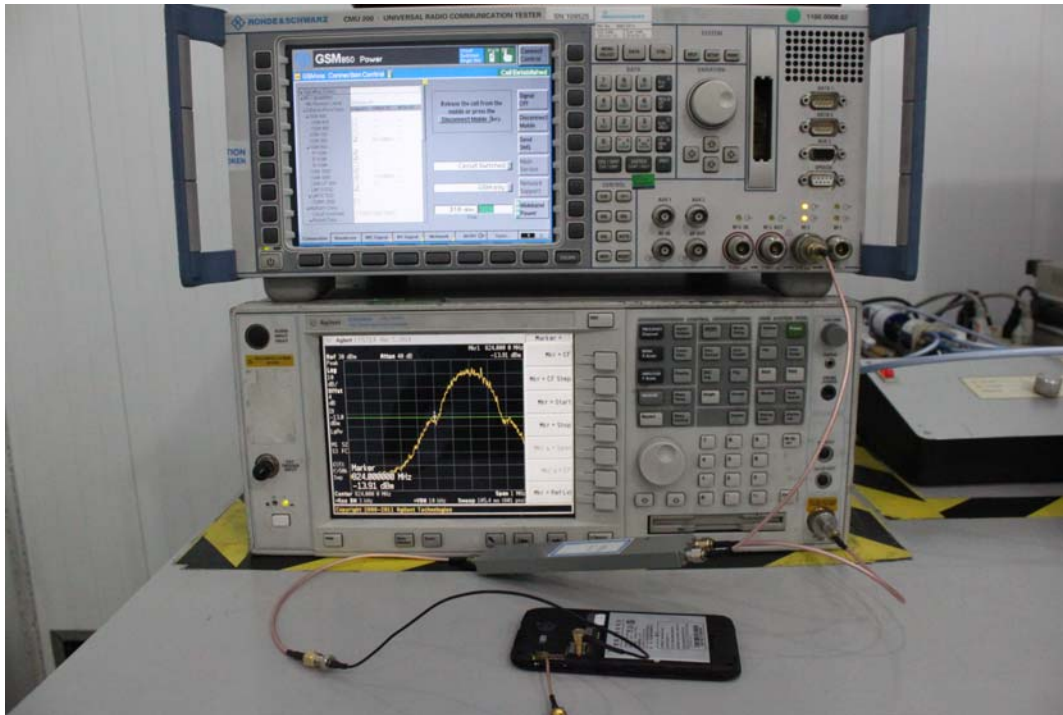

RADIATED EMISSION TEST SETUP

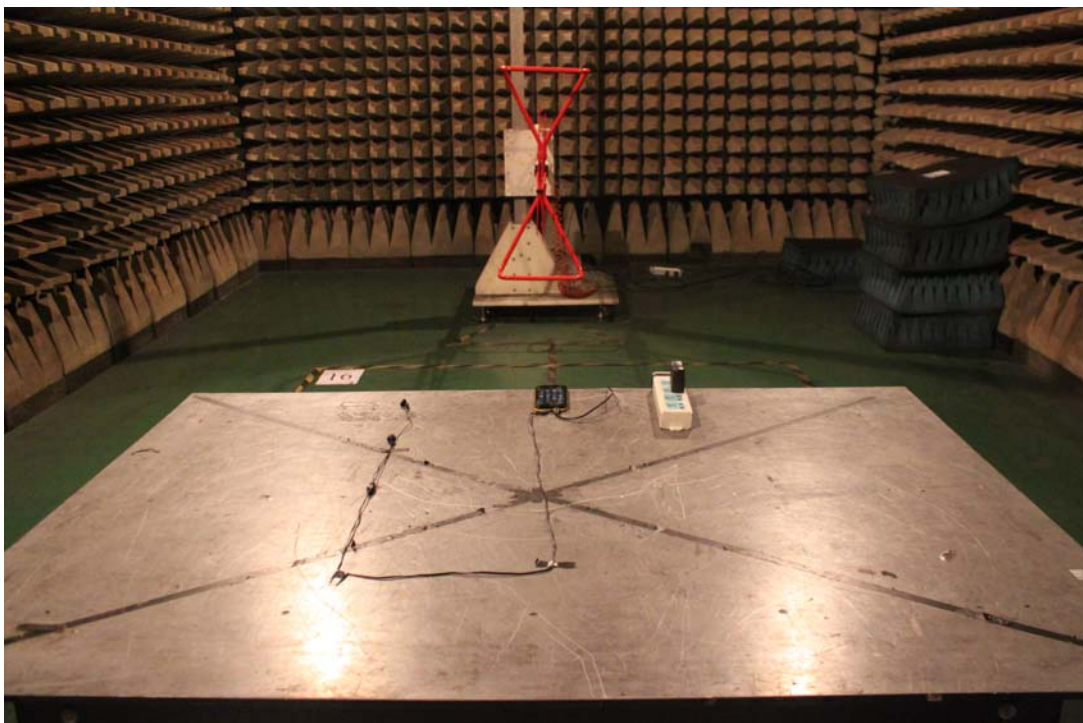

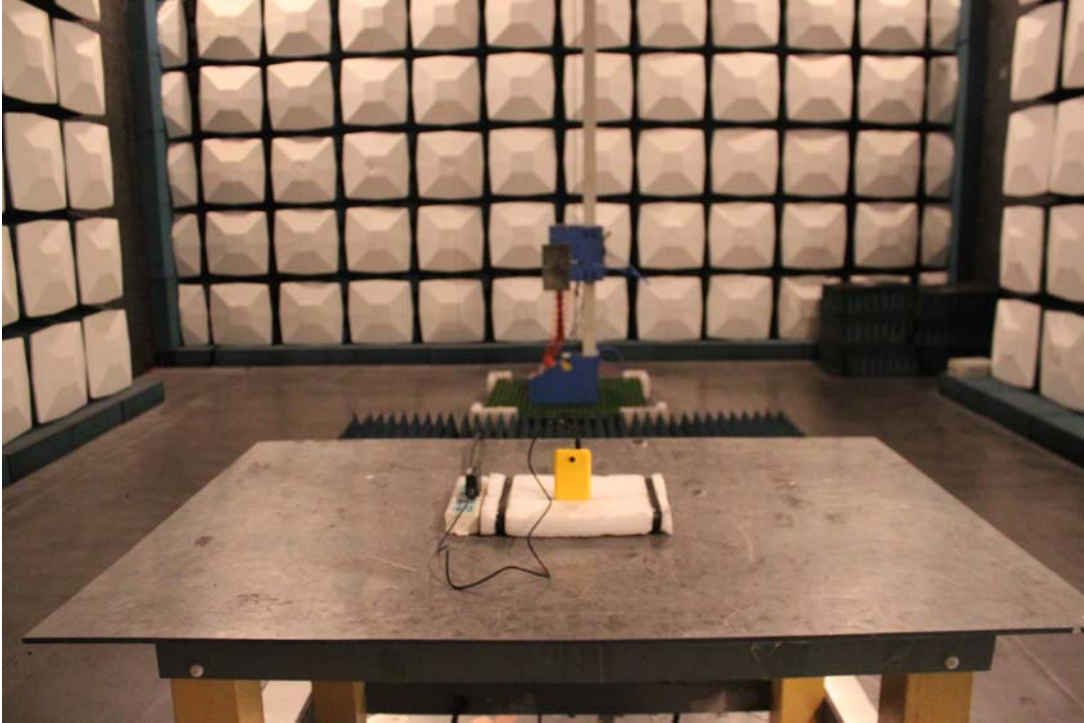

APPENDIX 2
PHOTOGRAPHS OF EUT


FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE

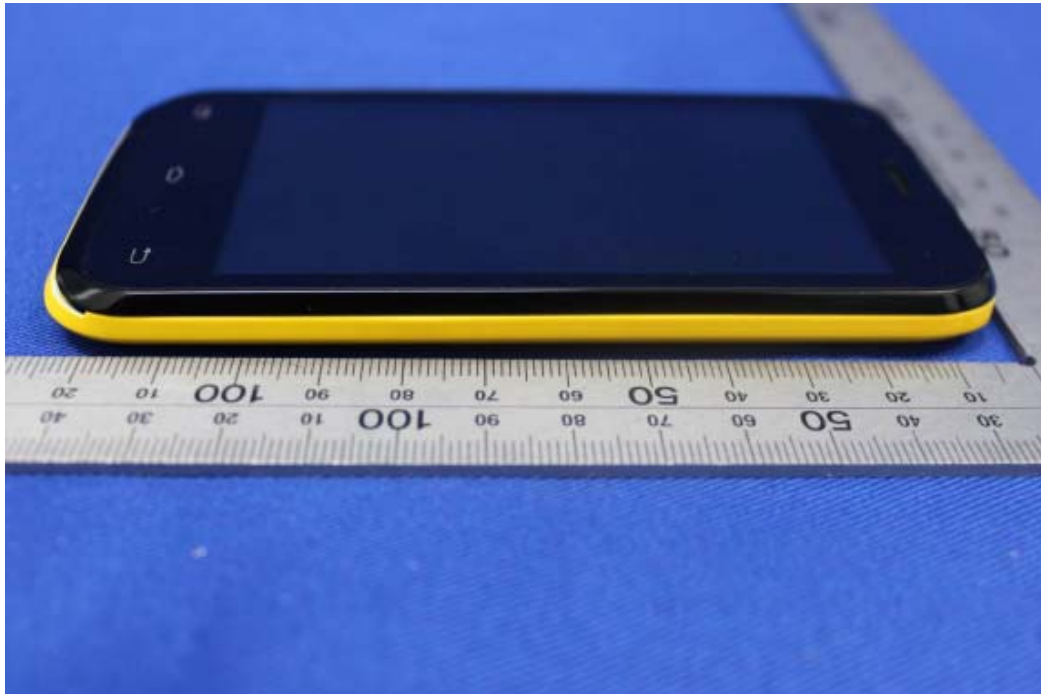

RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



PHOTO OF EARPHONE



PHOTO OF USB CABLE



PHOTO OF POWER SUPPLY



PHOTO OF BATTERY



INTERNAL PHOTO OF SAMPLE – 1




INTERNAL PHOTO OF SAMPLE – 2



INTERNAL PHOTO OF SAMPLE -3



INTERNAL PHOTO OF SAMPLE -4

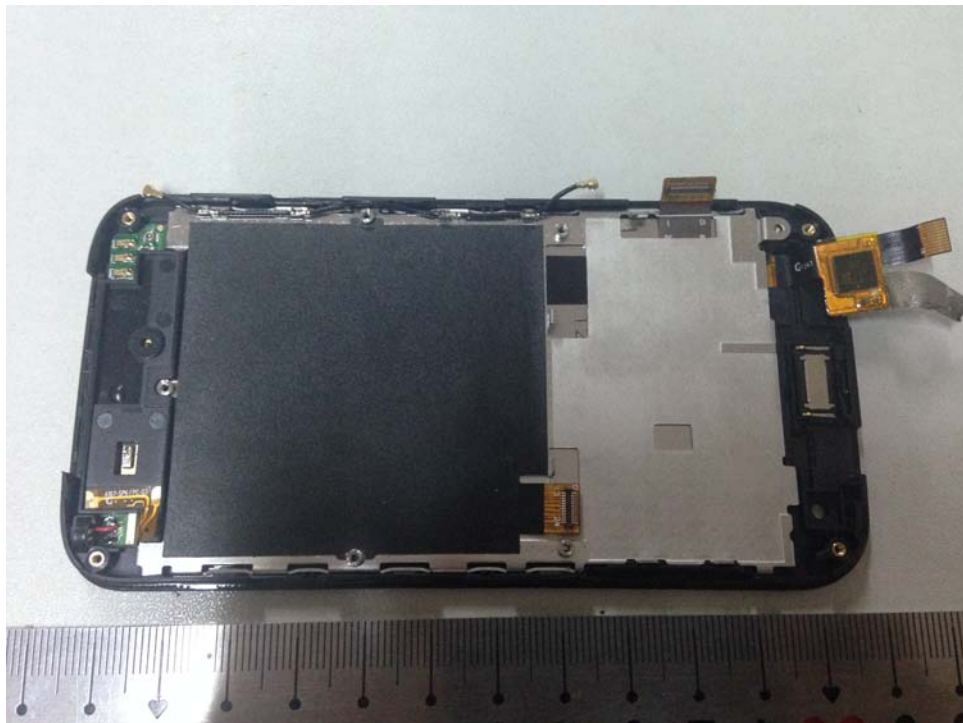

INTERNAL PHOTO OF SAMPLE -5



-----END OF REPORT-----