



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85224-1571

www.mflom.com info@mflom.com (480) 926-3100, FAX: 926-3598

Transmitter Certification

of

FCC ID: OM3VTRAKH150

Model: VTRAKH150

to

Federal Communications Commission

Rule Part 90 and Confidentiality

Date of report: May 7, 2004

On the Behalf of the Applicant:

Galaxy Tracking Systems L.L.C.

At the Request of:

P.O. GTS-2251

Galaxy Scientific Corp.
600 Louis Dr., Suite 202
Warminster, PA 18974

Attention of:

Michael O' Brien, Software Engineer
(215) 672-8005; FAX: -8708
email: michael.obrien@galaxyscientific.com

Supervised by:

A handwritten signature in black ink that reads 'M. Flom P. Eng.' The signature is stylized with a large 'M' and a prominent 'F'.

Morton Flom, P. Eng.

List of Exhibits

(FCC **Certification** (Transmitters) - Revised 9/28/98)

Applicant: Galaxy Tracking Systems L.L.C.

FCC ID: OM3VTRAKH150

By Applicant:

- | | |
|---|---|
| 1. Letter of Authorization | x |
| 2. Confidentiality Request: 0.457 And 0.459 | x |
| 3. Part 90.203(e) & (g) Attestation | x |
| 4. Identification Drawings, 2.1033(c)(11) | |
| <u>x</u> Label | |
| <u>x</u> Location of Label | |
| <u>x</u> Compliance Statement | |
| <u>x</u> Location of Compliance Statement | |
| 5. Photographs, 2.1033(c)(12) | x |
| 6. Documentation: 2.1033(c) | |
| (3) User Manual | x |
| (9) Tune Up Info | x |
| (10) Schematic Diagram | x |
| (10) Circuit Description | x |
| Block Diagram | x |
| Parts List | x |
| Active Devices | x |
| 7. MPE Report | x |

By M.F.A. Inc.:

- A. Testimonial & Statement of Certification

The Applicant has been cautioned as to the following:**15.21 Information to the User.**

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Table of Contents

<u>Rule</u>	<u>Description</u>	<u>Page</u>
	Test Report	1
2.1033(c)(14)	Rule Summary	2
	Standard Test Conditions and Engineering Practices	3
2.1033(c)	General Information Required	5
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	ERP Carrier Power (Radiated)	10
2.1053(a)	Field Strength of Spurious Radiation	12
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	16
90.214	Transient Frequency Behavior	23
2.1055(a)(1)	Frequency Stability (Temperature Variation)	27
2.1055(b)(1)	Frequency Stability (Voltage Variation)	29
2.202(g)	Necessary Bandwidth and Emission Bandwidth	31

Page Number 1 of 31.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) **Test Report**

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0450019

d) Client: Galaxy Scientific Corp.
600 Louis Dr., Suite 202
Warminster, PA 18974

e) Identification: VTRAKH150
FCC ID: OM3VTRAKH150

EUT Description: Vehicle Tracking Unit

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: May 7, 2004
EUT Received: March 15, 2004

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Page Number

2 of 31.

Sub-part

2.1033(c)(14):**Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 – Domestic Public Fixed Radio Services
- _____ 22 – Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 – International Fixed Public Radiocommunication services
- _____ 24 – Personal Communications Services
- _____ 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 – Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 – Aviation Services
- x 90 – Private Land Mobile Radio Services
- _____ 94 – Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 97 - Amateur Radio Service
- _____ 101 – Fixed Microwave Services

**Standard Test Conditions
and
Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.


Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.


Page Number

4 of 31.

NIST

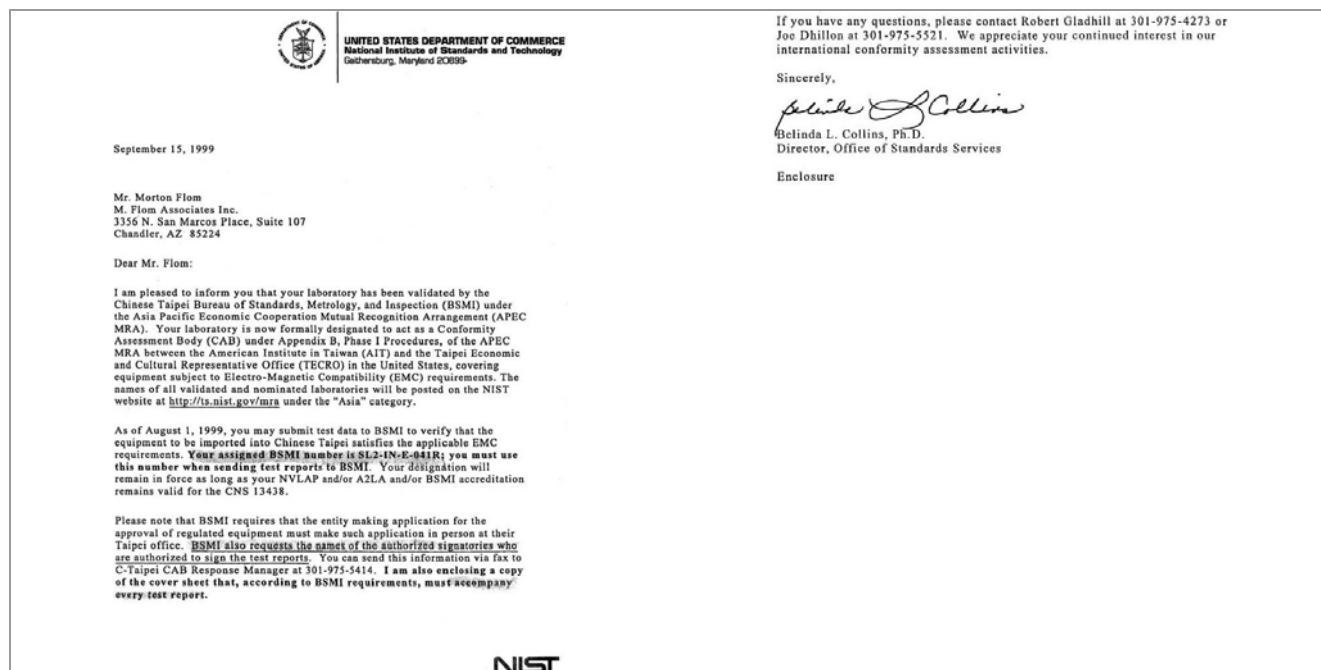

Industry Canada

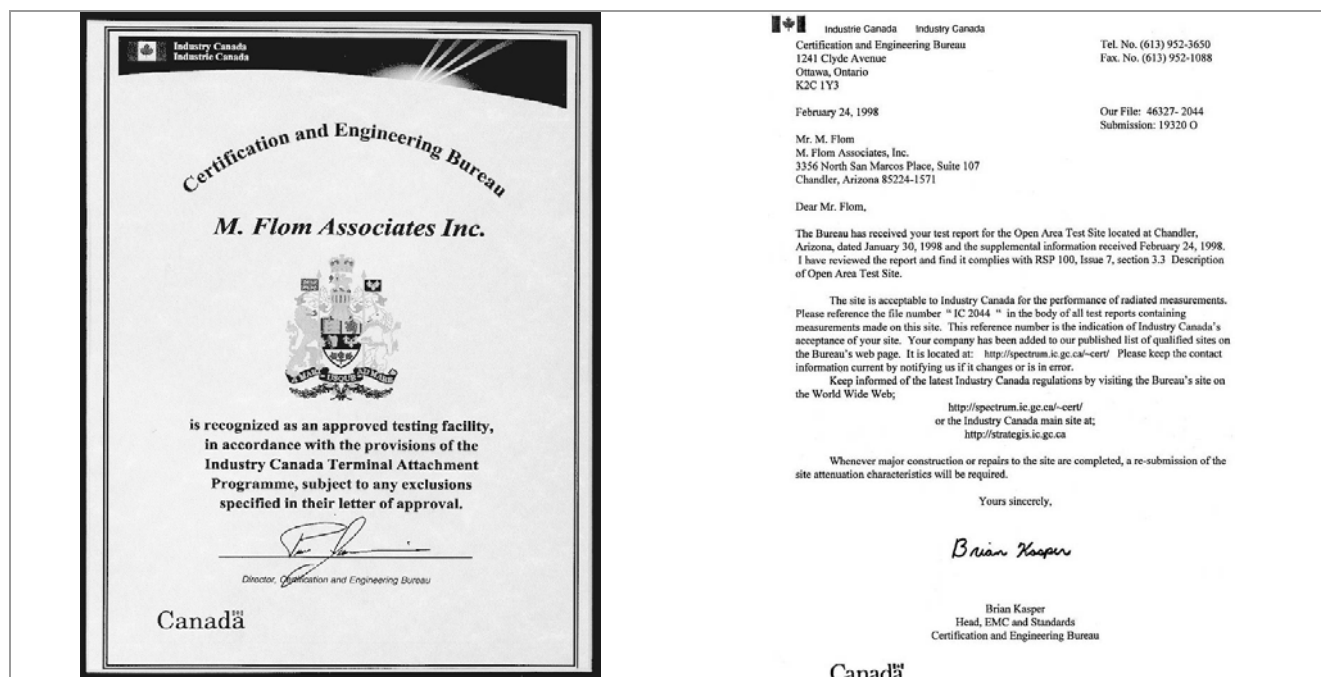

Page Number

5 of 31.

List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

90, Confidentiality

Sub-part 2.1033**(c)(1): Name and Address of Applicant:**

Galaxy Tracking Systems LLC
3120 Fire Road
Egg Harbor Township, NJ 08234

Manufacturer:

Applicant

(c)(2): FCC ID:

OM3VTRAKH150

Model Number:

VTRAKH150

(c)(3): Instruction Manual(s):

Please see attached exhibits

(c)(4): Type of Emission:

11K0F1D

(c)(5): Frequency Range, MHz:

150 to 174

(c)(6): Power Rating, Watts:☐ Switchable☒ Variable

2

☐ N/A**FCC Grant Note: BB****(c)(7): Maximum Power Rating, Watts:**

300

DUT Results:Passes ☒ xFails ☐

Page Number

6 of 31.

Information for Push-To-Talk Devices

Type and number of antenna to be used for this device:

Vehicle Mounted Whip

Maximum antenna gain for antenna indicated above:

3dBi

Can this device sustain continuous operation with respect to its hardware capabilities and allowable operating functions?

No

Other hardware or operating restrictions that could limit a person's RF Exposure:

None

Source-based time-averaging (see 2.1093 of rules) applicable to reduce the average output power:

No

If device has headset and belt-clip accessories that would allow body-worn operations, what is the minimum separation distance between the antenna and the user's body in this operating configuration?

No

Can device access wire-line services to make phone calls, either directly or through an operator?

No

Can specific operating instructions be given to users to eliminate any potential RF Exposure concerns for both front-of-the-face and body-worn operating configurations?

Vehicle mount only

Other applicable information the applicant may provide that can serve as effective means for ensuring RF Exposure compliance:

Yes, user manual

Page Number

7 of 31.

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

Collector Current, A	=	per manual
Collector Voltage, Vdc	=	per manual
Supply Voltage, Vdc	=	12.8 (12.0Vdc nominal)

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

☐ Attached Exhibits
☒ N/A

(c)(14): **Test and Measurement Data:**

Follows

Page Number 8 of 31.

Name of Test: Carrier Output Power (Conducted)


Specification: 47 CFR 2.1046(a)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

Measurement Procedure

- A) The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.
- B) Measurement accuracy is $\pm 3\%$.

Transmitter Test Set-Up: RF Power Output

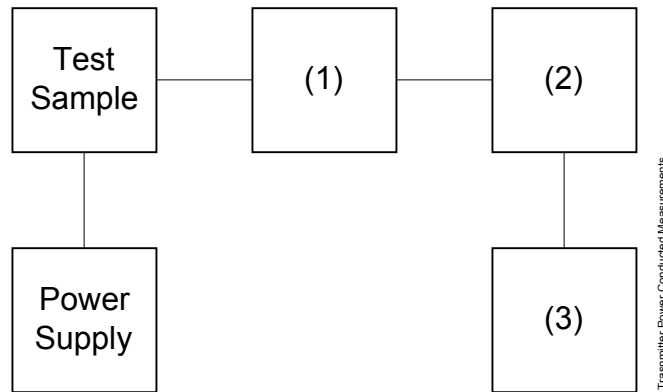

Asset	Description	s/n
(1)	Coaxial Attenuator	
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(2)	Power Meters	
X i00020	HP 8901A Power Mode	2105A01087
(3)	Frequency Counter	
X i00020	HP 8901A Frequency Mode	2105A01087

Page Number

9 of 31.

Measurement Results

(Worst case)

Frequency of Carrier, MHz = 162.000, 150.100, 173.900
Ambient Temperature = 23°C ± 3°C

Power Setting	RF Power, dBm	RF Power, Watts
High	32.9	2



Performed by:

David E. Lee, Lab Manager

Page Number 10 of 31.

Name of Test: ERP Carrier Power (Radiated)

Specification: TIA/EIA 603A (Substitution Method)


Measurement Procedure

Definition

The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method of Measurement:

- A) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

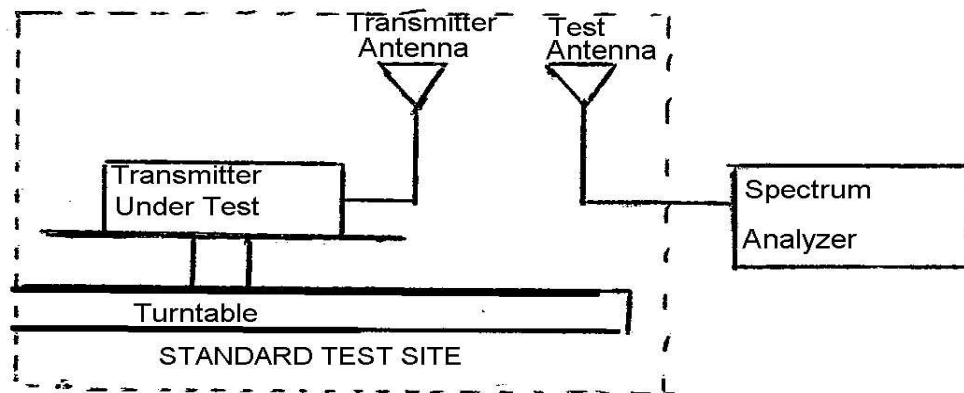

- B) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.
- C) Repeat step B) for seven additional readings at 45° interval positions of the turntable.
- D) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.
- E) Calculate the average radiated output power from the readings in step C) and D) by the following:

$$\text{average radiated power} = 10 \log_{10} \Sigma 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

Page Number

11 of 31.

Test Equipment

Asset	Description	s/n	Cycle	Last Cal
Transducer				
X i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-03
i00089	Aprl 2001 200MHz-1GHz	001500	12 mo.	Sep-03
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Jan-03
Amplifier				
X i00028	HP 8449A	2749A00121	12 mo.	May-03
Spectrum Analyzer				
i00029	HP 8563E	3213A00104	12 mo.	May-03
X i00033	HP 85462A	3625A00357	12 mo.	Aug-03
Substitution Generator				
X i00067	HP 8920A Communication TS	3345U01242	12 mo.	Oct-03
i00207	HP 8753D Network Analyzer	3410A08514	12 mo.	Jul-03

Measurement Results

	150.100 MHz		162.000 MHz		173.900 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	26.7	1.8	20.0	1.2	21.1	2.2
45°	26.1	1.8	23.0	1.2	21.0	2.2
90°	28.2	1.8	22.5	1.2	25.1	2.2
135°	21.4	1.8	26.3	1.2	22.1	2.2
180°	26.0	1.8	23.9	1.2	18.6	2.2
225°	25.3	1.8	25.5	1.2	22.4	2.2
270°	22.4	1.8	22.2	1.2	18.5	2.2
315°	24.2	1.8	14.5	1.2	22.0	2.2
	150.100 MHz		162.000 MHz		173.900 MHz	
Av. Radiated Power:	26.8dbm		23.4dbm		23.6dbm	



Performed by:

David E. Lee, Lab Manager

Page Number 12 of 31.

Name of Test: Field Strength of Spurious Radiation

Specification: 47 CFR 2.1053(a)

Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917


Measurement Procedure

Definition:

Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies, which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


Method of Measurement:

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
 - 2) Video Bandwidth ≥ 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load that is placed on the turntable. The RF cable to this load should be of minimum length.

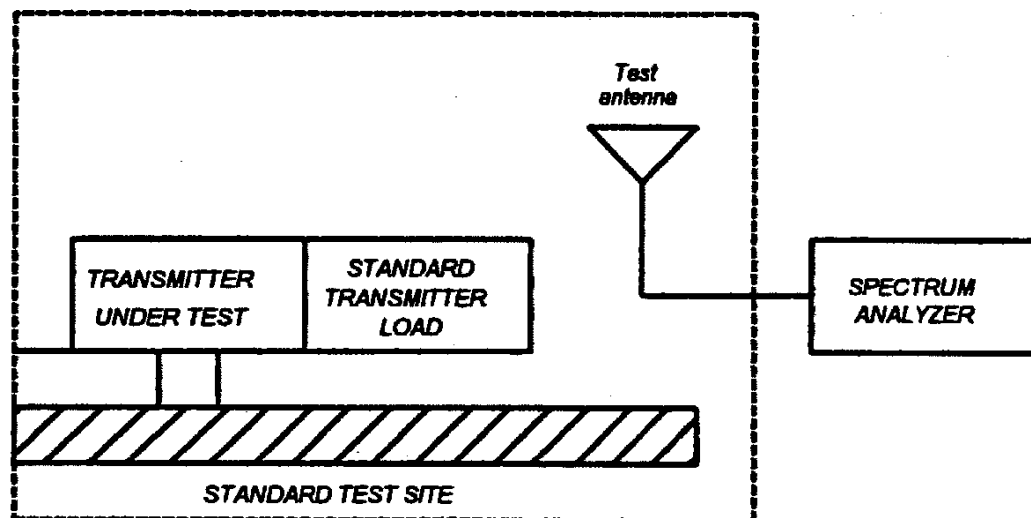

Name of Test: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to $\pm$ the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

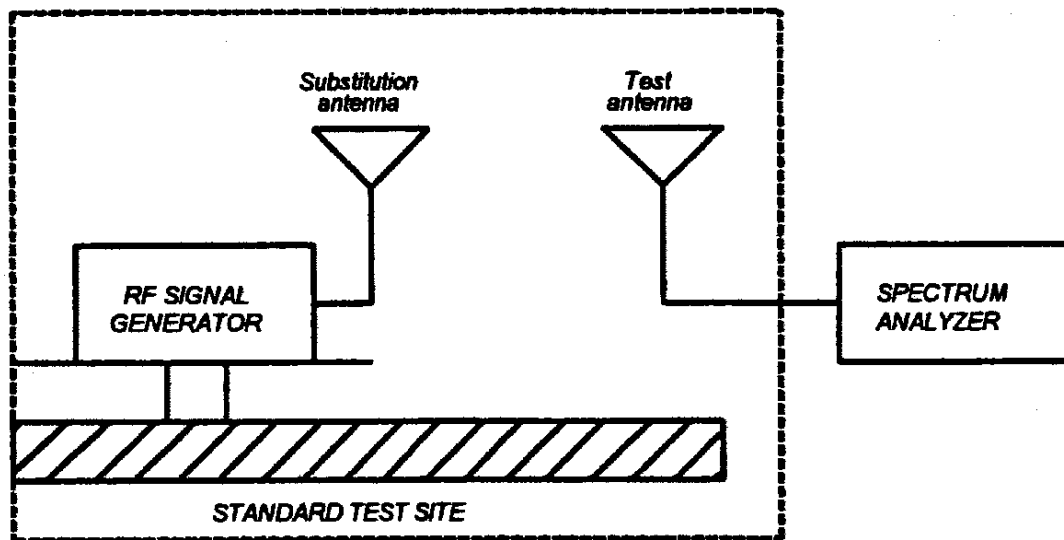

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Page Number 14 of 31.

Name of Test: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =

$$10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment

Asset	Description	s/n	Cycle	Last Cal
Transducer				
	i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo. Sep-03
X	i00089	April 2001 200MHz-1GHz	001500	12 mo. Sep-03
X	i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo. Jan-04
Amplifier				
X	i00028	HP 8449A	2749A00121	12 mo. May-04
Spectrum Analyzer				
X	i00029	HP 8563E	3213A00104	12 mo. May-04
X	i00033	HP 85462A	3625A00357	12 mo. Aug-03
Substitution Generator				
X	i00067	HP 8920A Communication TS	3345U01242	12 mo. Oct-03
X	i00207	HP 8753D Network Analyzer	3410A08514	12 mo. Jul-03
Microphone, Antenna Port, and Cabling				
Microphone		<u>N/A</u>	Cable Length	<u>N/A</u> Meters
Antenna Port Terminated		<u>Yes</u>	Load	<u>50</u> Antenna Gain <u>N/A</u>
All Ports Terminated by Load		<u>Yes</u>	Peripheral	<u>Yes</u>

Page Number 15 of 31.

Name of Test: Field Strength of Spurious Radiation

Measurement Results

g0430023: 2004-Mar-25 Thu 11:52:00

STATE: 2:High Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	ERP, dBm	ERP, dBc
150.100	300.200000	-61.7	-89.9
150.100	450.300000	-60.6	-89.9
150.100	600.400000	-53.0	-89.9
150.100	750.500000	-52.4	-89.9
150.100	900.600000	-52.4	-89.9
150.100	1050.700000	-45.2	-89.9
150.100	1200.808800	-41.5	-89.9
150.100	1350.908800	-43.7	-89.9
150.100	1501.008800	-45.8	-89.9



Performed by:

David E. Lee, Lab Manager

Page Number 16 of 31.

Name of Test: Emission Masks (Occupied Bandwidth)


Specification: 47 CFR 2.1049(c)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

Measurement Procedure

- A) The EUT and test equipment were set up as shown below
- B) For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
- C) For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- D) The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

Transmitter Test Set-Up: Occupied Bandwidth

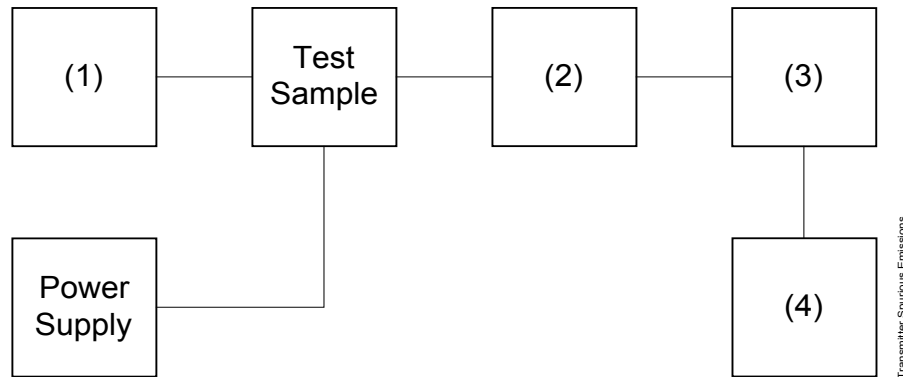

Asset	Description	s/n
(1) Audio Oscillator/Generator		
X i00017	HP 8903A Modulation Meter	2216A01753
(2) Coaxial Attenuator		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00123	NARDA 766 (10 dB)	7802A
(3) Interface		
X i00021	HP 8954A Transceiver Interface	2146A00159
(4) Spectrum Analyzer		
X i00048	HP 8566B Spectrum Analyzer	2511A01467
i00029	HP 8563E Spectrum Analyzer	3213A00104

Page Number 17 of 31.


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0440079: 2004-Apr-13 Tue 21:41:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

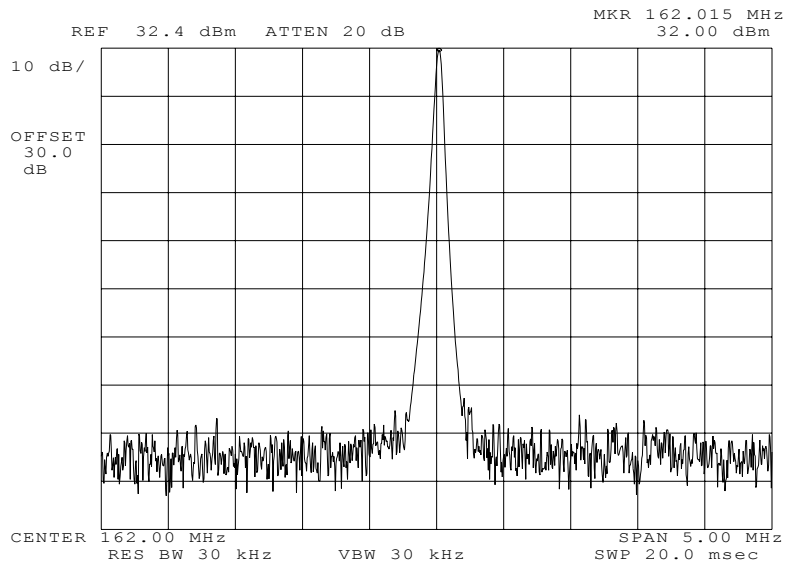

Power:
Modulation:

HIGH
NONE

Performed by:

David E. Lee, Lab Manager

Page Number 18 of 31.


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0440080: 2004-Apr-13 Tue 21:45:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

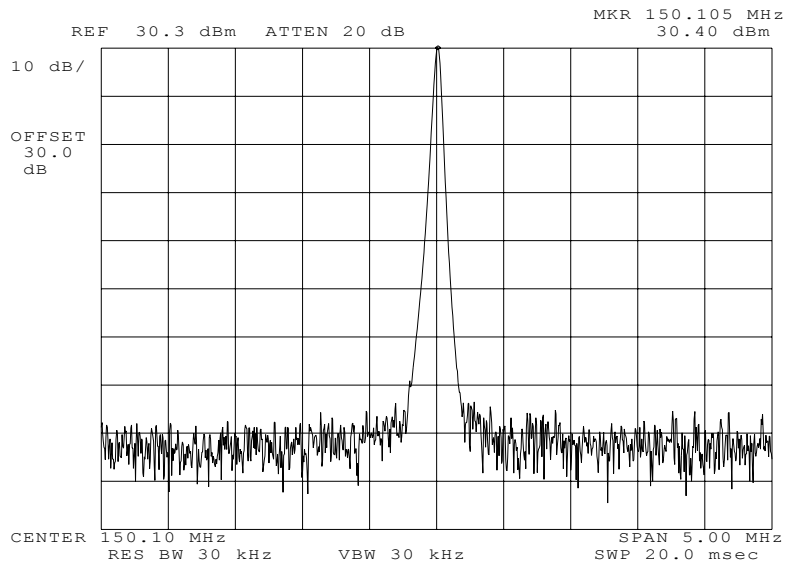

Power:
Modulation:

HIGH
NONE

Performed by:

David E. Lee, Lab Manager

Page Number 19 of 31.


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0440081: 2004-Apr-13 Tue 21:46:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

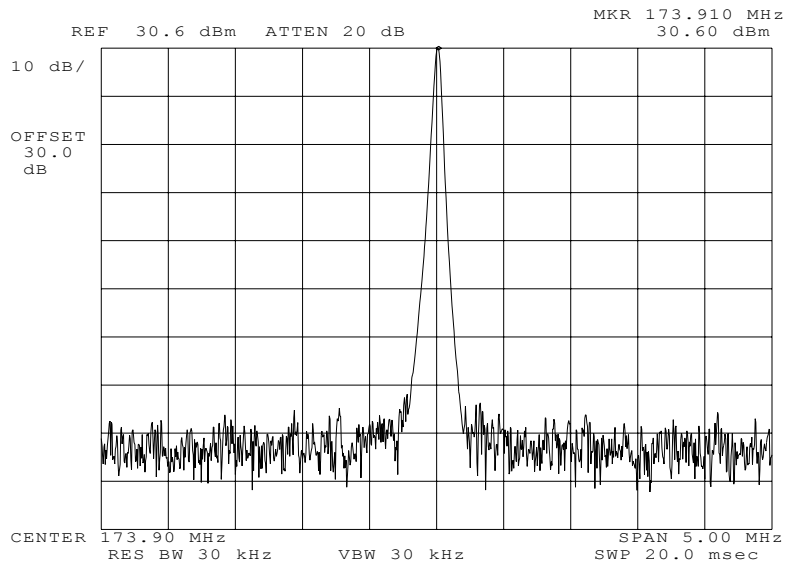

Power:
Modulation:

HIGH
NONE

Performed by:

David E. Lee, Lab Manager

Page Number 20 of 31.


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0440082: 2004-Apr-13 Tue 21:57:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

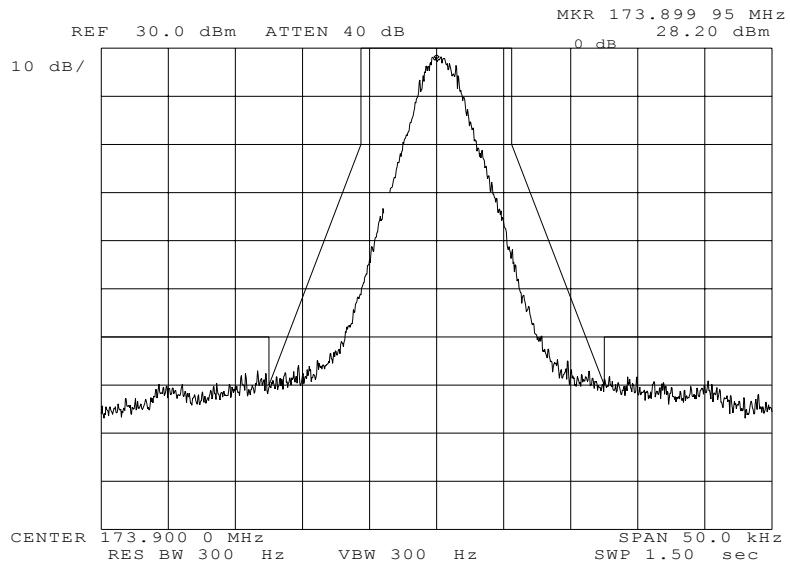

Power:
Modulation:

HIGH
9600GMSK
MASK: D, VHF/UHF 12.5kHz BW

Performed by:

David E. Lee, Lab Manager

Page Number 21 of 31.


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0440083: 2004-Apr-13 Tue 21:59:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

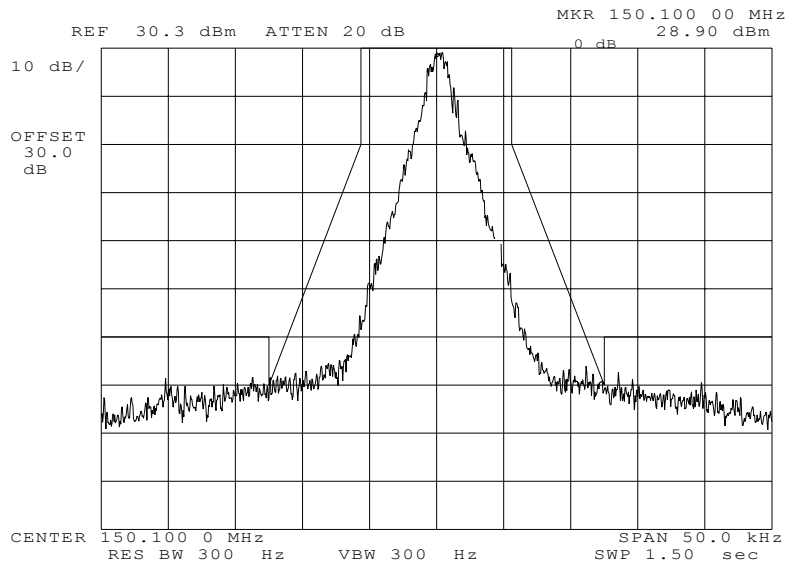

Power:
Modulation:

HIGH
9600GMSK
MASK: D, VHF/UHF 12.5kHz BW

Performed by:

David E. Lee, Lab Manager

Page Number 22 of 31.


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0440084: 2004-Apr-13 Tue 22:04:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

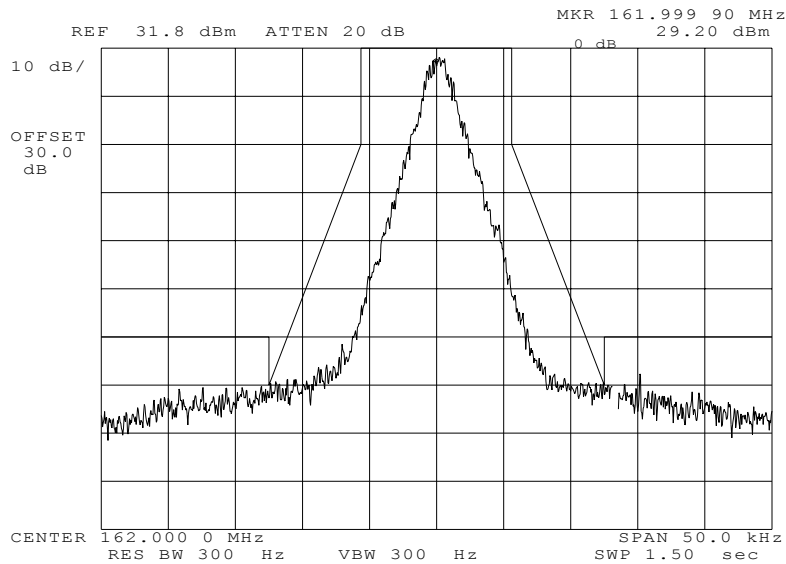

Power:
Modulation:

HIGH
9600GMSK
MASK: D, VHF/UHF 12.5kHz BW

Performed by:

David E. Lee, Lab Manager

Page Number 23 of 31.

Name of Test: Transient Frequency Behavior
Specification: 47 CFR 90.214
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19


Measurement Procedure

- A) The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
- B) The transmitter was turned on.
- C) Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded.
- D) The transmitter was turned off.
- E) An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step C) above, measured at the output of the combiner. This level was then fixed for the remainder of the test.
- F) The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
- G) The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded.
- H) The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.



Performed by:

David E. Lee, Lab Manager

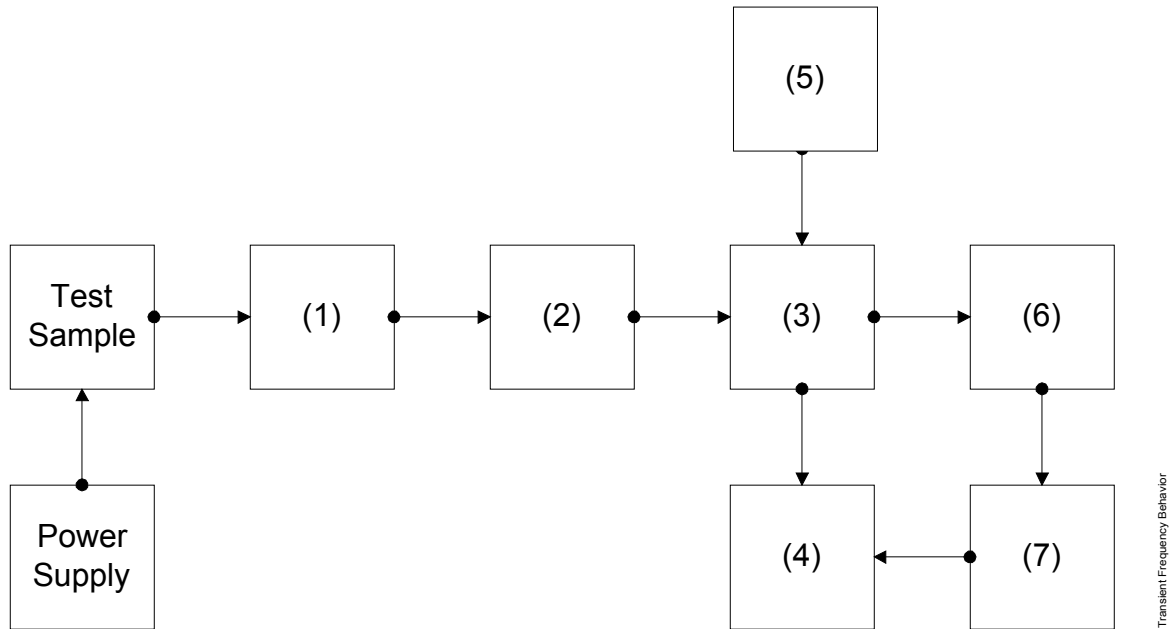Transmitter Set-Up: Transient Frequency Behavior

Asset	Description	s/n
(1) Attenuator	(Removed after 1st step)	
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
(2) Attenuator		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3) Combiner		
X i00154	4 x 25 Ω Combiner	154
(4) Crystal Decoder		
X i00159	HP 8470B Crystal Detector	1822A10054
(5) RF Signal Generator		
X i00067	HP 8920A Communication TS	3345U01242
(6) Modulation Analyzer		
X i00020	HP 8901A Modulation Meter	2105A01087
(7) Oscilloscope		
X i00030	HP 54502A Digital Oscilloscope	2927A00209

Page Number


25 of 31.

Name of Test:

Transient Frequency Behavior

State: 2004-APR-14, 21:26, Wed

Ambient Temperature: 23°C ± 3°C

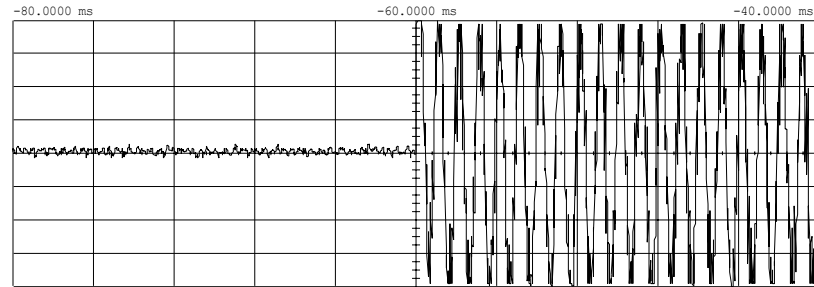

	Timebase	Delay/Pos	Reference	Mode
Main	4.00 ms/div	-80.0000 ms	Left	Realtime (EXTENDED)
Channel 1	Sensitivity 75.0 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc BW lim (1M ohm)

Trigger mode : State
On Positive Edge Of Chan2 When Pattern [H-X] is present
Trigger Levels
Chan1 = -240.000 mV (noise reject ON)
Holdoff = 40.000 ns

Power:
Modulation:High
Carrier On

Performed by:


David E. Lee, Lab Manager

Page Number 26 of 31.

Name of Test: Transient Frequency Behavior

State: 2004-APR-14, 21:28, Wed

Ambient Temperature: 23°C ± 3°C

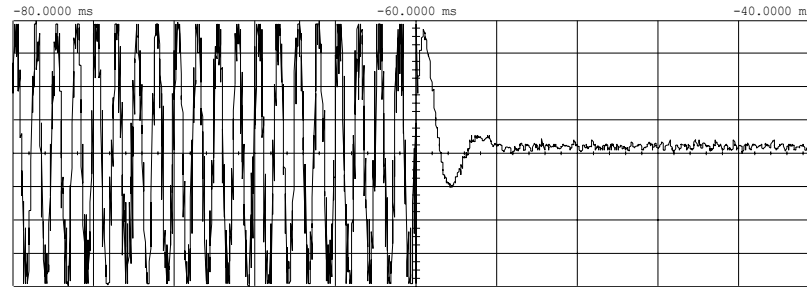

Main	Timebase	Delay/Pos	Reference	Mode
	4.00 ms/div	-80.0000 ms	Left	Realtime (EXTENDED)
Channel 1	Sensitivity	Offset	Probe	Coupling
	75.0 mV/div	0.00000 V	1.000 :1	dc BW lim (1M ohm)

Trigger mode : Edge
On Negative Edge Of Chan2
Trigger Level
Chan2 = -25.000 mV (noise reject ON)
Holdoff = 40.000 ns

Power:
Modulation:

High
Carrier Off

Performed by:

David E. Lee, Lab Manager

Page Number 27 of 31.

Name of Test: Frequency Stability (Temperature Variation)


Specification: 47 CFR 2.1055(a)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Measurement Procedure

- A) The EUT and test equipment were set up as shown on the following page.
- B) With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- C) With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- D) The temperature tests were performed for the worst case.

Transmitter Test Set-Up: Temperature Variation

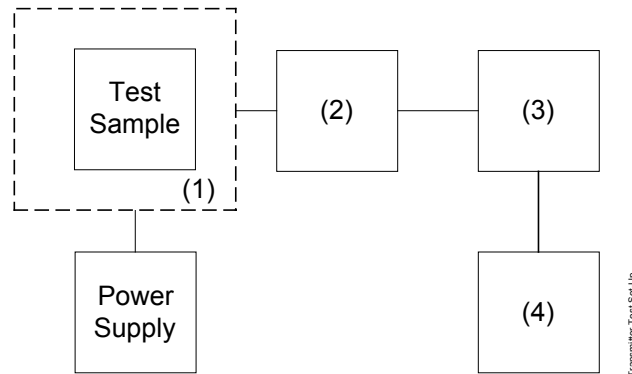


Asset	Description	s/n
(1) Temperature, Humidity, Vibration		
X i00027	Tenney Temp. Chamber	9083-765-234
(2) Coaxial Attenuator		
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3) RF Power		
X i00067	HP 8920A Communications TS	3345U01242
(4) Frequency Counter		
X i00067	HP 8920A Communications TS	3345U01242

Page Number 28 of 31.

Name of Test: Frequency Stability (Temperature Variation)

Measurement Results

State: Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

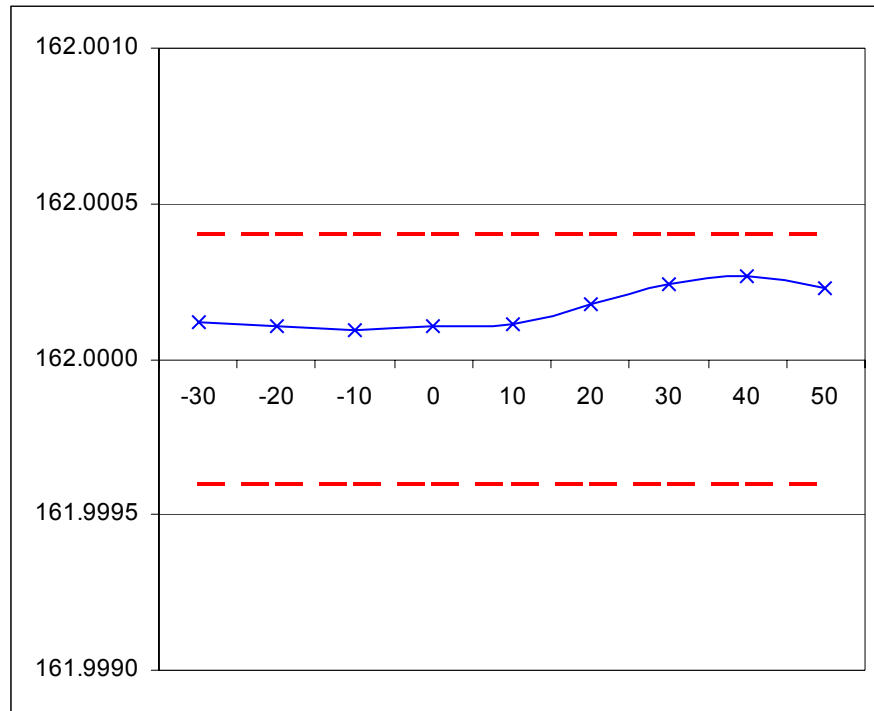

Performed by:

David E. Lee, Lab Manager

Page Number 29 of 31.

Name of Test: Frequency Stability (Voltage Variation)


Specification: 47 CFR 2.1055(d)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Measurement Procedure

- A) The EUT was placed in a temperature chamber (if required) at $25 \pm 5^\circ\text{C}$ and connected as shown below.
- B) The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- C) The variation in frequency was measured for the worst case.

Transmitter Test Set-Up: Voltage Variation

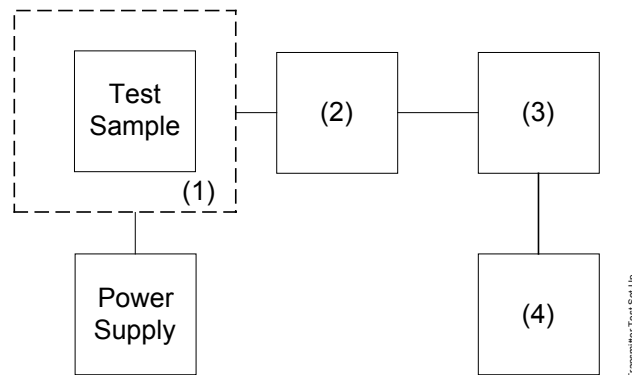

Asset	Description	s/n
(1)	Temperature, Humidity, Vibration	
i00027	Tenney Temp. Chamber	9083-765-234
(2)	Coaxial Attenuator	
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3)	RF Power	
X i00020	HP 8901A Power Mode	2105A01087
(4)	Frequency Counter	
X i00020	HP 8901A Frequency Mode	2105A01087

Page Number

30 of 31.

Results: Frequency Stability (Voltage Variation)

State:

Ambient Temperature: 23°C ± 3°C

Limit, ppm = ± 2.5
 Limit, Hz = 405
 Battery End Point (Voltage) = 10.0

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
115	14.7	162.000110	+110	+0.67
100	12.8	162.000109	+109	+0.67
85	10.9	162.000110	+110	+0.67
BEP	10.0	162.000103	+103	+0.64



Performed by:

David E. Lee, Lab Manager

Page Number 31 of 31.

Name of Test: Necessary Bandwidth and Emission Bandwidth

Specification: 47 CFR 2.202(g)

Baud Rate = 9.6kbps

Necessary Bandwidth Calculation:

MAXIMUM MODULATION (M), kHz	= 4.0
MAXIMUM DEVIATION (D), kHz	= 1.5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B_N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 11.0



Performed by:

David E. Lee, Lab Manager

END OF TEST REPORT

MFA p0430007, d0450019

**Testimonial
and
Statement of Certification**

This is to Certify:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:

A handwritten signature in black ink, appearing to read "M. Flom P. Eng.", with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.