

**KTL Test Report:** 9R00977.2

**Applicant:** E.T.M. Industries Inc.  
PO Box 610  
266 Hall Avenue  
Renfrew, Ontario  
K7V 4E7

**Equipment Under Test:  
(E.U.T.)** Farm Alert Implement Lighting System  
Implement Transceiver

**FCC ID:** OMBETM-FA-T-4

**In Accordance With:** **FCC Part 15, Subpart C**  
For Low Power Transmitters Operating Periodically  
In The Band 40.66 - 40.77 MHz And Above 70 MHz

**Tested By:** KTL Ottawa Inc.  
3325 River Road, R.R. 5  
Ottawa, Ontario K1V 1H2

**Authorized By:** R. Grant, Senior RF Specialist

**Date:**

**Total Number of Pages:** 31

## **Table of Contents**

### **Section 1. Summary of Test Results**

- General
- Summary of Test Data

### **Section 2. Equipment Under Test**

- General Equipment Information
- Description of E.U.T.
- Modifications Incorporated in E.U.T.
- Theory of Operation
- Exercise Program

### **Section 3. Equipment Configuration**

- Equipment Configuration List
- Inter-Connection Cables
- Configuration of E.U.T.

### **Section 4. Transmission Requirements**

- Test Conditions
- Test Results
- Test Data
- Rationale for Compliance
- Graphs

### **Section 5. Radiated Emissions**

- Test Conditions
- Test Results
- Test Data - Radiated Emissions
- Radiated Photographs
- Pre-Scan Data

### **Section 6. Occupied Bandwidth**

- Test Conditions
- Test Results
- Test Data
- Graphs

## **Table of Contents, continued**

### **Section 7. Frequency Tolerance**

- Test Conditions
- Test Results
- Test Data

### **Section 8. Periodic Alternate Field Strength Requirements**

- Test Conditions
- Test Results
- Test Data

### **Section 9. Powerline Conducted Emissions**

- Test Conditions
- Test Results
- Test Data

### **Section 10. Block Diagrams**

- Conducted Emissions
- Radiated Prescan
- Outdoor Test Site for Radiated Emissions
- Occupied Bandwidth

### **Section 11. Test Equipment List**

#### **Annex A - Restricted Bands**

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

## **Section 1. Summary of Test Results**

Manufacturer: E.T.M. Industries Inc.

Model No.: ETM-FA-T-4

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.231. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

New Submission  Production Unit

Class II Permissive Change  Pre-Production Unit

D	X	T
---	---	---

 Equipment Code

**THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.**

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



**NVLAP LAB CODE: 100351-0**

TESTED BY: \_\_\_\_\_ DATE: \_\_\_\_\_  
Wayne Clarke, Senior EMC Specialist

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

### **Summary Of Test Data**

Name of Test	Paragraph Number	Results
Transmission Requirements	15.231(a)	Complies
Radiated Emissions	15.231(b)	Complies
Occupied Bandwidth	15.231(c)	Complies
Frequency Tolerance	15.231(d)	Not Applicable
Periodic Alternate Field Strength Requirements	15.231(e)	Not Applicable
Powerline Conducted Emissions	15.207	Not Applicable

### **Footnotes For N/A's:**

#### **Test Conditions:**

<b>Indoor</b>	Temperature: 22 °C
	Humidity: 30 %
<b>Outdoor</b>	Temperature: 26 °C
	Humidity: 42 %

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

## **Section 2. Equipment Under Test (E.U.T.)**

### **General Equipment Information**

**Frequency Range:** 318 MHz  
**Operating Frequency(ies) of Sample:** 317.98 MHz  
**Type of Emission:** Pulse with modulation  
**Emission Designator:** 147KL1D  
**Supply Power Requirement:** 4 D Cells, 6 Vdc

**Duty Cycle Calculation:**

<b>Short Pulse Duration:</b>	3.83 ms
<b>Long Pulse Duration:</b>	10.17 ms

NR Short Pulses      In 100 ms      = 8.0  
NR Long Pulses      In 100 ms      = 2.5

Total On Time      =  $(8 \times 3.83) + (2.5 \times 10.17)$   
                            =  $25.43 + 30.64$   
                            = 56.07 ms

Duty Cycle      =  $20 \log \frac{\text{on time ms}}{100 \text{ ms}}$

$$= 20 \log \frac{56.07}{100}$$
$$= 20 \log 0.5607$$
$$= -5.03$$
$$= -5 \text{ dB}$$

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

FCC ID: OMBETM-FA-T-4

---

**Description of E.U.T.**

The E.U.T. is a signaling device for a farm implement system. It allows the tractor keypad to signal turns or stops. It is designed to easily switch from one implement to another.

**Modifications Incorporated in E.U.T.**

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

FCC ID: OMBETM-FA-T-4

---

### **Theory of Operation**

The E.U.T. receives a command from the keypad unit and echoes back to the keypad unit.

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

### **Justification**

The E.U.T. was configured for testing as per typical installation.

The following combinations were investigated to establish worst case configuration:

- (1) Normal mounting position was tested.

### **Exercise Program**

The E.U.T. exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

#### **Exercise Mode:**

- (1) Transmitting

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

*FCC ID: OMBETM-FA-T-4*

---


## **Section 3. Equipment Configuration**

### **Equipment Configuration List:**

Item	Description	Model No.	Serial.	Rev.
(A)	Implement Unit	ETM-FA-T-4	None	

**Inter-connection Cables: Not Applicable**

### **Configuration of the Equipment Under Test (E.U.T)**

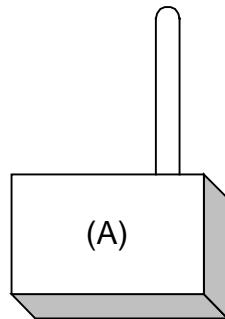

## Section 4. Transmission Requirements

NAME OF TEST: Transmission Requirements	PARA. NO.: 15.231(a)
TESTED BY: Wayne Clarke	DATE: May 27, 1999

**Minimum Standard:** 15.231(a) Continuous transmissions such as voice, video or data transmissions are not permitted.

15.231(a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds after being released.

15.231(a)(2) A transmitter activated automatically shall cease transmission within 5 seconds of activation.

15.231(a)(3) Periodic transmissions at regular pre-determined intervals are not permitted. However polling or supervisory transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

15.231(a)(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm.

**Test Results:** Complies.

**Test Data:** Compliance was determined by verification of technical specifications and a functional test on the equipment.

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

*FCC ID: OMBETM-FA-T-4*

---

### **Rationale for Compliance with Transmission Requirements**

**15.231 (a):** This equipment has no provision for voice, video or data transmission

**15.231(a)(1) :** Complies – The transmitter is automatically deactivated within 300 ms from the start of transmission

**15.231(a)(2) :** Complies – Manual Activation

**15.231(a)(3) :** Complies – Only Operates Manually


**15.231(a)(4) :** Not Applicable

**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

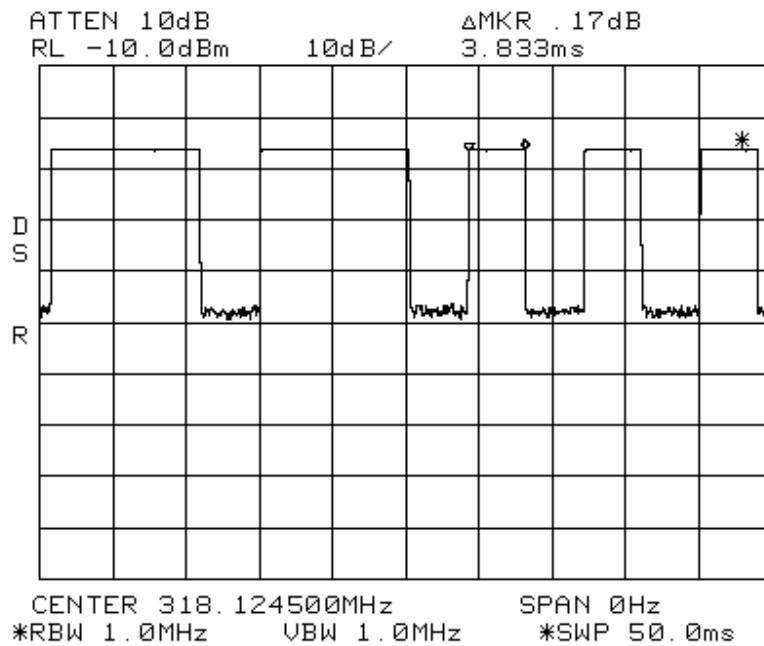


**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

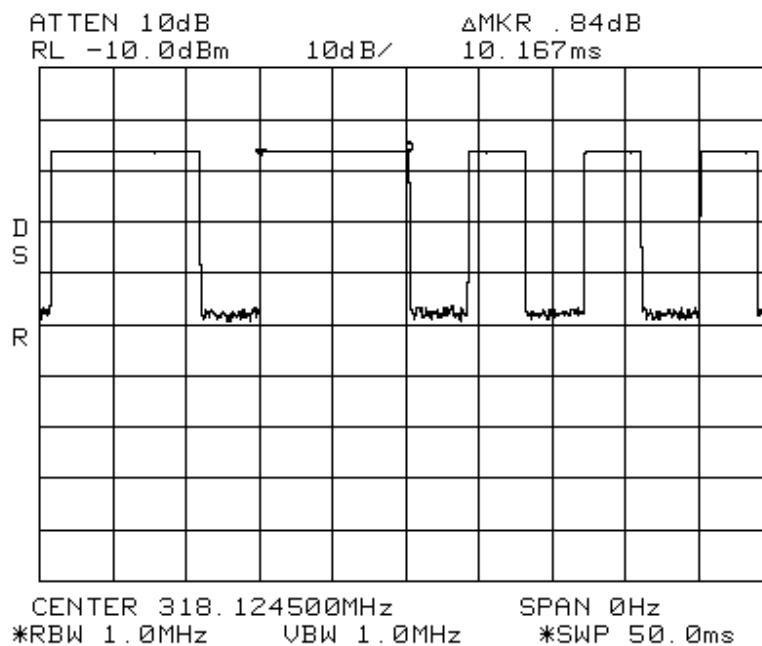


**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

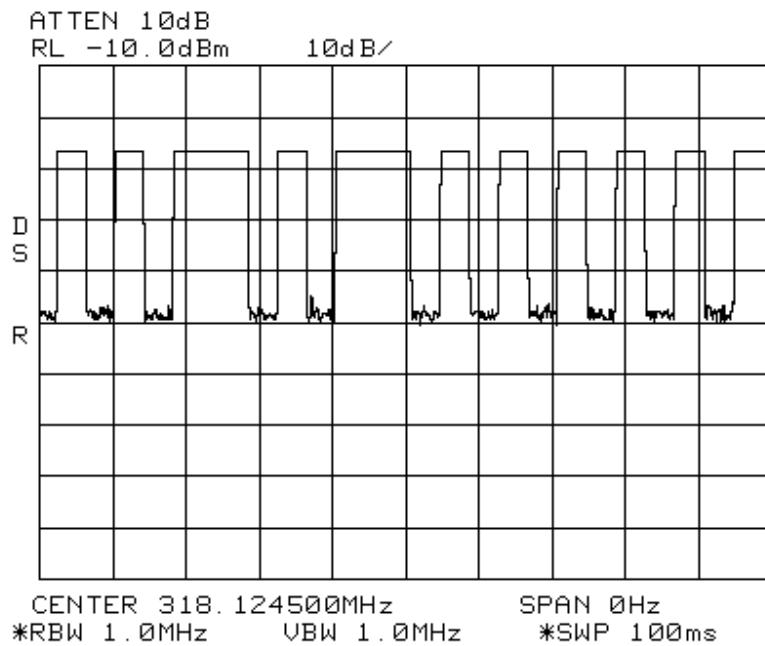


**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

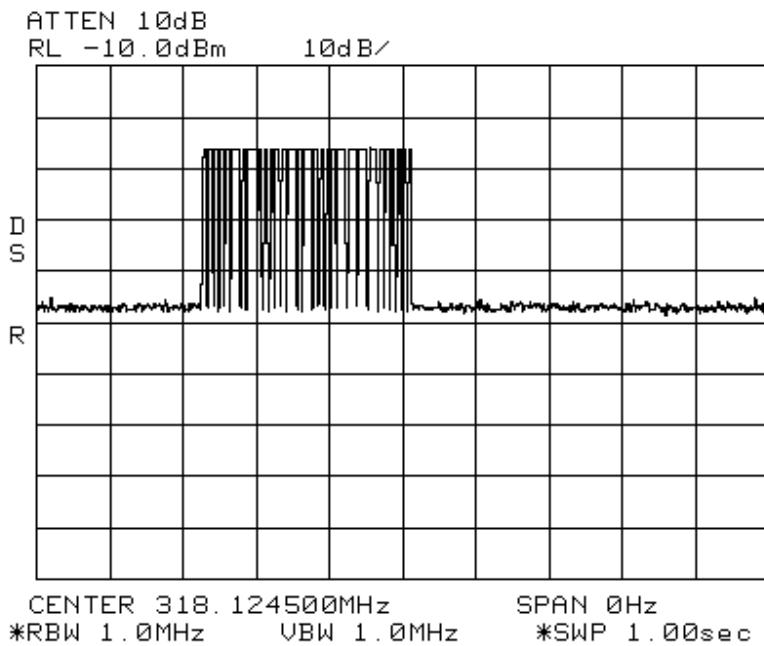

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

## Section 5. Radiated Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.231(b)
TESTED BY: Wayne Clarke	DATE: June 4, 1999

### Minimum Standard:

#### Permissible Field Strength Limits (Momentarily Operated Devices)

Fundamental Frequency (MHz)	Field Strength of Fundamental Microvolts/Meter at 3 meters; (watts)	Field Strength of Unwanted Emissions Microvolts/Meter at 3 meters; (watts)
40.66 - 40.70	2,250	225
70-130	1, 250	125
130-174	1,250 to 3,750*	125 to 375
174-260 (note 1)	3,750	375
260-470 (note 1)	3,750 to 12,500*	375 to 1,250
Above 470	12,500	1,250

#### Notes:

# Use quasi-peak or averaging meter.	For 130 - 174 MHz: $FS \text{ (microvolts/m)} = (56.82 \times F) - 6136$
* Linear interpolation with frequency F in MHz	For 260 - 470 MHz: $FS \text{ (microvolts/m)} = (41.67 \times F) - 7083$

Any emissions that fall within the restricted bands of 15.205 shall not exceed the following limits:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m} @ 3\text{m}$ )	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

**Test Results:** Complies. The worst-case emission level is 72.5 dB $\mu$ V/m @ 3m at 317.98 MHz. This is 3.3 dB below the specification limit.

**Test Data:** See attached table.

Above 1 GHz a spectrum analyzer and low noise amplifier are used to measure emission levels. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was 3 MHz.

In the case of handheld equipment, the E.U.T. is rotated in three planes to obtain worst-case results.

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

### Test Data - Radiated Emissions

Test Distance (meters) : 3		Range: A Tower		Receiver: ESVP		RBW(kHz): 120		Detector: ????			
Freq. (MHz)	Ant. *	Pol. (V/H)	Ant. HGT. (m)	Table (deg.)	RCVD Signal (dB $\mu$ V/m)	Ant. Factor (dB)**	Amp. Gain (dB)***	Duty Cycle Corr. (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
317.98	E/D3	V			54.4	23.1		5.0	72.5	75.8	3.3
317.98	E/D3	H			46.9	23.1		5.0	65.0	75.8	10.8

**Notes:**

B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole

\* Re-measured using dipole antenna.

\*\* Includes cable loss when amplifier is not used.

\*\*\* Includes cable loss.

( ) Denotes failing emission level.

**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2


*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

FCC ID: OMBETM-FA-T-4


---

**Radiated Photographs (Worst Case Configuration)**

**Front View**

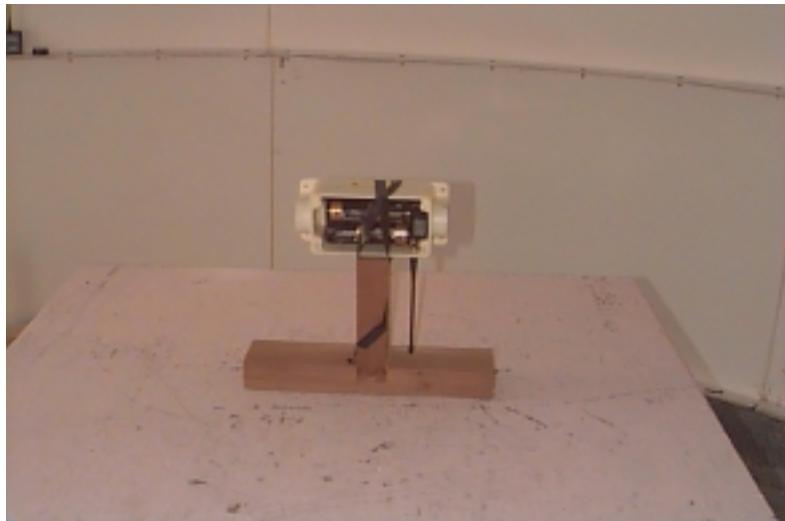

**Rear View**

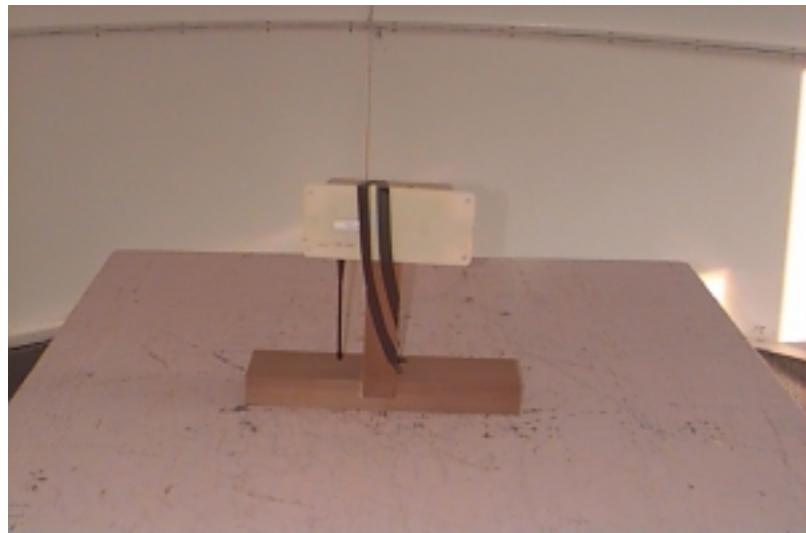

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

FCC ID: OMBETM-FA-T-4

---

## **Section 6.        Occupied Bandwidth**

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.231(c)
TESTED BY: Wayne Clarke	DATE: May 27, 1999

**Minimum Standard:**        15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

**Test Results:**        Complies. See attached graph.


**Test Data:**        See attached graph.

**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
FCC ID: OMBETM-FA-T-4

---

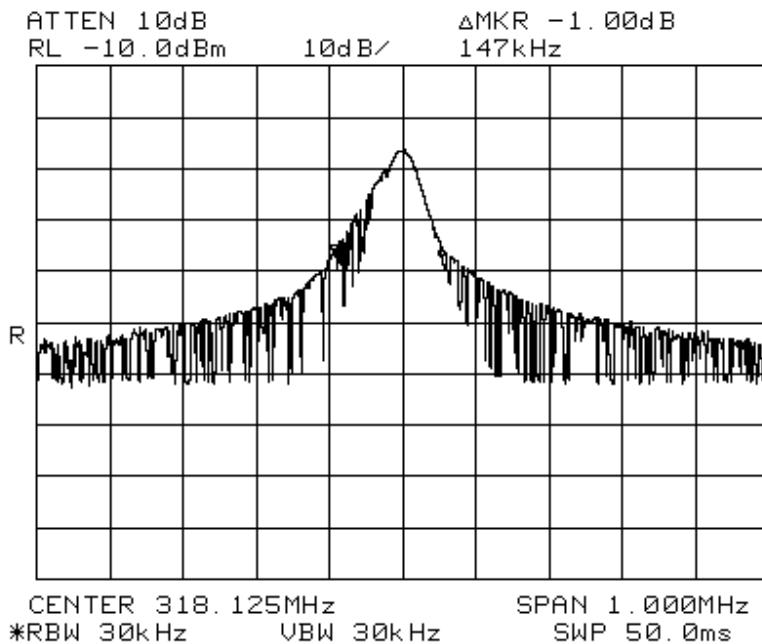

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

**Section 7. Frequency Tolerance  
Devices in the Frequency Band 40.66 - 40.77 MHz**

NAME OF TEST: Frequency Tolerance	PARA. NO.: 15.231(d)
TESTED BY:	DA

**Minimum Standard:** 15.231(d) For devices operating within the frequency band 40.66 - 40.70 MHz, the bandwidth of the emission shall be confined within the band edges and the frequency tolerance of the carrier shall be  $\pm 0.01\%$ . This frequency tolerance shall be maintained for a temperature variation of -20 degrees to +50 degrees C at normal supply voltage and for a variation in the primary power supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**Test Results:** Complies/Does Not Comply. See attached graph and data.

**Test Data:** See attached graph.

**NOT APPLICABLE**

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---


## Section 8. Periodic Alternate Field Strength Requirements

NAME OF TEST: Periodic Alternate Field Strength Requirements PARA. NO.: 15.231(e)

TESTED BY:

DATE:

**Minimum Standard:** 15.231(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (b) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except that the field strength table in paragraph (b) of this section is replaced by the following.

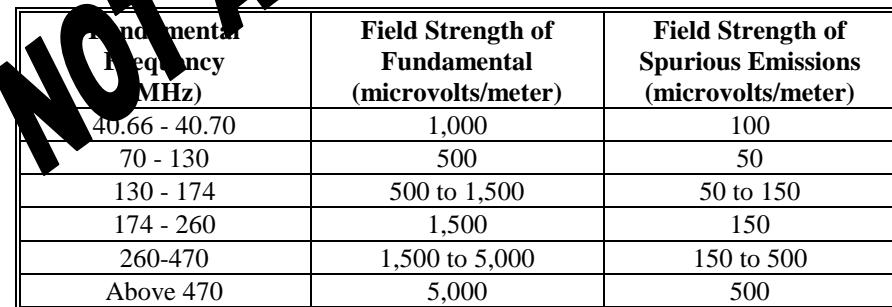

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500	50 to 150
174 - 260	1,500	150
260-470	1,500 to 5,000	150 to 500
Above 470	5,000	500

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

**Test Results:** Complies/Does Not Comply.

**Test Data:** See attached table.

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

## Section 9. Powerline Conducted Emissions

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207
TESTED BY:	DATE:

### Minimum Standard:

Frequency(MHz)	Maximum Powerline Conducted Voltage
	µV
0.45 - 30.0	250
	48

**Test Results:** Complies/Does Not Comply. See attached graphs and table.

**Test Data:** See attached graphs and table.

### Method Of Measurement: (Procedure ANSI C63.4-1992)

Measurements were made using a spectrum analyzer with 10 kHz RBW, Peak detector. Any emissions that are close to the limit are measured using a test receiver with 10 kHz bandwidth, CISPR Quasi-Peak detector.

Broadband emissions are identified by switching the receiver detector function from Quasi-Peak to Average. If the amplitude of the emission drops by 6 dB or more then the emission is classified as broadband and the Quasi-Peak level is reduced by a factor of 13 dB.

All emissions within 10 dB of limit have been recorded.

**NOT APPLICABLE**

KTL Ottawa

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

## **EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver**

FCC ID: OMBETM-FA-T-4

## Measurement Data:

**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*

*FCC ID: OMBETM-FA-T-4*

---

**Conducted Photographs (Worst Case Configuration)**

SIDE VIEW

**NOT APPLICABLE**


FRONT VIEW

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
FCC ID: OMBETM-FA-T-4


---

## Section 10. Block Diagrams

### Conducted Emissions

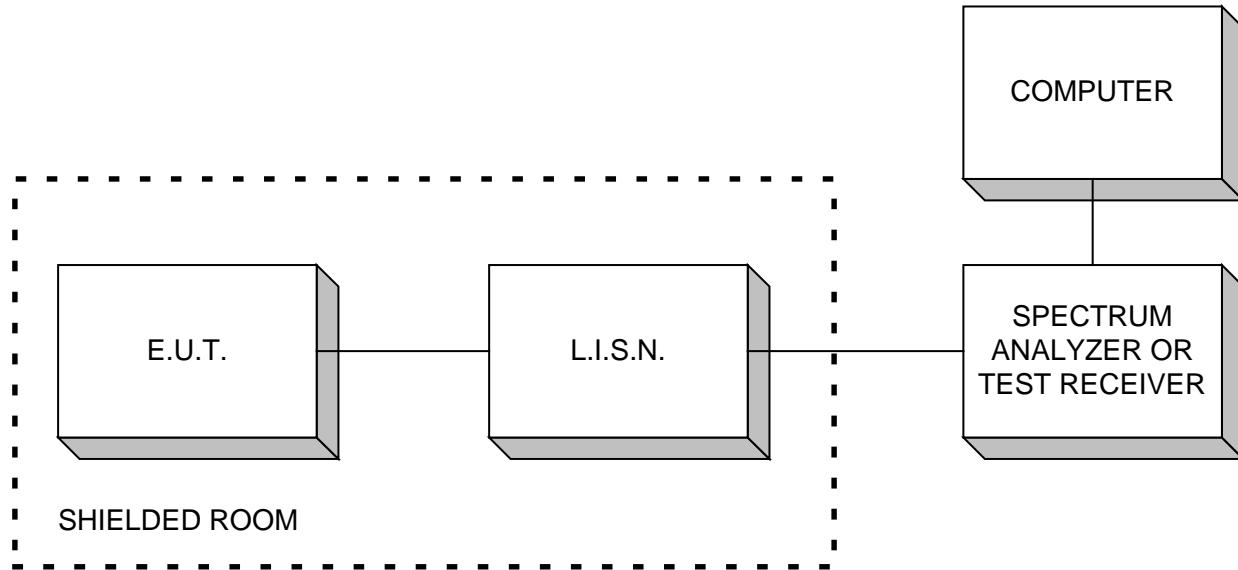


### Radiated Prescan

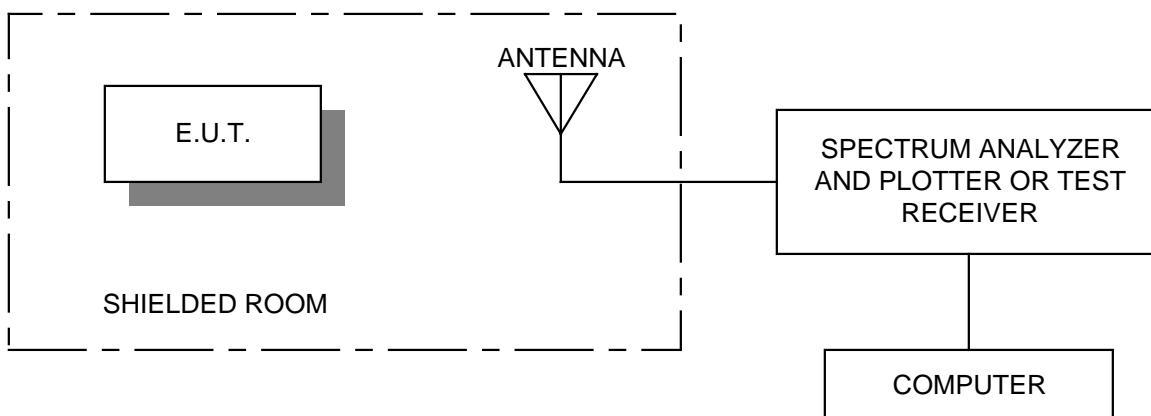


*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver  
FCC ID: OMBETM-FA-T-4*

---

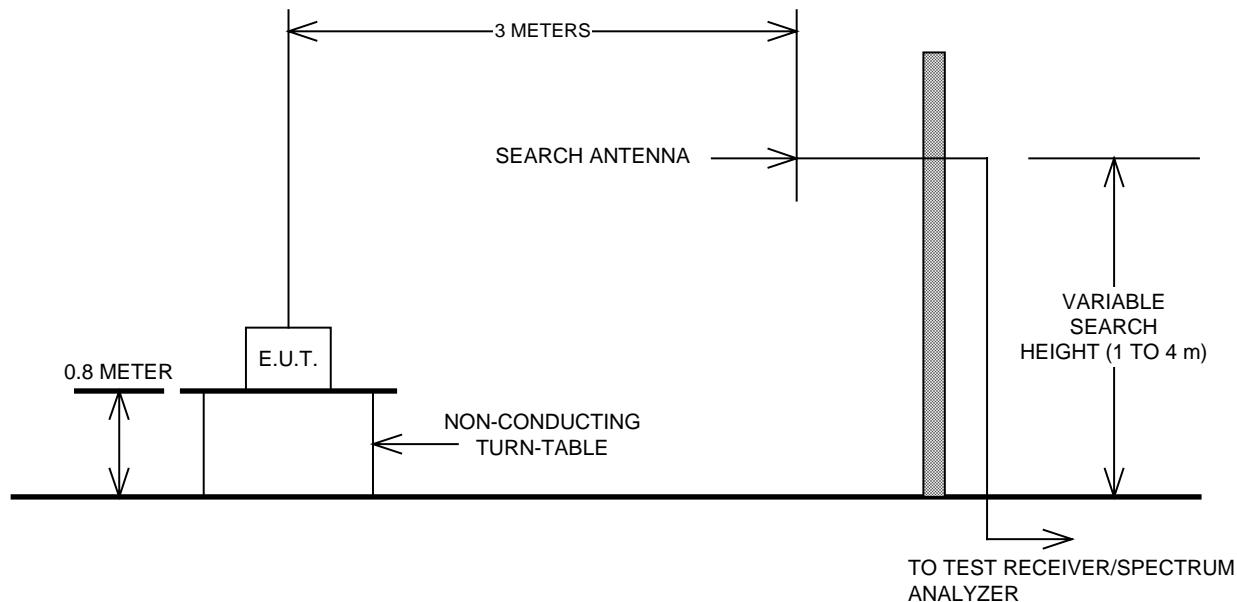**Outdoor Test Site For Radiated Emissions**

The spectrum was searched up to the 10th harmonic of the fundamental frequency of operation.

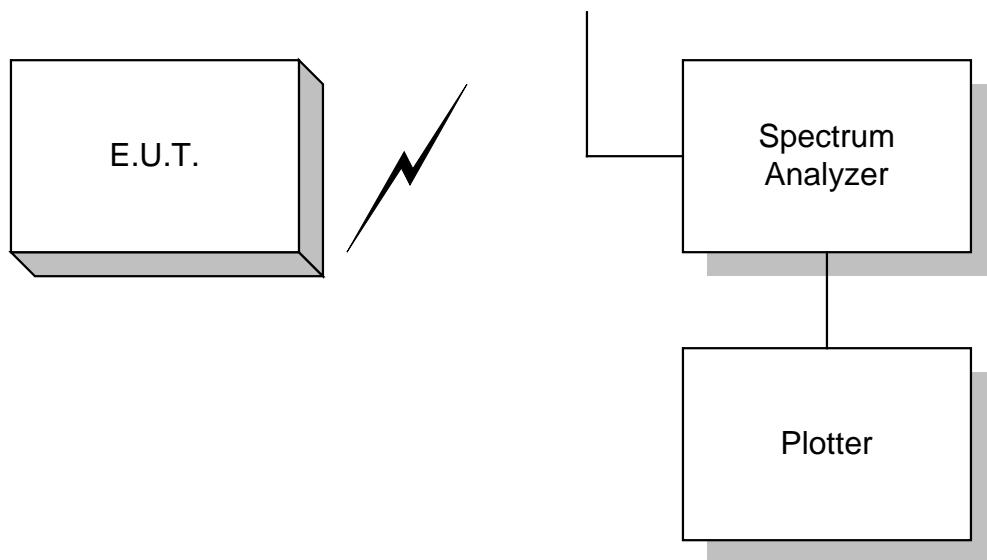**Occupied Bandwidth**

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

**Section 11.                   Test Equipment List**

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.	
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	May 20/98	July 20/99	
1 Year	Receiver	Rohde & Schwarz	ESVP	892661/014	Mar. 31/98	Mar. 31/99	
2 Year	Horn Antenna	EMCO #2	3115	4336	Oct. 30/97	Oct. 30/99	
1 Year	Log Periodic Antenna	EMCO	LPA-25	1141	July 27/98	July 27/99	
1 Year	Low Noise Amplifier	Avantek	AWT-8035	1005	Aug. 4/98	Aug. 4/99	
1 Year	Spectrum Analyzer	Hewlett Packard	8564E	3846A01407	May 31/99	May 31/00	

NA: Not Applicable

NCR: No Cal Required

COU: CAL On Use

**KTL Ottawa**

FCC PART 15, SUBPART C  
FOR LOW POWER TRANSMITTERS  
PROJECT NO.: 9R00977.2  
ANNEX A

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

**ANNEX A**

**RESTRICTED BANDS**

*EQUIPMENT: Farm Alert Implement Lighting System – Implement Transceiver*  
*FCC ID: OMBETM-FA-T-4*

---

## **Section A      Restricted Bands of Operation**

(a) Except as shown in paragraph (d) of this section , only spurious emissions are permitted in any of the frequency bands listed below:

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.49 - 0.51	16.69475-16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425-16.80475	960-1240	7.25-7.75
3.020 - 3.026	25.5-25.67	1300-1427	8.025-8.5
4.125 - 4.128	37.5-38.25	1435-1626.6	9.0-9.2
4.17725 - 4.17775	73-74.6	1645.5-1646.5	9.3-9.5
4.20725 - 4.20775	74.8-75.2	1660-1710	10.6-12.7
6.215 - 6.218	108-121.94	1718.8-1722.2	13.25-13.4
6.31175 - 6.31225	123-138	2220-2300	14.47-14.5
8.291 - 8.294	149.9-150.05	2310-2390	15.35-16.2
8.362 - 8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625 - 8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425 - 8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29 - 12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975 - 12.52025	240-285	3345.8-3358	36.43-36.5
12.57675 - 12.57725	322-335.4	3600-4400	Above 38.6
13.36 - 13.41			