

ANTENNA INFORMATION

OEM	NA
ODM	Compal
Platform model name	MP10-XENON-C
Intel platform (ex: Yes, No or NA)	NA
Platform type (ex: regular NB, convertible PC, AIO...etc)	Tablet
SAR minimum separation (mm)	NA

Antenna manufacturer	INPAQ Technology Co.,Ltd.		
Address	2F., No.135, Ligone St., Beitou Dist., Taipei City 112019, Taiwan(R.O.C)		
Antenna Part number	DC33002Y02H (WA-P-LA-03-327)		
Antenna type (ex: PIFA, Dipole...etc)	PIFA		

Antenna Peak gain w/ cable loss (dBi)*									
	2400MHz	2450MHz	2500MHz						
BT	2.61	2.32	2.28						


Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
BT	01-13LC2-0P4	245	1.13	50 ohm	I-PEX

* 3D Antenna Peak Gain required being test in system basis.


1. Test & System Description

1.1 Measurement Method and System

Test setting:

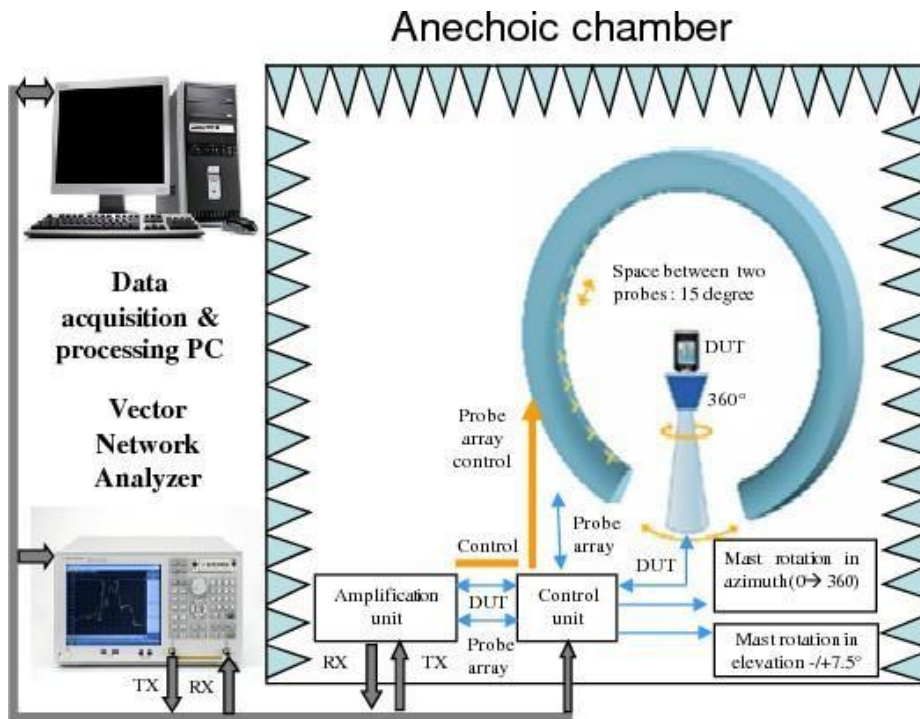

1.2 Test setup

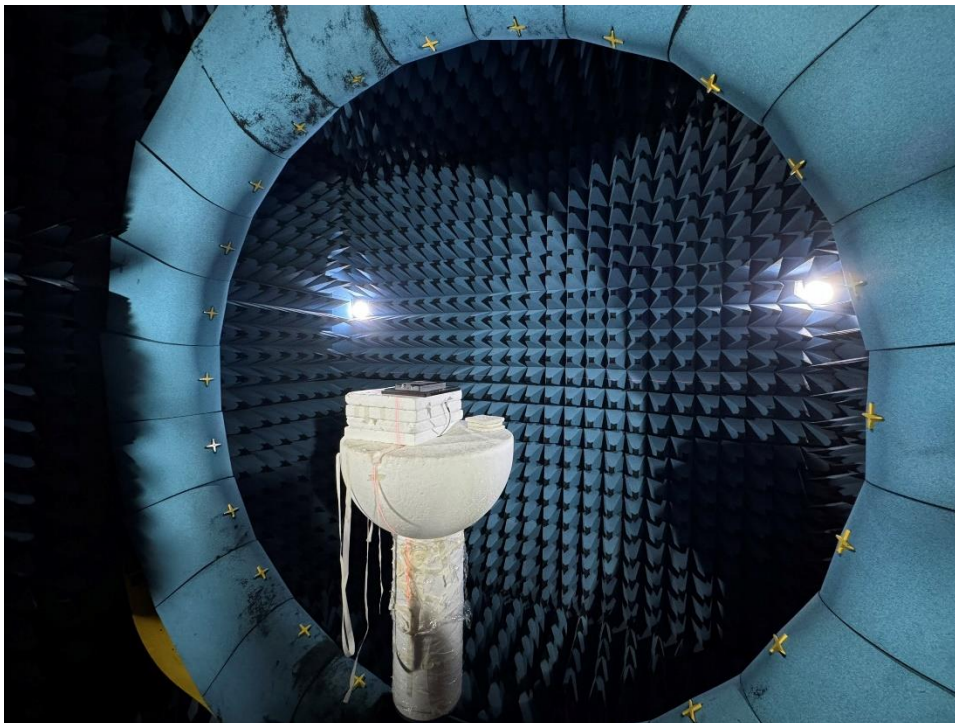

1.3 Equipment list


Device	Manufacturer
■ SATIMO SG24 system : 0.4 to 6 GHz	MVG
■ Control unit	MVG
■ Power and control unit	MVG
■ Tx and Rx amplification units	MVG
■ Instrumentation rack	MVG
■ Uninterruptible power supply	FT
■ Reference horns	MVG
■ Vector Network Analyzer	Agilent E5071C

2. Radiation characteristics of antenna loaded in Host Platform

BT Antenna


- BT Antenna: 2400MHz

Peak Gain	Total
	2.61

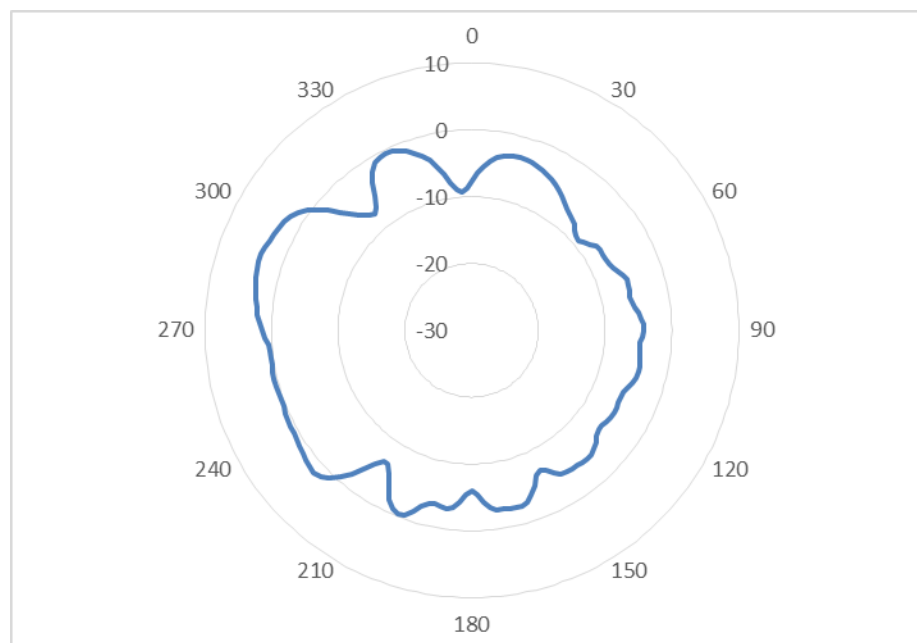

■ BT Antenna: 2450MHz

Peak Gain	Total
	2.32

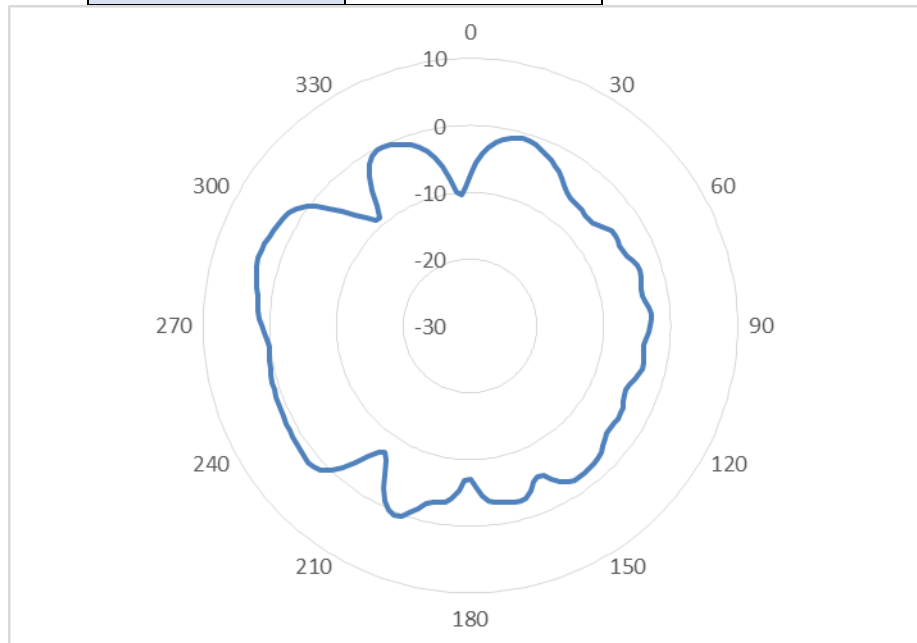

■ BT Antenna: 2500MHz

Peak Gain	Total
	2.28

