

January 24, 2019


Listen Technologies Corporation
14912 Heritagecrest Way
Bluffdale, UT 84065-4818

Dear Guy Leishman,

Enclosed is the EMC Wireless test report for compliance testing of the Listen Technologies Corporation, LKR-11 and LKR-12 as tested to the requirements of Title 47 CFR 2015 edition for Part 15, Subpart D for Intentional Radiators.

Thank you for using the services of Eurofins | MET Labs, Inc. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,
EUROFINS | MET LABS, INC.



Joel Huna
Documentation Department

Reference: (\\Listen Technologies Corporation\\EMCS100559-FCC15D)

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins | MET Labs, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Electromagnetic Compatibility Criteria Test Report

for the

**Listen Technologies Corporation
Model LKR-11 and LKR-12**

Tested under
the FCC Rules contained in
Title 47 of the CFR, Part 15. Subpart D
for Intentional Radiators

MET Report: EMCS100559-FCC15D

January 24, 2019

Prepared For:

**Listen Technologies Corporation
14912 Heritagecrest Way
Bluffdale, UT 84065-4818**


Prepared By:
Eurofins | MET Labs, Inc.
3162 Belick St.
Santa Clara, CA 95054

**Electromagnetic Compatibility Criteria
Test Report**

for the

**Listen Technologies Corporation
Model LKR-11 and LKR-12****Tested Under**
the FCC Rules contained in
Title 47 of the CFR, Part 15. Subpart D
for Intentional RadiatorsJames Borrott, Project Engineer
Electromagnetic Compatibility LabJoel Huna
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15 Subpart D, of the FCC Rules under normal use and maintenance.

John Mason,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 24, 2019	Initial Issue.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	4
	C. Test Site	5
	D. Measurement Uncertainty	5
	E. Description of Test Sample.....	5
	F. Equipment Configuration.....	7
	G. Support Equipment	7
	H. Ports and Cabling Information.....	7
	I. Mode of Operation.....	8
	J. Method of Monitoring.....	8
	K. Modifications	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard.....	8
	L. Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	9
	§ 15.323(d)(1) Spurious Emissions	10
IV.	Test Equipment	12
V.	Certification & User's Manual Information	14
	A. Certification Information	15
	B. Label and User's Manual Information	19

List of Tables

Table 1. Executive Summary of EMC Part 15 Subpart D Compliance Testing	2
Table 2. Uncertainty Calculations Summary	5
Table 3. Equipment Configuration	7
Table 4. Support Equipment	7
Table 5. Ports and Cabling Information	7

List of Plots

Plot 1. Radiated Emissions, 30 MHz – 1000 MHz, LKR-11	11
Plot 2. Radiated Emissions, 30 MHz – 1000 MHz, LKR-12	11

List of Figures

Figure 1. Block Diagram of Test Configuration, LKR-11	6
Figure 2. Block Diagram of Test Configuration, LKR-12	6

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Listen Technologies Corporation LKR-11 and LKR-12, with the requirements of Part 15 Subpart D. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the LKR-11 and LKR-12. Listen Technologies Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the LKR-11 and LKR-12, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart D, in accordance with Listen Technologies Corporation, purchase order number 0006309.

Requirement	FCC Part	Test Procedure (Section numbers refer to ANSI C63.17 unless otherwise noted)	Result
Spurious emissions conducted	15.323 (d) (1) & 15.323 (d) (2)	6.1.6	Compliant

Table 1. Executive Summary of EMC Part 15 Subpart D Compliance Testing

II. Equipment Configuration

A. Overview

Eurofins | MET Labs, Inc. was contracted by Listen Technologies Corporation to perform testing on the LKR-11 and LKR-12, under Listen Technologies Corporation's purchase order number 0006309.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Listen Technologies Corporation, LKR-11 and LKR-12.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	LKR-11 and LKR-12		
Model(s) Covered:	LKR-11 and LKR-12		
EUT Specifications:	Primary Power: 3.7 VDC Li-Ion Battery		
	FCC ID: OMDLK1-001		
	Operating Mode:	DECT wireless technology based module	
	Type of Modulations:	DECT	
	Equipment Code:	PUB	
	EUT power:	0.03 watts	
	EUT Frequency Ranges:	1921 – 1928MHz	
Analysis:	The results obtained relate only to the item(s) tested.		
Environmental Test Conditions:	Temperature: 15-35° C		
	Relative Humidity: 30-60%		
	Barometric Pressure: 860-1060 mbar		
Evaluated by:	James Borrott		
Report Date(s):	January 24, 2019		

B. References

CFR 47, Part 15, Subpart D	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.17:2013	American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories

C. Test Site

All testing was performed at Eurofins | MET Labs, Inc., 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at Eurofins | MET Labs.

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

Table 2. Uncertainty Calculations Summary

E. Description of Test Sample

The LKR-11 and LKR-12, Equipment Under Test (EUT) is described as the following:

LKR-11 ListenTALK Receiver Pro

The term LKR-11 ListenTALK Receiver Pro refers to a ListenTALK hand-held unit that can be used as a participant unit that can only receive audio from a ListenTALK group. The LKR-11 is a full featured listen only unit.

LKR-12 ListenTALK Receiver Basic

The term LKR-12 Listen TALK Receiver Basic refers to a ListenTALK hand-held unit that can be used as a participant unit that can only receive audio from a ListenTALK group. The LKR-12 is a limited featured listen only unit.

The ListenTALK device is a hand held DECT unit that communicates to other ListenTALK units (one or many) using a headset or internal microphone for the audio. The LK-1 has a PTT button for two way communication. The LKR-11 and LKR-12 do not have a PTT button. Most applications will be for tour groups in a portable setting.

Note: The LK-1 was only used as support equipment.

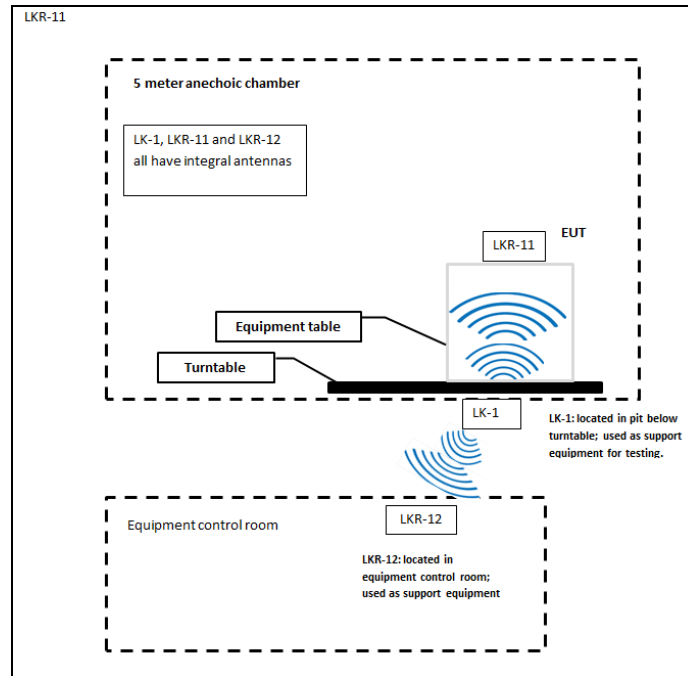


Figure 1. Block Diagram of Test Configuration, LKR-11

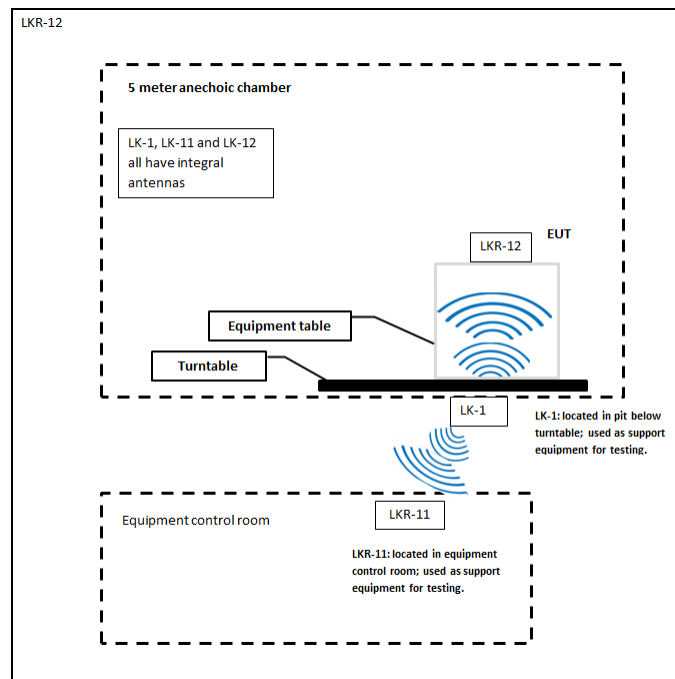


Figure 2. Block Diagram of Test Configuration, LKR-12

F. Equipment Configuration

The EUT was set up as outlined in Figures 1 and 2. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Country
LK-1-A0		ListenTALK LK-1	LK-1-A0	LK-1-A0	D18A7AA0489	USA
LKR-11-A0		ListenTALK LKR-11-A0	LKR-11-A0	LKR-11-A0	E18A0B00021	USA
LKR-12-A0		ListenTALK LKR-12-A0	LKR-12-A0	LKR-12-A0	E18A0B10020	USA
		Headset/Earpiece				

Table 3. Equipment Configuration

G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
LA-482	Docking Station/LA-482	Listen Tech	LA-482	N/A
LA-210	Docking Station PSU	Listen Tech	LA-210	N/A
LPT-A110	USB B cable	Listen Tech	LPT-A110	N/A
LA-422	USB micro cable	Listen Tech	LA-422	N/A
The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.				

Table 4. Support Equipment

H. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	Headset	Headset earpiece	1	1	1	Yes	Headset
2	USB	4 conductor	1	2	2	Yes	USB with Power
3	Charging & USB (Bottom)	4 Connections	4 Ports	Port	Port connection	No	Charging and USB

Table 5. Ports and Cabling Information

I. Mode of Operation

The ListenTALK units are put in continuous mode for EMC testing.

The ListenTALK LK-1 device has a Leader and Participant mode. The LKR-11 & LKR-12 are Participant units only. In Leader mode the audio is always transmitting unless the MUTE button is pressed. The Leader can transmit to one or many ListenTALK units (LKR-11 & LKR-12).

J. Method of Monitoring

There is an antenna ICON on the display screen of the ListenTALK LK-1 device that will show if a unit is linked to another unit (LK-1, LKR-11, & LKR-12) and at what level of RSSI to each unit.

The connection between the LKR-11 or LKR-12 and the LK-1 support device is monitored by verifying that audio is being transmitted.

K. Modifications**a) Modifications to EUT**

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the standard.

L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Listen Technologies Corporation upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.323(d)(1) Spurious Emissions

Test Criteria: §15.323(d)(1): Out of Band Emissions

Emissions shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the band edge and 1.25 MHz above or below the band; 50 dB between 1.25 and 2.5 MHz above or below the band; and 60 dB at 2.5 MHz or greater above or below the band.

§15.323(d)(2): In-Band Emissions


Emissions inside the band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth, the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth, the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the band edge, the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. “B” is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: For both in and out of band emissions the EUT was connected directly to a spectrum analyzer. The RBW of the spectrum analyzer was set to a minimum 1% of the emission band width.


Test Results: Equipment compliant with the Spurious Emission limits of § 15.323(d)(1).

Test Engineer(s): James Borrott

Test Date(s): September 14, 2018

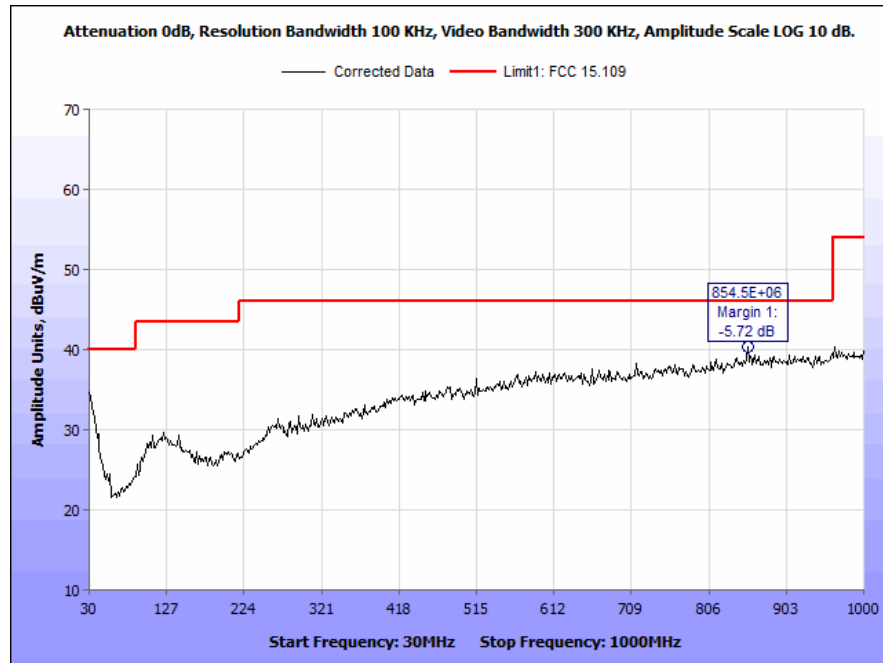

Plot 1. Radiated Emissions, 30 MHz – 1000 MHz, LKR-11

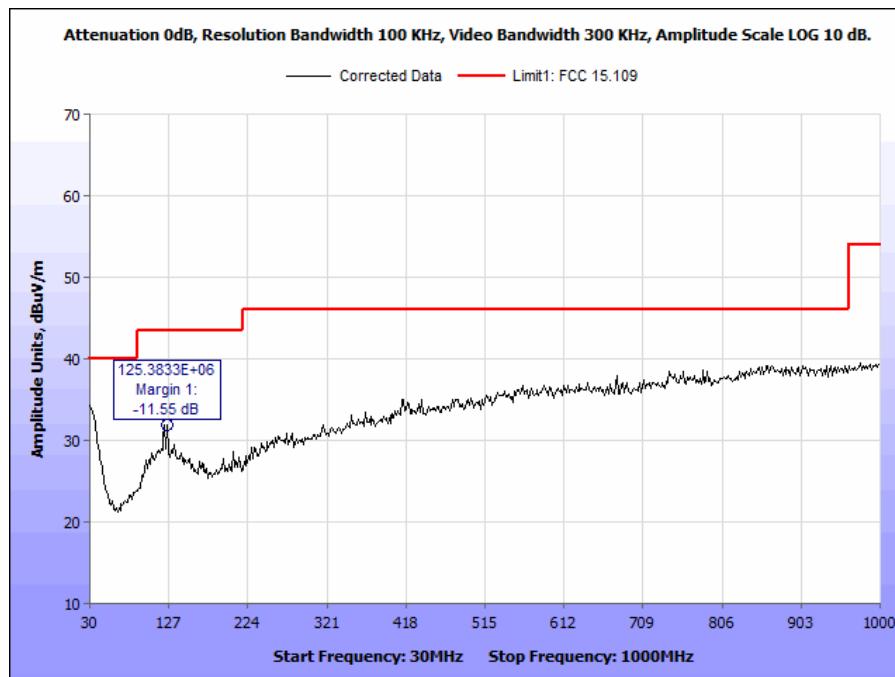

Plot 2. Radiated Emissions, 30 MHz – 1000 MHz, LKR-12

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

Asset#	Description	Manufacturer	Model	Last Cal	Next Cal
1S2600	Bilog Antenna	Teseq	CBL6112D	11/28/2016	11/28/2018
1S2482	5 Meter Chamber (NSA)	Panashield	5 Meter Semi-Anechoic Chamber	See Note	
1S2399	Turntable Controller	SUNOL SCIENCE	SC99V	See Note	
1S3962	Spectrum Analyzer (PSA)	Keysight/Agilent	E4448A	4/25/2018	4/25/2019
1S4070	Digital Barometer	Control Co	6530	6/22/2018	6/22/2020

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

End of Report