

APPENDIX B
: PLOTS OF CONDUCTED EMISSIONS

■ Test Mode : 1280*1024 / 75Hz

Scan Settings (1 Range)


Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN ON

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 25

Acc Margin: 60dB

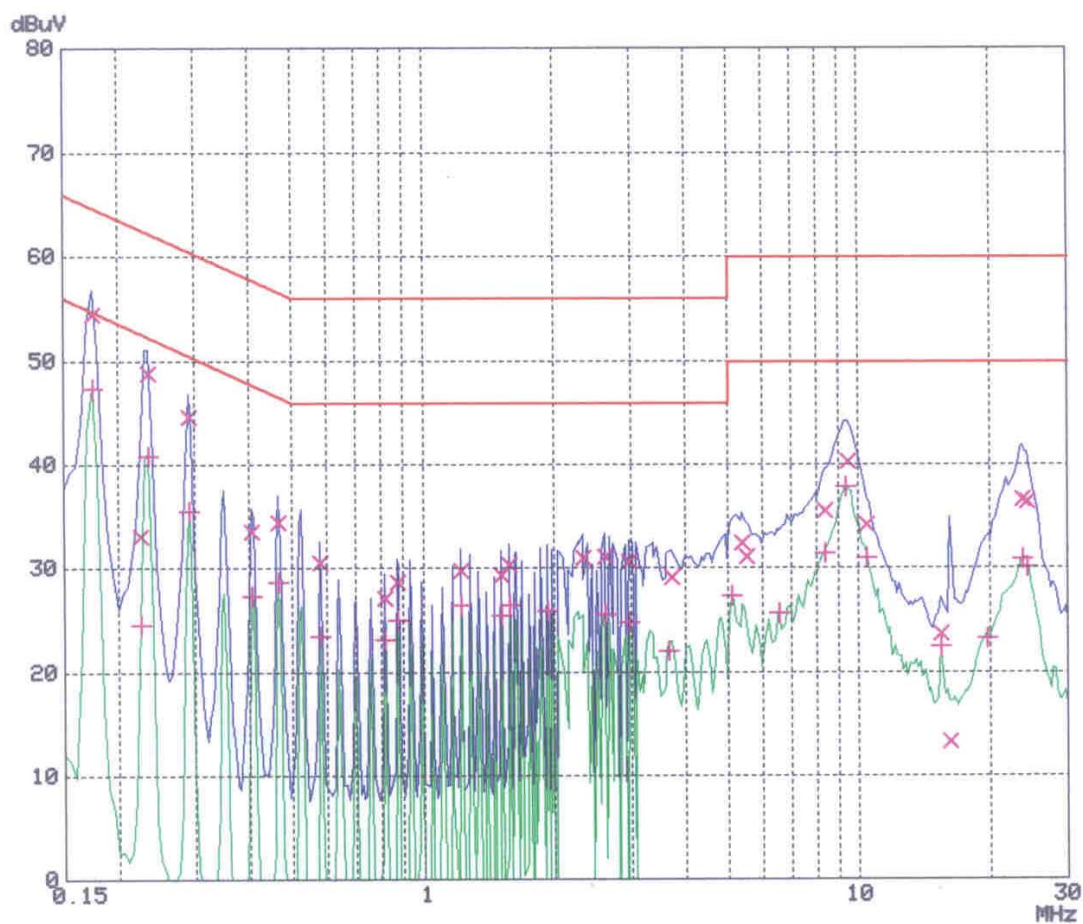


< Hot line >

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN ON

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 60dB

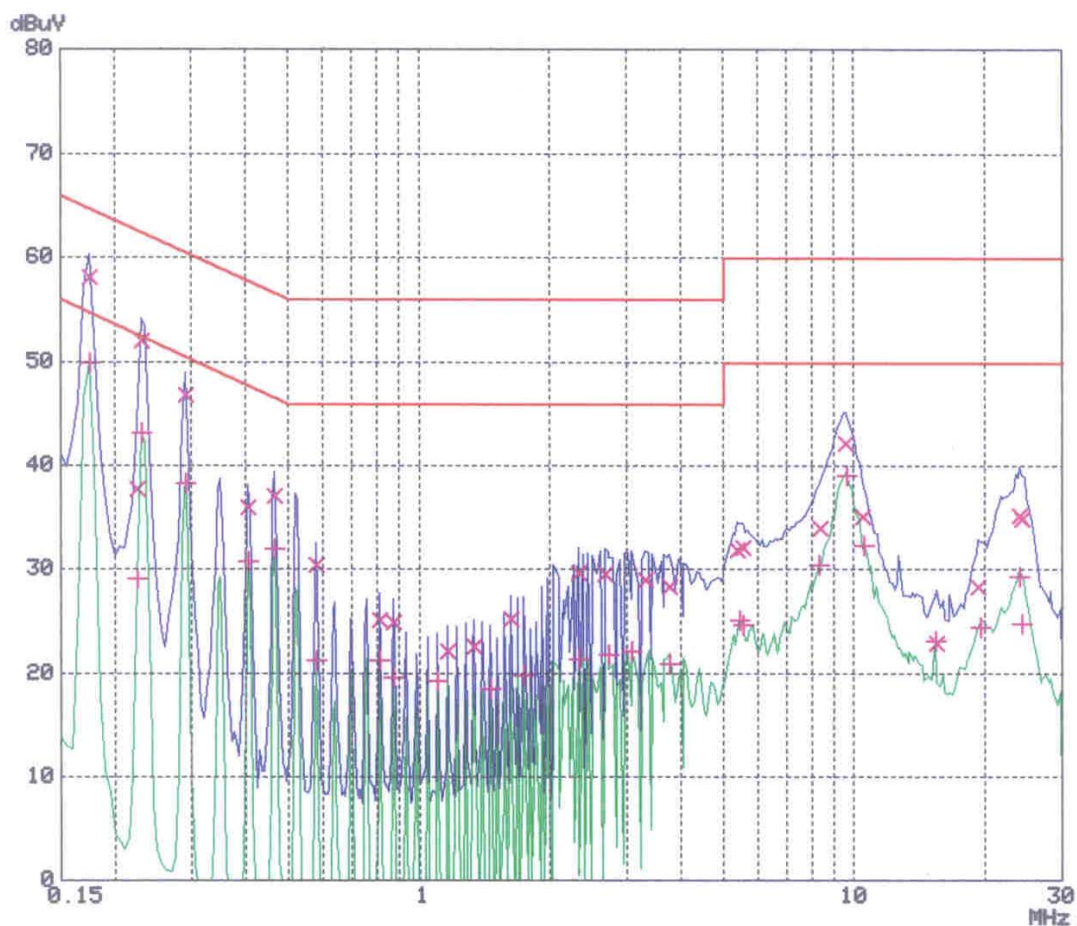


< Neutral line >

■ Test Mode : 1024*768 / 75Hz

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO LN	ON

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

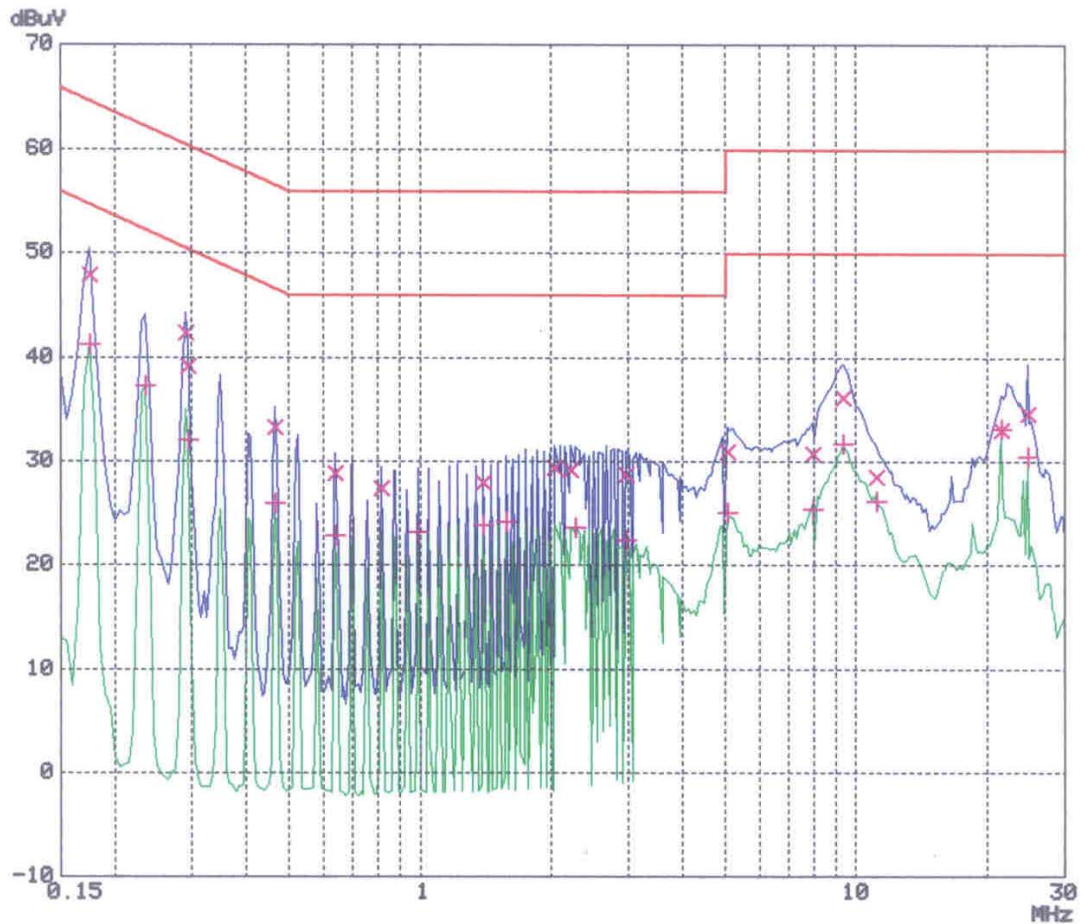


< Hot line >

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN ON


Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

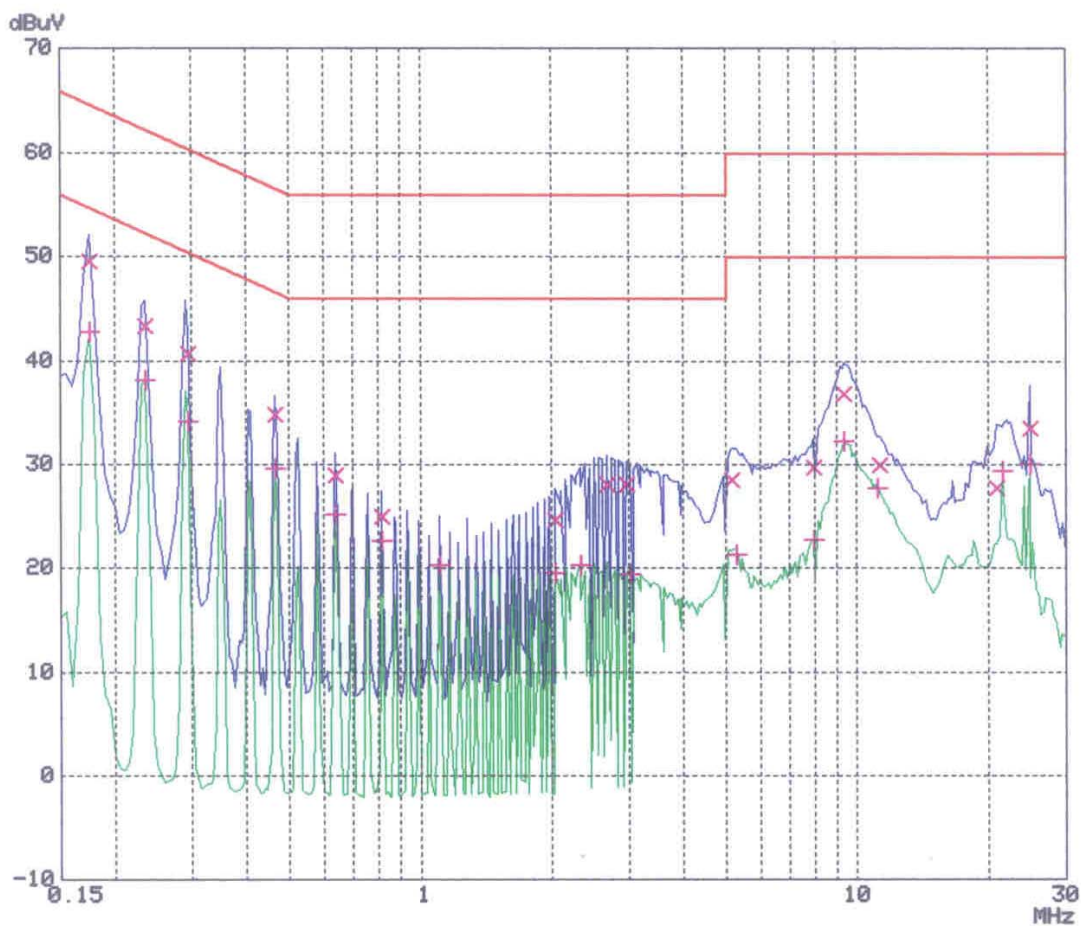

< Neutral line >

■ Test Mode : 800*600 / 60Hz

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp
150k 30M 5k 9k PK+AV 20ms AUTO LN ON
Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

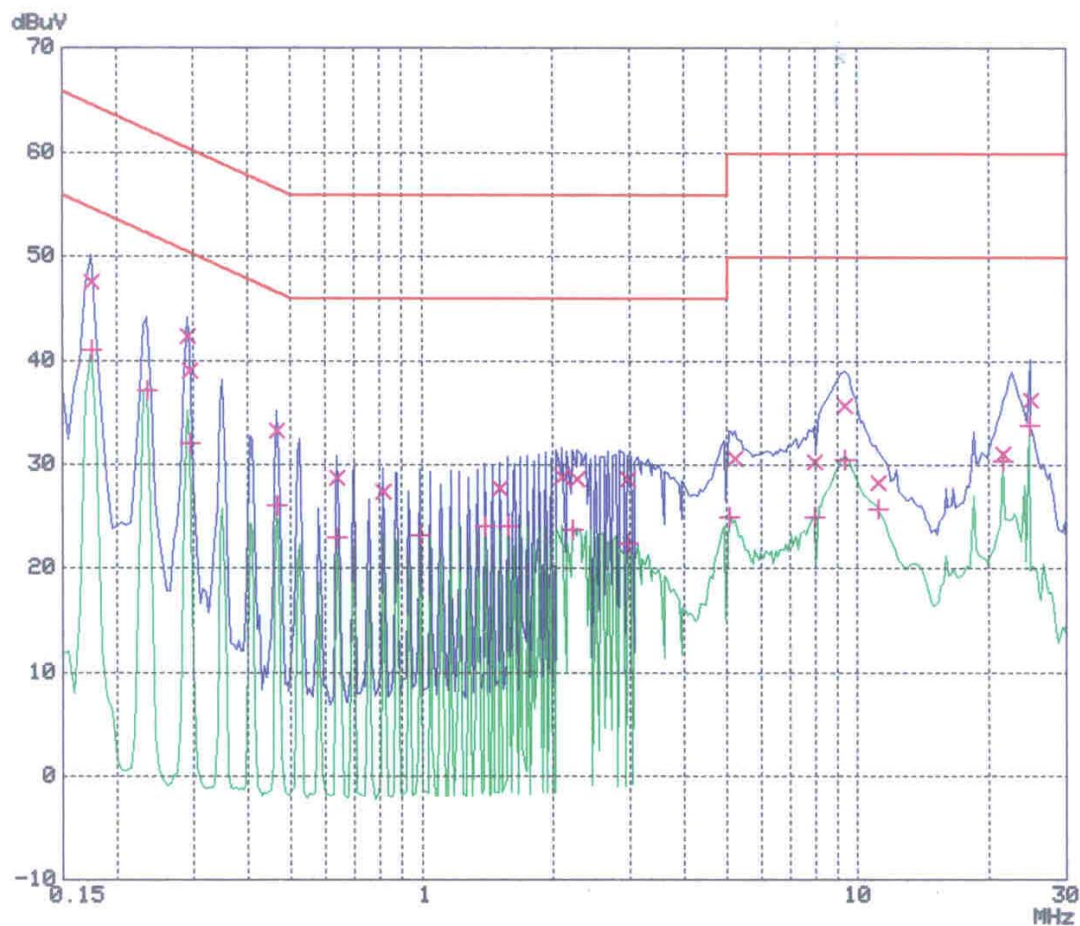


< Hot line >

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	5k	9k	PK+AV	20ms	AUTO	LN ON

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

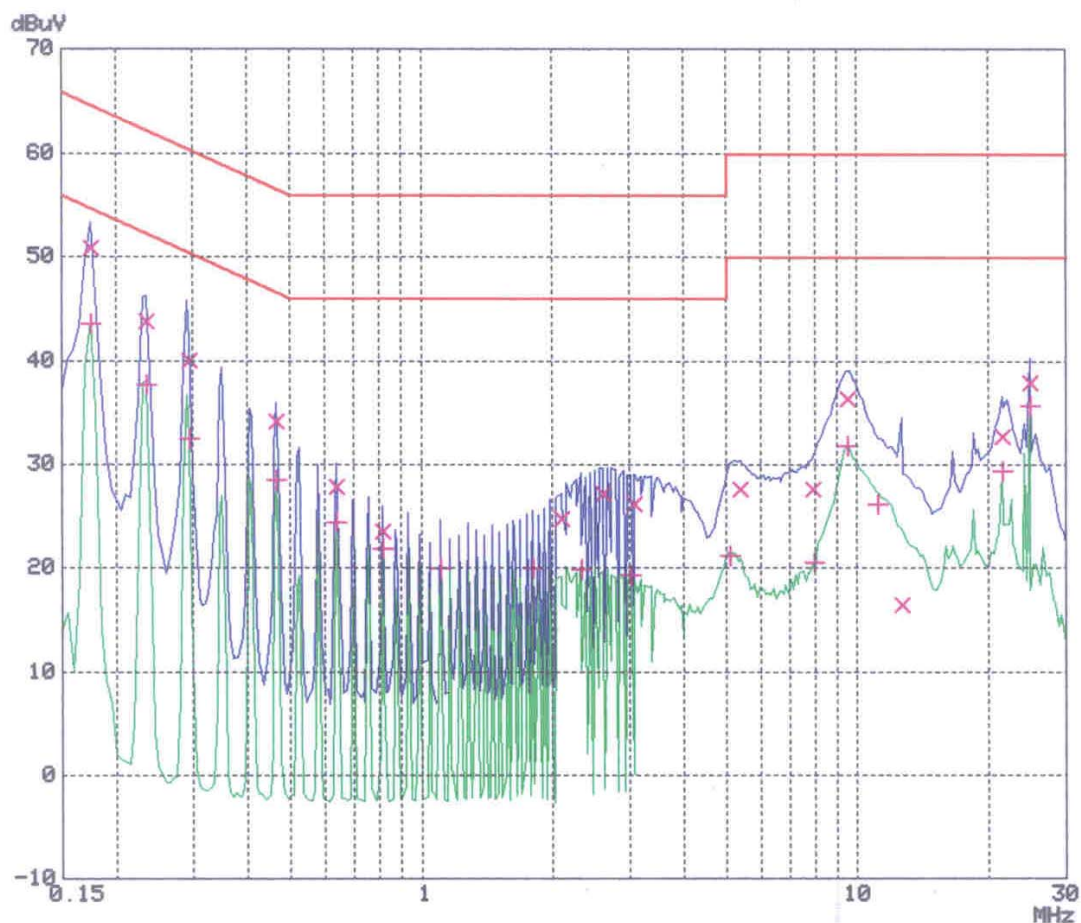

< Neutral line >