
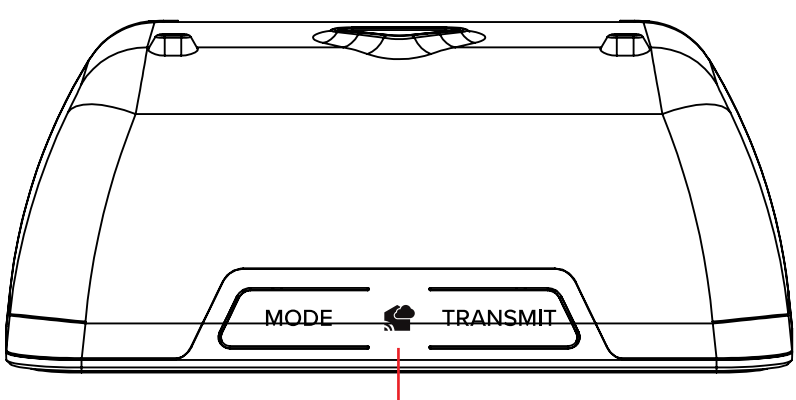


LA CROSSE®
TECHNOLOGY

INTERIOR SENSOR
TEMPERATURE & HUMIDITY





Silkscreen
PMS 4276 C

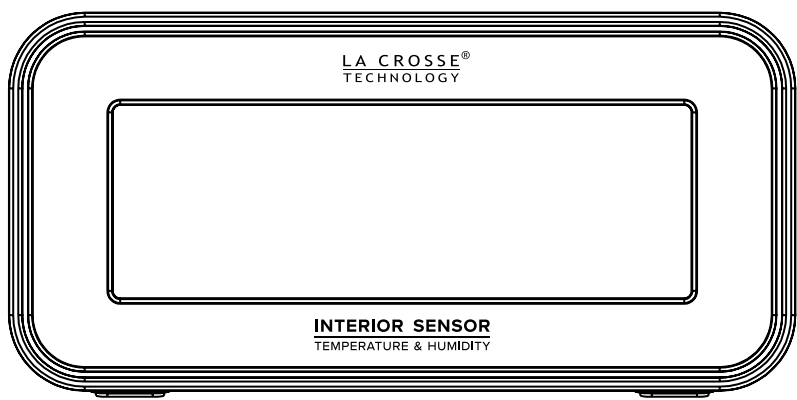

MODE

TRANSMIT



Silkscreen PMS 4276 C

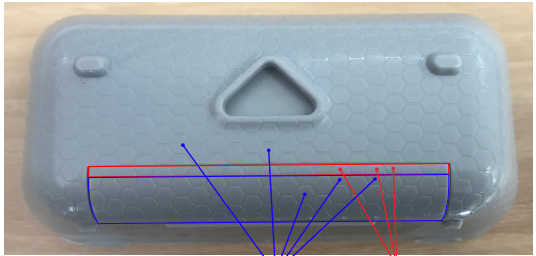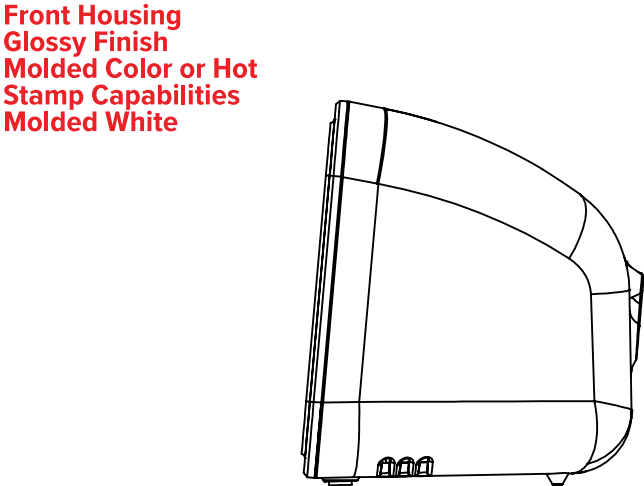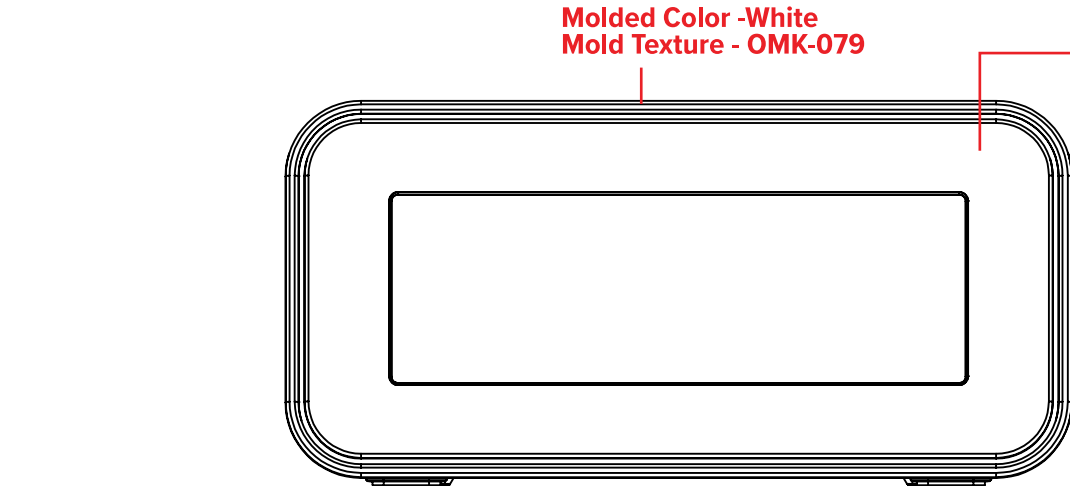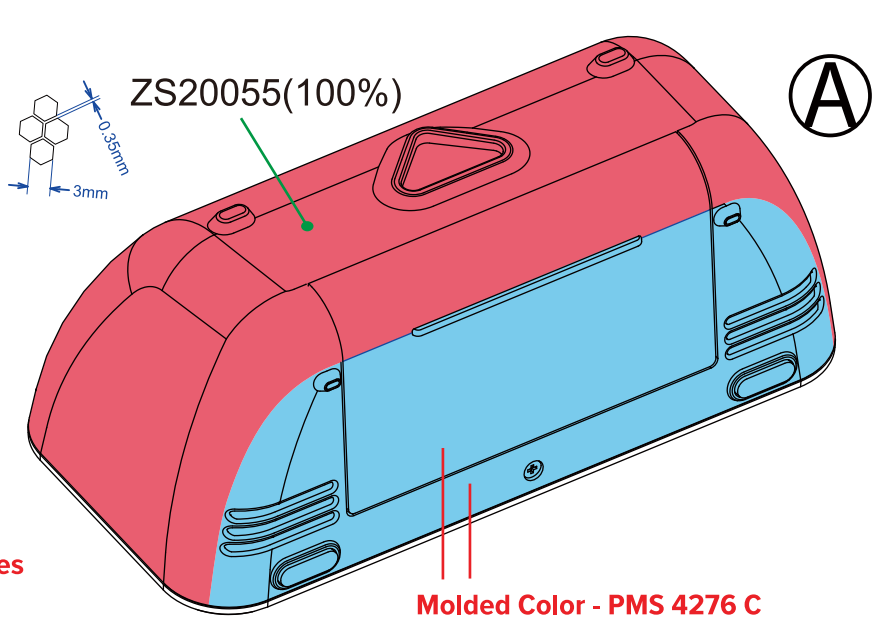

Example LCD


Segments

Silkscreen Elements

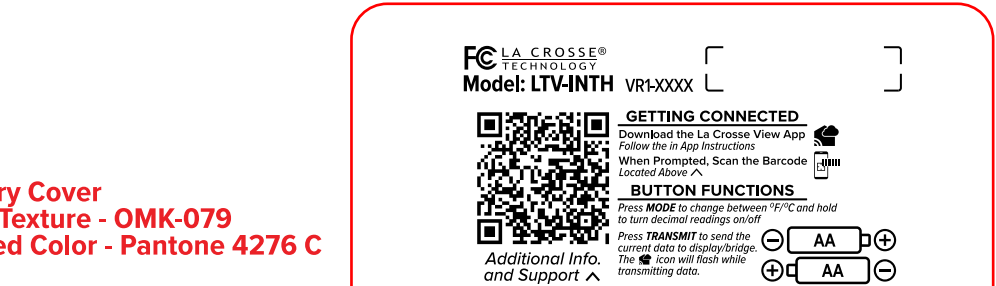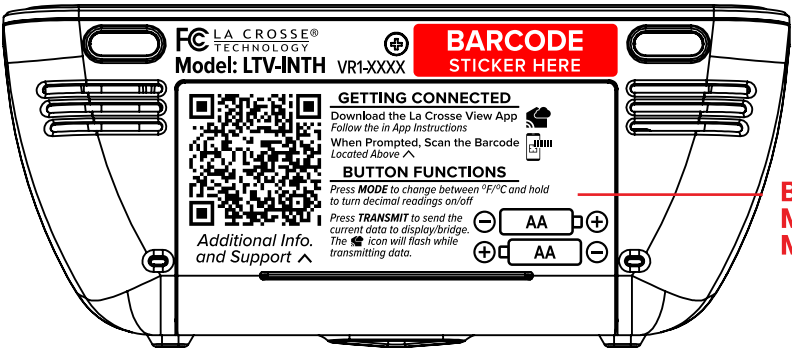

Made in China

In-Mold

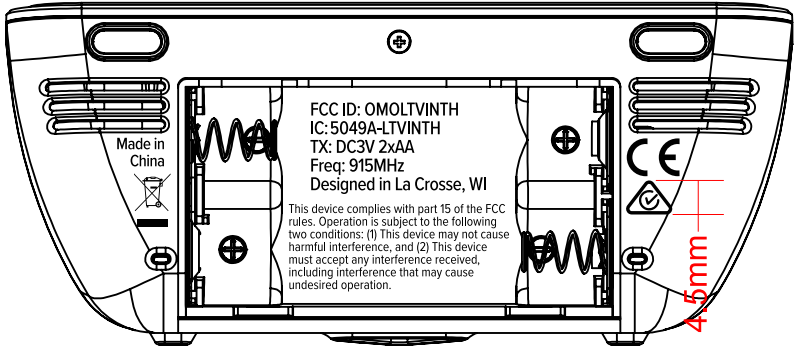

CE

In-Mold

FCC ID: OMOLTVINTH
IC: 5049A-LTVINTH
TX: DC3V 2xAA
Freq: 915MHz
Designed in La Crosse, WI

Laser Printed

| | |
|----------|------------------------------------|
| DRY | Too Dry: Less than or equal to 25% |
| SEMI-DRY | Dry: 26% to 39% |
| COMFORT | Comfort: 40% to 75% |
| SEMI-WET | Wet: 76% to 83% |
| WET | Too Wet: 84% to 99% |

Label Location

