

15.247(c) & 15.109(b) Field strength of spurious emissions:

REQUIREMENTS: Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	PEAK FIELD STRENGTH dBuV/m	ATT. LEVEL dB	MARGIN dB	ANT.
YAGI ANTENNA							
2413.00	83.50	1.09	29.03	113.62	0.0	0.0	V
4824.00R	16.70	1.45	33.93	52.08	61.54	1.92	V
7237.00	2.90	1.82	36.64	41.36	72.26	12.64	V
9650.00	1.00	2.11	38.60	41.71	71.91	12.29	H
14476.00R	3.50	2.57	39.29	45.35	68.27	8.65	H
2438.00	82.30	1.10	29.09	112.49	0.0	0.0	V
4876.00R	15.20	1.46	33.99	50.65	61.84	3.35	V
7314.00R	2.50	1.83	36.73	41.06	71.43	12.94	V
9752.00	-1.00	2.12	38.66	39.79	72.7	14.21	V
14628.00	1.40	2.58	39.06	43.04	69.45	10.69	H
2472.00	80.50	1.10	29.18	110.78	0.0	0.0	V
4944.00R	14.90	1.47	34.06	50.43	60.35	3.57	V
7416.00R	2.00	1.84	36.84	40.69	70.09	13.31	V
9888.00	0.60	2.14	38.75	41.49	69.29	12.51	H
PARABOLIC ANTENNA							
2413.00	87.70	1.09	29.03	117.82	0.0	0.0	V
4824.00R	15.30	1.45	33.93	50.68	67.14	3.32	V
7237.00	2.80	1.82	36.64	41.26	76.56	12.74	V
9650.00	1.00	2.11	38.60	41.71	76.11	12.29	V
14476.00R	3.90	2.57	39.29	45.75	72.07	8.25	H
2455.00	84.50	1.10	29.14	114.74	0.0	0.0	V
4910.00R	15.70	1.47	34.02	51.19	63.55	2.81	V
7365.00R	2.90	1.84	36.79	41.52	73.22	12.48	V
9820.00	0.60	2.13	38.71	41.44	73.3	12.56	H
14731.00	2.00	2.59	38.90	43.50	71.24	10.50	H
2472.00	83.60	1.10	29.18	113.88	0.0	0.0	V
4944.00R	14.60	1.47	34.06	50.13	63.75	3.87	V
7416.00R	2.00	1.84	36.84	40.69	73.19	13.31	V
14832.00	1.00	2.60	38.75	42.35	71.53	11.65	H

NOTE: ATTENUATION = PEAK CARRIER LEVEL - PEAK LEVEL OF HARMONIC
MARGIN = 54dBuV/M - PEAK LEVEL OF HARMONIC

APPLICANT: TELLUMAT (PTY) LIMITED.

FCCID: ONJMDR2400-EHD

REPORT #: T:\CUS\T\TELLUMAT\TEL293A9\SID

DATE: JULY 23, 1999


PAGE #: 8

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 except the spread spectrum portion was connected to its custom antenna at a height of 1.5 meters. The spectrum was scanned from 30MHz to at least the tenth harmonic of the fundamental. Above 1.0GHz the RBW was 1.0MHz and the VBW was 10Hz. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th LANE, GAINESVILLE, FL 32605.

2.993(a)(b)

2.993(a)(b) Continued Field strength of spurious emissions:

Method of Measuring Radiated Spurious Emissions

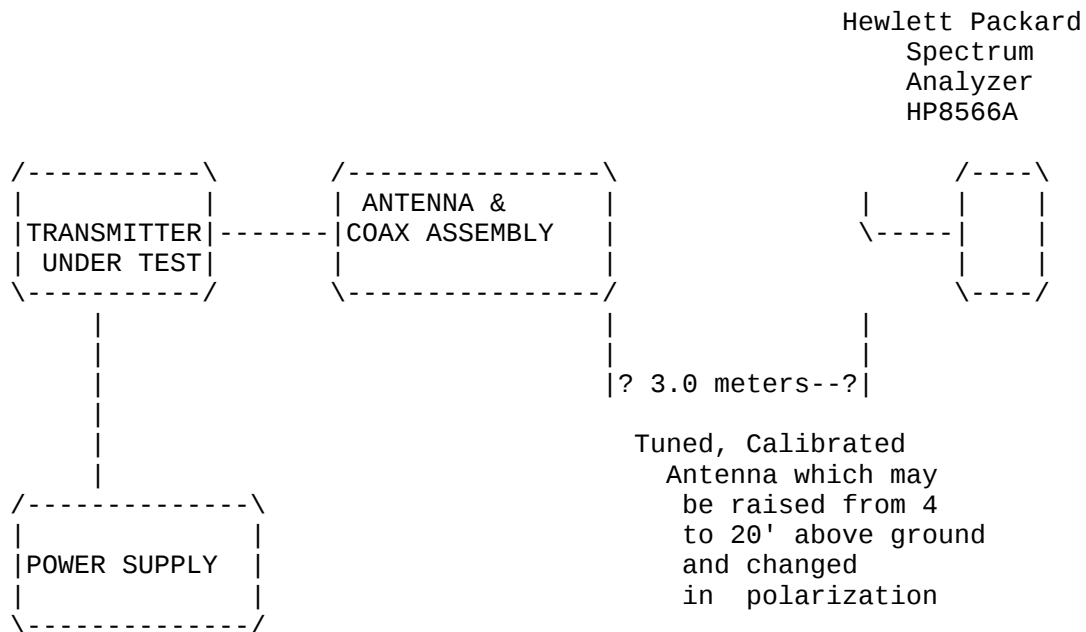

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: TELLUMAT (PTY) LIMITED.

FCCID: ONJMDR2400-EHD

REPORT #: T:\CUS\T\TELLUMAT\TEL293A9\SID

DATE: JULY 23, 1999

PAGE #: 9