
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2025/05/12

1_RF 2.4GHz_2.4G Wireless-2M_CH0_Left-side_0mm_ANT Main**DUT: Mouse; Type: P723**

Communication System: UID 0, WLAN 2.4G; Frequency: 2402 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(6.39, 8.11, 6.76) @ 2402 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2024/11/18
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0323 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.236 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 0.0331 W/kg

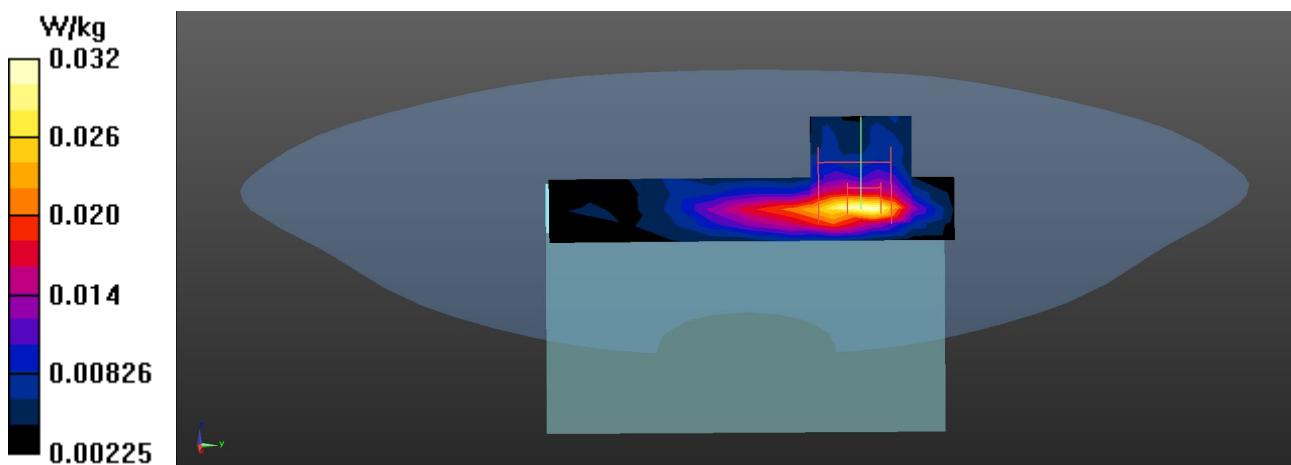

Test Laboratory: DEKRA

Date: 2025/05/12

5_Bluetooth_BLE-1M_CH0_Left-side_0mm_ANT Main**DUT: Mouse; Type: P723**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2402 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(6.39, 8.11, 6.76) @ 2402 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2024/11/18
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0416 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.559 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 0.0415 W/kg

