


Test Report No:  
2540017R-RFUSV01S-A

## TEST REPORT

### FCC Rules & Regulations

Product Name	WIRELESS GAMING MOUSE
Brand Name	ASUS
Model No.	P723
FCC ID	OO9P723
Applicant's Name / Address	G.Tech Technology Ltd. No.8, Jinyuan 1st Road, Tangjiawan Town High-tech Zone, Zhuhai, 519085, China
Manufacturer's Name	ASUSTeK COMPUTER INC.
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By Jinn Chen	
Tested By Jason Tuan	
Approved By Steven Tsai	
Date of Receipt	2025/04/01
Date of Issue	2025/05/19
Report Version	V1.0

## INDEX

	page
Competences and Guarantees.....	4
General Conditions .....	4
Revision History.....	5
Summary of Test Result.....	6
1. General Information.....	7
1.1. EUT Description .....	7
1.2. EUT Information .....	9
1.3. Testing Location Information .....	9
1.4. Measurement Uncertainty .....	10
1.5. List of Test Equipment.....	11
2. Test Configuration of EUT .....	13
2.1. Test Condition.....	13
2.2. Test Frequency Mode.....	13
2.3. Duty Cycle .....	14
2.4. Measurement Configuration.....	15
2.5. Tested System Details.....	16
2.6. Configuration of Tested System .....	16
2.7. EUT Operating Procedures .....	16
3. AC Power Line Conducted Emission .....	17
3.1. Test Setup .....	17
3.2. Test Limit .....	17
3.3. Test Procedure .....	17
3.4. Test Result of AC Power Line Conducted Emission .....	17
4. 6dB Bandwidth .....	18
4.1. Test Setup .....	18
4.2. Test Limit .....	18
4.3. Test Procedures .....	18
4.4. Test Result of 6dB Bandwidth .....	18
5. Maximum Peak Conducted Output Power.....	19
5.1. Test Setup .....	19
5.2. Test Limit .....	19
5.3. Test Procedures .....	19
5.4. Test Result of Maximum Peak Conducted Output Power.....	19
6. Power Spectral Density.....	20
6.1. Test Setup .....	20
6.2. Test Limit .....	20

---

6.3.	Test Procedures .....	20
6.4.	Test Result of Power Spectral Density .....	20
7.	Antenna Port Conducted Emission .....	21
7.1.	Test Setup .....	21
7.2.	Test Limit .....	21
7.3.	Test Procedure .....	21
7.4.	Test Result of Antenna Port Conducted Emission .....	21
8.	Radiated Emission .....	22
8.1.	Test Setup .....	22
8.2.	Test Limit .....	23
8.3.	Test Procedure .....	23
8.4.	Test Result of Radiated Emission .....	23

Appendix A. Test Result of AC Power Line Conducted Emission

Appendix B. Test Result of 6dB Bandwidth

Appendix C. Test Result of Maximum Peak Conducted Output Power

Appendix D. Test Result of Power Spectral Density

Appendix E. Test Result of Antenna Port Conducted Emission

Appendix F. Test Result of Radiated Emission

Appendix G. Test Setup Photograph

---

## Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

---

## General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

## Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	2025/05/19

## Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	6dB Bandwidth	PASS	-
5	Maximum Peak Conducted Output Power	PASS	-
6	Power Spectral Density	PASS	-
7	Antenna Port Conducted Emission	PASS	-
8	Radiated Emission	PASS	-

### Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 1. General Information

### 1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz
Operating Frequency / Channel Number	GFSK (1 Mbps): 2402 ~ 2480 MHz / 40 Channels GFSK (2 Mbps): 2404 ~ 2478 MHz / 37 Channels
Mode	Bluetooth LE
Type of Modulation	GFSK (1 Mbps, 2 Mbps)

Accessories Information		
No.	Equipment Name	Description
1	WIRELESS DONGLE	--
2	Wireless Receiver Extender	--
3	USB to Type C Cable	Shielded, 2m

Antenna Information				
Item.	Brand Name	Part No.	Type	Gain (dBi)
1	G.Tech Technology Ltd.	152000592	PCB	3.87

Note: The antenna of EUT conforms to FCC 15.203.

## Channel List for GFSK (1 Mbps)

## Working Frequency of Each Channel

Channel	Frequency (MHz)						
00	2402	01	2404	02	2406	03	2408
04	2410	05	2412	06	2414	07	2416
08	2418	09	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

## Channel List for GFSK (2 Mbps)

## Working Frequency of Each Channel

Channel	Frequency (MHz)						
01	2404	02	2406	03	2408	04	2410
05	2412	06	2414	07	2416	08	2418
09	2420	10	2422	11	2424	13	2428
14	2430	15	2432	16	2434	17	2436
18	2438	19	2440	20	2442	21	2444
22	2446	23	2448	24	2450	25	2452
26	2454	27	2456	28	2458	29	2460
30	2462	31	2464	32	2466	33	2468
34	2470	35	2472	36	2474	37	2476
38	2478	-	-	-	-	-	-

## 1.2. EUT Information

EUT Power Type	From DC 3.8V (by Battery) / DC 5V (by USB)
----------------	--------------------------------------------

## 1.3. Testing Location Information

USA	FCC Designation Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual	Test Date
AC Power Line Conducted Emission	Temperature (°C)	10~40 °C	24.5 °C	2025/05/09
	Humidity (%RH)	10~90 %	51.8 %	
RF Conducted Emission	Temperature (°C)	10~40 °C	25.6 °C	2025/05/08
	Humidity (%RH)	10~90 %	58.7 %	
Radiated Emission	Temperature (°C)	10~40 °C	25.9 °C	2025/04/11~2025/05/08
	Humidity (%RH)	10~90 %	69.1 %	

## 1.4. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
AC Power Line Conducted Emission	$\pm 3.50$ dB
6dB Bandwidth	$\pm 1580.61$ Hz
Maximum Peak Conducted Output Power	Spectrum Analyzer: $\pm 2.13$ dB Power Meter: $\pm 1.05$ dB
Power Spectral Density	$\pm 2.13$ dB
Antenna Port Conducted Emission	$\pm 2.13$ dB
Radiated Emission	9 kHz~30 MHz: $\pm 3.30$ dB 30 MHz~1 GHz: $\pm 5.19$ dB 1 GHz~18 GHz: $\pm 4.46$ dB 18 GHz~40 GHz: $\pm 4.19$ dB
Duty Cycle	$\pm 0.62$ %

## 1.5. List of Test Equipment

### For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2024/06/24	2025/06/23
V	Two-Line V-Network	R&S	ENV216	101306	2024/04/01	2026/03/31
V	Two-Line V-Network	R&S	ENV216	101307	2023/08/17	2025/08/16
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2025/01/10	2026/01/09

Note:

1. Two-Line V-Network is calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

### For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2024/12/18	2025/12/17
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2025/05/05	2026/05/04
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240002	2025/05/07	2026/05/06
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240003	2025/05/07	2026/05/06

Note:

1. All equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version : DTC\_RF\_Tool\_Release V100

### For Radiated Measurements /HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	TESEQ	HLA6121	49611	2025/02/18	2026/02/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2023/08/09	2025/08/08
	Horn Antenna	Com-Power	AH-840	101101	2023/12/04	2025/12/03
V	Horn Antenna	RF SPIN	DRH18-E	210507A18ES	2024/05/15	2025/05/14
V	Pre-Amplifier	SGH	SGH0301-9	20211007-11	2025/01/10	2026/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2025/01/10	2026/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2025/01/10	2026/01/09
	Pre-Amplifier	EMCI	EMC184045SE	980369	2025/01/10	2026/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160311	2025/01/10	2026/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242	2025/01/10	2026/01/09
V	Filter	MICRO TRONICS	BRM20887	G003	2025/01/05	2026/01/04
	Filter	MICRO TRONICS	BRM50716	G196	2025/01/05	2026/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2024/12/06	2025/12/05
V	Spectrum Analyzer	R&S	FSV3044	101114	2025/02/26	2026/02/25
V	Coaxial Cable	SGH	SGH18	2021005-1	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	SGH18	202108-4	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	HA800	GD20110223-1	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-8	2025/01/10	2026/01/09

Note:

1. Bi-Log Antenna and Horn Antenna (AH-840) are calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

**For Radiated measurements / FS-CB03**

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Double Ridged Guide Horn Antenna	ETS-Lindgren	3117	00203800	2025/02/05	2026/02/04
V	Horn Antenna	COM-POWER	AH-840	101087	2024/07/09	2025/07/08
V	Filter	MICRO TRONICS	BRM50702	G270	2025/01/05	2026/01/04
	Receiver	R&S	ESR26	101706	2025/04/22	2026/04/21
V	Signal Analyzer	R&S	FSV40	101148	2024/05/14	2025/05/13
V	Coaxial Cable	SUHNER	SUCOFLEX 106	RF003/B	2024/07/04	2025/07/03
V	Coaxial Cable	SUHNER	SUCOFLEX 106	RF003/C	2024/07/04	2025/07/03
V	Coaxial Cable	ROSNOL	R-Test EW0630	RF003/D	2024/07/04	2025/07/03
V	Coaxial Cable	SGH	SGH118	2021001-3	2024/06/18	2025/06/17
V	Microwave Preamplifier	EMCI	EMC051835SE	980311	2025/02/06	2026/02/05
V	Preamplifier with cable	EMCI	EMC184045SE	980314	2024/08/22	2025/08/21

Note:

1. The equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

## 2. Test Configuration of EUT

### 2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 5V (by USB)


### 2.2. Test Frequency Mode

Test Software Version	ASUSTek / Version 1.03
-----------------------	------------------------

Modulation	Frequency (MHz)	Power Setting
GFSK (1 Mbps)	2402	5
	2440	5
	2480	5
GFSK (2 Mbps)	2404	5
	2440	5
	2478	5

### 2.3. Duty Cycle

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	VBW (Hz)
GFSK (1 Mbps)	0.3860	0.6260	61.66	2.10	3000
GFSK (2 Mbps)	0.1980	0.6240	31.73	4.99	10000

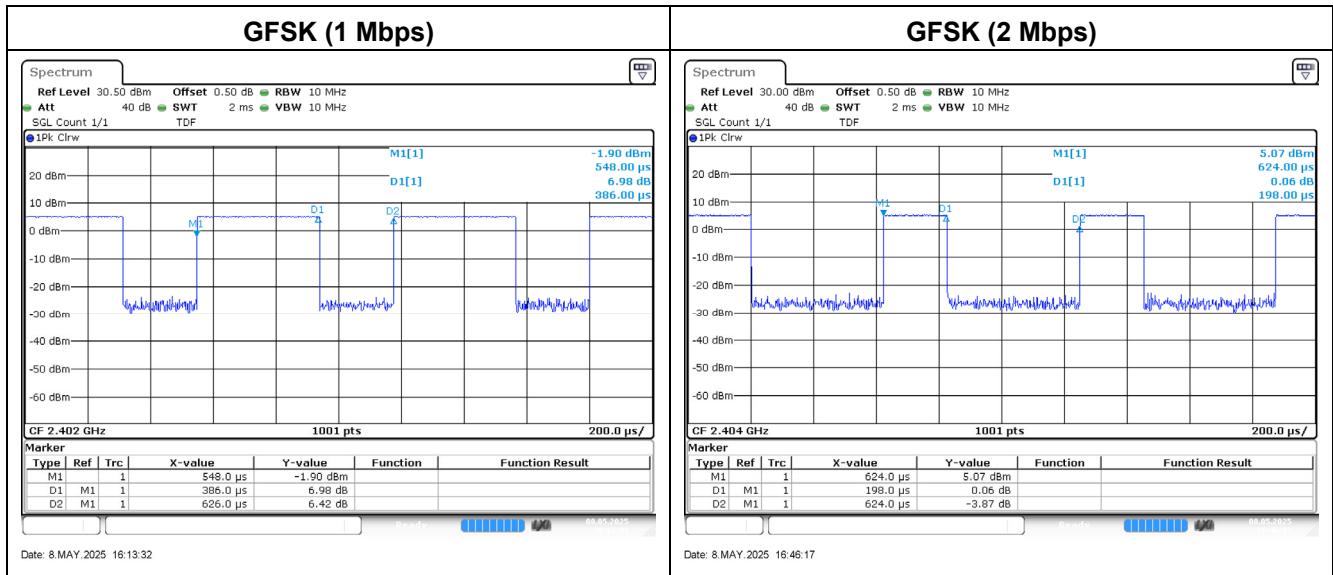

## 2.4. Measurement Configuration

Test Mode	Mode 1 (Transmit)	GFSK (1 Mbps)
		GFSK (2 Mbps)


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated emissions below 1 GHz and AC power line conducted emissions, all modes of operation were investigated, and the worst-case emissions are reported.
3. The radiation measurements are performed in the X, Y, and Z axis positions. Only the worst case is shown in the report.
4. The EUT is available in two colors: black and white, with white as the primary color for testing purposes. The color does not affect the test results.

## 2.5. Tested System Details

No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	P75G	7CTHQF2	N/A

## 2.6. Configuration of Tested System

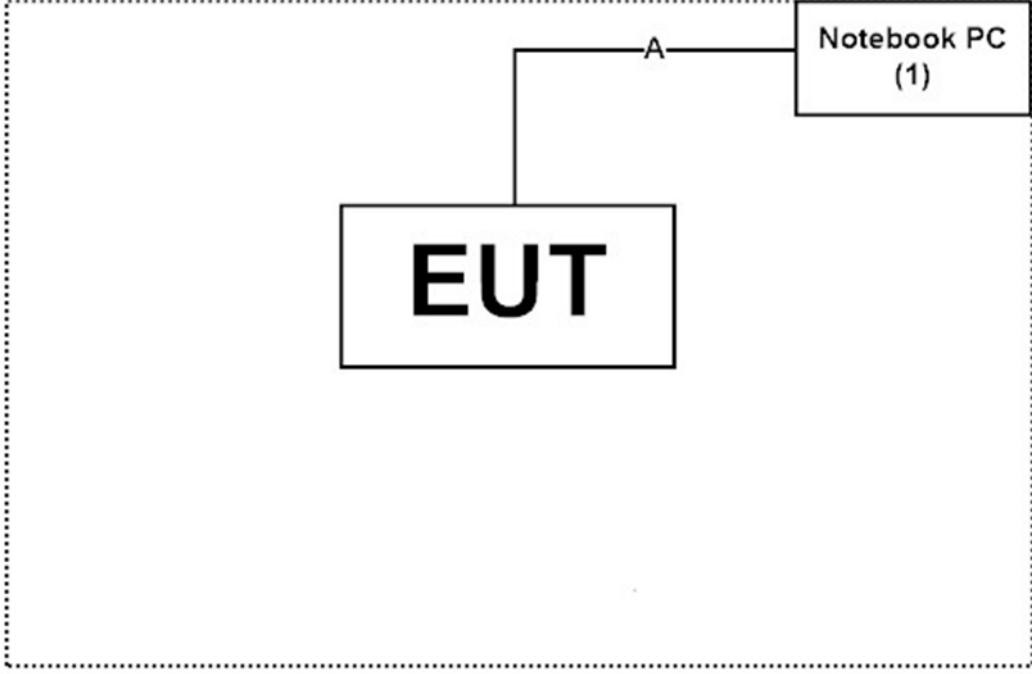
Connection Diagram	
	
Signal Cable Type	Signal Cable Description
A	USB to Type C Cable
Shielded, 2m	

## 2.7. EUT Operating Procedures

1	Setup the EUT as shown in Section 2.6.
2	Execute software “ASUSTek / Version 1.03” on the Notebook PC.
3	Configure the test mode, the test channel, and the data rate.
4	Press “OK” to start the continuous Transmit.
5	Verify that the EUT works properly.

### 3. AC Power Line Conducted Emission

#### 3.1. Test Setup

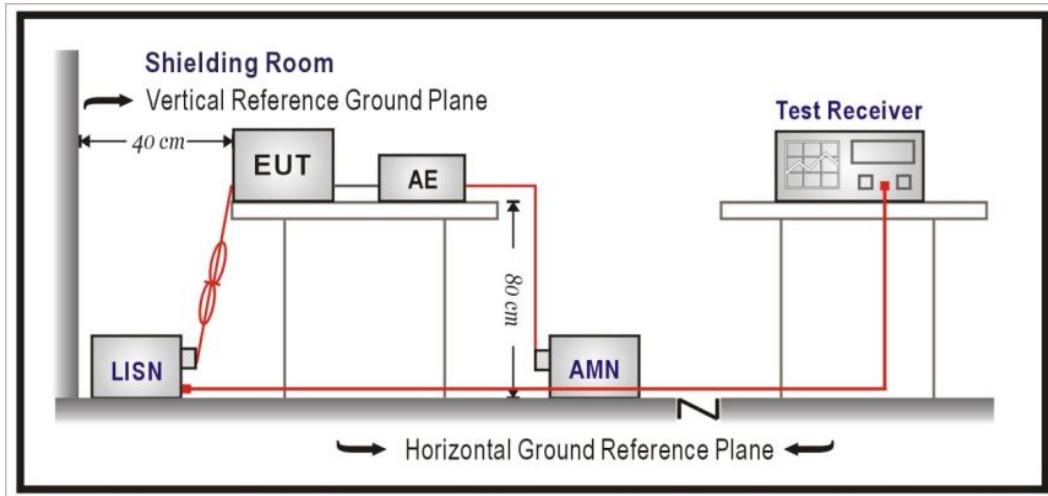

#### 3.2. Test Limit

Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

#### 3.3. Test Procedure


The EUT was setup according to ANSI C63.10: 2013 for AC Power Line Conducted Emissions.

#### 3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

## 4. 6dB Bandwidth

### 4.1. Test Setup

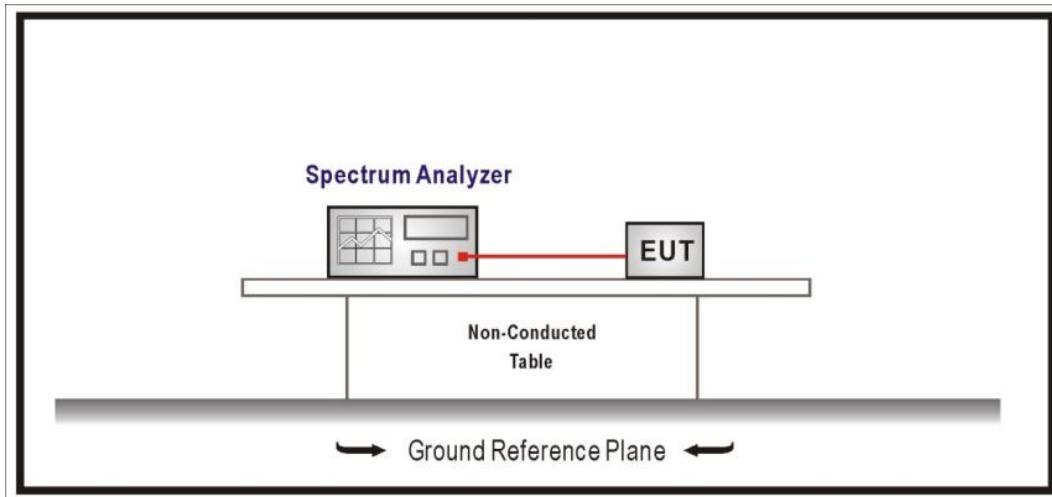

### 4.2. Test Limit

The 6 dB bandwidth:  $\geq 500$  kHz.

### 4.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

### 4.4. Test Result of 6dB Bandwidth

Refer as Appendix B

## 5. Maximum Peak Conducted Output Power

### 5.1. Test Setup

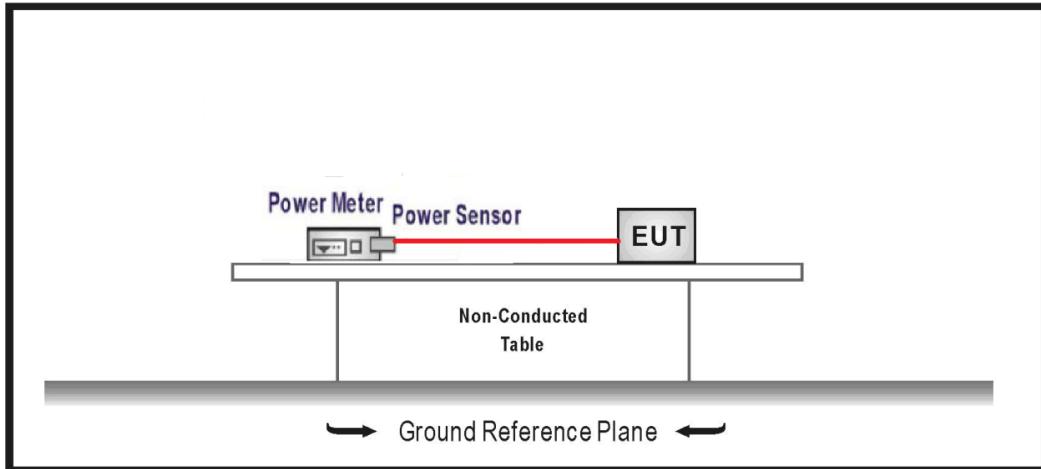

### 5.2. Test Limit

The Maximum Peak Conducted Output Power shall be less 1 Watt.

### 5.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

### 5.4. Test Result of Maximum Peak Conducted Output Power

Refer as Appendix C

## 6. Power Spectral Density

### 6.1. Test Setup

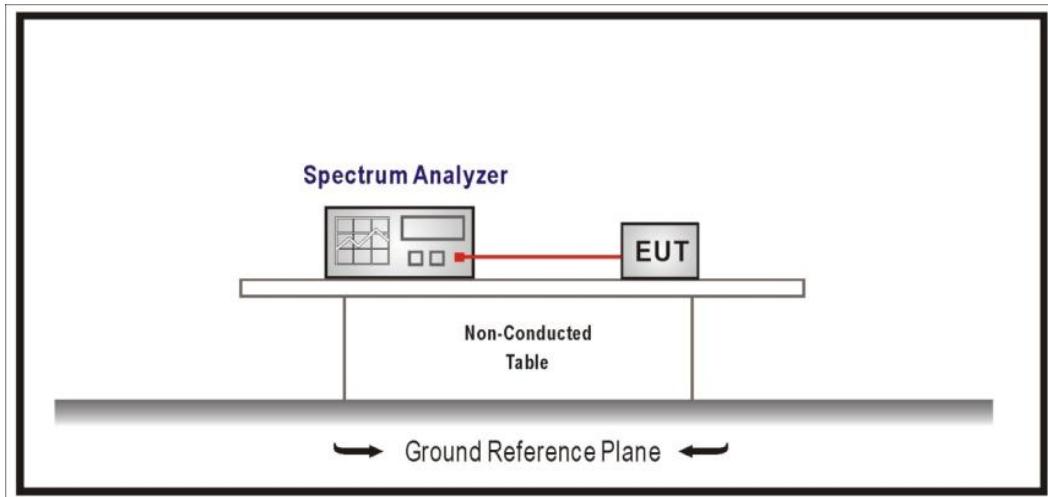

### 6.2. Test Limit

The power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

### 6.4. Test Result of Power Spectral Density

Refer as Appendix D

## 7. Antenna Port Conducted Emission

### 7.1. Test Setup

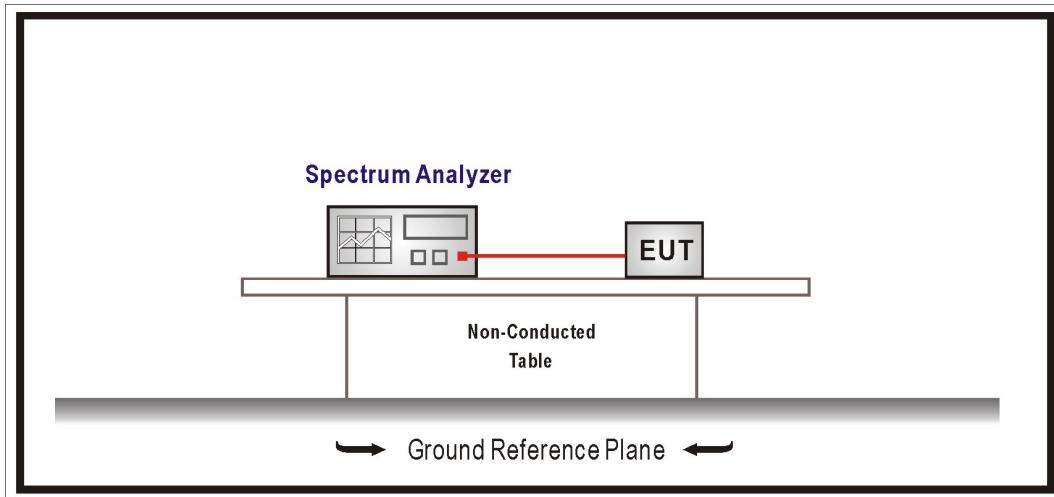

### 7.2. Test Limit

RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Remarks:

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit.
2. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 7.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.


### 7.4. Test Result of Antenna Port Conducted Emission

Refer as Appendix E


## 8. Radiated Emission

### 8.1. Test Setup


9 kHz ~ 30 MHz

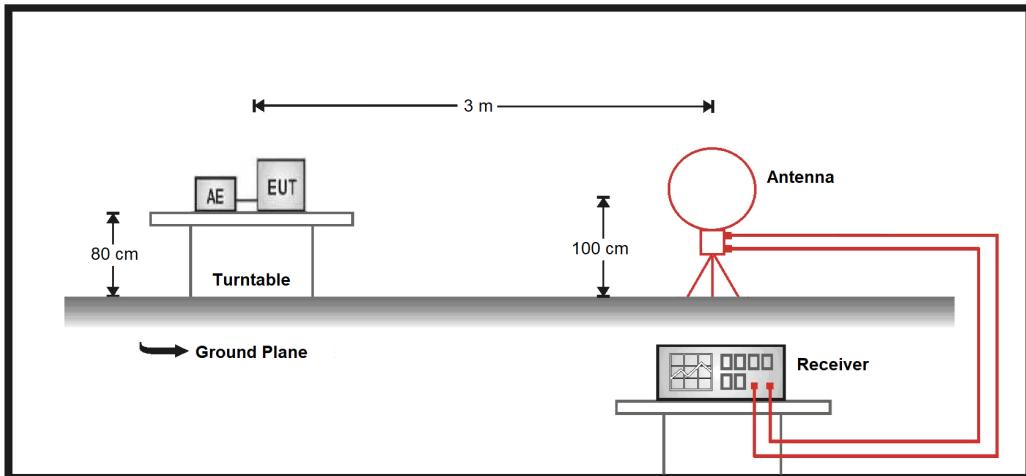

30 MHz ~ 1 GHz

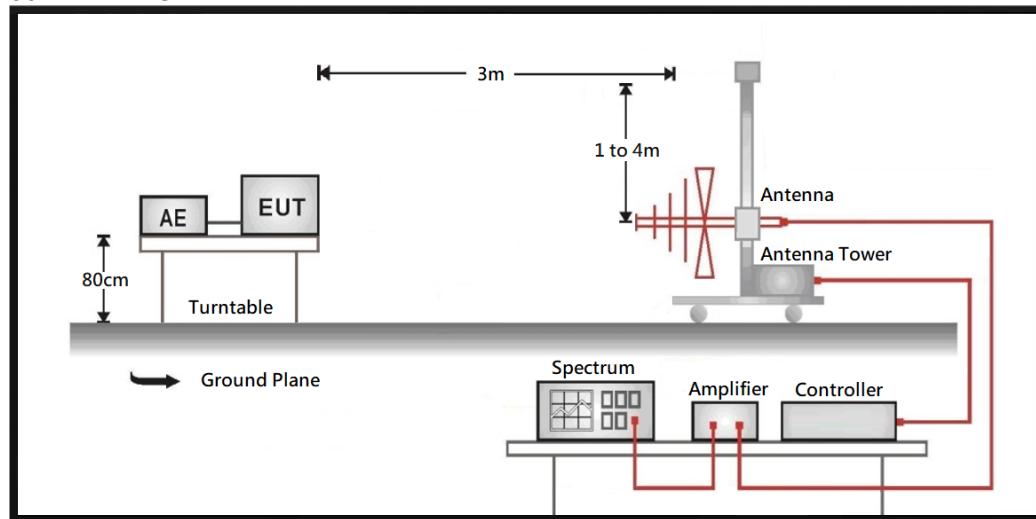

Above 1 GHz

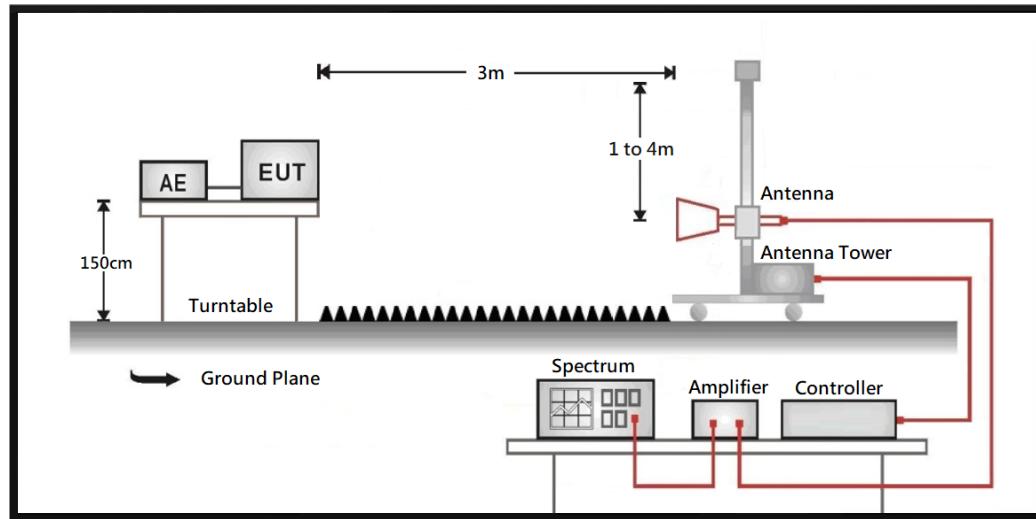

## 8.2. Test Limit

Frequency (MHz)	Field strength ( $\mu$ V/m)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dB $\mu$ V/m) = 20 log Field strength ( $\mu$ V/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

## 8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9 kHz (including the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

## 8.4. Test Result of Radiated Emission

Refer as Appendix F