



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial
Zone, Gushu 2nd Road, Bao'an District, Shenzhen
518126, P.R. China

TEST REPORT

FCC ID: OOH-L5

Applicant : Comda Advanced Technology Corporation

Address : The 2nd Industrial Park, Maowan Village, Sanxiang Town,
Zhongshan City, Guangdong, PRC.

Equipment Under Test (EUT):

Name : Bluetooth stereo headset

Model : L5,L1

In Accordance with: FCC 15.247

Report No : STE120630838

Date of Test : June 30-July 7, 2012

Date of Issue : July 9,2012

Test Result: **PASS**

In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

A handwritten signature in dark ink, appearing to read "Mark Zhu", is written over a horizontal line.

(Mark Zhu)

General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

Contents

1. General Information.....	4
1.1. Description of Device (EUT).....	4
1.2. Accessories of device (EUT)	4
1.3. Test Lab information.....	4
2. Summary of test	5
2.1. Summary of test result	5
2.2. Assistant equipment used for test	5
2.3. Block Diagram.....	5
2.4. Test mode.....	6
2.5. Test Conditions	6
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	6
2.7. Test Equipment	7
3. Maximum Peak Output power	8
3.1. Test limit	8
3.2. Test Procedure.....	8
3.3. Test Setup.....	8
3.4. Test Results	8
4. 20dB bandwidth	9
4.1. Limit	9
4.2. Test Procedure.....	9
4.3. Test Result.....	9
5. Carrier Frequency Separation	13
5.1. Limit	13
5.2. Test Procedure.....	13
5.3. Test Result.....	13
6. Number Of Hopping Channel	15
6.1. Limit	15
6.2. Test Procedure.....	15
6.3. Test Result.....	15
7. Dwell Time.....	18
7.1. Test limit.....	18
7.2. Test Procedure	18
7.3. Test Results.....	18
8. Radiated emissions.....	29
8.1. Limit	29
8.2. Block Diagram of Test setup.....	30
8.3. Test Procedure.....	30
8.4. Test Result.....	31
9. Band Edge Compliance	40
9.1. Block Diagram of Test Setup	40
9.2. Limit	40
9.3. Test Procedure.....	40
9.4. Test Result.....	40

10. Power Line Conducted Emissions 49

10.1. Block Diagram of Test Setup 49

10.2. Limit 49

10.3. Test Procedure..... 49

10.4. Test Result..... 49

11. Antenna Requirements..... 52

11.1. Limit 52

11.2. Result 52

12. Test setup photo 53

13. Photos of EUT 55

1. General Information

1.1. Description of Device (EUT)

EUT	: Bluetooth stereo headset
Model No.	: L5, L1
DIFF	: Only different in appearance, the other the same.
Power supply	: DC 3.7V From battery DC 5V From PC with AC 120V/60Hz
Trademark	: N/A
Radio Technology	: Bluetooth 2.1+ EDR
FCC Operation frequency	: 2402MHz -2480MHz
Modulation	: GFSK, $\pi/4$ DQPSK, 8-DPSK
Antenna Type	: Patch antenna, Gain: 1.87dBi
Applicant Address	: Comda Advanced Technology Corporation The 2 nd Industrial Park, Maowan Village, Sanxiang Town, Zhongshan City, Guangdong, PRC.
Manufacturer Address	: Comda Advanced Technology Corporation The 2 nd Industrial Park, Maowan Village, Sanxiang Town, Zhongshan City, Guangdong, PRC.

1.2. Accessories of device (EUT)

Accessories 1	: USB cable
M/N	: 1m, unshield

1.3. Test Lab information

Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
FCC Registered No.:197647

2. Summary of test

2.1. Summary of test result


Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2009	PASS
20dB Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2009	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2009	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2009	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2009	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2009	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
MPE ESTIMATION	FCC Part 2: 2.1093	PASS

2.2. Assistant equipment used for test


Description : Test PC 1
 Manufacturer : Acer
 Model No. : 4552G

2.3. Block Diagram

1, For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by Bluesuite software before test.



2, For Power Line Conducted Emissions Test: EUT was connected to power adapter by 1m USB line



2.4. Test mode

The test software “Bluesuite” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
BDR:GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
EDR: $\pi/4$ QPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
EDR:8-DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Note: For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with 8-DPSK and GFSK.

2.5. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	1×10-9	

Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2°C	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

2.7. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGR EN	N/A	SEL0017	05.08, 2012	1Year
Spectrum analyzer	Agilent	E4443A	MY46185649	05.08, 2012	1Year
Receiver	R&S	ESCI	100492	05.08, 2012	1Year
Receiver	R&S	ESCI	101202	05.08, 2012	1Year
Bilog Antenna	Sunol	JB3	A121206	12.15, 2011	1Year
Horn Antenna	EMCO	3115	640201028-06	12.15, 2011	1Year
Power Meter	Anritsu	ML2487A	6K00001491	05.08, 2012	1Year
ETS Horn Antenna	ETS	3160	SEL0076	05.08, 2012	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	12.15, 2011	1Year
Cable	Resenberger	N/A	No.1	05.08, 2012	1Year
Cable	SCHWARZBE CK	N/A	No.2	05.08, 2012	1Year
Cable	SCHWARZBE CK	N/A	No.3	05.08, 2012	1Year
Pre-amplifier	R&S	AFS42-0010 1 800-25-S-42	SEL0081	05.08, 2012	1Year
Pre-amplifier	R&S	AFS33-1800 2650-30-8P- 44	SEL0080	05.08, 2012	1Year
Base station	Agilent	E5515C	GB44300243	05.08, 2012	1 Year
Temperature controller	Terchy	MHQ	120	05.08, 2012	1Year
Power Meter	Anritsu	K240C	020346	05.08, 2012	1 Year
Signal Generator	HP	83732B	VS3449051	05.08, 2012	1 Year
Attenuator	Agilent	8491B	MY39262165	05.08, 2012	1 Year

3. Maximum Peak Output power

3.1. Test limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Results

EUT: Bluetooth stereo headset M/N:L5						
Test date: 2012-07-04		Test site: RF site		Tested by: TaTa jiang		
Mode	Freq (MHz)	Reading Power (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
GFSK	2402	0.20	1.87	2.07	30	27.93
	2441	0.27	1.87	2.14	30	27.86
	2480	0.15	1.87	2.02	30	27.98
$\pi/4$ QPSK	2402	0.08	1.87	1.95	30	28.05
	2441	0.02	1.87	1.89	30	28.13
	2480	0.07	1.87	1.94	30	28.06
8-DPSK	2402	0.04	1.87	1.91	30	28.16
	2441	0.08	1.87	1.95	30	28.25
	2480	0.06	1.87	1.93	30	28.21
Conclusion: PASS						

4. 20dB bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result

EUT: Bluetooth stereo headset M/N:L5				
Test date: 2012-06-25		Test site: RF site		Tested by: TaTa jiang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.845	/	PASS
	2441	0.851	/	PASS
	2480	0.840	/	PASS
8-DPSK	2402	1.293	/	PASS
	2441	1.266	/	PASS
	2480	1.275	/	PASS


Original Test data For 20dB bandwidth
GFSK

Agilent

R T

▲ Mkr1 845 kHz

-0.08 dB

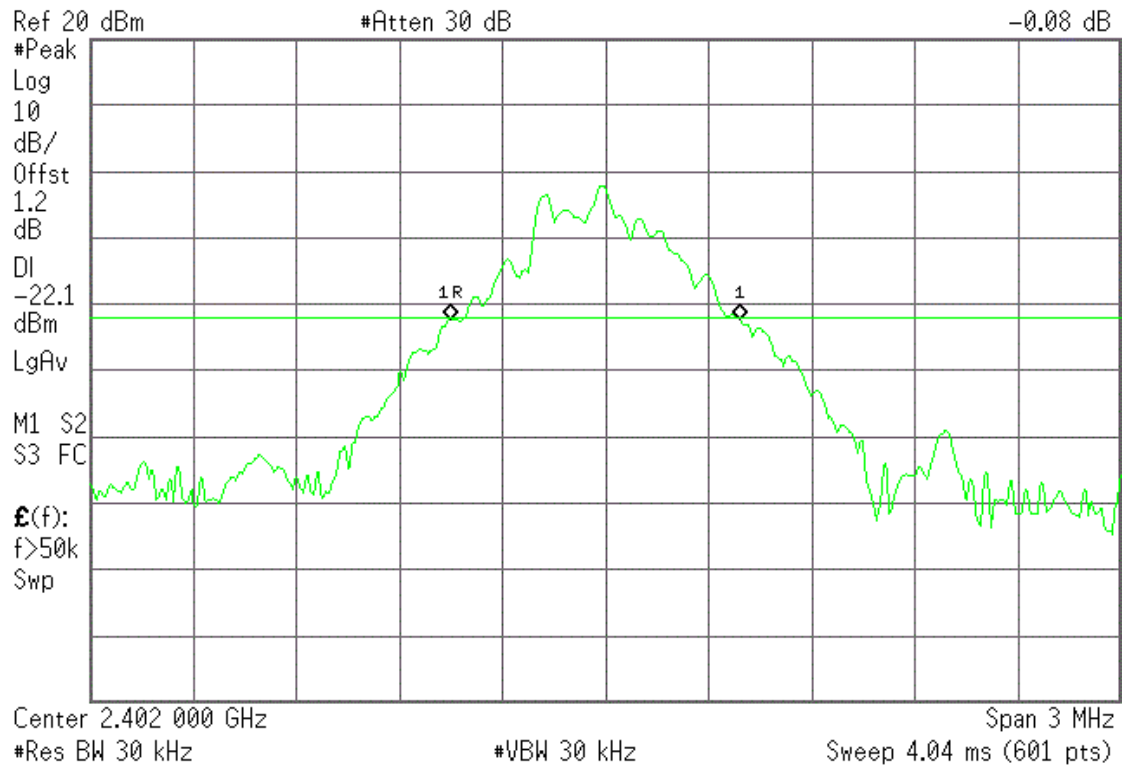



Agilent

R L


▲ Mkr1 851 kHz



-0.15 dB

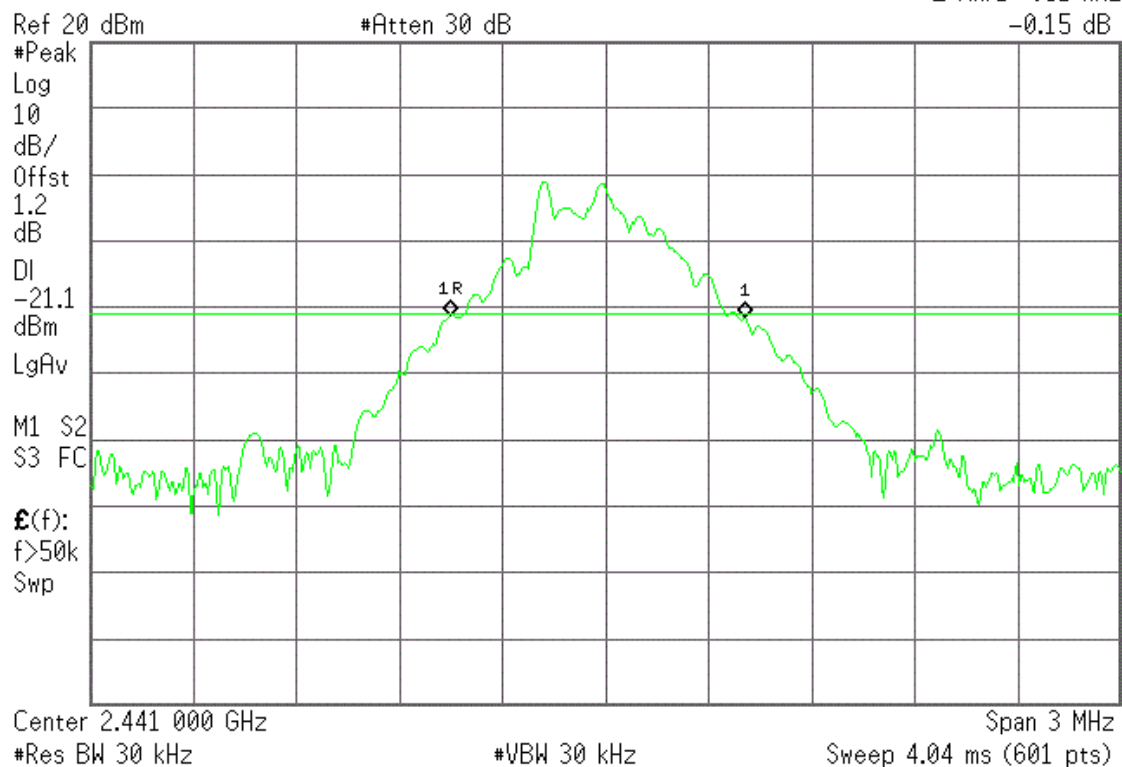

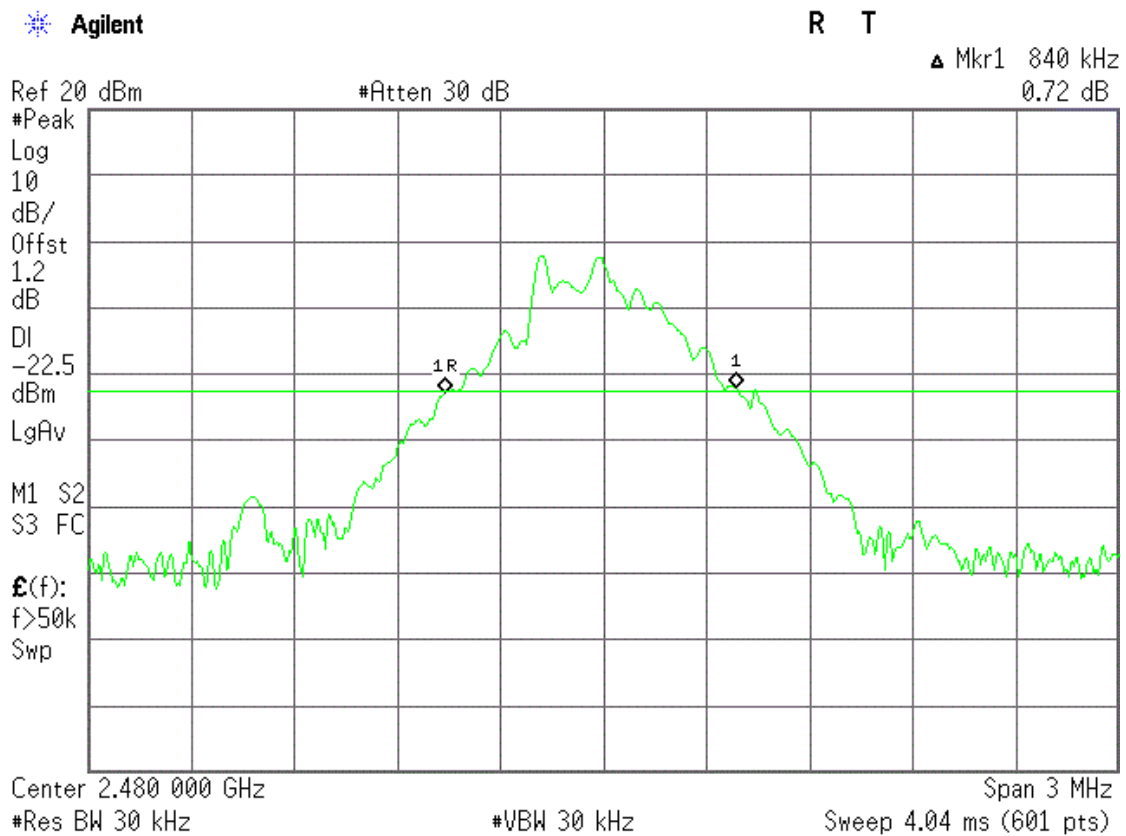

8-DPSK

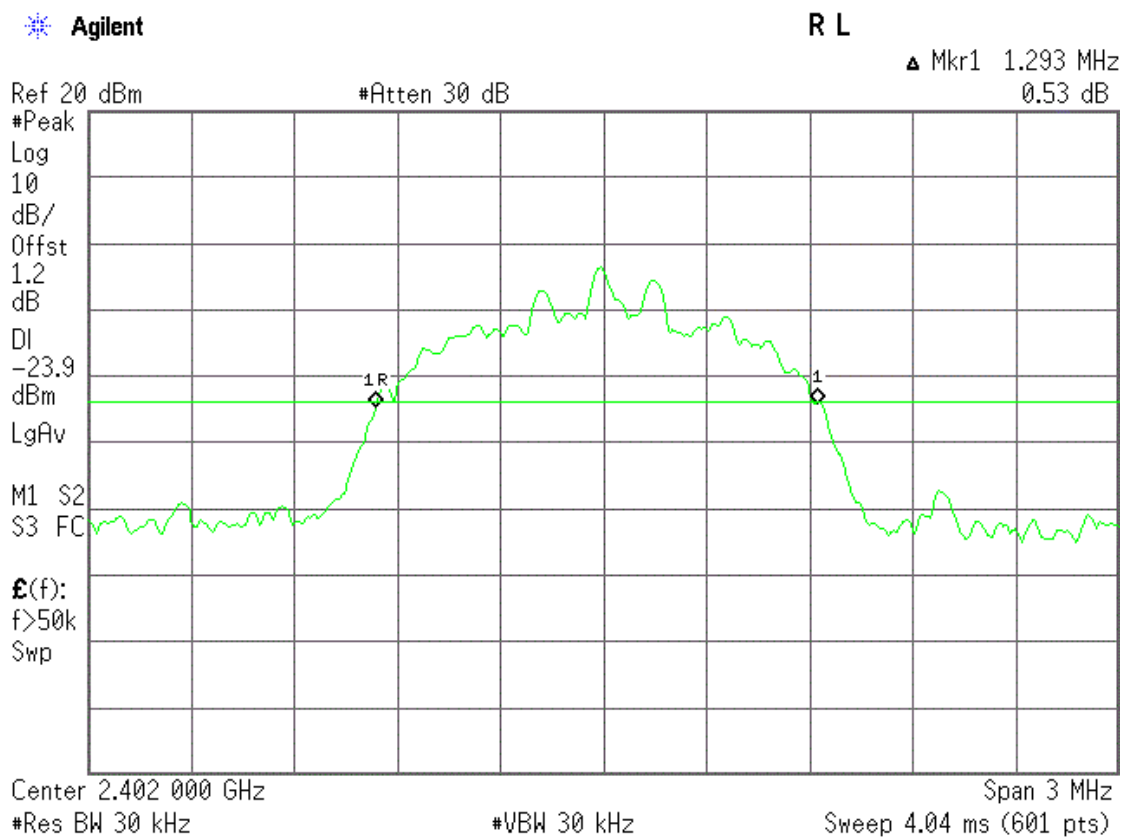

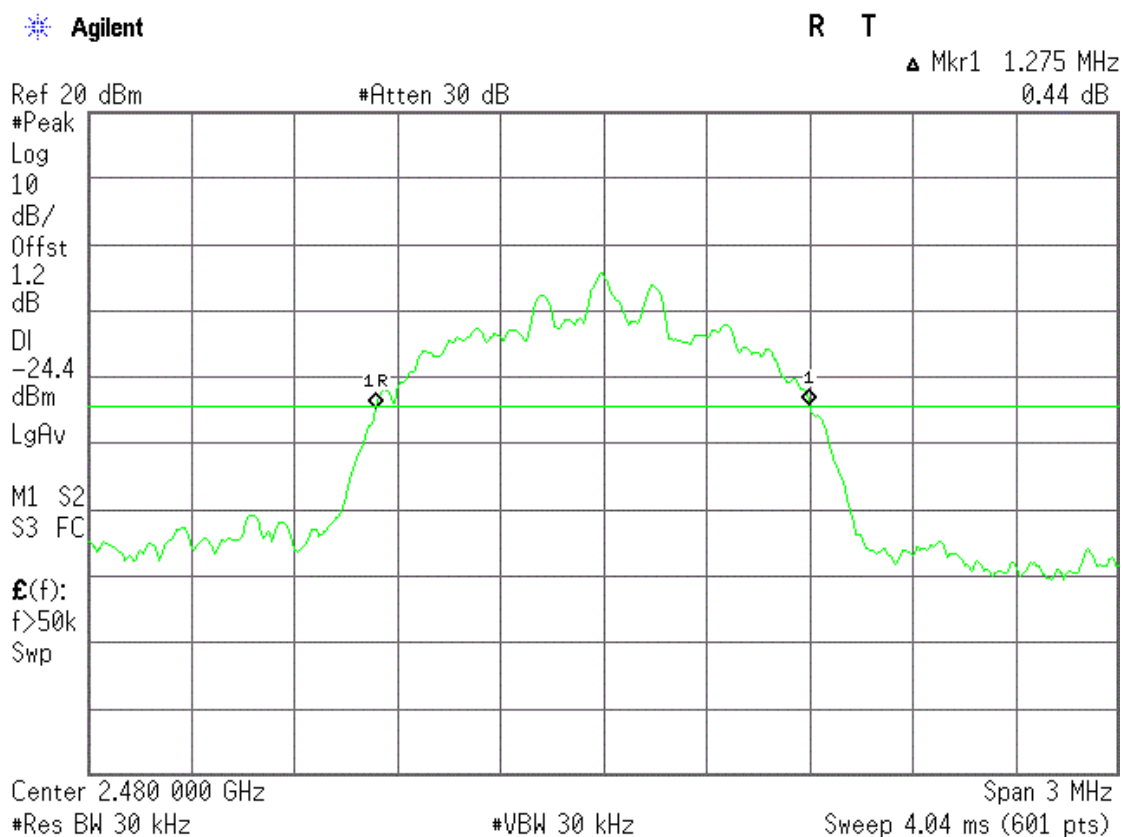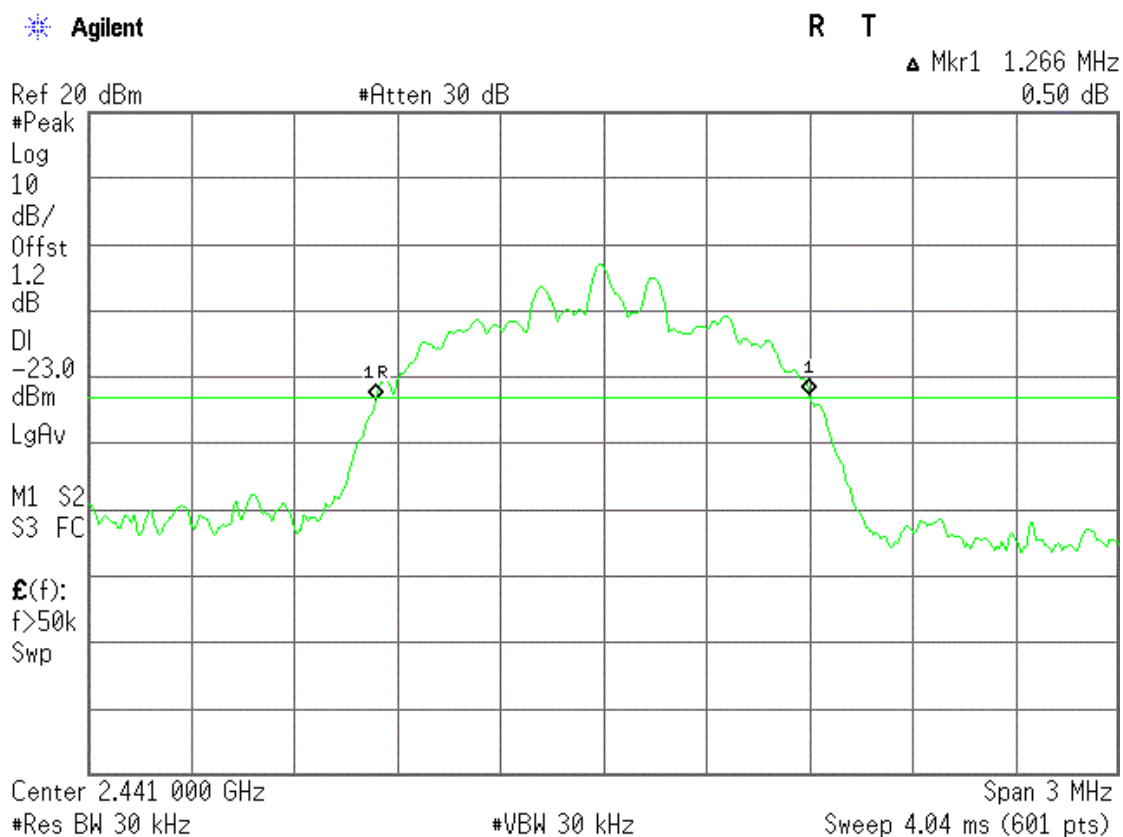

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

EUT: Bluetooth stereo headset		M/N:L5		
Test date: 2012-06-25		Test site: RF site		Tested by: TaTa jiang
Mode	Channel separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz) 2/3 20dB bandwidth	Conclusion
GFSK	1.0	0.851	0.57	PASS
8-DPSK	1.0	1.293	0.86	PASS

Original test data for channel separation

GFSK

Agilent

R T

▲ Mkr2 -1.000 MHz
1.63 dB

Ref 20 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

1.2

dB

LgAv

M1 S2

Center 2.441 000 GHz

Span 3 MHz

#Res BW 30 kHz

VBW 300 kHz

Sweep 3.08 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Freq	2.440 000 GHz	-2.83 dBm
1Δ	(1)	Freq	1.000 MHz	1.36 dB
2R	(1)	Freq	2.442 000 GHz	-3.14 dBm
2Δ	(1)	Freq	-1.000 MHz	1.63 dB

8-DPSK

Agilent

R T

▲ Mkr2 -1.000 MHz
0.42 dB

Ref 20 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

1.2

dB

LgAv

M1 S2

Center 2.441 000 GHz

Span 3 MHz

#Res BW 30 kHz

VBW 300 kHz

Sweep 3.08 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Freq	2.440 000 GHz	-2.83 dBm
1Δ	(1)	Freq	1.000 MHz	0.10 dB
2R	(1)	Freq	2.442 000 GHz	-3.14 dBm
2Δ	(1)	Freq	-1.000 MHz	0.42 dB

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW.

6.3. Test Result

EUT: Bluetooth stereo headset M/N:L5			
Test date: 2012-06-27		Test site: RF site	Tested by: TaTa jiang
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS

Original test data for hopping channel number
GFSK:

Agilent

R T

Mkr1 2.402 00 GHz
-1.47 dBm

Ref 20 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

1.2

dB

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

Start 2.400 00 GHz

Stop 2.441 50 GHz

#Res BW 510 kHz

#VBW 510 kHz

Sweep 1 ms (601 pts)

Agilent

R T

Mkr1 2.480 00 GHz
-1.81 dBm

Ref 20 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

1.2

dB

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

Start 2.441 50 GHz

Stop 2.483 00 GHz

#Res BW 510 kHz

#VBW 510 kHz

Sweep 1 ms (601 pts)

8-DPSK:

Agilent

R T

Mkr1 2.402 00 GHz
-3.28 dBm

Ref 20 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

1.2

dB

LgAv

M1 S2

S3 FC

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.400 00 GHz

Stop 2.441 50 GHz

#Res BW 510 kHz

#VBW 510 kHz

Sweep 1 ms (601 pts)

Agilent

R T

Mkr1 2.480 00 GHz
-3.58 dBm

Ref 20 dBm

#Atten 30 dB

#Peak

Log

10

dB/

Offst

1.2

dB

LgAv

M1 S2

S3 FC

 $\mathcal{E}(f)$:

FTun

Swp

Start 2.441 50 GHz

Stop 2.483 00 GHz

#Res BW 510 kHz

#VBW 510 kHz

Sweep 1 ms (601 pts)

7. Dwell Time

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Results

PASS.

A period time = $0.4 \text{ (s)} * 79 = 31.6 \text{ (s)}$

CH Low: DH1 time slot = $0.404 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 258.6 \text{ (ms)}$

DH3 time slot = $1.658 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 353.7 \text{ (ms)}$

DH5 time slot = $2.898 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 370.9 \text{ (ms)}$

3-DH1 time slot = $0.390 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 249.6 \text{ (ms)}$

3-DH3 time slot = $1.658 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 353.7 \text{ (ms)}$

3-DH5 time slot = $2.898 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 370.9 \text{ (ms)}$

CH Mid: DH1 time slot = $0.404 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 258.6 \text{ (ms)}$

DH3 time slot = $1.644 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 350.7 \text{ (ms)}$

DH5 time slot = $2.898 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 370.9 \text{ (ms)}$

3-DH1 time slot = $0.404 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 258.6 \text{ (ms)}$

3-DH3 time slot = $1.658 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 353.7 \text{ (ms)}$

3-DH5 time slot = $2.912 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 372.7 \text{ (ms)}$

CH High: DH1 time slot = $0.404 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 258.6 \text{ (ms)}$

DH3 time slot = $1.658 \text{ (ms)} * (1600 / (3 * 79)) * 31.6 = 353.7 \text{ (ms)}$

DH5 time slot = $2.898 \text{ (ms)} * (1600 / (5 * 79)) * 31.6 = 370.9 \text{ (ms)}$

3-DH1 time slot = $0.404 \text{ (ms)} * (1600 / (1 * 79)) * 31.6 = 258.6 \text{ (ms)}$

$$3\text{-DH3 time slot} = 1.658 \text{ (ms)} * (1600/(3*79)) * 31.6 = 353.7 \text{ (ms)}$$


$$3\text{-DH5 time slot} = 2.898 \text{ (ms)} * (1600/(5*79)) * 31.6 = 370.9 \text{ (ms)}$$

Detailed information please see the following page.

DH1: CH Low

Agilent


R T

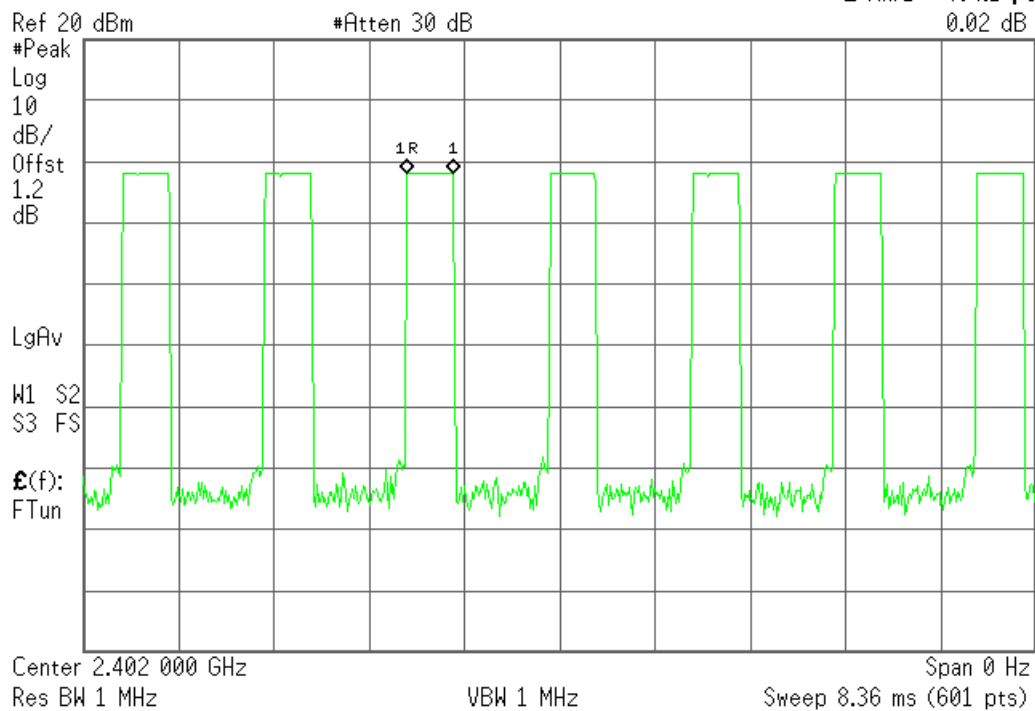 Δ Mkr1 404.1 μ s
0.02 dB


DH1: CH Mid

Agilent


R T

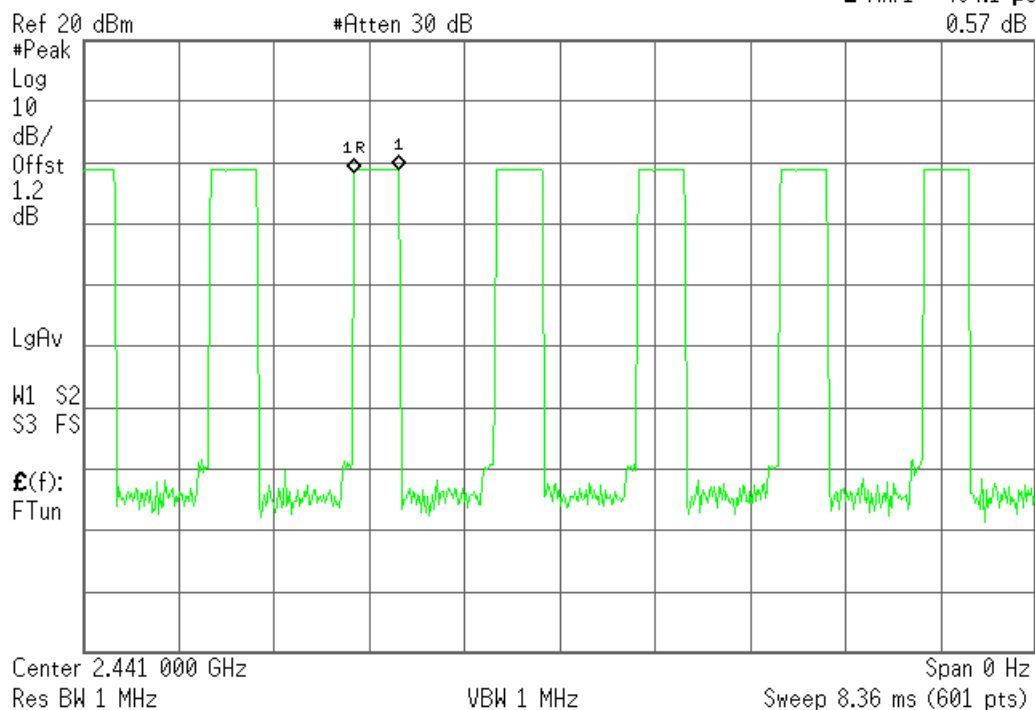 Δ Mkr1 404.1 μ s
0.57 dB


DH1: CH High

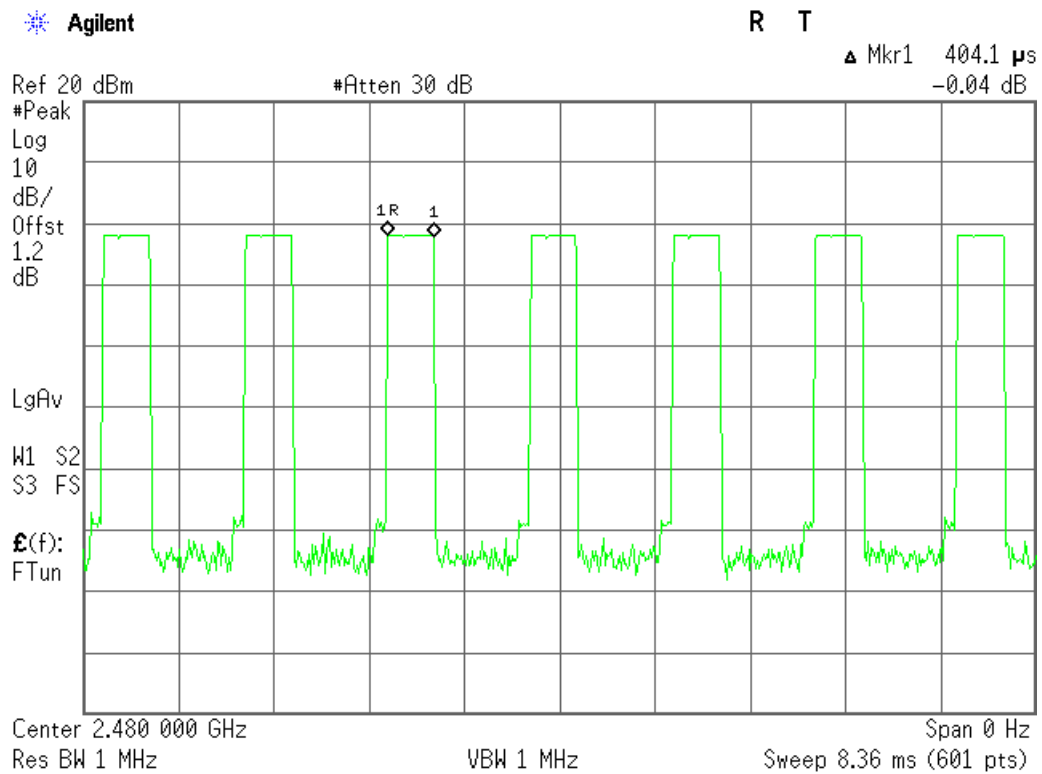


DH3: CH Low:

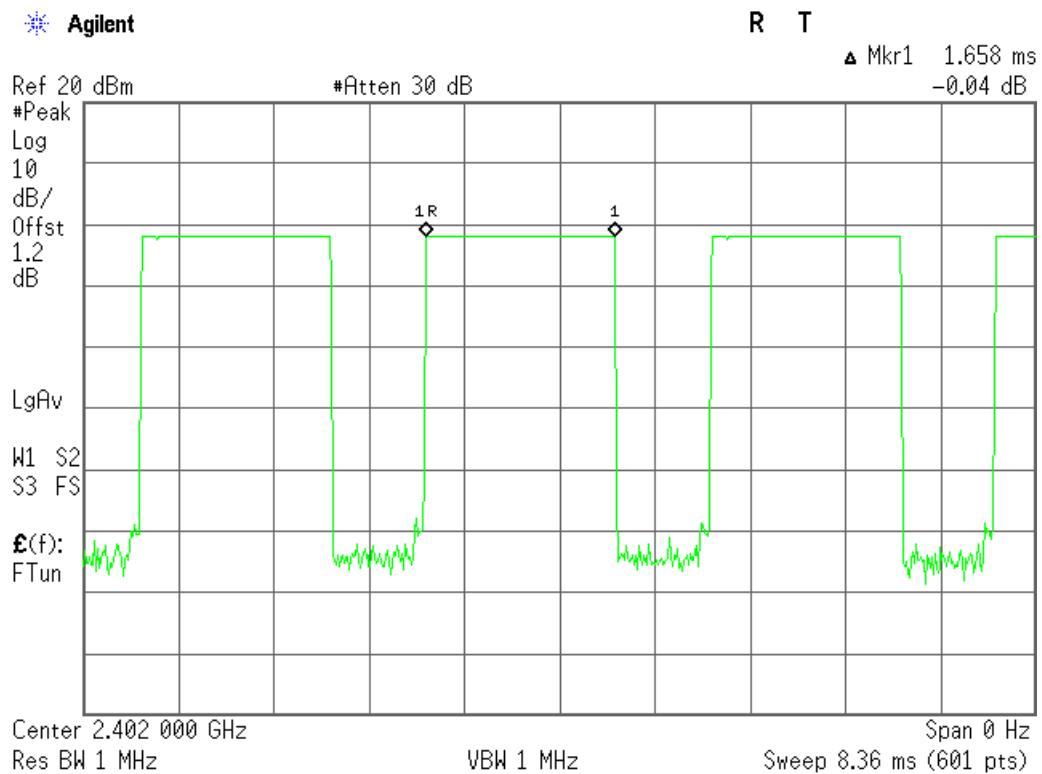

DH3: CH Mid

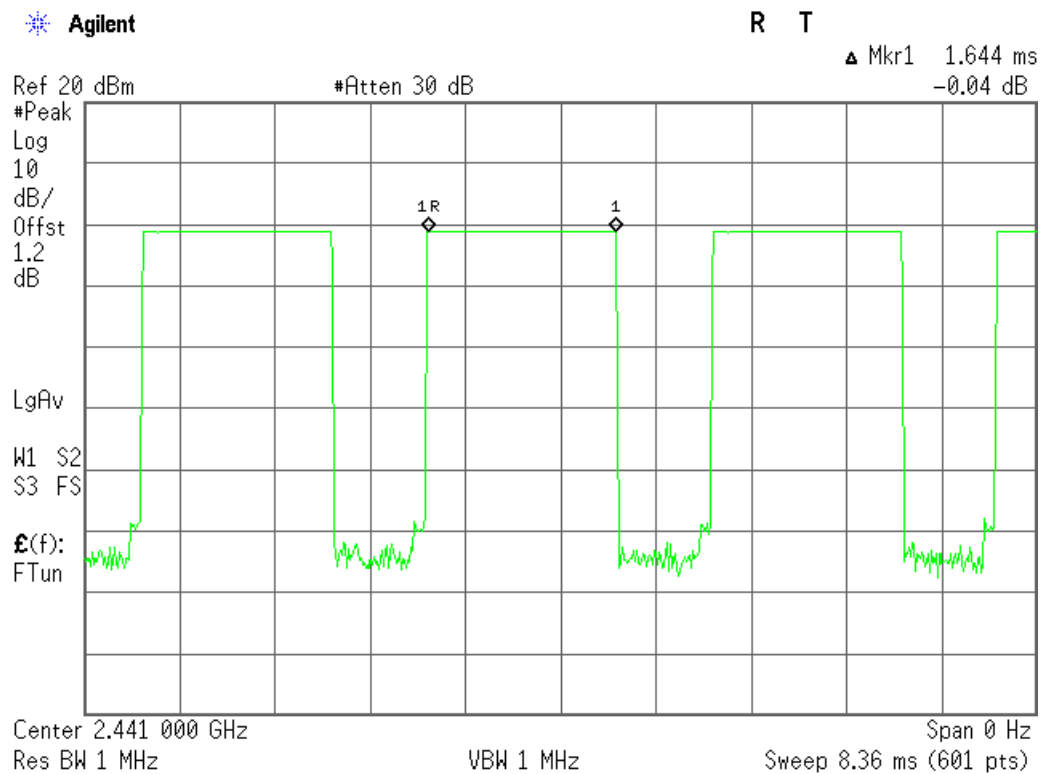


DH3 CH High

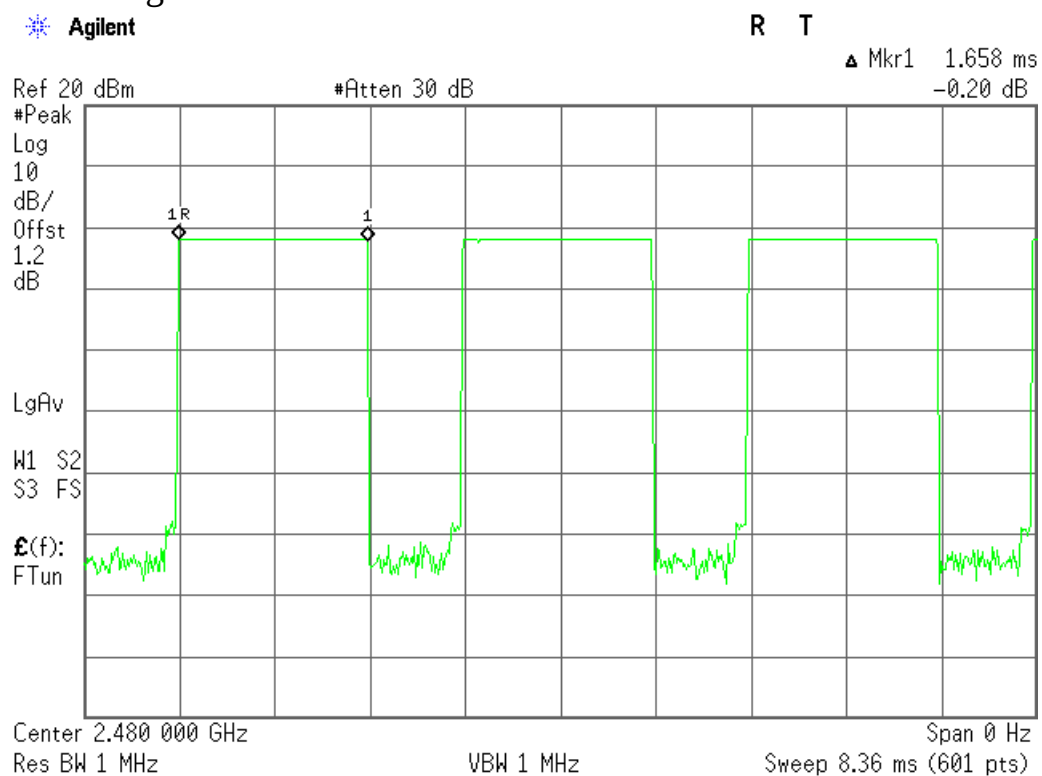

DH5 CH Low

Agilent


R T

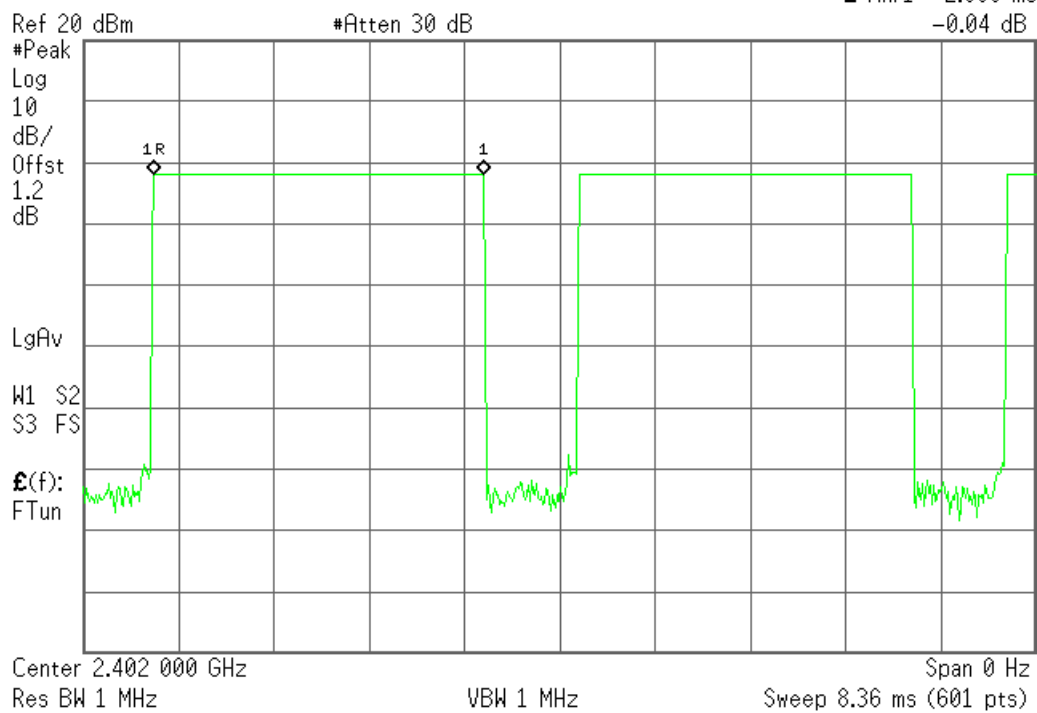▲ Mkr1 2.898 ms
-0.04 dB


DH5 CH Mid

Agilent


R T

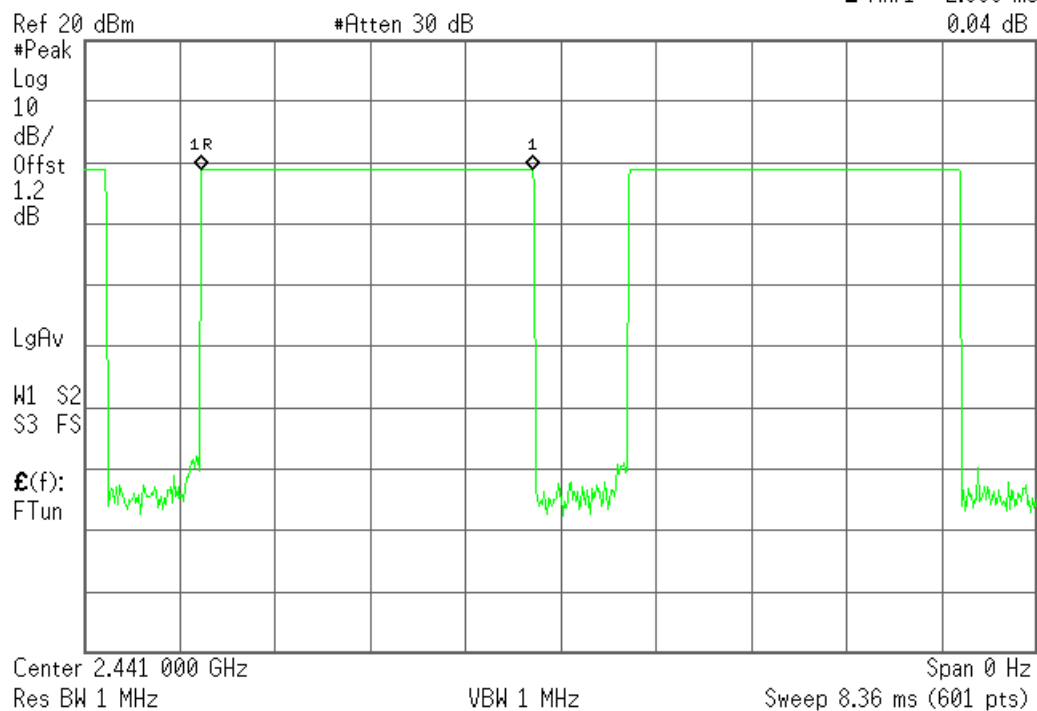▲ Mkr1 2.898 ms
0.04 dB


DH5 CH High

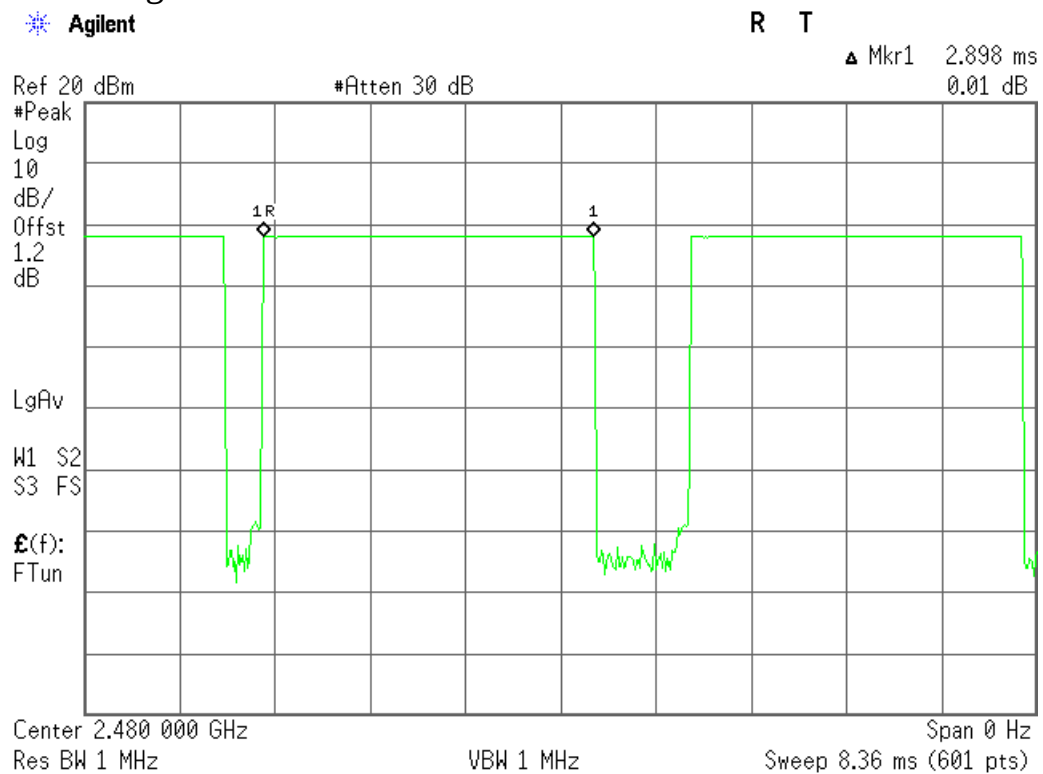


3-DH1: CH Low

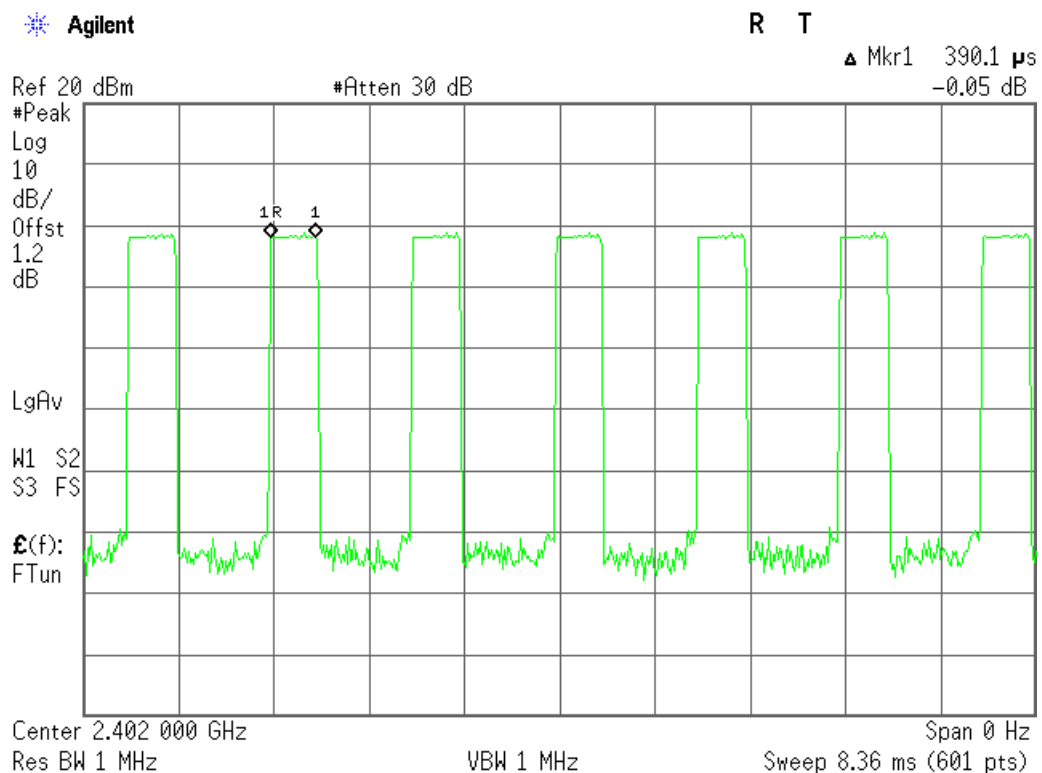

3-DH1: CH Mid

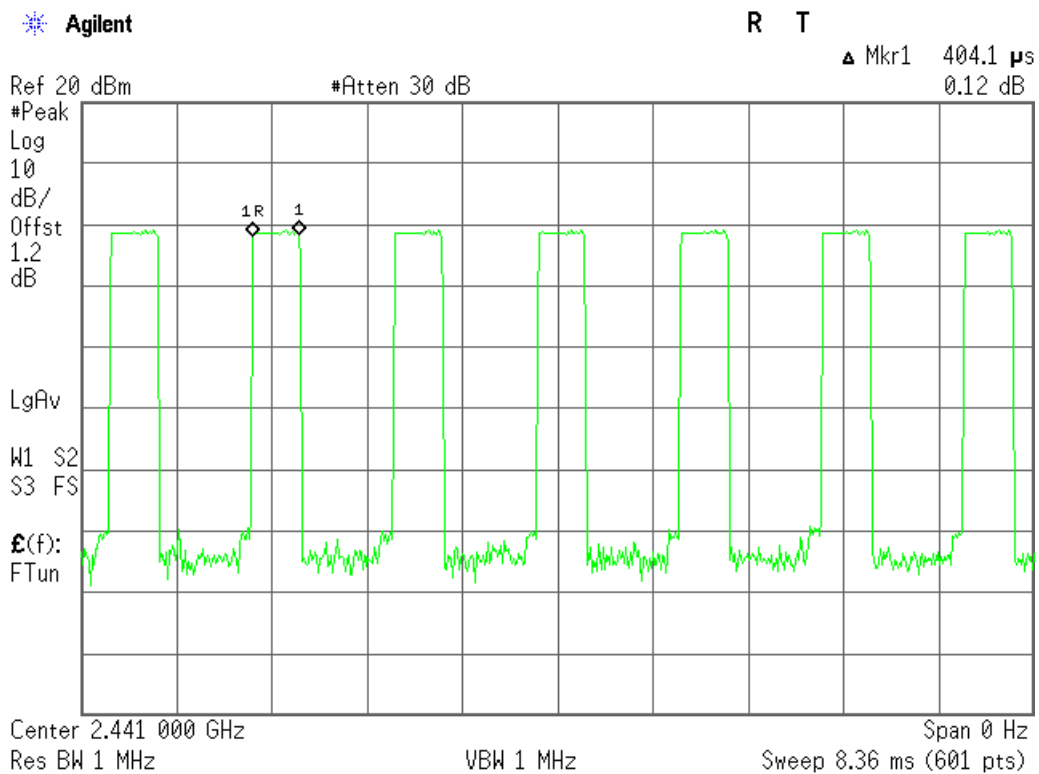


3-DH1: CH High

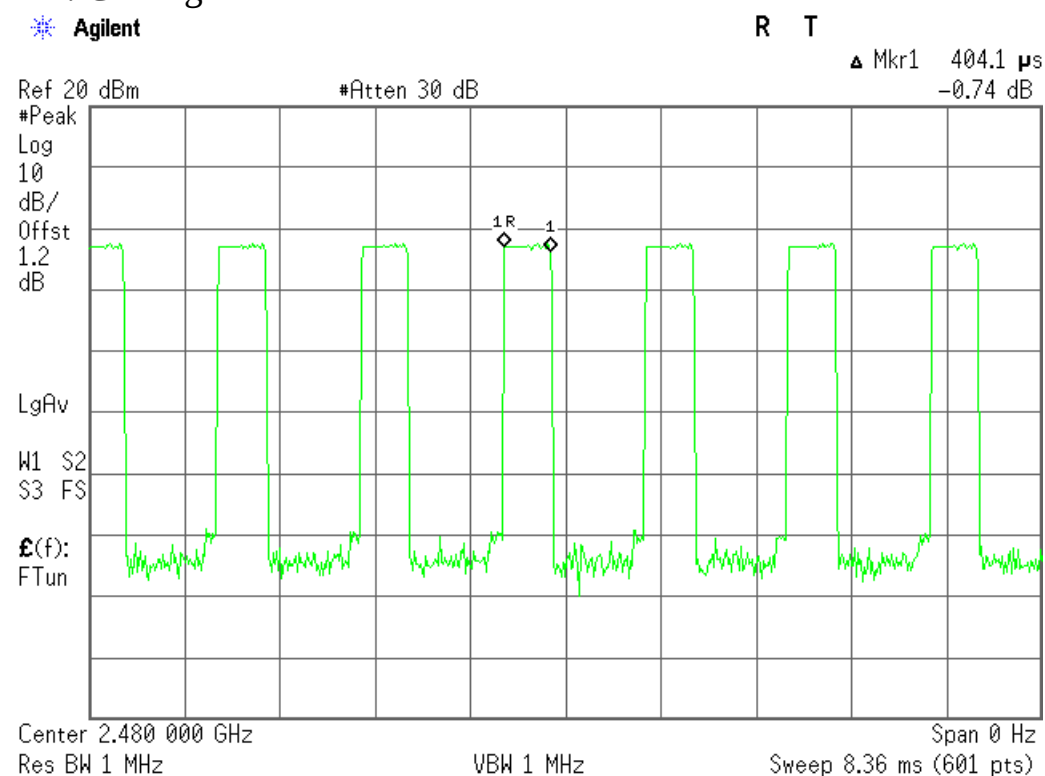

3-DH3: CH Low

Agilent


R L

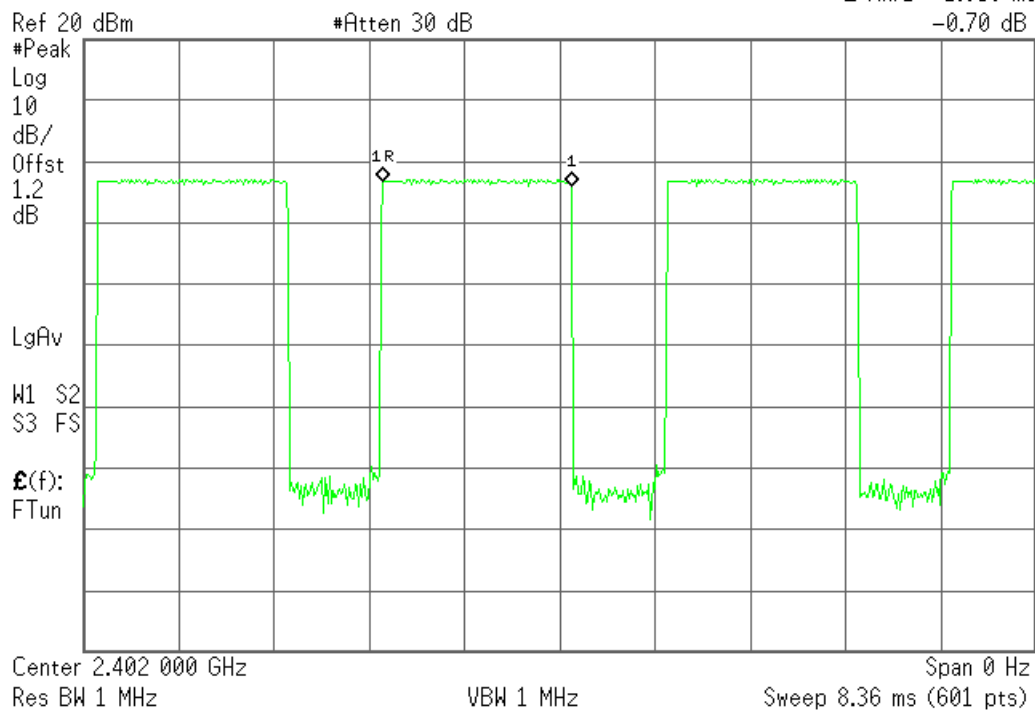▲ Mkr1 1.658 ms
-0.70 dB


3-DH3: CH Mid

Agilent


R T

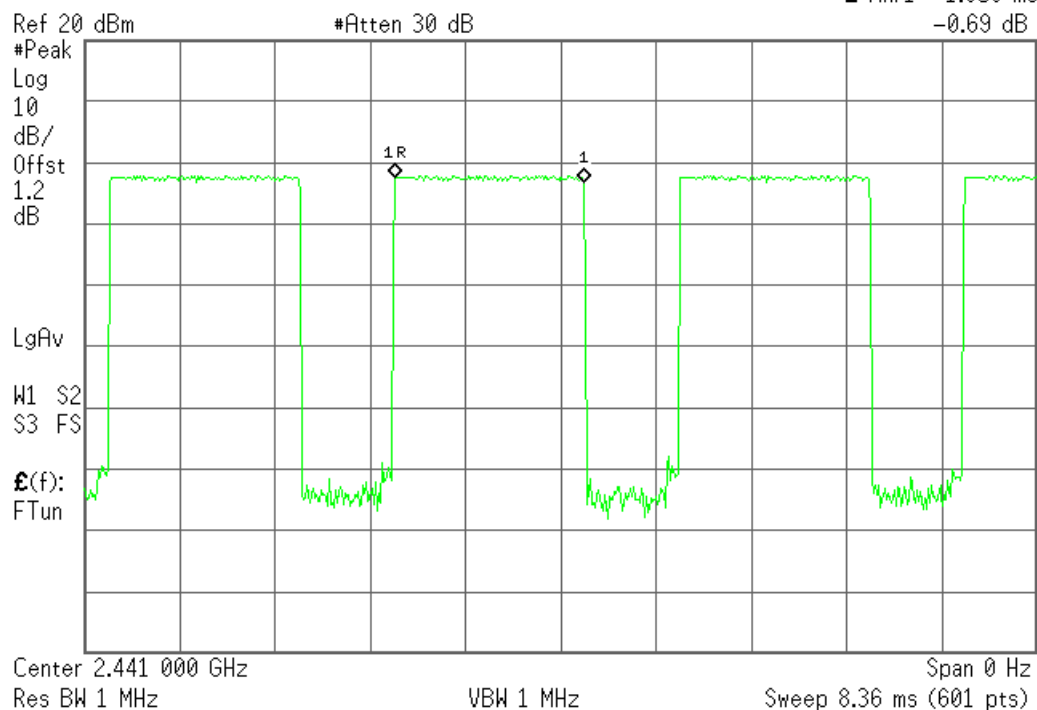▲ Mkr1 1.658 ms
-0.69 dB


3-DH3: CH High

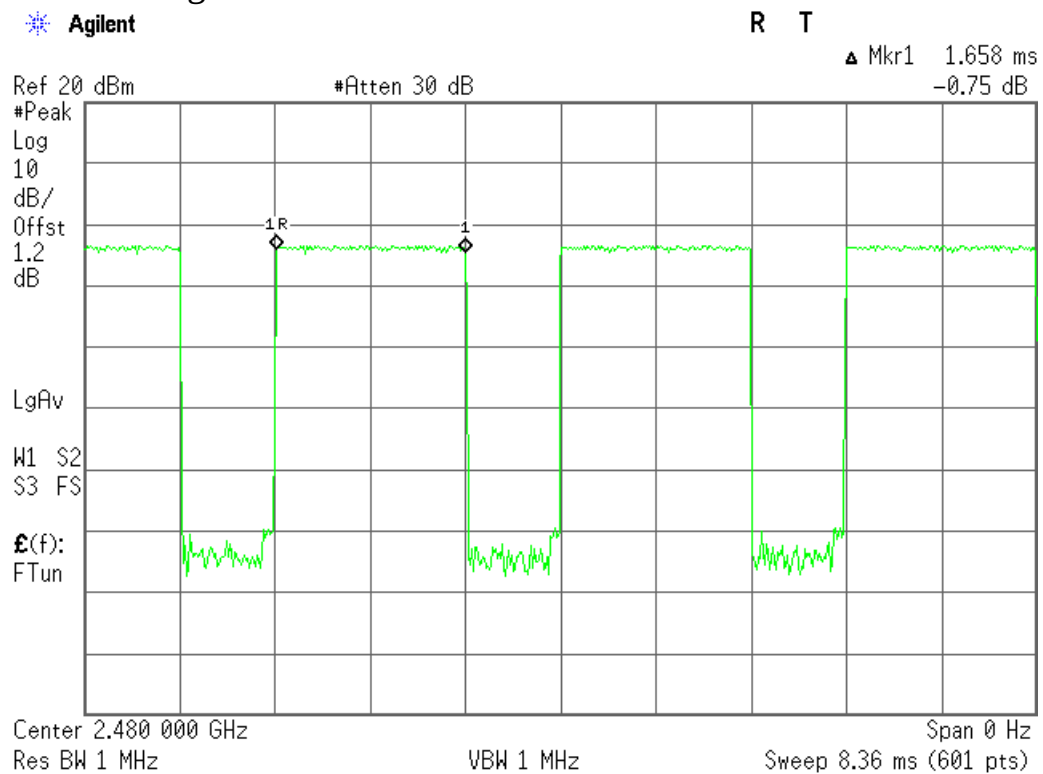


3-DH5: CH Low

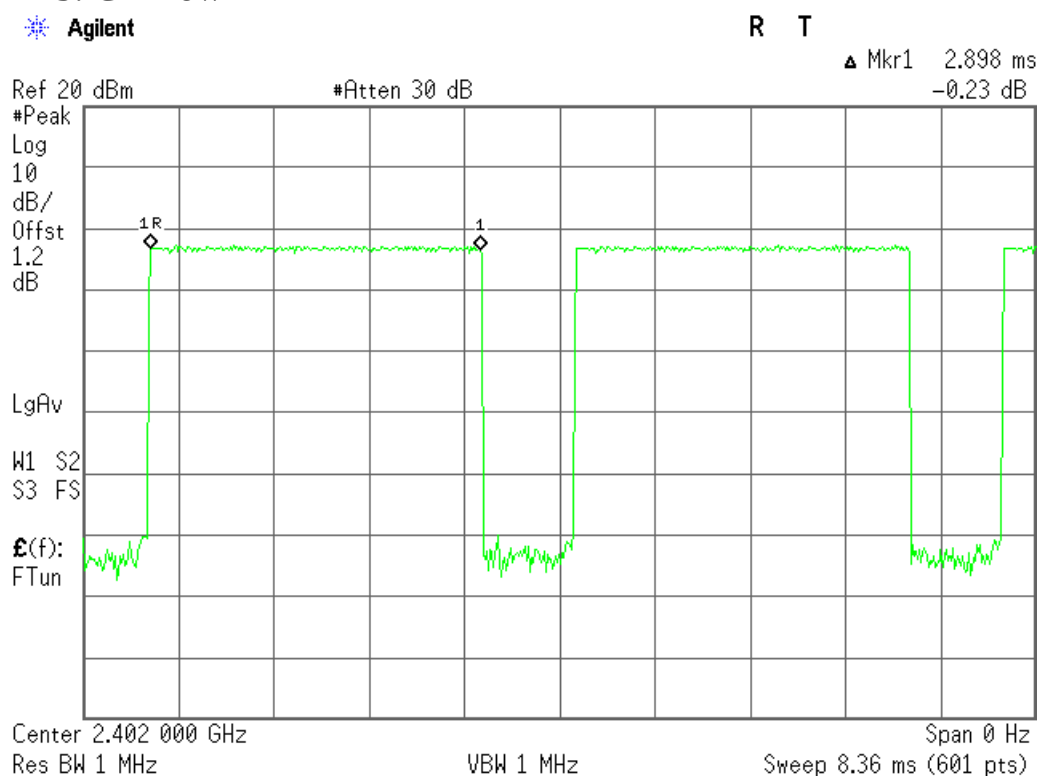

3-DH5: CH Mid

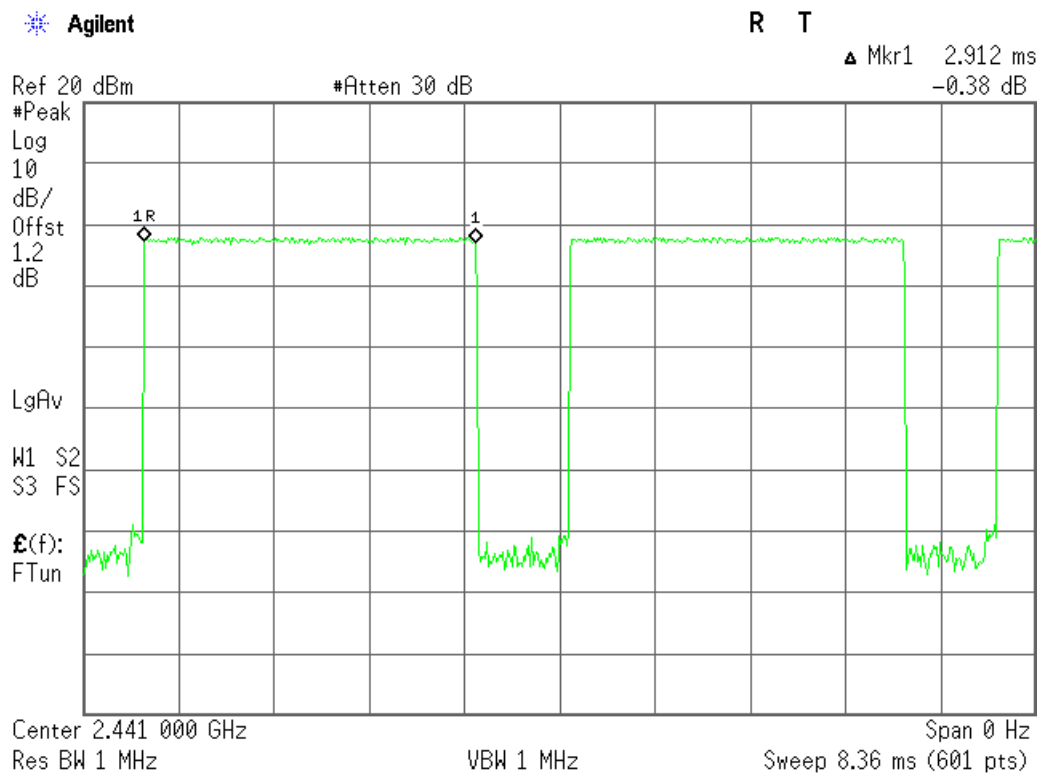

3-DH5: CH High

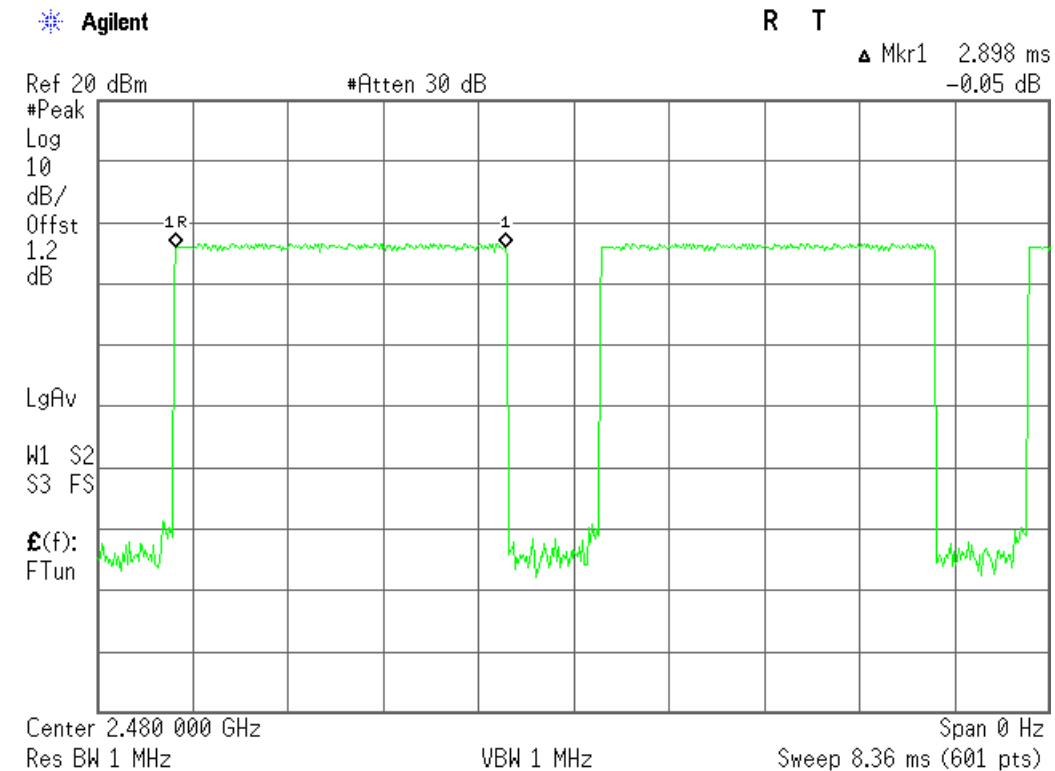

8. Radiated emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

8.2.1. In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

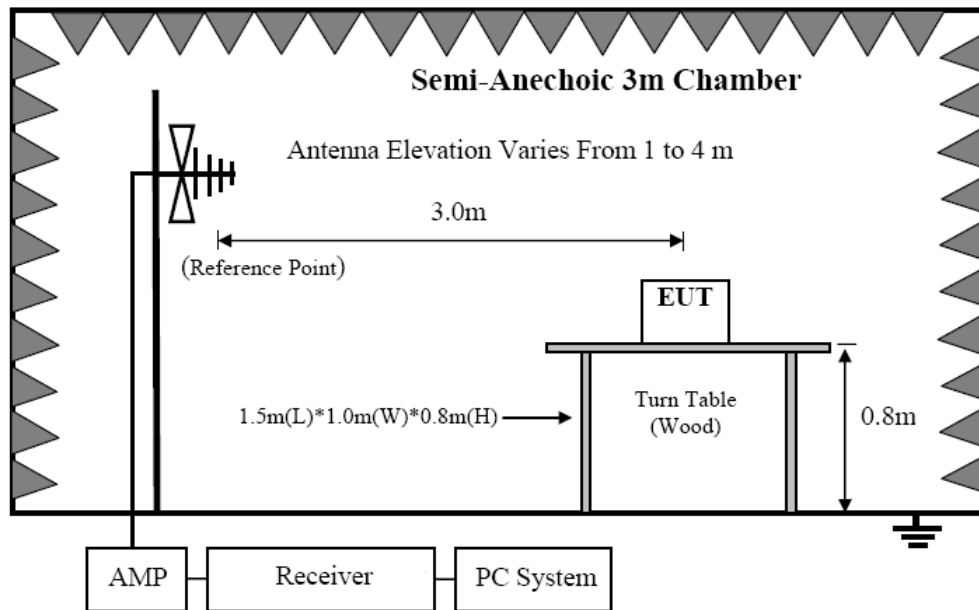

8.2.2. In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

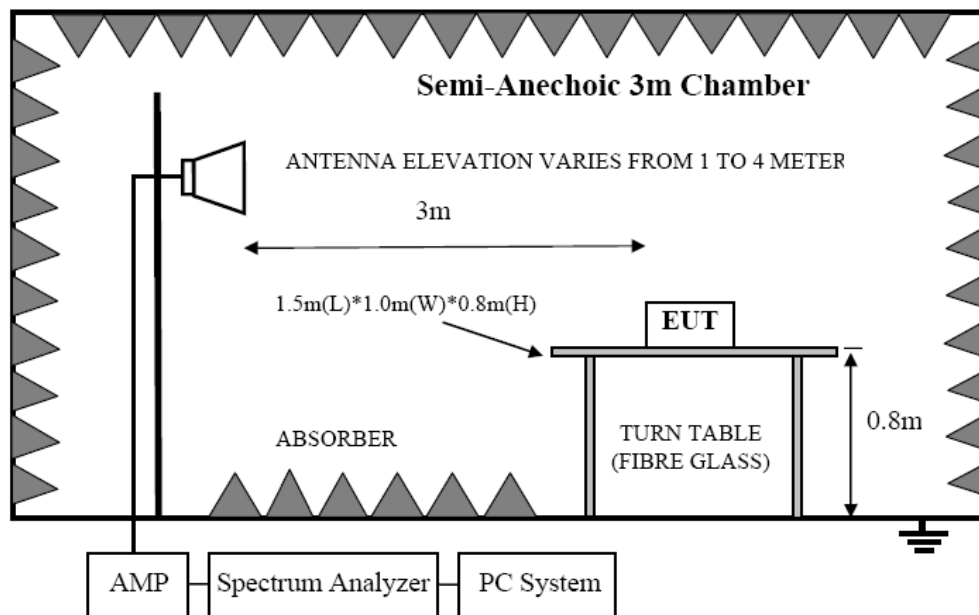

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.

- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Change power supply range from 85% to 115% of the rated supply voltage for AC power supply.
 - (d) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2009 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result

We have scanned the 5th harmonic from 9KHz to the EUT.

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1GHz



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

Data: 3 File: E:\REPORT DATA\G\GuangDaKeJi\RE设置.EM6 (4)

Date: 2012-07-06 Time: 21:38:14

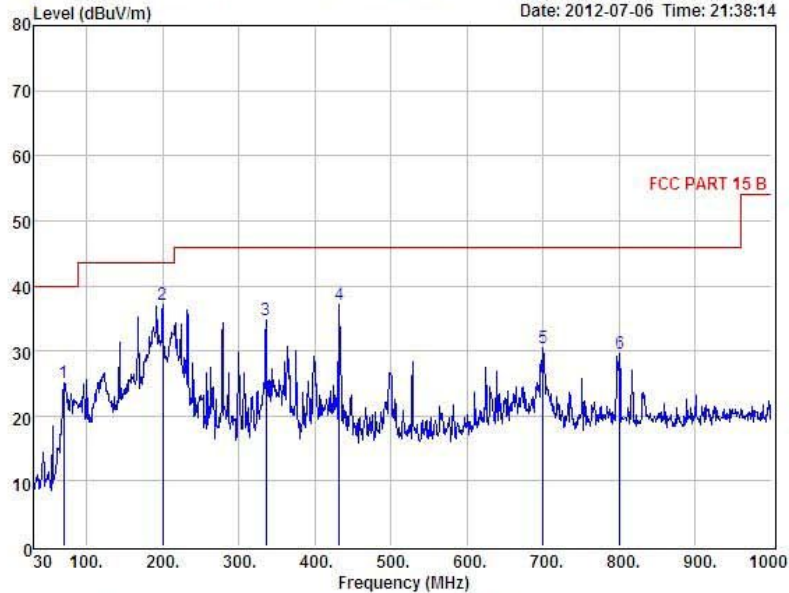

Condition : FCC PART 15 B 3m POL: HORIZONTAL
EUT : Bluetooth stereo headset
Model No. : L5
Test Mode : Play Music
Power : DC 5V From PC With 120V/60Hz
Test Engineer : Store
Remark :


Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	69.77	44.23	10.82	30.76	0.70	24.99	40.00	-15.01	QP
2	199.75	56.85	9.90	30.97	1.40	37.18	43.50	-6.32	QP
3	335.55	50.31	13.58	31.24	2.12	34.77	46.00	-11.23	QP
4	431.58	50.34	15.53	31.46	2.63	37.04	46.00	-8.96	QP
5	699.30	39.09	19.64	31.76	3.40	30.37	46.00	-15.63	QP
6	800.18	36.98	20.70	31.65	3.60	29.63	46.00	-16.37	QP



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

Data: 4 File: E:\REPORT DATA\G\GuangDaKeJi\RE设置.EM6 (4)

Date: 2012-07-06 Time: 21:38:41

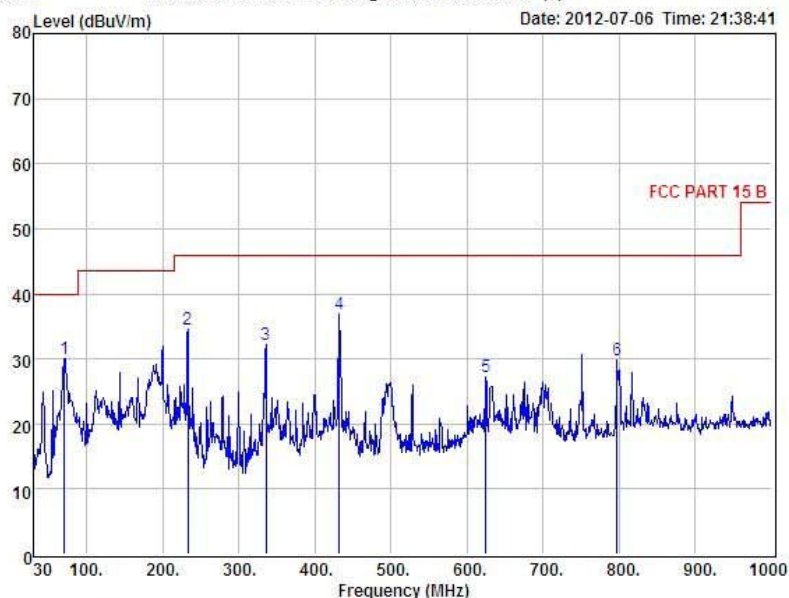

Condition : FCC PART 15 B 3m POL: VERTICAL
EUT : Bluetooth stereo headset
Model No. : L5
Test Mode : Play Music
Power : DC 5V From PC With 120V/60Hz
Test Engineer : Store
Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	70.74	49.63	10.51	30.77	0.71	30.08	40.00	-9.92	QP
2	232.73	52.78	11.26	31.08	1.57	34.53	46.00	-11.47	QP
3	335.55	47.75	13.58	31.24	2.12	32.21	46.00	-13.79	QP
4	431.58	50.12	15.53	31.46	2.63	36.82	46.00	-9.18	QP
5	624.61	37.08	18.76	31.81	3.25	27.28	46.00	-18.72	QP
6	797.27	37.26	20.69	31.65	3.59	29.89	46.00	-16.11	QP

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth stereo headset M/N:L5									
Power: DC 5V form PC with AC 120V/60Hz									
Test date: 2012-07-05 Test site: 3m Chamber Tested by: Simple									
Test mode: GFSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	103.24	28.45	6.63	36.09	102.23	/	/	PK
2	4804	49.76	34.31	10.51	35.36	59.22	74.00	-14.78	PK
3	4804	31.25	34.31	10.51	35.36	40.71	54.00	-13.29	AV
4	7206	/							
5	9608	/							
6	12010	/							
Antenna Polarity: Horizontal									
1	2402	105.41	28.45	6.63	36.09	104.4	/	/	PK
2	4804	51.35	34.31	10.51	35.36	60.81	74.00	-13.19	PK
3	4804	35.57	34.31	10.51	35.36	45.03	54.00	-8.97	AV
4	7206	/							
5	9608	/							
6	12010	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth stereo headset M/N:L5									
Power: DC 5V form PC with AC 120V/60Hz									
Test date: 2012-07-05 Test site: 3m Chamber Tested by: Simple									
Test mode: GFSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2441	105.42	28.48	6.68	36.12	104.46	/	/	PK
2	4882	49.84	34.37	10.57	35.42	59.36	74.00	-14.64	PK
3	4882	34.37	34.37	10.57	35.42	43.89	54.00	-10.11	AV
4	7323	/							
5	9764	/							
6	12205	/							
Antenna Polarity: Horizontal									
1	2441	107.36	28.48	6.68	36.12	106.4	/	/	PK
2	4882	53.84	34.37	10.57	35.42	63.36	74.00	-10.64	PK
3	4882	36.79	34.37	10.57	35.42	46.31	54.00	-7.69	AV
4	7323	/							
5	9764	/							
6	12205	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz ,Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz ,Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth stereo headset M/N:L5									
Power: DC 5V form PC with AC 120V/60Hz									
Test date: 2012-07-05 Test site: 3m Chamber Tested by: Simple									
Test mode: GFSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480	101.39	28.51	6.71	36.15	100.46	/	/	PK
2	4960	51.74	35.12	10.59	35.44	62.01	74.00	-11.99	PK
3	4960	34.69	35.12	10.59	35.44	44.96	54.00	-9.04	AV
4	7440	/							
5	9920	/							
6	12400	/							
Antenna Polarity: Horizontal									
1	2480	107.38	28.51	6.71	36.15	106.45	/	/	PK
2	4960	56.21	35.12	10.59	35.44	66.48	74.00	-7.52	PK
3	4960	36.75	35.12	10.59	35.44	47.02	54.00	-6.98	AV
4	7440	/							
5	9920	/							
6	12400	/							
Note:									
1,Measuring frequency from 1GHz to 25GHz									
2,Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2,Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3,Result = Read level + Antenna factor + cable loss-Amp factor									
4,All the other emissions not reported were too low to read and deemed to comply with FCC limit.									


1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth stereo headset M/N:L5									
Power: DC 5V form PC with AC 120V/60Hz									
Test date: 2012-07-05 Test site: 3m Chamber Tested by: Simple									
Test mode: 8-DPSK Tx CH1 2402MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2402	103.37	28.46	6.65	36.09	102.39	/	/	PK
2	4804	50.54	34.47	10.41	35.26	60.16	74.00	-13.84	PK
3	4804	35.26	34.47	10.41	35.26	44.88	54.00	-9.12	AV
4	7206	/							
5	9608	/							
6	12010	/							
Antenna Polarity: Horizontal									
1	2402	105.76	28.46	6.65	36.09	104.78	/	/	PK
2	4804	53.66	34.47	10.41	35.26	63.28	74.00	-10.72	PK
3	4804	37.89	34.47	10.41	35.26	47.51	54.00	-6.49	AV
4	7206	/							
5	9608	/							
6	12010	/							
Note:									
1,Measuring frequency from 1GHz to 25GHz									
2,Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2,Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3,Result = Read level + Antenna factor + cable loss-Amp factor									
4,All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth stereo headset M/N:L5									
Power: DC 5V form PC with AC 120V/60Hz									
Test date: 2012-07-05 Test site: 3m Chamber Tested by: Simple									
Test mode: 8-DPSK Tx CH40 2441MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2441	103.84	28.49	6.67	36.13	102.87	/	/	PK
2	4882	49.76	34.51	10.43	35.30	59.40	74.00	-14.60	PK
3	4882	34.84	34.51	10.43	35.30	44.48	54.00	-9.52	AV
4	7323	/							
5	9764	/							
6	12205	/							
Antenna Polarity: Horizontal									
1	2441	107.25	28.49	6.67	36.13	106.28	/	/	PK
2	4882	51.32	34.51	10.43	35.30	60.96	74.00	-13.04	PK
3	4882	36.53	34.51	10.43	35.30	46.17	54.00	-7.83	AV
4	7323	/							
5	9764	/							
6	12205	/							
Note:									
1,Measuring frequency from 1GHz to 25GHz									
2,Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz ,Sweep time=Auto, Detector: PK									
2,Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz ,Sweep time=Auto, Detector: PK									
3,Result = Read level + Antenna factor + cable loss-Amp factor									
4,All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

1GHz—25GHz Radiated emission Test result									
EUT: Bluetooth stereo headset M/N:L5									
Power: DC 5V form PC with AC 120V/60Hz									
Test date: 2012-07-05 Test site: 3m Chamber Tested by: Simple									
Test mode: 8-DPSK Tx CH79 2480MHz									
Antenna polarity: Vertical									
No	Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480	101.43	28.52	6.70	36.16	100.49	/	/	PK
2	4960	52.57	35.15	10.59	35.33	62.98	74.00	-11.02	PK
3	4960	33.36	35.15	10.59	35.33	43.77	54.00	-10.23	AV
4	7440	/							
5	9920	/							
6	12400	/							
Antenna Polarity: Horizontal									
1	2480	105.82	28.52	6.70	36.16	104.88	/	/	PK
2	4960	53.68	35.15	10.59	35.33	64.09	74.00	-9.91	PK
3	4960	35.74	35.15	10.59	35.33	46.15	54.00	-7.85	AV
4	7440	/							
5	9920	/							
6	12400	/							
Note:									
1, Measuring frequency from 1GHz to 25GHz									
2, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK									
2, Spectrum Set for AV measure: RBW=1MHz, VBW=10Hz, Sweep time=Auto, Detector: PK									
3, Result = Read level + Antenna factor + cable loss-Amp factor									
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

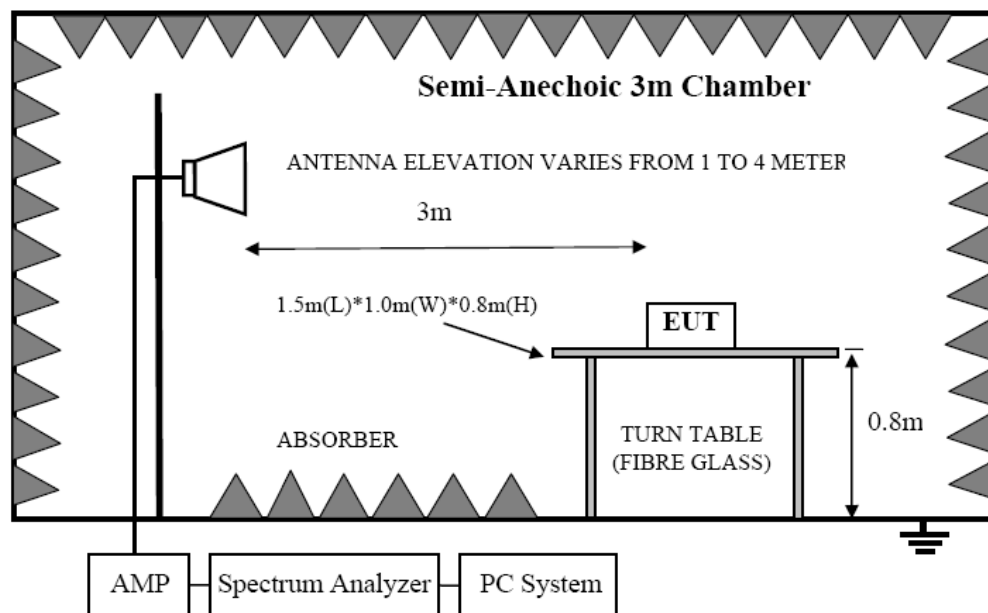

9.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

Same with clause 6.3 except change investigated frequency range from 2310MHz to 2415MHz , 2475MHz to 2500MHz and 5725MHz to 5850MHz

9.4. Test Result

PASS. (See below detailed test data)

GFSK

CH LOW :

Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.390 0 GHz
56.47 dB μ V

Ref 120 dB μ V

#Atten 30 dB


#Peak

Log
10
dB/

DI
74.0
dB μ V
LgAv

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

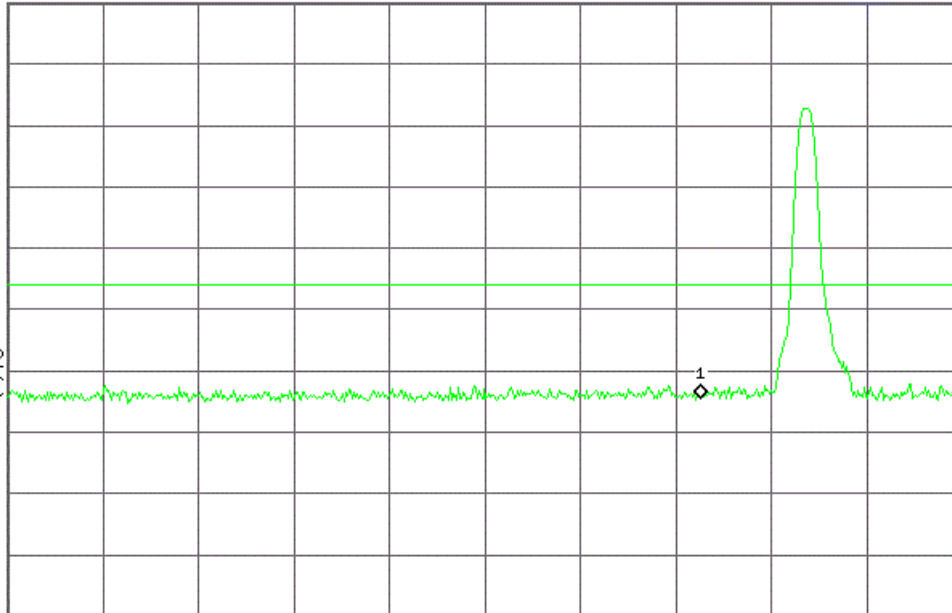

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.390 0 GHz
46.84 dB μ V

Ref 120 dB μ V


#Atten 30 dB

#Avg
Log
10
dB/

DI
54.0
dB μ V
PAvg

W1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

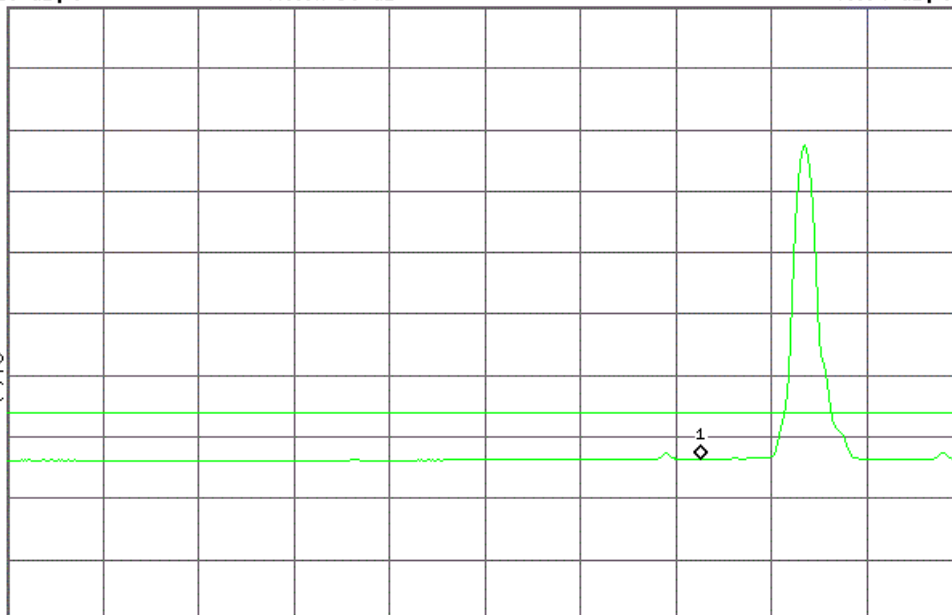

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 27.12 s (601 pts)

CH High :

Detector mode: Peak

Polarity: Horizontal

 **Agilent**

R T

Mkr1 2.483 50 GHz
57.13 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Peak
Log
10
dB/

DI
74.0
dB μ V
LgAv

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

Start 2.450 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

 **Agilent**

R T

Mkr1 2.483 50 GHz
46.66 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Avg
Log
10
dB/

DI
54.0
dB μ V
PAvg

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

Start 2.450 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 12.33 s (601 pts)

CH LOW :

Detector mode: Peak

Polarity: Vertical

 **Agilent**

R T

Mkr1 2.390 0 GHz
56.73 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Peak
Log
10
dB/

DI
74.0
dB μ V
LgAv

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.420 0 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

 **Agilent**

R T

Mkr1 2.390 0 GHz
46.68 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Avg
Log
10
dB/

DI
54.0
dB μ V
PAvg

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz


Stop 2.420 0 GHz

Sweep 27.12 s (601 pts)

CH High :


Detector mode: Peak

Polarity: Vertical

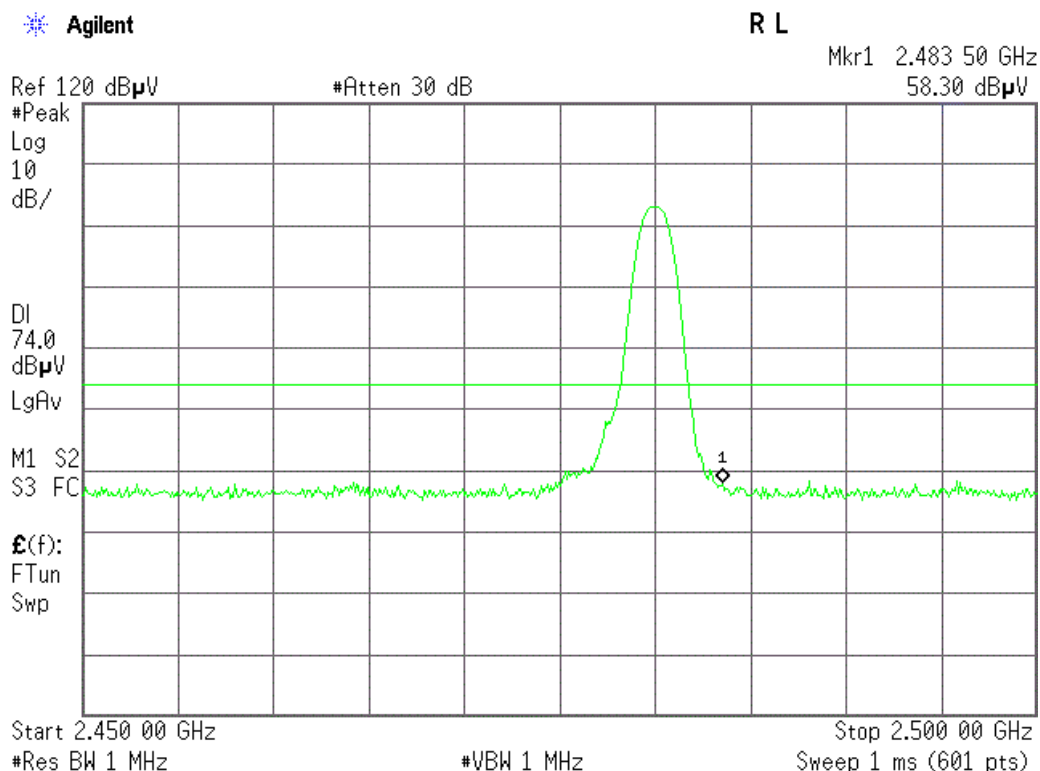

Detector mode: Average

Polarity: Vertical

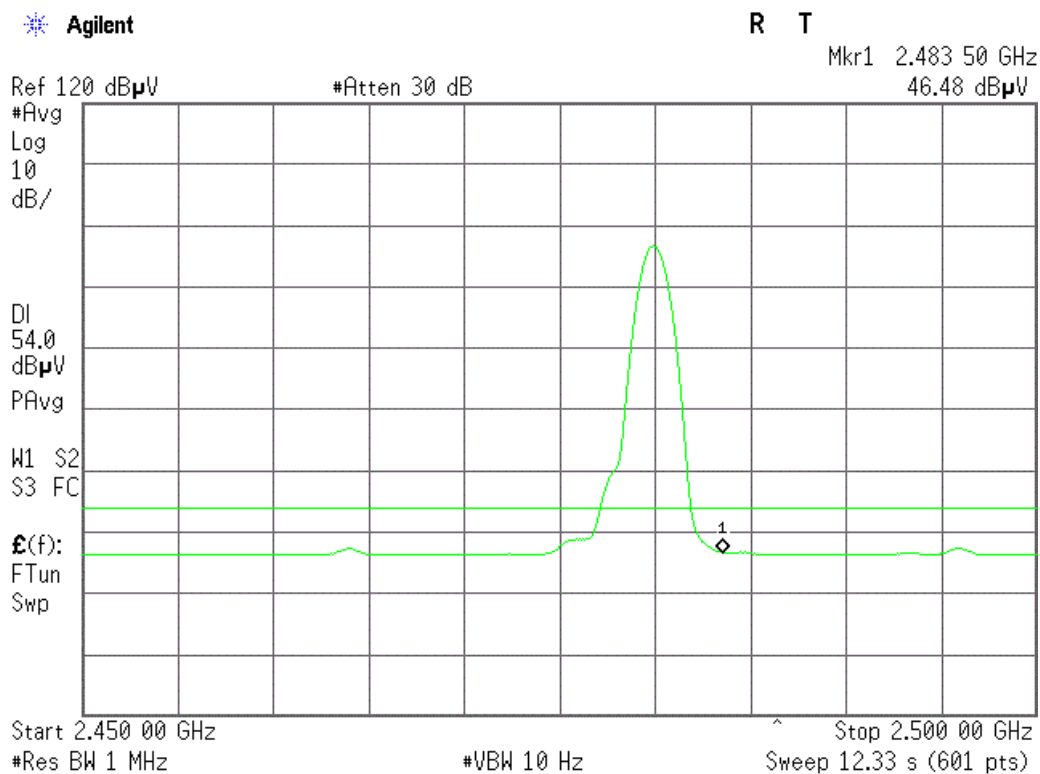

8-DPSK

CH LOW :

Detector mode: Peak**Polarity: Horizontal**

Agilent

R T

Mkr1 2.390 0 GHz
55.58 dB μ VRef 120 dB μ V

#Atten 30 dB

#Peak
Log
10
dB/DI
74.0
dB μ V
LgAvM1 S2
S3 FC $\mathcal{E}(f)$:
FTun
Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.420 0 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

Agilent

R T

Mkr1 2.390 0 GHz
46.44 dB μ VRef 120 dB μ V

#Atten 30 dB

#Avg
Log
10
dB/DI
54.0
dB μ V
PAvgM1 S2
S3 FC $\mathcal{E}(f)$:
FTun
Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.420 0 GHz

Sweep 27.12 s (601 pts)

CH High :

Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
58.95 dB μ V

Ref 120 dB μ V


#Atten 30 dB

#Peak
Log
10
dB/

DI
74.0
dB μ V
LgAv

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp

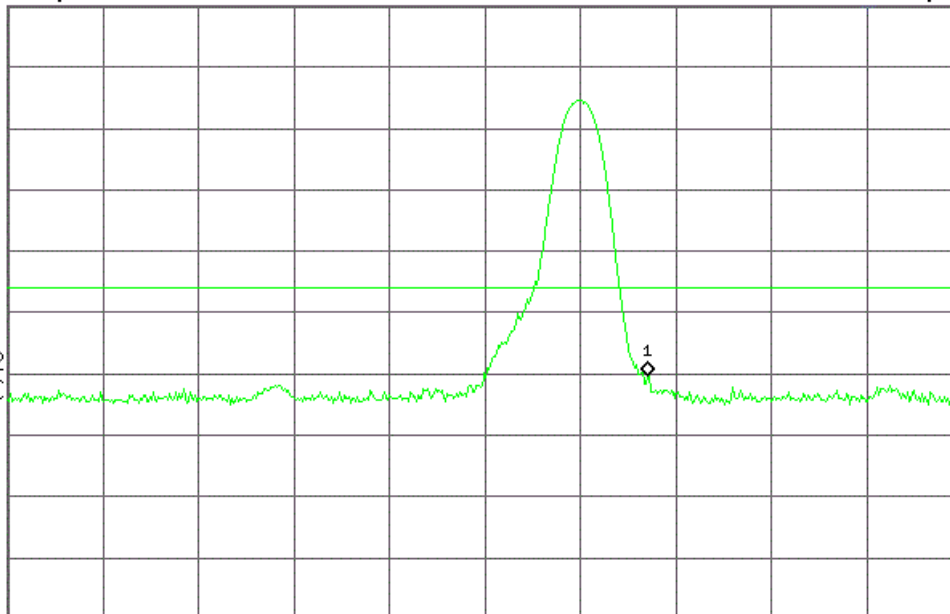

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
47.10 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Avg
Log
10
dB/

DI
54.0
dB μ V
PAvg

M1 S2
S3 FC

$\mathcal{E}(f)$:
FTun
Swp



Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 12.33 s (601 pts)


CH LOW :

Detector mode: Peak

Polarity: Vertical

Agilent

R T

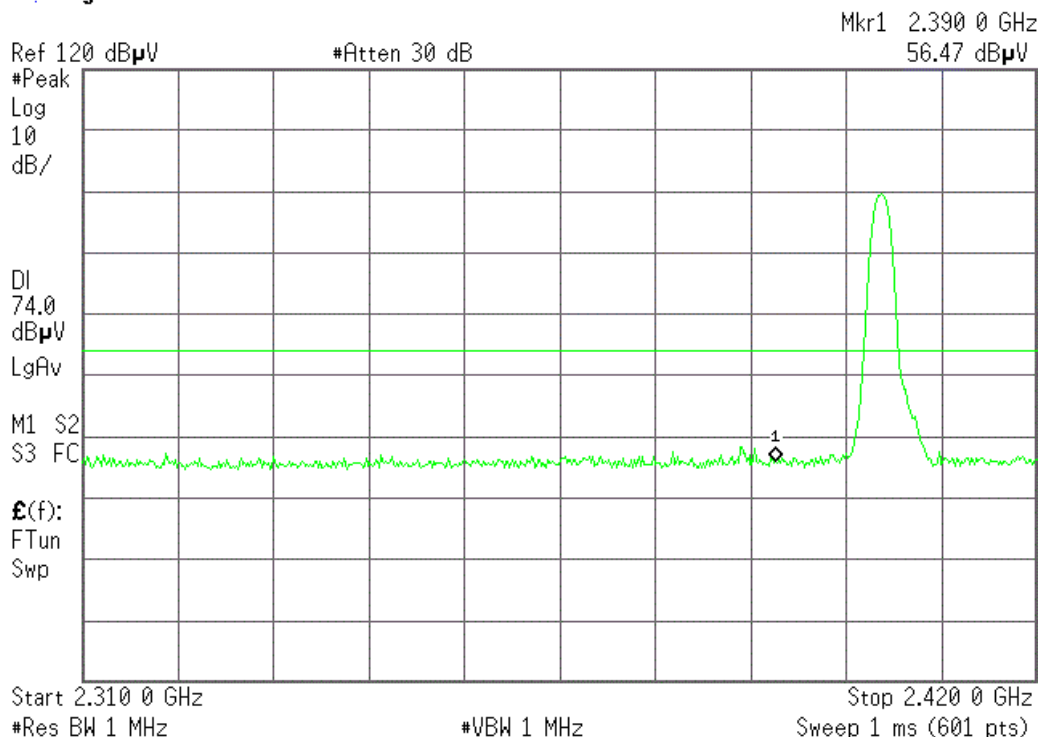


Detector mode: Average

Polarity: Vertical

Agilent

R T

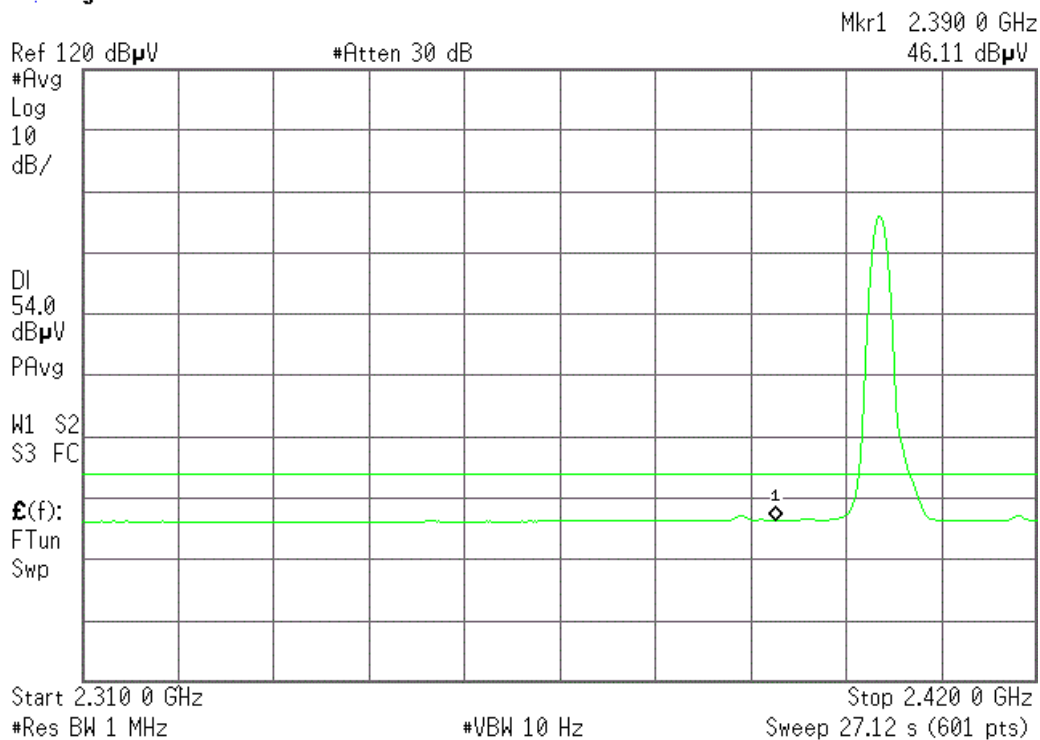

CH High :

Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 2.483 50 GHz
56.23 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Peak
Log
10
dB/

DI
74.0
dB μ V
LgAv

M1 S2
S3 FC

$E(f)$:
FTun
Swp

Start 2.450 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 2.483 50 GHz
47.83 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Avg
Log
10
dB/

DI
54.0
dB μ V
PAvg

M1 S2
S3 FC

$E(f)$:
FTun
Swp

Start 2.450 00 GHz

#Res BW 1 MHz


#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 12.33 s (601 pts)

10. Power Line Conducted Emissions

10.1. Block Diagram of Test Setup

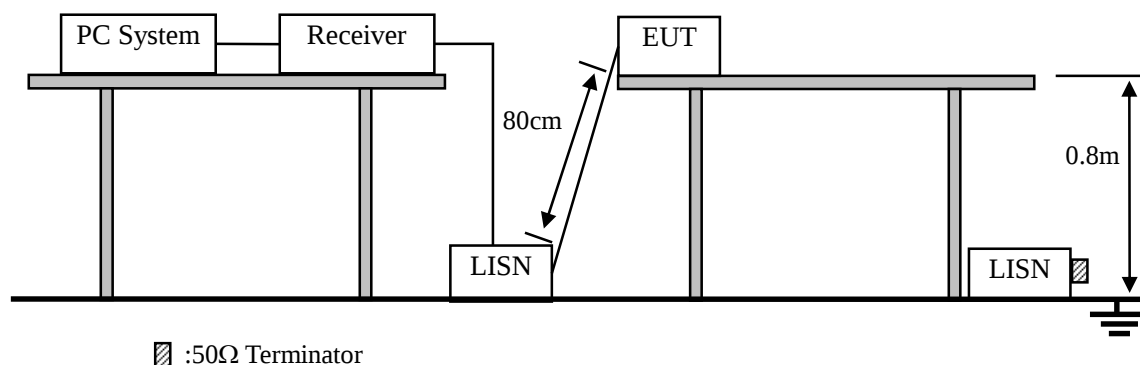

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N1), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4 2009 and ANSI C64.10:2009 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

PASS. (See below detailed test data)



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

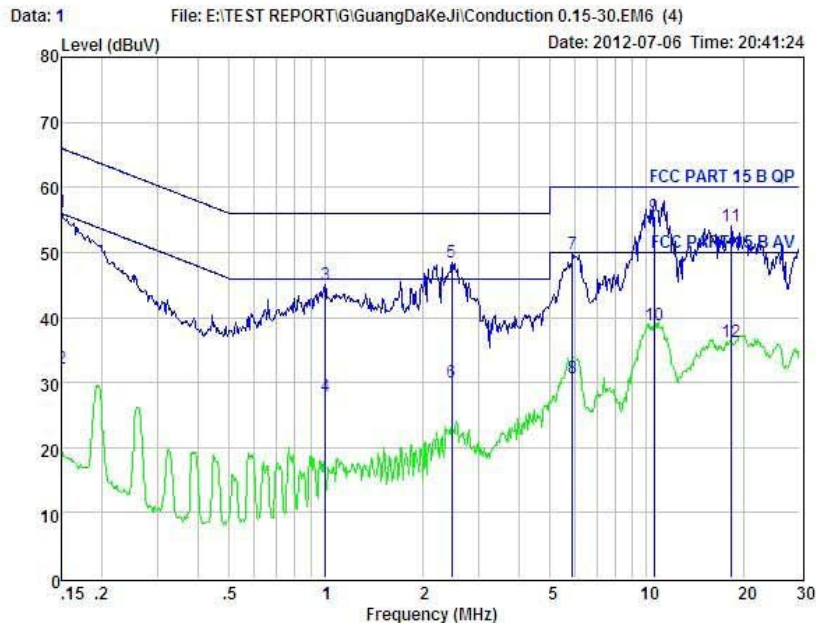


Condition : FCC PART 15 B QP POL: LINE
EUT : Bluetooth stereo headset
Model No. : LS
Test Mode : Play Music
Power : DC 5V From PC With 120V/60Hz
Test Engineer: Store
Remark :

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.150	46.42	0.03	-9.72	0.10	56.27	66.00	-9.73	QP
2	0.150	22.25	0.03	-9.72	0.10	32.10	56.00	-23.90	Average
3	1.000	35.13	0.04	-9.71	0.10	44.98	56.00	-11.02	QP
4	1.000	17.93	0.04	-9.71	0.10	27.78	46.00	-18.22	Average
5	2.474	38.52	0.06	-9.70	0.11	48.39	56.00	-7.61	QP
6	2.474	20.23	0.06	-9.70	0.11	30.10	46.00	-15.90	Average
7	5.867	39.91	0.11	-9.62	0.14	49.78	60.00	-10.22	QP
8	5.867	20.75	0.11	-9.62	0.14	30.62	50.00	-19.38	Average
9	10.564	45.62	0.21	-9.50	0.22	55.55	60.00	-4.45	QP
10	10.564	28.91	0.21	-9.50	0.22	38.54	50.00	-11.46	Average
11	18.426	44.00	0.30	-9.46	0.32	54.08	60.00	-5.92	QP
12	18.426	26.26	0.30	-9.46	0.32	36.34	50.00	-13.66	Average



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

Data: 3 File: E:\TEST REPORT\G\GuangDaKeJi\Conduction 0.15-30.EM6 (4) Date: 2012-07-06 Time: 20:44:19

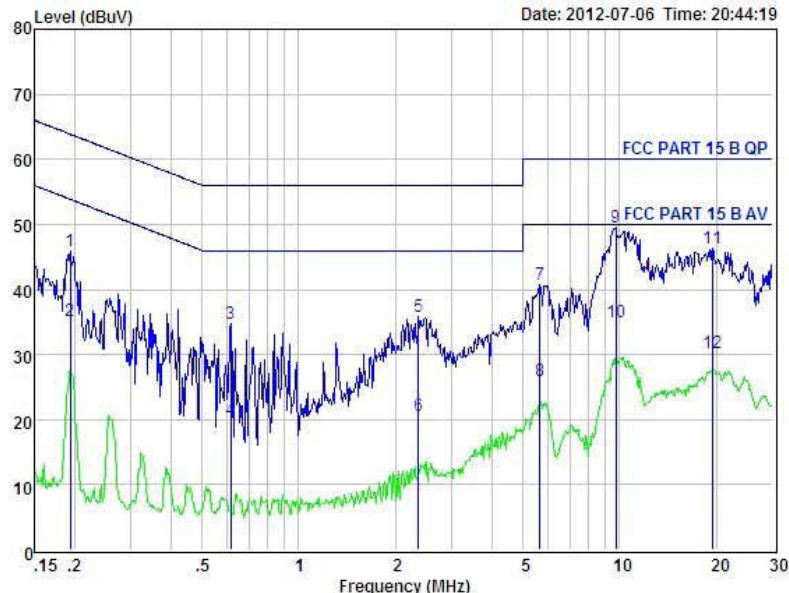

Condition : FCC PART 15 B QP POL: NEUTRAL
EUT : Bluetooth stereo headset
Model No. : L5
Test Mode : Play Music
Power : DC 5V From PC With 120V/60Hz
Test Engineer: Store
Remark :

Item	Freq MHz	Read dBuV	LISN Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	0.194	36.03	0.03	-9.72	0.10	45.88	63.84	-17.96	QP
2	0.194	25.26	0.03	-9.72	0.10	35.11	53.84	-18.73	Average
3	0.614	24.95	0.03	-9.72	0.10	34.80	56.00	-21.20	QP
4	0.614	10.08	0.03	-9.72	0.10	19.93	46.00	-26.07	Average
5	2.358	26.02	0.06	-9.70	0.11	35.89	56.00	-20.11	QP
6	2.358	10.80	0.06	-9.70	0.11	20.67	46.00	-25.33	Average
7	5.653	30.80	0.10	-9.64	0.13	40.67	60.00	-19.33	QP
8	5.653	16.10	0.10	-9.64	0.13	25.97	50.00	-24.03	Average
9	9.757	39.76	0.18	-9.36	0.20	49.50	60.00	-10.50	QP
10	9.757	25.16	0.18	-9.36	0.20	34.90	50.00	-15.10	Average
11	19.532	36.23	0.31	-9.48	0.34	46.36	60.00	-13.64	QP
12	19.532	20.03	0.31	-9.48	0.34	30.16	50.00	-19.84	Average

- 3 -

Note: 1. Result Level = Read Level + LISN Factor + Cable loss

2. If QP Result comply with AV limit, AV Result is deemed to comply with AV limit

11. Antenna Requirements



11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.87dBi.

12. Test setup photo

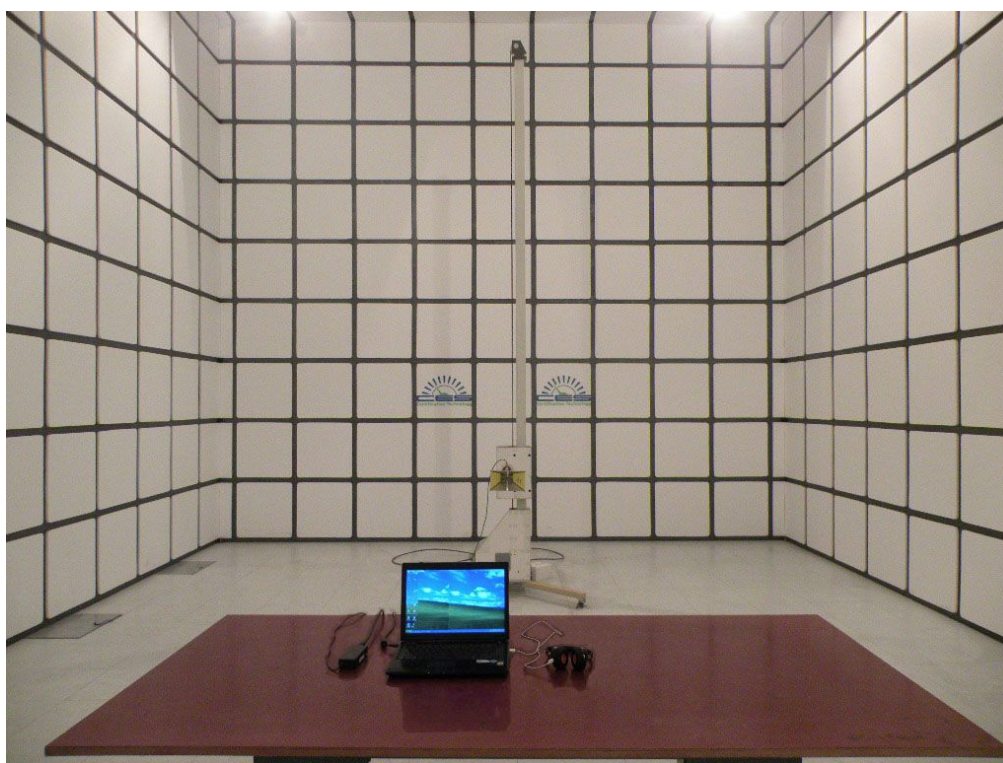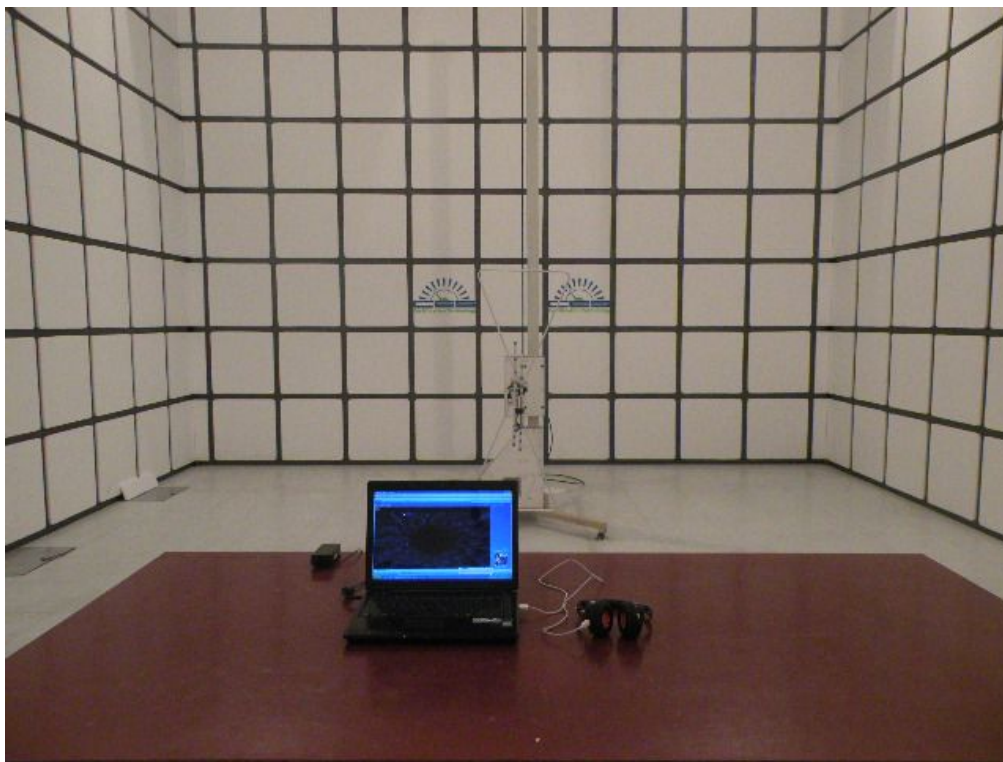






13.Photos of EUT










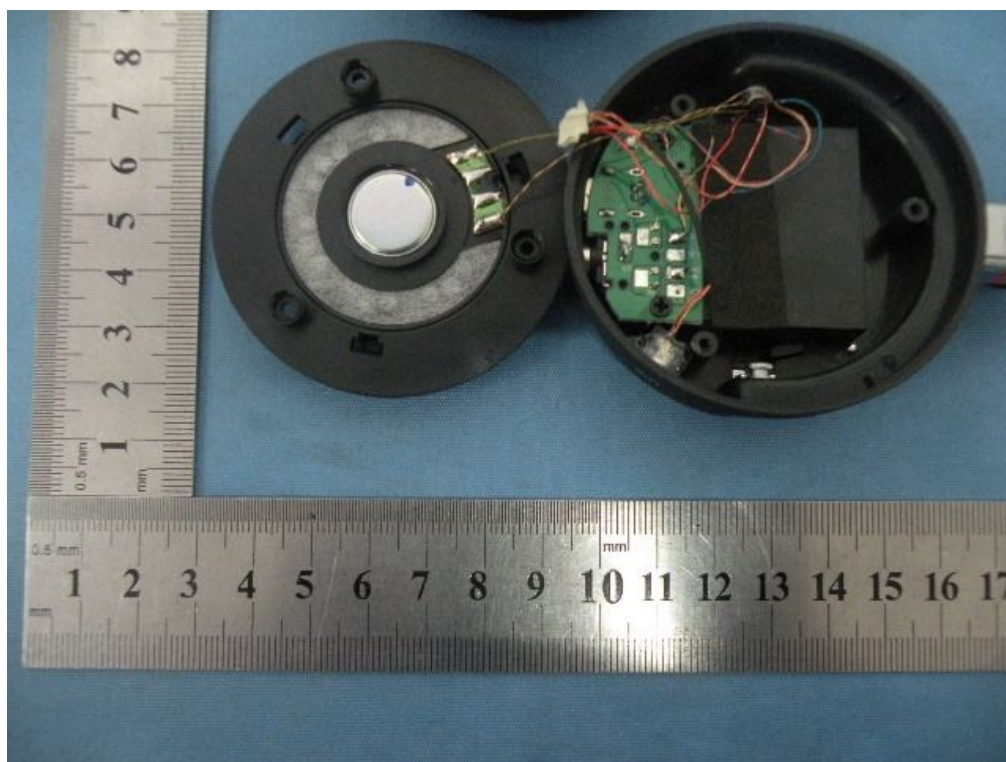

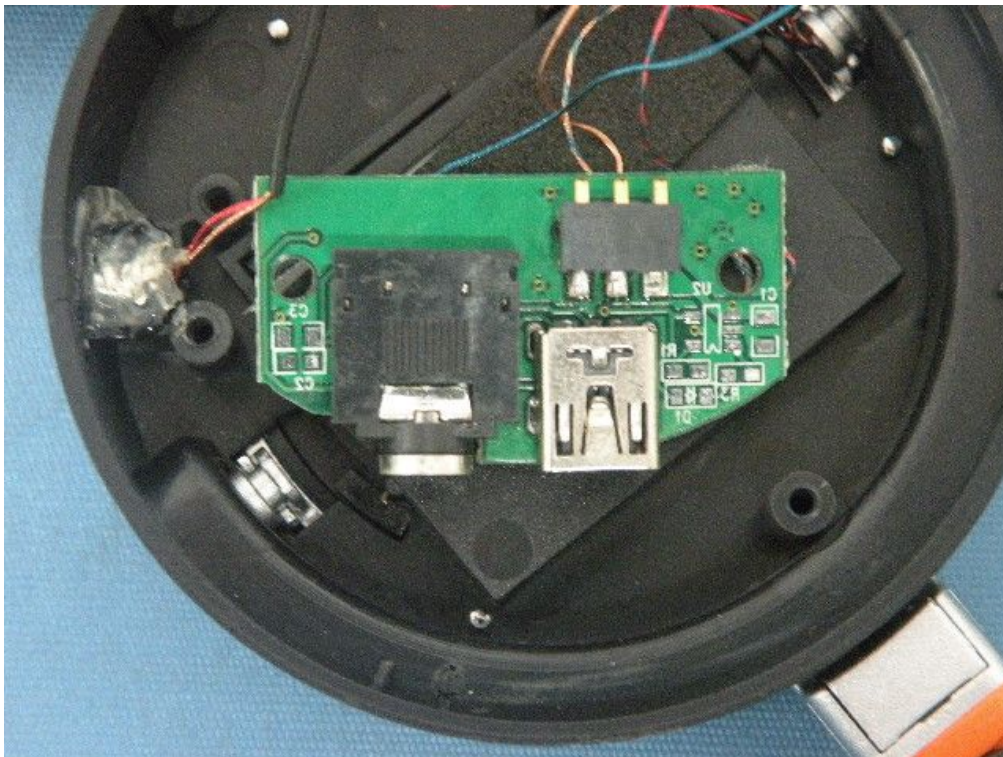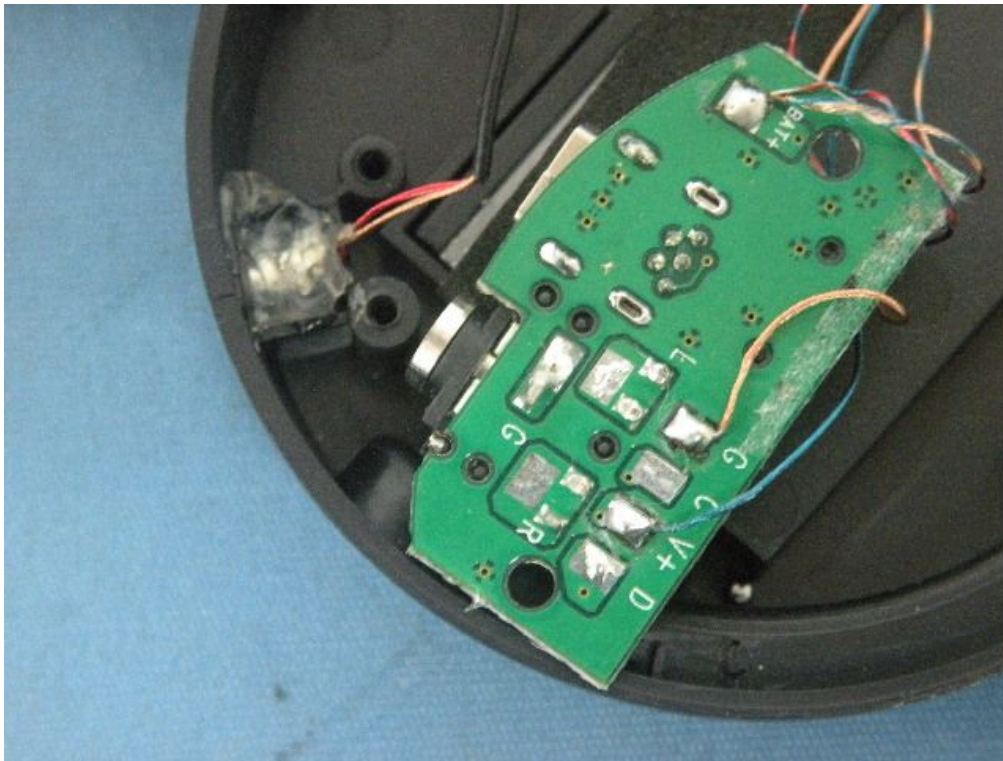

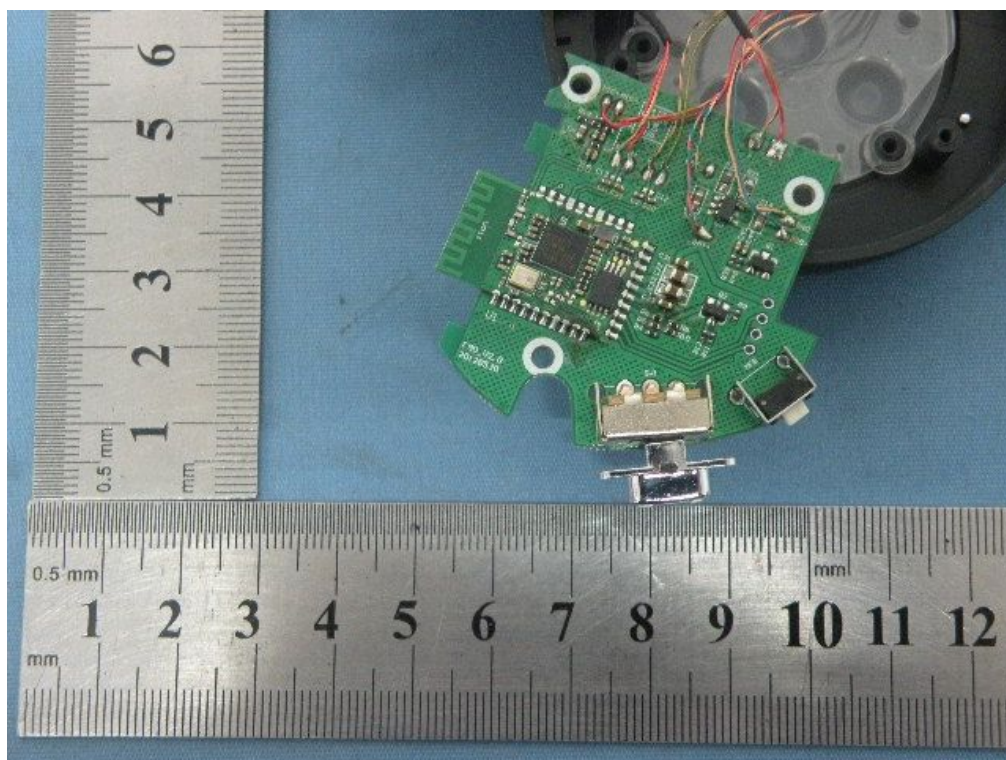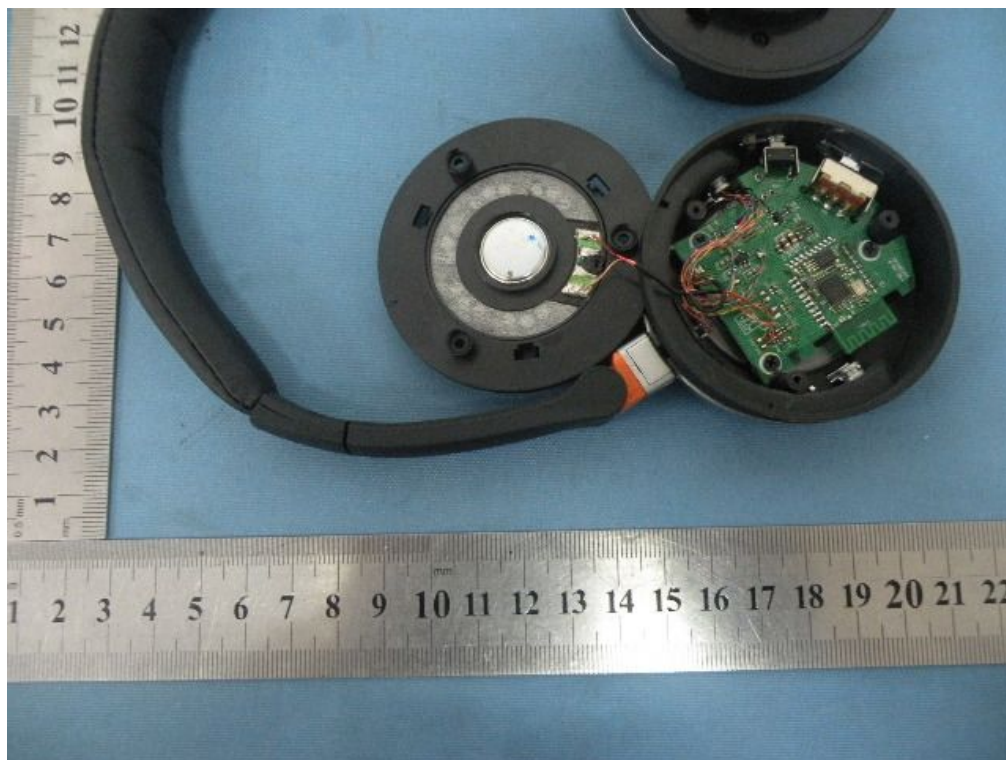

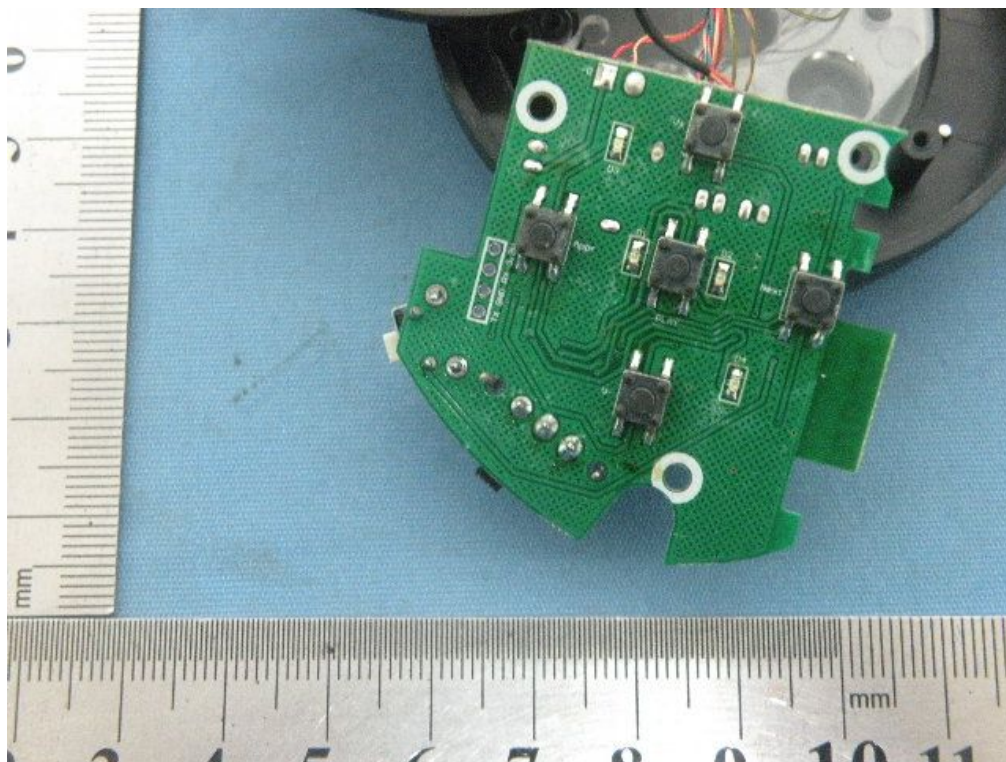

END OF THE REPORT