

REPORT OF MEASUREMENTS
PART 15C (15.247) - INTENTIONAL RADIATOR

DEVICE: 2.4 GHZ 11 CHANNEL DIRECT SEQUENCE
SPREAD SPECTRUM WIRELESS
ROUTER/BRIDGE

MODEL: NCL1170

MANUFACTURER: WAVERIDER COMMUNICATIONS
(CANADA) INC.

ADDRESS: 6120 – 1A STREET S.W.
CALGARY ALBERTA
CANADA T2H 0G3

WORK ORDER: 9181HR



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 (EN45001)

ACME TESTING
2002 Valley Highway
Acme, WA 98220-0003
Steve Fitzgerald Phone: 360 595 2785

ELECTRICAL (EMC)

Valid to: November 30, 2001

Certificate Number: 0829-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following Electromagnetic Compatibility (EMC) tests:

Radiated & Conducted Emissions
Immunity
Voltage sags
Harmonics
Flicker

On the following materials and products:

Electrical and electronic equipment for information technology, industrial, scientific, and medical applications, residential service, receivers, and licensed and unlicensed transmitters.

Using the following standards:

U.S. Code of Federal Regulations (CFR) 47, FCC Method Parts 15 (using ANSI C63.4-1992), 18 & 90
CISPR: 11; 13; 14 (excluding click measurements); 22 (including Amendments 1 and 2)
CNS: 13439; 13438
EN: 50081-1; 50081-2; 50082-1; 50082-2; 55011; 55013; 55014-1 (excluding click measurements); 55014-2; 55022; 55103-1; 55103-2; 60601-1-2; 60945 (sections 9 & 10 only); 61000-4-2; 61000-4-3; 61000-4-4; 61000-4-5 (single phase only, excluding 10/700 surge testing); 61000-4-6; 61000-4-8; 61000-4-11; 61000-3-2; 61000-3-3
AS/NZS: 3548, 2064.1/2, 4251.1, 4252.1
IEC: 801-2; 801-3; 801-4; 801-5; 1000-4-2; 1000-4-3; 1000-4-4; 1000-4-5; 1000-4-6
ENV: 50140; 50204
ICES-003 Issue 2 Revision 1
RSS-210 Issue 2
Bellcore GR-1089-CORE (Sections 2 through 3.2.4)

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8370 • Phone: 301 644 3248 • Fax: 301 662 2974



1. GENERAL	5
1.1 DOCUMENT HISTORY.....	5
1.2 PURPOSE.....	6
1.3 MANUFACTURER	7
1.4 TEST LOCATION.....	7
1.5 ACCREDITATION AND LISTING	7
2. TEST RESULTS SUMMARY.....	8
3. DESCRIPTION OF EQUIPMENT AND PERIPHERALS.....	9
3.1 EQUIPMENT UNDER TEST (EUT).....	9
3.2 MODE OF OPERATION DURING TESTING	9
3.3 MODIFICATIONS REQUIRED FOR COMPLIANCE.....	9
3.4 EUT PERIPHERALS FOR EMISSIONS	9
3.5 DESCRIPTION OF INTERFACE CABLES FOR EMISSIONS	10
4. ANTENNA REQUIREMENT.....	11
4.1 REGULATION.....	11
4.2 RESULT.....	11
5. CONDUCTED EMISSIONS TESTS.....	12
5.1 TEST EQUIPMENT	12
5.2 PURPOSE.....	12
5.3 TEST PROCEDURES	12
5.4 TEST RESULTS.....	13
5.5 GRAPHICAL DATA	14
6. 6 DB BANDWIDTH	16
6.1 REGULATION.....	16
6.2 TEST EQUIPMENT	16
6.3 TEST PROCEDURES	16
6.4 TEST RESULTS.....	16
6.5 GRAPHICAL DATA	17
7. POWER OUTPUT.....	20
7.1 REGULATION.....	20
7.2 TEST EQUIPMENT	20
7.3 TEST PROCEDURES	20
7.4 TEST RESULTS.....	20
8. ANTENNA GAIN REQUIREMENTS	21
8.1 REGULATION.....	21
8.2 RESULT.....	21
9. RADIO FREQUENCY EXPOSURE.....	22
9.1 REGULATION.....	22
9.2 RESULT.....	22
9.3 CALCULATIONS	22
9.4 CONCLUSION	22

(Table of Contents Continued)

10.	CONDUCTED SPURIOUS EMISSIONS.....	23
10.1	REGULATION.....	23
10.2	TEST EQUIPMENT	23
10.3	TEST PROCEDURES	23
10.4	TEST RESULTS.....	23
10.5	GRAPHICAL DATA	24
11.	RADIATED SPURIOUS EMISSIONS.....	30
11.1	REGULATION.....	30
11.2	TEST EQUIPMENT	30
11.3	TEST PROCEDURES	31
11.4	TEST RESULTS.....	32
12.	PEAK POWER SPECTRAL DENSITY	40
12.1	REGULATION.....	40
12.2	TEST EQUIPMENT	40
12.3	TEST PROCEDURES	40
12.4	TEST RESULTS.....	40
12.5	GRAPHICAL DATA	41
13.	PROCESS GAIN REQUIREMENTS	44
13.1	REGULATION.....	44
13.2	RESULT.....	44
14.	LABELING INFORMATION.....	ERROR! BOOKMARK NOT DEFINED.
15.	EUT PHOTOS	ERROR! BOOKMARK NOT DEFINED.
16.	MISCELLANEOUS COMMENTS AND NOTES.....	45
17.	LIST OF ATTACHMENTS	45

1. General

1.1 Document History

REVISION	DATE	COMMENTS
-	9 February 2001	Initial Release, Paul G. Slavens

Note: Acme Testing Co. hereby makes the following statements so as to conform with Chapter 10 (Test Reports) Requirement of ANSI C63.4:1992 “Methods and Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”:

- The units described in this report were received at Acme Testing Co.’s facilities and testing was performed on the units described in this report on 10, 11, 15, 16, 17, and 18 January 2001.
- The Test Results reported herein apply only to the Units actually tested, and to substantially identical Units.
- This test report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government, or any other foreign government.

This document is the property of Acme Testing, Co., and shall not be reproduced, except in full, without prior written approval of Acme Testing Co. However, all ownership rights are hereby returned unconditionally to WaveRider Communications (Canada) Inc., and approval is hereby granted to WaveRider Communications (Canada) Inc and its employees and agents to reproduce all or part of this report for any legitimate business purpose without further reference to Acme Testing Co.

1.2 Purpose

The purpose of this report is to show compliance to the FCC regulations for spread spectrum unlicensed devices operating under section 15.247 of the Code of Federal Regulations title 47.

THE DATA CONTAINED IN THIS REPORT WAS COLLECTED AND COMPILED BY:

PAUL G. SLAVENS
CHIEF EMC ENGINEER

DANIEL B. STATON
EMC TECHNICIAN

1.3 Manufacturer

Company Name: WaveRider Communications (Canada) Inc.
Contact: Ivan Rodrigues
Street Address: 6120 – 1A Street S.W.
City/Province: Calgary Alberta
Country/Postal Code: Canada T2H 0G3
Telephone: 403 319-2350
Fax: 403 319-2359

1.4 Test location

Laboratory: Test Site #1
Street Address: 2002 Valley Highway
Mailing Address: PO Box 3
City/State/Zip: Acme WA 98220-0003
Telephone: 888 226-3837
Fax: 360 595-2722
E-mail: acmetest@acmetesting.com
Web: www.acmetesting.com

1.5 Accreditation and Listing

Acme Testing Co.'s test facilities are accredited by A2LA for the specific scope of accreditation under Certificate Numbers: 0829-01 (Acme, WA), and 0829-02 (Plummer, ID). Acme Testing Co.'s test facilities that are used to perform radiated and conducted emissions are currently registered with the Federal Communications Commission under registration numbers: 90420 (Acme, WA), and 96502 (Plummer, ID). In addition test facilities are also registered with the Industry Canada under registration numbers: 3251 (Acme, WA), and 3618 (Plummer, ID).

2. Test Results Summary

Summary of Test Results

2.4 GHZ 11 Channel Direct Sequence Spread Spectrum Wireless Router/Bridge, Model NCL1170

Requirement	CFR Section	Test Result
Radiated Spurs < 15.209	15.205(b)	PASS
AC Emissions < 48 dBuV	15.207	PASS
6 dB BW > 500 kHz	15.247(a)	PASS
Max Output Power < 1 W	15.247(a)	PASS
Antenna Gain Requirements	15.247(b)	PASS
Radio Frequency Exposure	15.247(b)	PASS
Conducted Spurious > -20 dBc	15.247(c)	PASS
Power Density < 8dBm in 3 kHz	15.247(d)	PASS
Process Gain > 10 dB	15.247(e)	PASS

The signed original of this report, supplied to the client, represents the only “official” copy. Retention of any additional copies (electronic or non-electronic media) is at Acme Testing Co.’s discretion to meet internal requirements only. The client has made the determination that EUT Condition, Characterization, and Mode of Operation are representative of production units, and meet the requirements of the specifications referenced herein.

Consistent with Industry practice, measurement and test equipment not directly involved in obtaining measurement results but having an impact on measurements (such as cable loss, antenna factors, etc.) is factored into the “Correction Factor” documented in certain test results. Instrumentation employed for testing meets tolerances consistent with known Industry Standards and Regulations.

The measurements contained in this report were made in accordance with the referenced standards and all applicable Public Notices received prior to the date of testing. Acme Testing Co. assumes responsibility only for the accuracy and completeness of this data as it pertains to the sample tested.

Paul G. Slavens
Chief EMC Engineer

Date of Issuance

3. Description of Equipment and Peripherals

3.1 Equipment Under Test (EUT)

Device: 2.4 GHZ 11 Channel Direct Sequence Spread Spectrum Wireless Router/Bridge
Model Number: NCL1170
FCC ID: OOX-WRM2000
Power: 120 V/60 Hz
Antennas: Dish, Yagi, Omni-directional, and Patch
Number of Channels: 11
Lowest Frequency: 2412 MHz
Highest Frequency: 2462 MHz

3.2 Mode of Operation During Testing

The EUT was exercised by transmitting a modulated signal on channels 1, 6 & 11. During radiated spurious emissions testing the EUT was tested with four (Dish, Yagi, Omni-directional, and Patch) antennas

3.3 Modifications Required for Compliance

1. None.

3.4 EUT Peripherals for Emissions

<u>Device</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>FCC ID</u>	<u>Serial Number</u>
Laptop Computer	Compaq	Series 2920A	DGIP5665	None
Power Supply	Acbel Polytech Inc.	APIOAD56-000	None	000044

3.5 Description of Interface Cables for Emissions

CPU and Transmitter Unit/Patch Antenna

Shielded	Unshielded	Flat	Round	Length	Ferrite
Yes	No	No	Yes	10 m (coiled)	No

CPU and Transmitter Unit/Yagi Antenna

Shielded	Unshielded	Flat	Round	Length	Ferrite
Yes	No	No	Yes	10.3 m (coiled)	No

CPU and Transmitter Unit/Dish Antenna

Shielded	Unshielded	Flat	Round	Length	Ferrite
Yes	No	No	Yes	1 m	No

CPU and Transmitter Unit/Laptop Computer (RS-232 cable)

Shielded	Unshielded	Flat	Round	Length	Ferrite
Yes	No	No	Yes	1.3 m	No

CPU and Transmitter Unit/Laptop Computer (CAT 5 cable)

Shielded	Unshielded	Flat	Round	Length	Ferrite
No	Yes	No	Yes	1 m	No

CPU and Transmitter Unit/Power Supply

Shielded	Unshielded	Flat	Round	Length	Ferrite
Yes	No	No	Yes	2 m	No

ARRANGEMENT OF INTERFACE CABLES: All interface cables were positioned for worst case maximum emissions within the manner assumed to be a typical operation condition (please reference photographs).

4. Antenna requirement

4.1 Regulation

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4.2 Result

The intentional radiator uses a propriety connector QMI part number WAVRPCAJ M0D1.

5. Conducted Emissions Tests

Test Requirement: FCC CFR47, Part 15C

Test Procedure: ANSI C63.4:1992

5.1 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Line Impedance Stabilization Network: EMCO 3825/2, Serial Number 9002-1601, Calibrated: 2 January 2000, Calibration due Date: 2 January 2001

5.2 Purpose

The purpose of this test is to evaluate the level of conducted noise the EUT imposes on the AC mains.

5.3 Test Procedures

For tabletop equipment, the EUT is placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that is placed above the groundplane. Floor standing equipment is placed directly on the groundplane. Any supplemental grounding mechanisms are connected, if appropriate. The EUT is connected to its associated peripherals, with any excess I/O cabling bundled to approximately 1 meter. The EUT is connected to a dedicated LISN and all peripherals are connected to a second separate LISN circuit. The LISNs are bonded to the groundplane.

Preview tests are performed to determine the “worst case” mode of operation. With the EUT operating in “worst case” mode, final conducted measurements are taken. Conducted measurements are made on each current carrying conductor with respect to ground.

Conducted Emissions Test Characteristics

Frequency range	0.45 MHz - 30.0 MHz
Test instrumentation resolution bandwidth	9 kHz
Lines Tested	Line 1/Line 2

5.4 Test Results

A summary of the highest amplitude emissions are listed below.

LINE 1 PEAK EMISSIONS

PEAK #	FREQ. (MHz)	AMPL (dBuV)
1	0.4914	46.6
2	0.5621	48.7
3	0.6374	40.9
4	3.166	40.5
5	3.371	40.9
6	3.516	40.5
7	3.416	40.6

LINE 1 QUASI - PEAK EMISSIONS

PEAK #	FREQ. (MHz)	AMPL (dBuV)
1	0.4956	43.8
2	0.5644	46.8

LINE 2 PEAK EMISSIONS



PEAK #	FREQ. (MHz)	AMPL (dBuV)
1	0.4998	46.7
2	0.5668	49.1
3	0.6401	42.3
4	0.7797	41.0
5	5.394	41.3
6	5.462	40.8



LINE 2 QUASI - PEAK EMISSIONS

PEAK #	FREQ. (MHz)	AMPL (dBuV)
1	0.4998	43.9
2	0.5692	47.5

A summary of the highest amplitude emissions is listed above.

5.5 Graphical Data

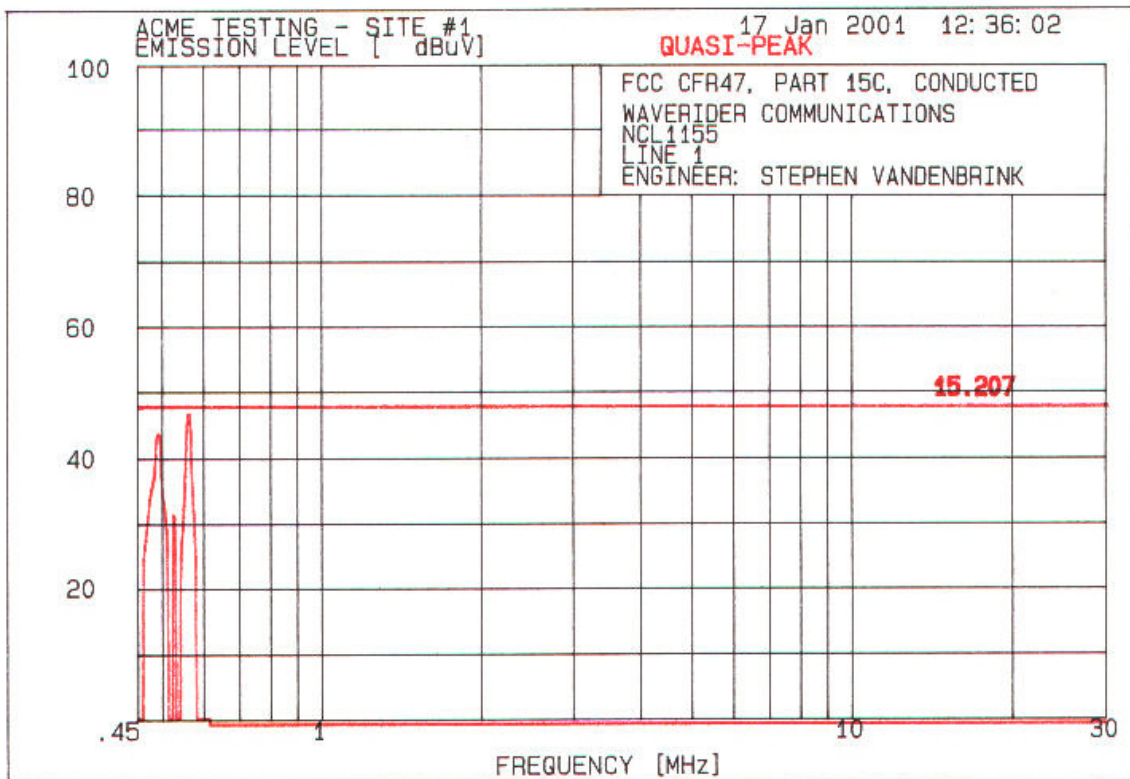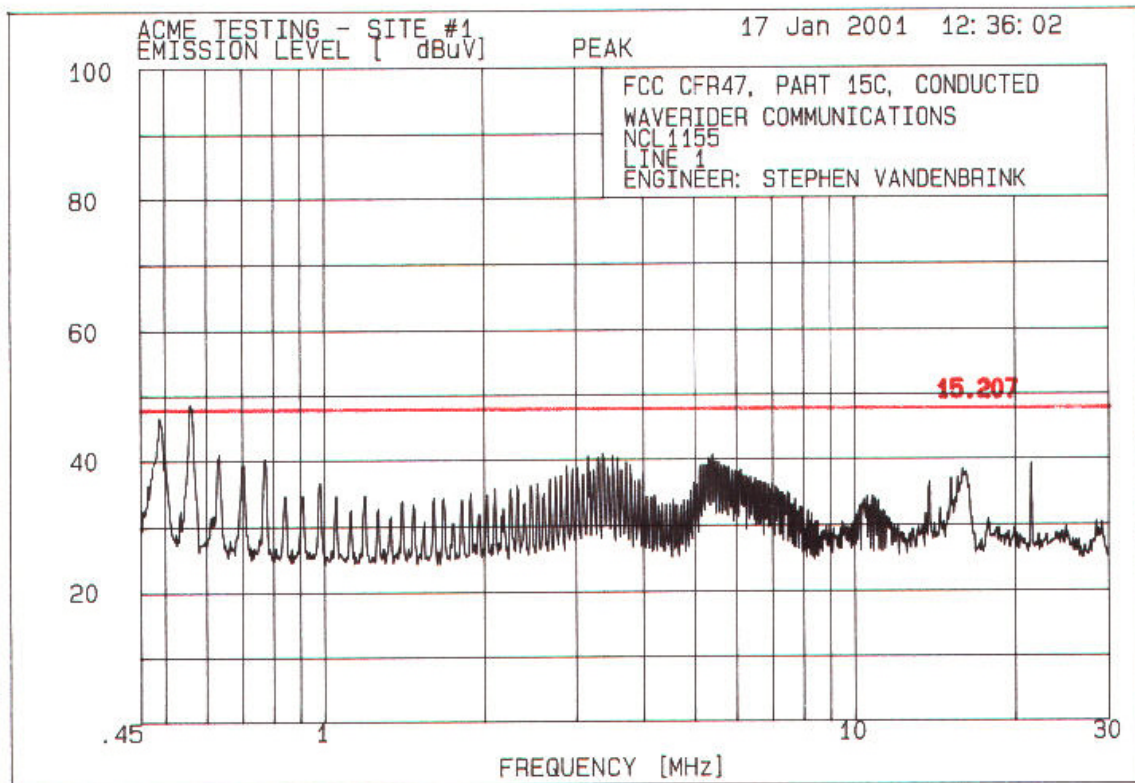

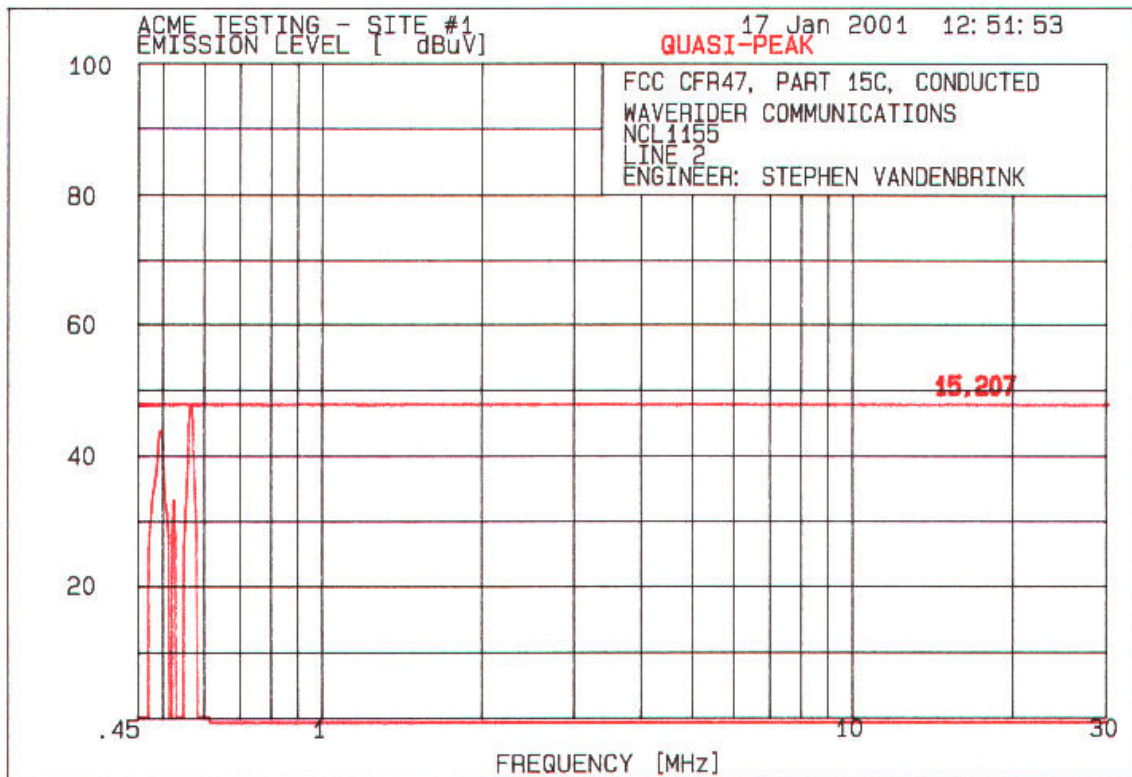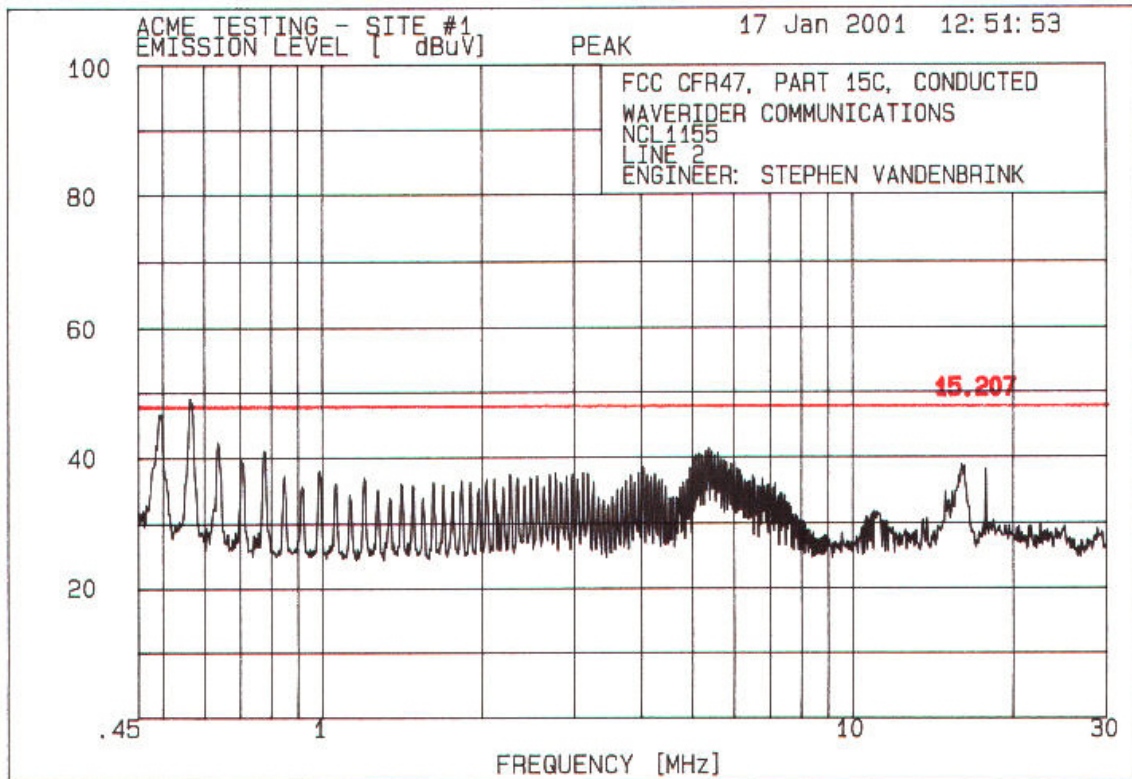

6. 6 dB Bandwidth

6.1 Regulation

15.247(a2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001


6.3 Test Procedures


The RF output of the EUT is connected to the RF input port of the RF preselector through a 20 dB pad. The following measurements were made with a RBW = 100 kHz and VBW = 300 KHz.


6.4 Test Results

- ⇒ The measured 6 dB bandwidth at channel 1 is 10.76 MHz.
- ⇒ The measured 6 dB bandwidth at channel 6 is 10.88 MHz.
- ⇒ The measured 6 dB bandwidth at channel 11 is 11.16 MHz.

6.5 Graphical Data

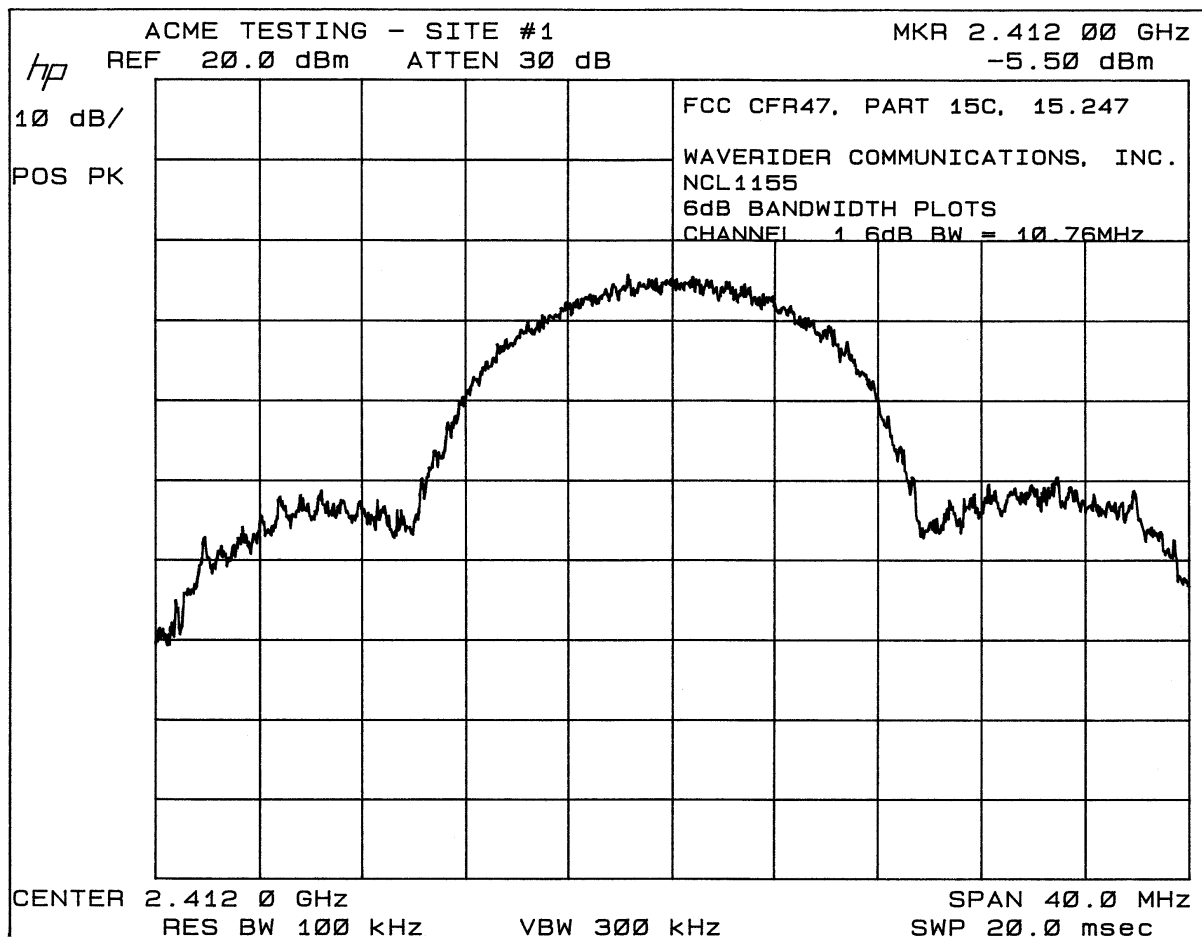

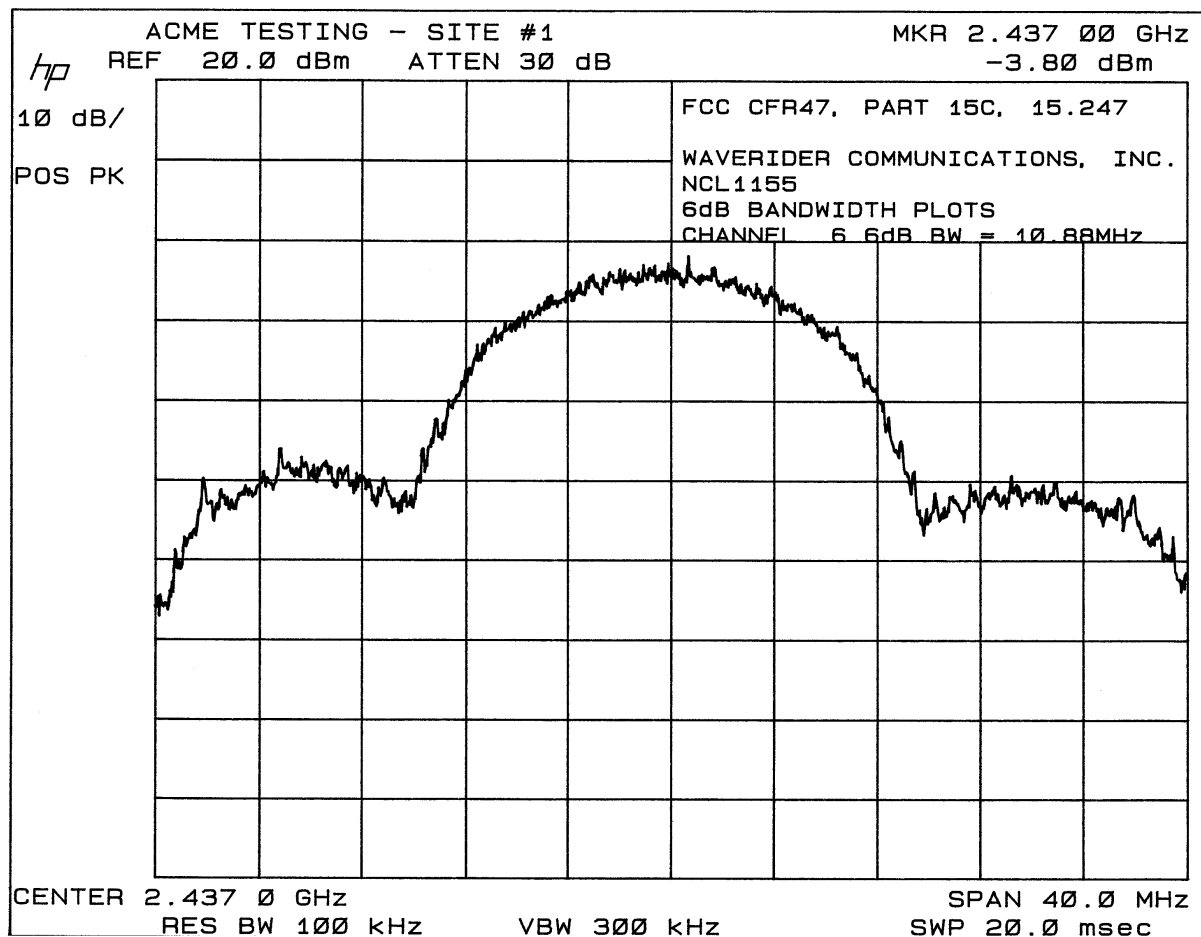

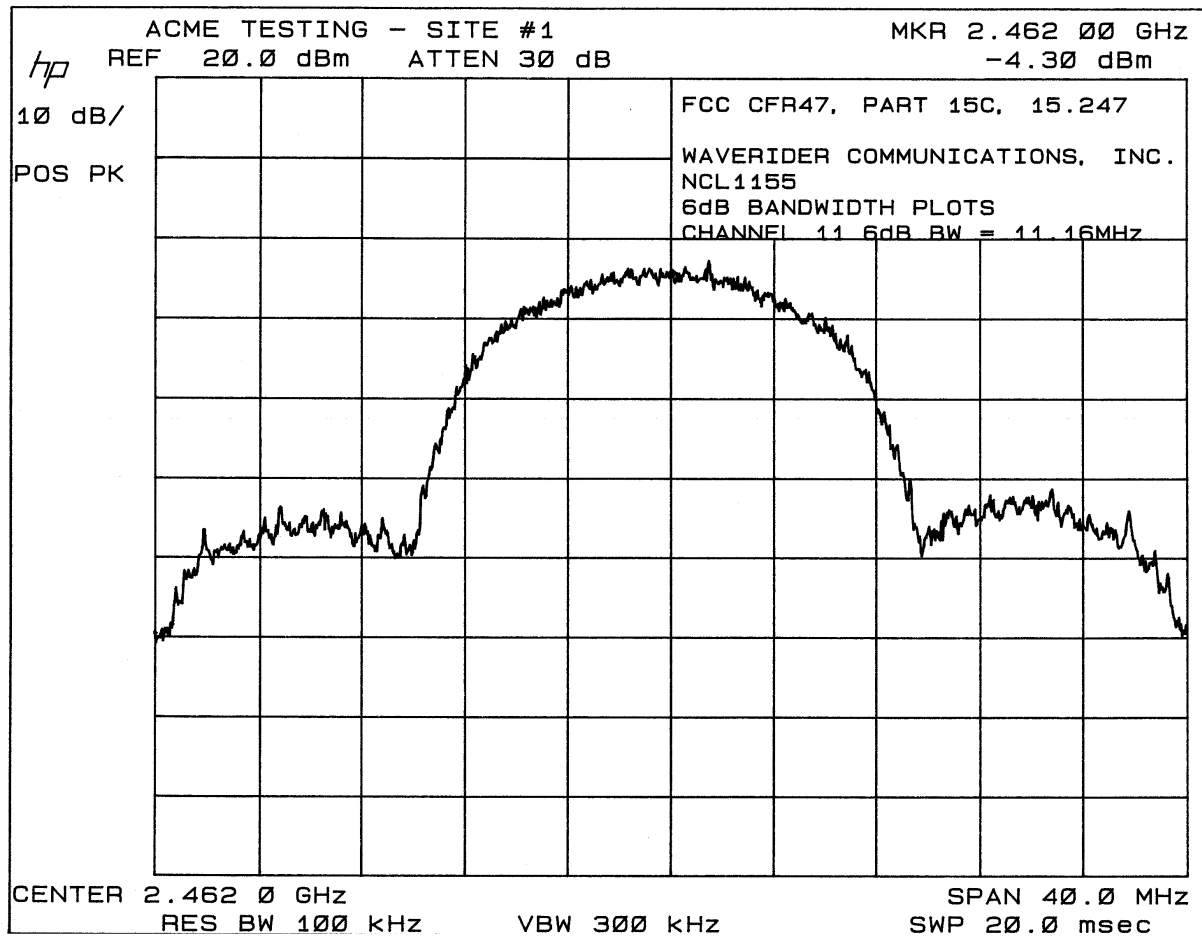

7. Power Output

7.1 Regulation

15.247(b1) The maximum peak output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz or 5725-5850 MHz band and for all direct sequence systems: 1 watt.

7.2 Test Equipment

⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001

⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001

7.3 Test Procedures

The modulated RF output of the EUT is connected to the RF input port of the RF reselector. The following measurements were made with a RBW = 3 MHz and VBW = 3 MHz.

7.4 Test Results

- ⇒ Measured maximum Peak Envelope Power for channel 1 was 25.3 dBm.
- ⇒ Measured maximum Peak Envelope Power for channel 6 was 25.3 dBm.
- ⇒ Measured maximum Peak Envelope Power for channel 11 was 25.3 dBm.

8. Antenna gain requirements

8.1 Regulation

15.247(b3) Except as shown below, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the above stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- 1 Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(3)(i) and (b)(3)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

8.2 Result

The antenna is supplied with 10 meters of LMR-400 coaxial cable, which provides 2.4 dB attenuation. The antenna also uses an inline filter, which provides 1.1 dB attenuation. Therefore, the power delivered to the antenna is $25.3 \text{ dBm} - 2.4 - 1.1 = 21.8 \text{ dBm}$. The 24 dBi antenna is 18 dB over 6 dBi. Since the antenna is for point-to-point $18 \text{ dB} / 3 = 6 \text{ dB}$, the power delivered to the antenna is less than $30 \text{ dBm} - 6 \text{ dB}$.

9. Radio Frequency exposure

9.1 Regulation

15.247(b4) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this Chapter.

9.2 Result

According to par 1.1307b(1), the EUT does not require an environmental evaluation.

1. This equipment classification is not present within table 1 of part 1.1307 and is not listed in section 1.1307b(2).
2. The EUT categorically exempt from routine environmental evaluation per section 2.1093.

Included are calculations that determine that minimum distance I from the transmitter antenna that will ensure an exposure limit at or below the guidelines given in table 1 of part 1.1310 for the general population. The formula for these calculations are taken from OET Bulletin 65, edition 97-01, August 1997; "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields".

9.3 CALCULATIONS

Per Table 1 of Section 1.1310 the limit for general population exposure at 2.4 GHz is 1.0 mW/cm²

Per OET Bulletin 65, edition 97-01 the formula for calculating power density is:

$$S = P \cdot G / 4\pi R^2$$

with

$$\text{Power} = 21.8 \text{ dBm} = 151.35 \text{ mW}$$

$$\text{Gain of Antenna} = 24 \text{ dBi or a numeric gain of } 251$$

therefore

Solving for R gives a minimum safe distance of 55 cm

9.4 CONCLUSION

The EUT user's manual instructs the installer to maintain the at least minimum safe distance.

10. Conducted Spurious Emissions

10.1 Regulation

15.247 I In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.2 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001


10.3 Test Procedures


The RF output of the EUT is connected to the RF input port of the RF preselector. The following measurements were made with a RBW = 100 kHz and VBW = 300 kHz.


10.4 Test Results


No out of band conducted emissions were detected within 40 dB of the carrier power.


10.5 Graphical Data

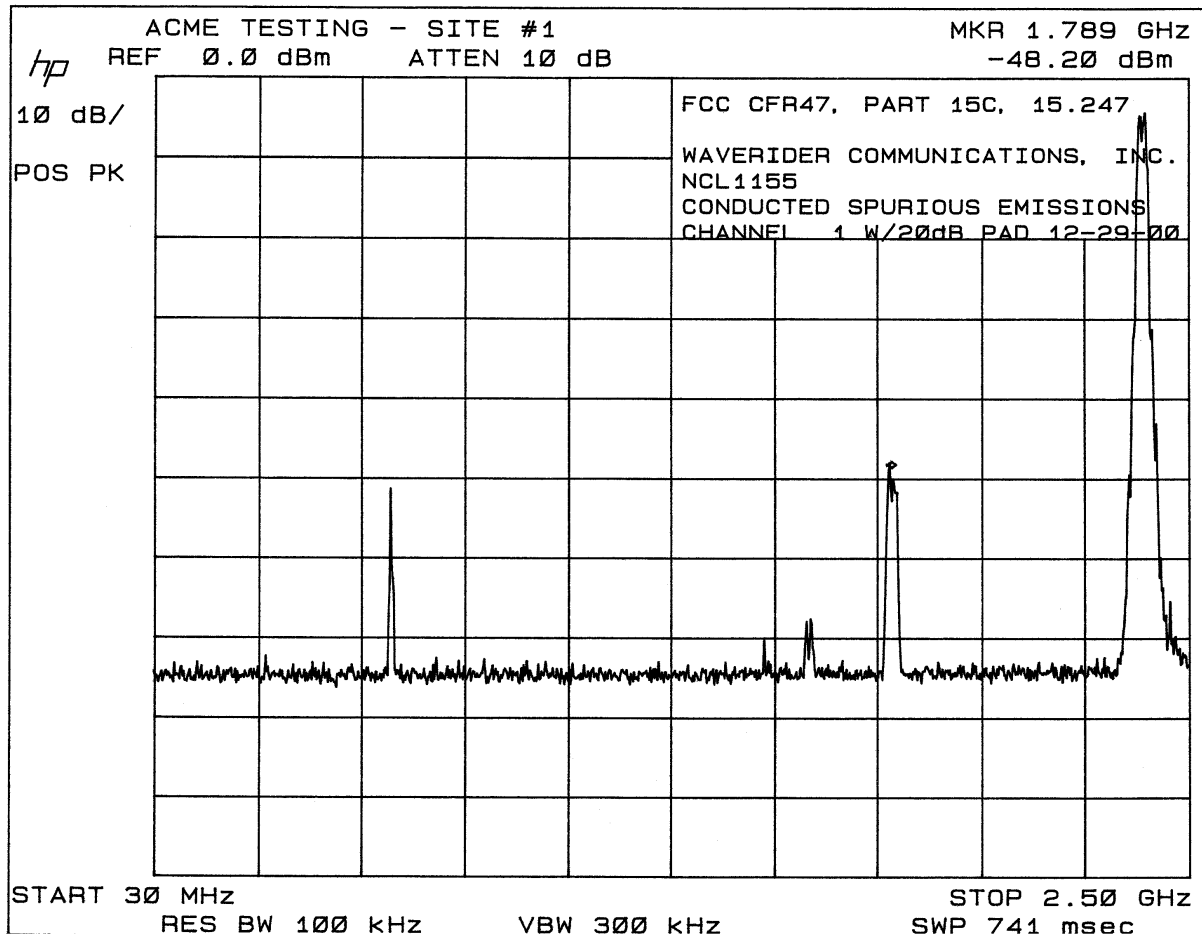


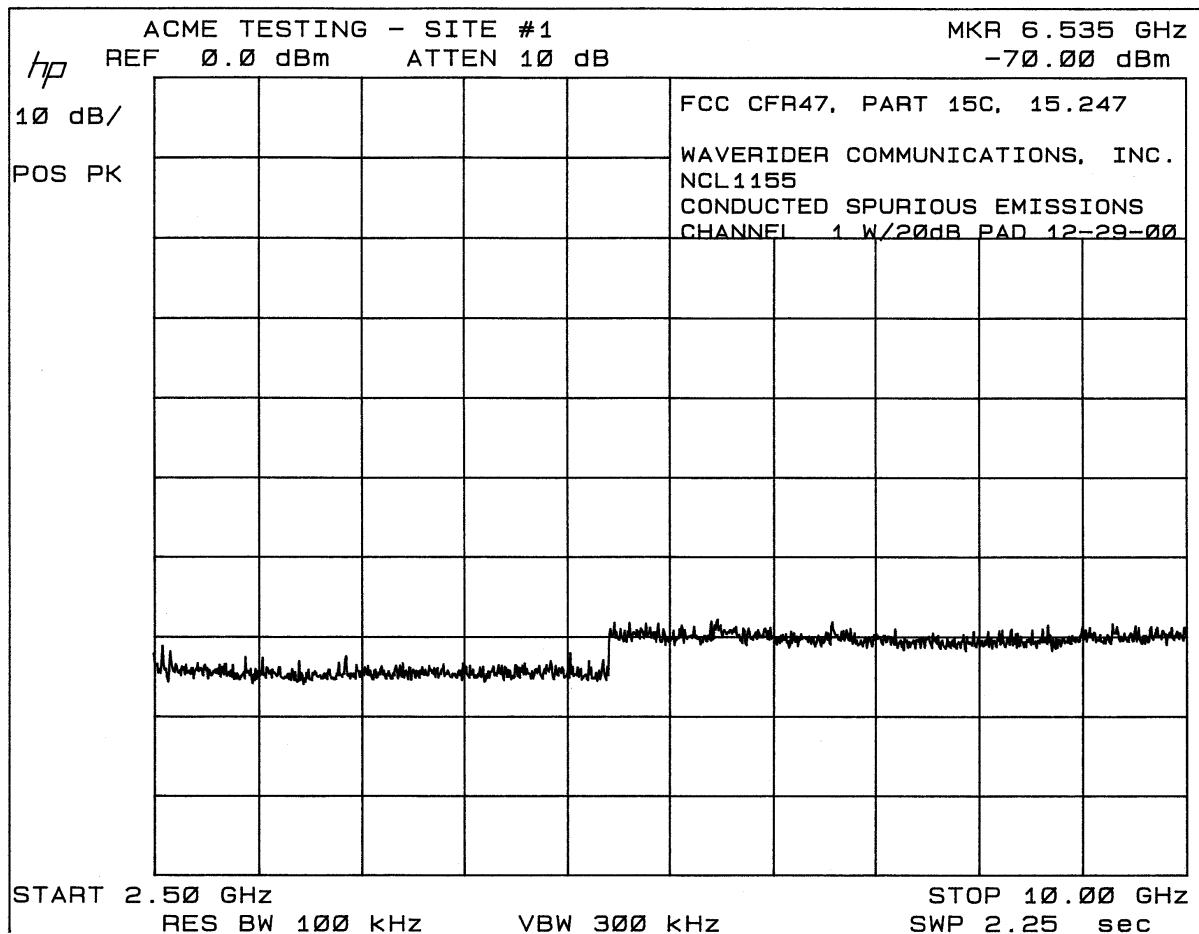

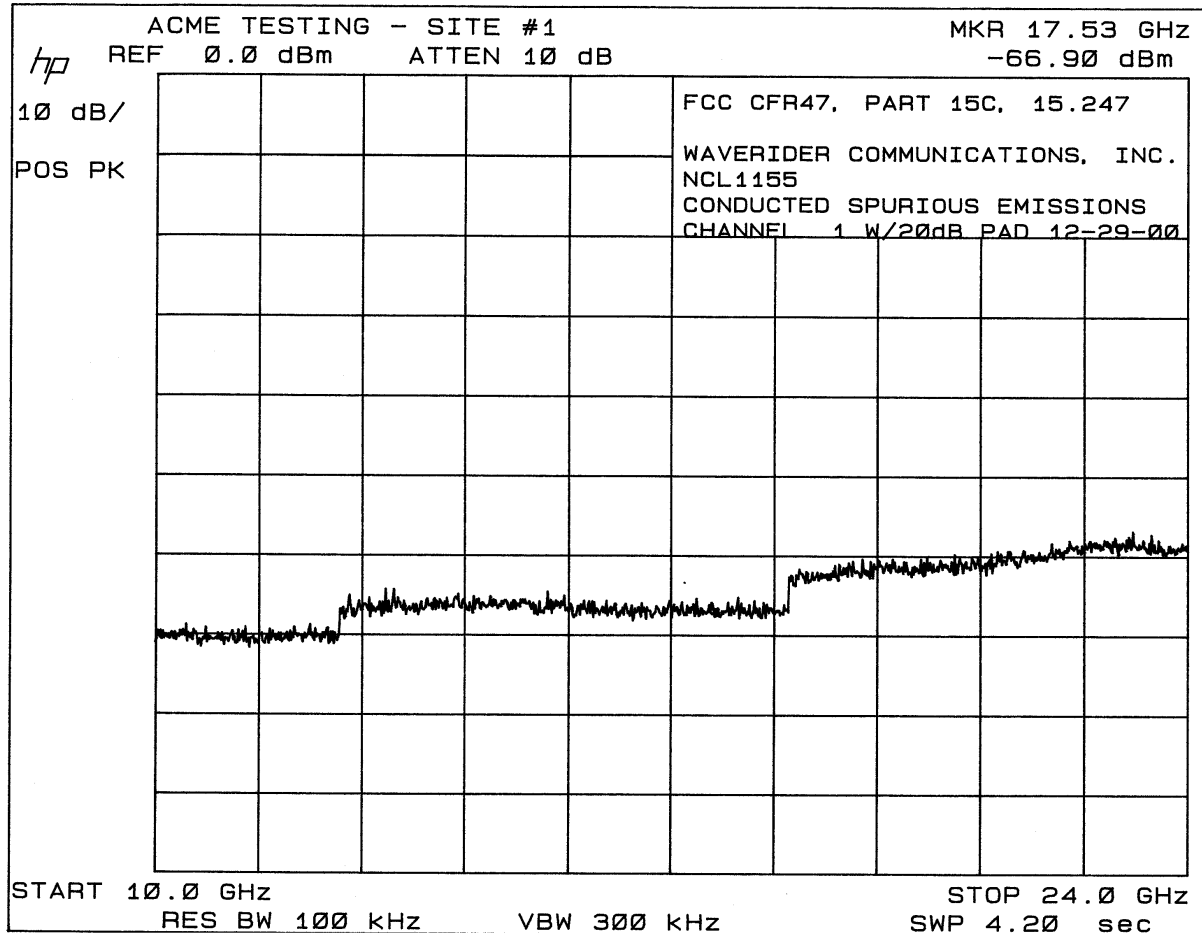

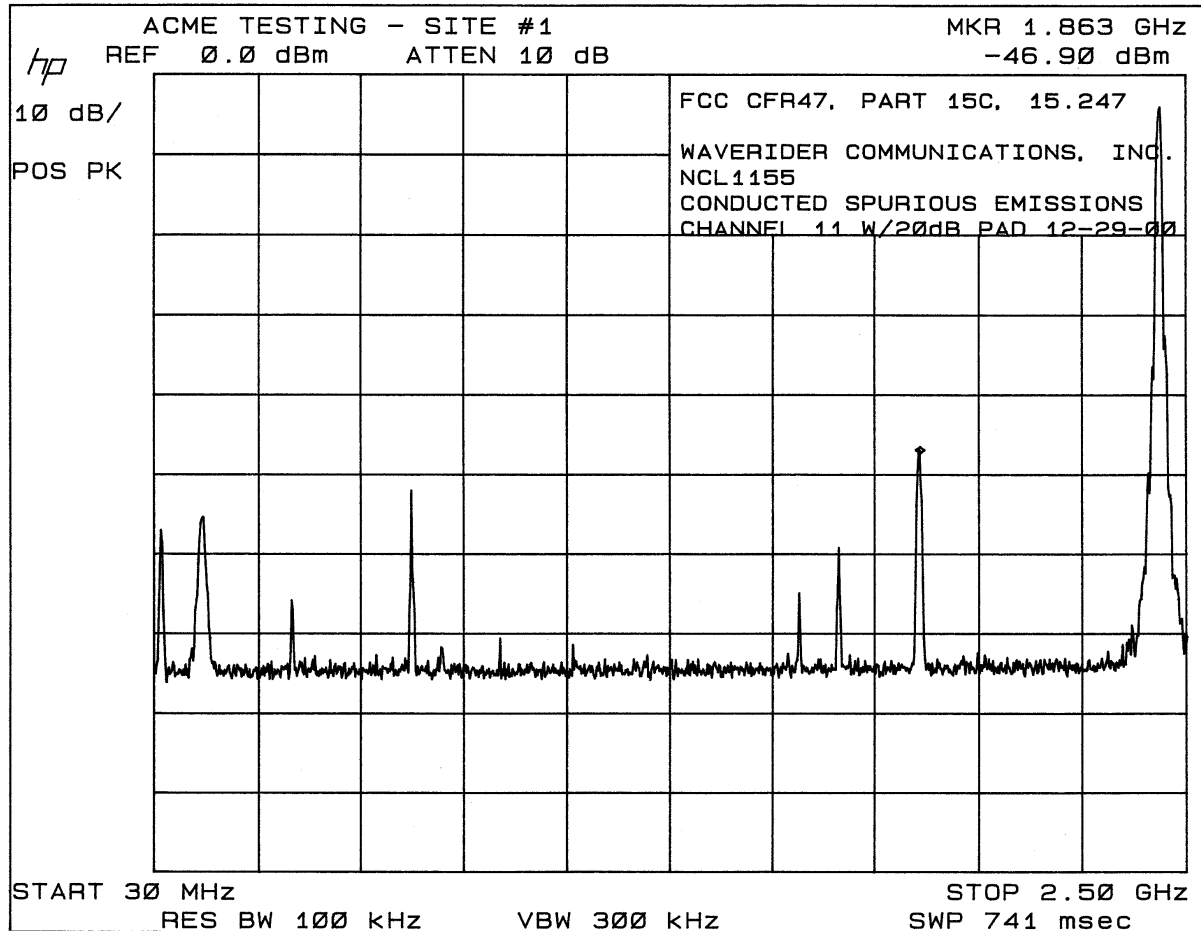

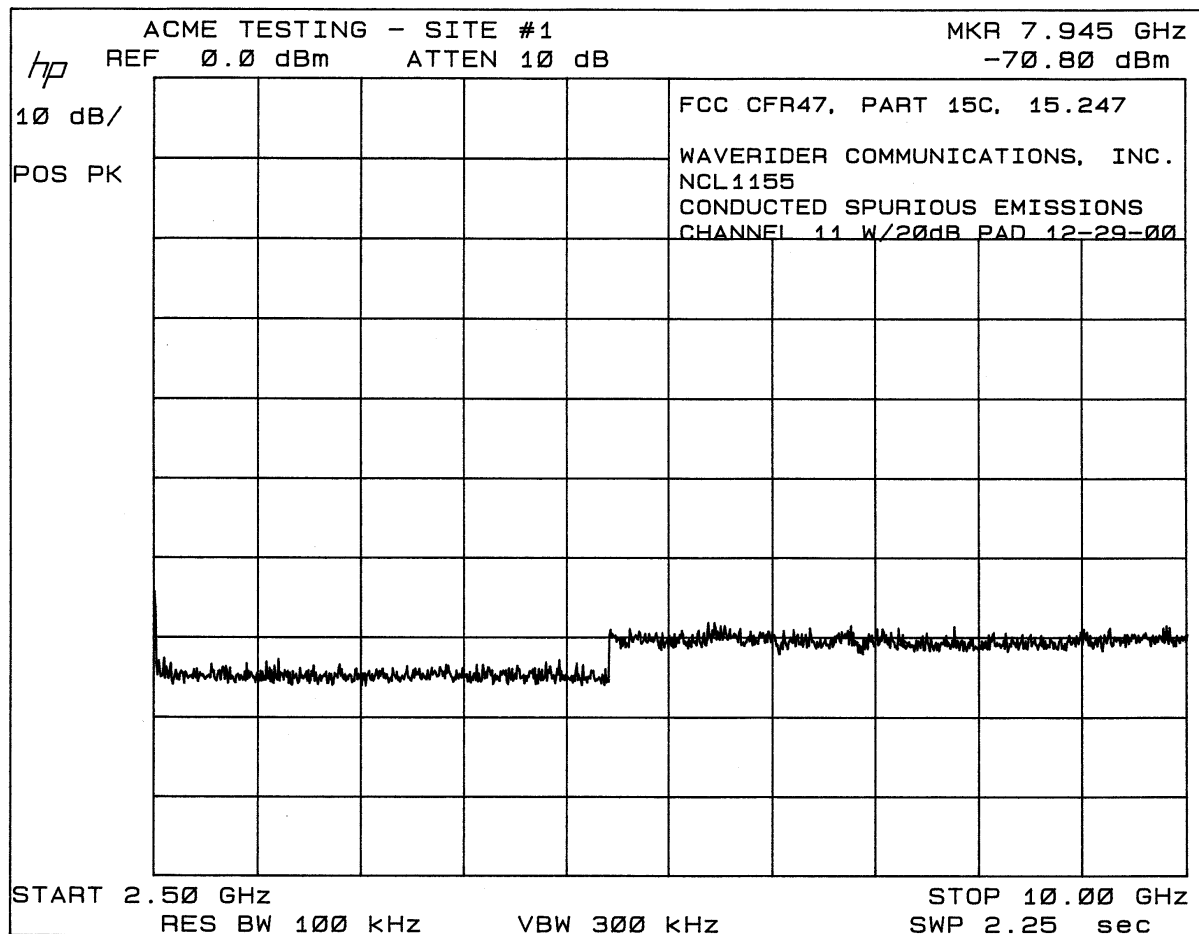

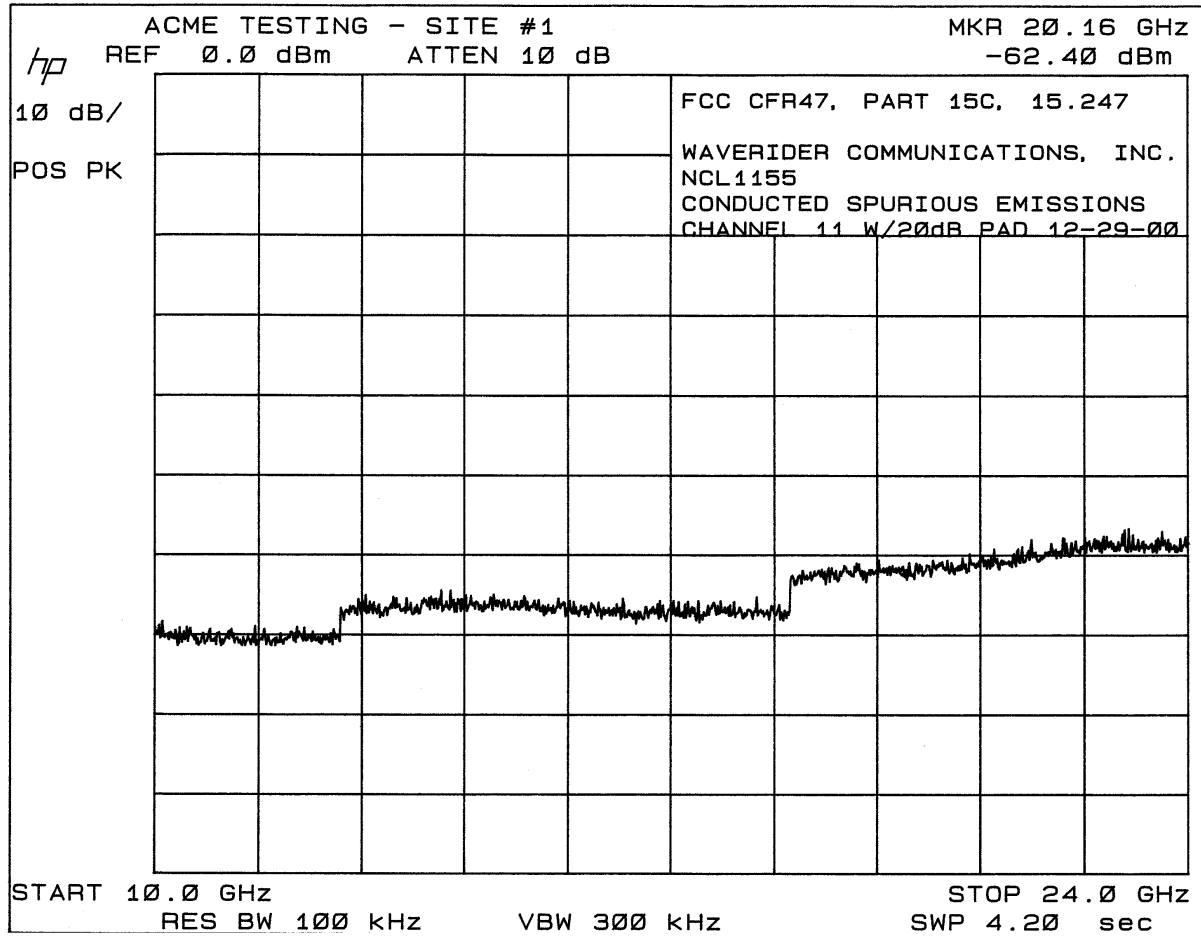

11. Radiated Spurious Emissions

11.1 Regulation

15.247 I In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

11.2 Test Equipment

- ⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Quasi Peak Adapter (yellow): Hewlett-Packard 85650A, Serial Number 2521A-00689, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001
- ⇒ Line Impedance Stabilization Network: EMCO 3825/2, Serial Number 9002-1601, Calibrated: 2 January 2000, Calibration due Date: 2 January 2001
- ⇒ Broadband Biconical Antenna (red) (20 MHz to 200 MHz): EMCO 3110, Serial Number 1115, Calibrated: 26 December 2000, Calibration due Date: 26 December 2001
- ⇒ Broadband Log Periodic Antenna (red) (200 MHz to 1000 MHz): EMCO 3146, Serial Number 2853, 26 December 2000, Calibration due Date: 26 December 2001
- ⇒ EUT Turntable Position Controller: Rothenbuhler Engineering, Custom, No Calibration Required
- ⇒ Antenna Mast: Compliance Design, model M100/200, No Calibration Required
- ⇒ Pyramidal Horn Antenna: EMCO 3160-10, Serial Number 9708-1055, Calibration Not Required
- ⇒ 2 GHz to 10 GHz Low Noise Preamplifier: Milliwave 593-2898, Serial Number 2494, Calibrated: 5 May 2000, Calibration Due Date: 5 May 2001
- ⇒ Double Ridge Guide Horn Antenna: EMCO 3115, Serial Number 9807-5534, Calibrated: 30 December 2000, Calibration due Date: 30 December 2001
- ⇒ 8 – 22GHz Preamplifier: MITEQ AFS4-35LN, Serial Number 484280, Calibrated: 3 January 2000, Calibration Due Date: 1 February 2001

11.3 Test Procedures

For tabletop equipment, the EUT is placed on a 1 meter by 1.5 meters wide and 0.8 meter high nonconductive table that sits on a flush mounted metal turntable. Floor standing equipment is placed directly on the flush mounted metal turntable. The EUT is connected to its associated peripherals with any excess I/O cabling bundled to approximately 1 meter.

Preview tests are performed to determine the “worst case” mode of operation. With the EUT operating in “worst case” mode, emissions from the unit are maximized by adjusting the polarization and height of the receive antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions.

Radiated Emissions Test Characteristics

Frequency range	30 MHz – 24000 MHz 15.205 RESTRICTED BANDS ONLY
Test distance	3 m
Test instrumentation resolution bandwidth	120 kHz (30 MHz – 1000 MHz) 1 MHz (1000 MHz – 24,000 MHz)
Receive antenna scan height	1 m – 4 m
Receive antenna polarization	Vertical/Horizontal

11.4 Test Results**WITH YAGI ANTENNA**

Frequency (MHz)	Emission (dBuV/m)	Spec limit(dBuV/m)	Delta to the limitdB	Function (Peak, Quasi-	Polarity (Vertical/ Horizontal)	Antenna Height (cm)	Table Azimuth (deg.)	Comments
156.525	30.4	43.5	-13.1	PK	V	180	225	CHANNEL 11
156.525	35.8	43.5	-7.7	PK	H	180	190	CHANNEL 11
156.8	30.0	43.5	-13.5	PK	V	180	225	CHANNEL 11
156.8	36.0	43.5	-7.5	PK	H	180	190	CHANNEL 11
401.636	36.0	46.0	-10.0	QP	V	100	230	CHANNEL 11
401.638	36.2	46.0	-9.8	QP	V	100	230	CHANNEL 6
401.638	41.4	46.0	-4.6	QP	H	230	210	CHANNEL 11
401.643	38.6	46.0	-7.4	QP	H	100	105	CHANNEL 1
401.646	35.2	46.0	-10.8	QP	V	150	350	CHANNEL 1
401.646	41.2	46.0	-4.8	QP	H	220	220	CHANNEL 6
407.409	38.1	46.0	-7.9	QP	H	230	210	CHANNEL 11
407.417	36.3	46.0	-9.7	PK	V	100	230	CHANNEL 11
407.423	39.1	46.0	-6.9	PK	V	220	160	CHANNEL 1
407.429	37.5	46.0	-8.5	QP	H	220	220	CHANNEL 6
407.437	37.0	46.0	-9.0	PK	V	110	220	CHANNEL 6
407.449	39.4	46.0	-6.6	PK	H	300	105	CHANNEL 1
1663.12	42.5	54.0	-11.5	AVG	H	130	90	CHANNEL 1
1663.26	54.7	74.0	-19.3	PK	V	220	160	CHANNEL 1
1663.42	45.4	54.0	-8.6	AVG	V	220	160	CHANNEL 1
1663.66	51.8	74.0	-22.2	PK	H	130	90	CHANNEL 1
1688.45	54.4	74.0	-19.6	PK	V	100	200	CHANNEL 6
1688.97	55.1	74.0	-18.9	PK	H	150	230	CHANNEL 6
1689.27	45.4	54.0	-8.6	AVG	V	100	200	CHANNEL 6
1689.38	45.1	54.0	-8.9	AVG	H	150	230	CHANNEL 6
1709.78	52.9	74.0	-21.1	PK	H	100	230	CHANNEL 11
1709.81	56.2	74.0	-17.8	PK	V	130	195	CHANNEL 11
1709.93	43.3	54.0	-10.7	AVG	H	100	230	CHANNEL 11
1709.95	46.2	54.0	-7.8	AVG	V	130	195	CHANNEL 11
4823.86	48.9	74.0	-25.1	PK	H	140	340	CHANNEL 1
4824.01	51.0	74.0	-23.0	PK	V	155	355	CHANNEL 1
4824.05	38.4	54.0	-15.6	AVG	V	155	355	CHANNEL 1
4824.16	37.4	54.0	-16.6	AVG	H	140	340	CHANNEL 1
4873.95	46.0	74.0	-28.0	PK	H	100	340	CHANNEL 6
4873.98	49.6	74.0	-24.4	PK	V	160	350	CHANNEL 6
4874	35.2	54.0	-18.8	AVG	H	100	340	CHANNEL 6
4874.01	40.6	54.0	-13.4	AVG	V	160	350	CHANNEL 6
4923.83	45.2	74.0	-28.8	PK	H	140	350	CHANNEL 11
4923.85	46.6	74.0	-27.4	PK	V	160	350	CHANNEL 11
4923.95	38.2	54.0	-15.8	AVG	H	140	350	CHANNEL 11
4923.98	42.7	54.0	-11.3	AVG	V	160	350	CHANNEL 11
7236.12	56.7	74.0	-17.3	PK	V	160	0	CHANNEL 1
7236.78	52.1	74.0	-21.9	PK	H	150	10	CHANNEL 1
7236.88	45.5	54.0	-8.5	AVG	V	160	0	CHANNEL 1
7236.92	41.5	54.0	-12.5	AVG	H	150	10	CHANNEL 1
7310.55	54.2	74.0	-19.8	PK	V	160	25	CHANNEL 6
7310.55	51.3	74.0	-22.7	PK	H	180	0	CHANNEL 6
7311.5	46.7	54.0	-7.3	AVG	V	160	25	CHANNEL 6
7311.7	43.2	54.0	-10.8	AVG	H	180	0	CHANNEL 6
7385.35	49.2	74.0	-24.8	PK	H	140	350	CHANNEL 11
7385.95	50.5	74.0	-23.5	PK	V	160	340	CHANNEL 11
7386.04	40.6	54.0	-13.4	AVG	H	140	350	CHANNEL 11
7386.7	41.6	54.0	-12.4	AVG	V	160	340	CHANNEL 11

With Omni Antenna

Frequency (MHz)	EUT Emission (dBuV/m)	Spec limit (dBuV/m)	Delta to the limitdB	Function (Peak, Quasi-)	Polarity (Vertical/ Horizontal)	Antenna Height (cm)	Table Azimuth (deg.)	Comments
156.525	34.3	43.5	-9.2	AVG	H	150	270	CHANNEL 11
156.525	29.5	43.5	-14.0	PK	V	200	0	CHANNEL 1
156.525	34.1	43.5	-9.4	PK	H	225	270	CHANNEL 1
156.525	29.0	43.5	-14.5	PK	V	105	220	CHANNEL 6
156.525	35.4	43.5	-8.1	PK	H	240	300	CHANNEL 6
156.525	28.8	43.5	-14.7	PK	V	100	200	CHANNEL 6
156.741	28.8	43.5	-14.7	PK	V	100	20	CHANNEL 1
156.793	34.5	43.5	-9.0	PK	H	240	275	CHANNEL 6
156.8	29.0	43.5	-14.5	PK	V	100	220	CHANNEL 11
156.8	33.9	43.5	-9.6	PK	H	150	250	CHANNEL 11
156.811	33.9	43.5	-9.6	PK	H	225	280	CHANNEL 1
156.827	29.1	43.5	-14.4	PK	V	105	220	CHANNEL 6
401.64	38.8	43.5	-4.7	PK	V	100	125	CHANNEL 11
401.642	42.3	46.0	-3.7	OP	H	100	110	CHANNEL 6
401.643	41.3	46.0	-4.7	QP	V	130	300	CHANNEL 1
401.645	38.8	46.0	-7.2	PK	V	130	200	CHANNEL 6
401.671	42.8	46.0	-3.2	OP	H	100	260	CHANNEL 1
401.999	43.2	46.0	-2.8	OP	H	100	100	CHANNEL 11
407.379	39.4	46.0	-6.6	OP	H	100	270	CHANNEL 1
407.437	37.8	46.0	-8.2	QP	H	100	100	CHANNEL 6
407.44	37.7	46.0	-8.3	OP	V	150	295	CHANNEL 1
407.44	36.0	46.0	-10.0	PK	V	150	190	CHANNEL 6
407.461	36.2	46.0	-37.8	PK	V	110	200	CHANNEL 11
408.009	39.3	46.0	-6.7	QP	H	100	110	CHANNEL 11
1663.3	47.3	54.0	-6.7	AVG	V	120	205	CHANNEL 1
1664.02	57.5	74.0	-16.5	PK	V	120	205	CHANNEL 1
1664.3	54.2	74.0	-19.8	PK	H	105	295	CHANNEL 1
1664.62	44.7	54.0	-9.3	AVG	H	105	295	CHANNEL 1
1687.83	57.1	74.0	-16.9	PK	V	110	200	CHANNEL 6
1688.21	54.8	74.0	-19.2	PK	H	115	160	CHANNEL 6
1689.37	46.0	54.0	-8.0	AVG	V	110	200	CHANNEL 6
1689.45	44.8	54.0	-9.2	AVG	H	115	160	CHANNEL 6
1709.8	55.7	74.0	-18.3	PK	V	115	205	CHANNEL 11
1709.88	54.0	74.0	-20.0	PK	H	100	250	CHANNEL 11
1709.94	46.6	74.0	-27.4	PK	V	115	205	CHANNEL 11
1709.94	44.8	74.0	-29.2	PK	H	100	250	CHANNEL 11
4823.94	50.7	74.0	-23.3	PK	V	135	220	CHANNEL 1
4824.01	48.6	74.0	-25.4	PK	H	150	160	CHANNEL 1
4824.29	40.8	54.0	-13.2	AVG	V	135	220	CHANNEL 1
4824.4	40.3	54.0	-13.7	AVG	H	150	160	CHANNEL 1
4873.84	53.2	74.0	-20.8	PK	V	100	170	CHANNEL 6
4873.9	47.9	74.0	-26.1	PK	H	115	160	CHANNEL 6
4873.95	44.6	54.0	-9.4	AVG	V	100	170	CHANNEL 6
4873.97	36.5	54.0	-17.5	AVG	H	115	160	CHANNEL 6
4923.82	51.9	54.0	-2.1	AVG	V	120	220	CHANNEL 11
4923.9	48.0	74.0	-26.0	PK	H	100	180	CHANNEL 11
4923.96	39.4	74.0	-34.6	PK	V	120	220	CHANNEL 11
4923.97	36.9	74.0	-37.1	PK	H	100	180	CHANNEL 11
7236.78	52.8	74.0	-21.2	PK	V	155	215	CHANNEL 1
7236.78	47.1	74.0	-26.9	PK	H	120	170	CHANNEL 1
7236.94	40.4	54.0	-13.6	AVG	V	155	215	CHANNEL 1
7236.98	38.2	54.0	-15.8	AVG	H	120	170	CHANNEL 1
7310.64	50.0	74.0	-24.0	PK	H	150	225	CHANNEL 6
7311.06	52.1	74.0	-21.9	PK	V	170	150	CHANNEL 6
7311.5	39.6	54.0	-14.4	AVG	H	150	225	CHANNEL 6
7311.65	42.0	54.0	-12.0	AVG	V	170	150	CHANNEL 6
7385.6	51.5	74.0	-22.5	PK	H	100	230	CHANNEL 11
7385.7	55.1	74.0	-18.9	PK	V	155	160	CHANNEL 11
7386.46	39.6	74.0	-34.4	PK	H	100	230	CHANNEL 11
7386.64	42.3	54.0	-11.7	AVG	V	155	160	CHANNEL 11

With DISH Antenna

Frequency (MHz)	Emission (dBuV/m)	Spec limit (dBuV/m)	Delta to the limitdB	Function (Peak, Quasi-	(Vertical/ Horizontal)	Antenna Height (cm)	Azimuth (deg.)	Comments
156.525	35.0	43.5	-8.5	QP	H	115	195	CHANNEL 6
156.525	33.6	43.5	-9.9	QP	H	150	175	CHANNEL 11
156.525	33.5	43.5	-10.0	PK	V	110	230	CHANNEL 1
156.525	33.6	43.5	-9.9	PK	V	115	215	CHANNEL 6
156.525	33.3	43.5	-10.2	PK	V	220	150	CHANNEL 11
156.525	34.5	43.5	-9.0	QP	H	115	200	CHANNEL 1
156.756	36.4	43.5	-7.1	QP	H	200	180	CHANNEL 6
156.799	33.2	43.5	-10.3	PK	V	240	150	CHANNEL 11
156.8	35.5	43.5	-8.0	QP	H	200	185	CHANNEL 11
156.802	34.8	43.5	-8.7	QP	H	115	180	CHANNEL 1
156.805	32.2	43.5	-11.3	PK	V	115	240	CHANNEL 6
156.824	32.9	43.5	-10.6	PK	V	100	230	CHANNEL 1
401.611	43.9	46.0	-2.1	QP	V	180	120	CHANNEL 11
401.622	45.9	46.0	-0.1	QP	H	220	200	CHANNEL 11
401.66	44.2	46.0	-1.8	QP	H	100	330	CHANNEL 6
401.666	43.6	46.0	-2.4	QP	V	120	190	CHANNEL 6
401.977	43.7	46.0	-2.3	QP	V	120	180	CHANNEL 1
402.006	45.5	46.0	-0.5	QP	H	200	205	CHANNEL 1
407.396	38.2	46.0	-7.8	QP	V	180	120	CHANNEL 11
407.412	41.1	46.0	-4.9	QP	H	205	200	CHANNEL 11
407.435	40.3	46.0	-5.7	QP	H	200	205	CHANNEL 1
407.44	36.8	46.0	-9.2	QP	V	160	190	CHANNEL 1
407.481	38.5	46.0	-7.5	QP	H	100	290	CHANNEL 6
408.005	37.9	46.0	-8.1	QP	V	100	175	CHANNEL 6
1663.9	53.8	74.0	-20.2	PK	V	130	215	CHANNEL 1
1664.22	52.6	74.0	-21.4	PK	H	100	200	CHANNEL 1
1664.6	42.7	54.0	-11.3	AVG	H	100	200	CHANNEL 1
1664.66	44.3	54.0	-9.7	AVG	V	130	215	CHANNEL 1
1687.51	54.6	74.0	-19.4	PK	H	200	250	CHANNEL 6
1687.67	55.1	74.0	-18.9	PK	V	155	210	CHANNEL 6
1688.13	43.9	54.0	-10.1	AVG	H	200	250	CHANNEL 6
1689.43	45.1	54.0	-8.9	AVG	V	155	210	CHANNEL 6
1709.22	56.1	74.0	-17.9	PK	H	110	210	CHANNEL 11
1709.8	54.4	74.0	-19.6	PK	V	190	100	CHANNEL 11
1709.96	44.7	54.0	-9.3	AVG	V	190	100	CHANNEL 11
1709.96	46.2	54.0	-7.8	AVG	H	110	210	CHANNEL 11
4823.89	49.7	74.0	-24.3	PK	H	190	180	CHANNEL 1
4823.93	51.4	74.0	-22.6	PK	V	160	185	CHANNEL 1
4824.23	40.7	54.0	-13.3	AVG	H	190	180	CHANNEL 1
4824.89	43.4	54.0	-10.6	AVG	V	160	185	CHANNEL 1
4873.83	55.1	74.0	-18.9	PK	V	100	190	CHANNEL 6
4873.84	53.7	74.0	-20.3	PK	H	175	160	CHANNEL 6
4873.88	42.4	54.0	-11.6	AVG	V	100	190	CHANNEL 6
4874.14	39.7	54.0	-14.3	AVG	H	175	160	CHANNEL 6
4923.84	49.9	74.0	-24.1	PK	H	130	170	CHANNEL 11
4923.87	56.2	74.0	-17.8	PK	V	185	100	CHANNEL 11
4923.92	37.8	54.0	-16.2	AVG	H	130	170	CHANNEL 11
4923.99	43.1	54.0	-10.9	AVG	V	185	100	CHANNEL 11
7235.46	52.1	74.0	-21.9	PK	H	150	170	CHANNEL 1
7236.48	53.1	74.0	-20.9	PK	V	150	180	CHANNEL 1
7236.76	40.7	54.0	-13.3	AVG	V	150	180	CHANNEL 1
7236.9	39.8	54.0	-14.2	AVG	H	150	170	CHANNEL 1
7310.72	51.3	74.0	-22.7	PK	V	155	180	CHANNEL 6
7310.92	50.9	74.0	-23.1	PK	H	150	170	CHANNEL 6
7311.55	40.3	54.0	-13.7	AVG	H	150	170	CHANNEL 6
7311.9	41.4	54.0	-12.6	AVG	V	155	180	CHANNEL 6
7384.9	54.6	74.0	-19.4	PK	H	130	170	CHANNEL 11
7385.45	50.9	74.0	-23.1	PK	V	180	155	CHANNEL 11
7385.48	42.2	54.0	-11.8	AVG	H	130	170	CHANNEL 11
7385.5	39.4	54.0	-14.6	AVG	V	180	155	CHANNEL 11

With PATCH Antenna

Frequency (MHz)	EUT Emission (dBuV/m)	Spec limit (dBuV/m)	Delta to the limitdB	Detector Function	Polarity (Vertical/ Horizontal)	Antenna Height (cm)	Table Azimuth (deg.)	Comments
156.525	36.1	43.5	-7.4	PK	V	100	190	CHANNEL 11
156.525	37.1	43.5	-6.4	QP	H	200	210	CHANNEL 11
156.8	36.8	43.5	-6.7	QP	H	200	200	CHANNEL 11
156.801	36.3	43.5	-7.2	PK	V	100	190	CHANNEL 11
401.647	38.0	46.0	-8.0	QP	V	170	40	CHANNEL 11
401.981	36.9	46.0	-9.1	QP	V	130	45	CHANNEL 1
401.985	44.8	46.0	-1.2	QP	H	260	200	CHANNEL 1
401.986	40.3	46.0	-5.7	QP	V	250	180	CHANNEL 6
401.989	44.2	46.0	-1.8	QP	H	260	200	CHANNEL 11
401.998	43.1	46.0	-2.9	QP	H	230	220	CHANNEL 6
407.988	35.8	46.0	-10.2	QP	V	170	40	CHANNEL 11
407.993	39.7	46.0	-6.3	QP	H	260	200	CHANNEL 11
407.996	34.4	46.0	-11.6	QP	V	250	180	CHANNEL 6
407.997	39.0	46.0	-7.0	QP	H	230	220	CHANNEL 6
408.001	39.0	46.0	-7.0	PK	V	130	45	CHANNEL 1
408.014	40.1	46.0	-5.9	QP	H	260	200	CHANNEL 1
1663.08	46.6	54.0	-7.4	AVG	V	120	200	CHANNEL 1
1663.22	44.0	54.0	-10.0	AVG	H	100	210	CHANNEL 1
1663.6	52.8	74.0	-21.2	PK	H	100	210	CHANNEL 1
1663.74	54.6	74.0	-19.4	PK	V	120	200	CHANNEL 1
1686.66	54.1	74.0	-19.9	PK	V	115	200	CHANNEL 6
1689.21	53.6	74.0	-20.4	PK	H	125	120	CHANNEL 6
1689.41	43.7	54.0	-10.3	AVG	H	125	120	CHANNEL 6
1689.42	45.9	54.0	-8.1	AVG	V	115	200	CHANNEL 6
1709.78	52.0	74.0	-22.0	PK	H	125	120	CHANNEL 11
1709.82	52.4	74.0	-21.6	PK	V	150	150	CHANNEL 11
1709.91	42.7	54.0	-11.3	AVG	V	150	150	CHANNEL 11
1709.91	42.7	54.0	-11.3	AVG	H	125	120	CHANNEL 11
4823.85	50.9	74.0	-23.1	PK	H	150	0	CHANNEL 1
4823.99	51.2	74.0	-22.8	PK	H	170	0	CHANNEL 1
4824.05	42.1	54.0	-11.9	AVG	H	170	0	CHANNEL 1
4824.38	39.2	54.0	-14.8	AVG	H	150	0	CHANNEL 1
4873.99	49.6	74.0	-24.4	PK	H	150	0	CHANNEL 6
4874.04	40.8	54.0	-13.2	AVG	H	150	0	CHANNEL 6
4874.15	49.6	74.0	-24.4	PK	H	135	15	CHANNEL 6
4874.18	38.4	54.0	-15.6	AVG	H	135	15	CHANNEL 6
4923.48	47.4	74.0	-26.6	PK	H	130	355	CHANNEL 11
4923.95	47.2	74.0	-26.8	PK	H	170	170	CHANNEL 11
4924	38.6	54.0	-15.4	AVG	H	130	355	CHANNEL 11
4924.04	41.9	54.0	-12.1	AVG	H	170	170	CHANNEL 11
7236.58	55.9	74.0	-18.1	PK	H	150	355	CHANNEL 1
7236.88	54.7	74.0	-19.3	PK	H	150	355	CHANNEL 1
7237.1	47.4	54.0	-6.6	AVG	H	150	355	CHANNEL 6
7239.46	44.9	54.0	-9.1	AVG	H	150	355	CHANNEL 1
7309.2	53.4	74.0	-20.6	PK	H	150	0	CHANNEL 6
7311.1	52.7	74.0	-21.3	PK	H	135	15	CHANNEL 6
7311.4	43.3	54.0	-10.7	AVG	H	150	0	CHANNEL 6
7311.4	45.1	54.0	-8.9	AVG	H	135	15	CHANNEL 6
7385.35	48.2	74.0	-25.8	PK	H	130	10	CHANNEL 11
7385.35	52.5	74.0	-21.5	PK	H	130	10	CHANNEL 11
7386.1	38.1	54.0	-15.9	AVG	H	130	10	CHANNEL 11
7386.1	41.5	54.0	-12.5	AVG	H	130	10	CHANNEL 11

12. Peak Power Spectral Density

12.1 Regulation

For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Test Equipment

⇒ Spectrum Analyzer (yellow): Hewlett-Packard 8566B, Serial Number 2403A06519, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001

⇒ RF Preselector (yellow): Hewlett-Packard 85685A, Serial Number 2648A00392, Calibrated: 20 November 2000, Calibration due Date: 20 November 2001

12.3 Test Procedures

The RF output of the EUT is connected to the RF input port of the RF preselector through a 10 dB pad. The following measurements were made with a RBW = 3 kHz, VBW = 10 kHz and Sweep Time = 666 seconds.


12.4 Test Results


Maximum peak power spectral density of channel 1 is 3.2 dBm.


Maximum peak power spectral density of channel 6 is 4.7 dBm.

Maximum peak power spectral density of channel 11 is 4.3 dBm.

12.5 Graphical Data

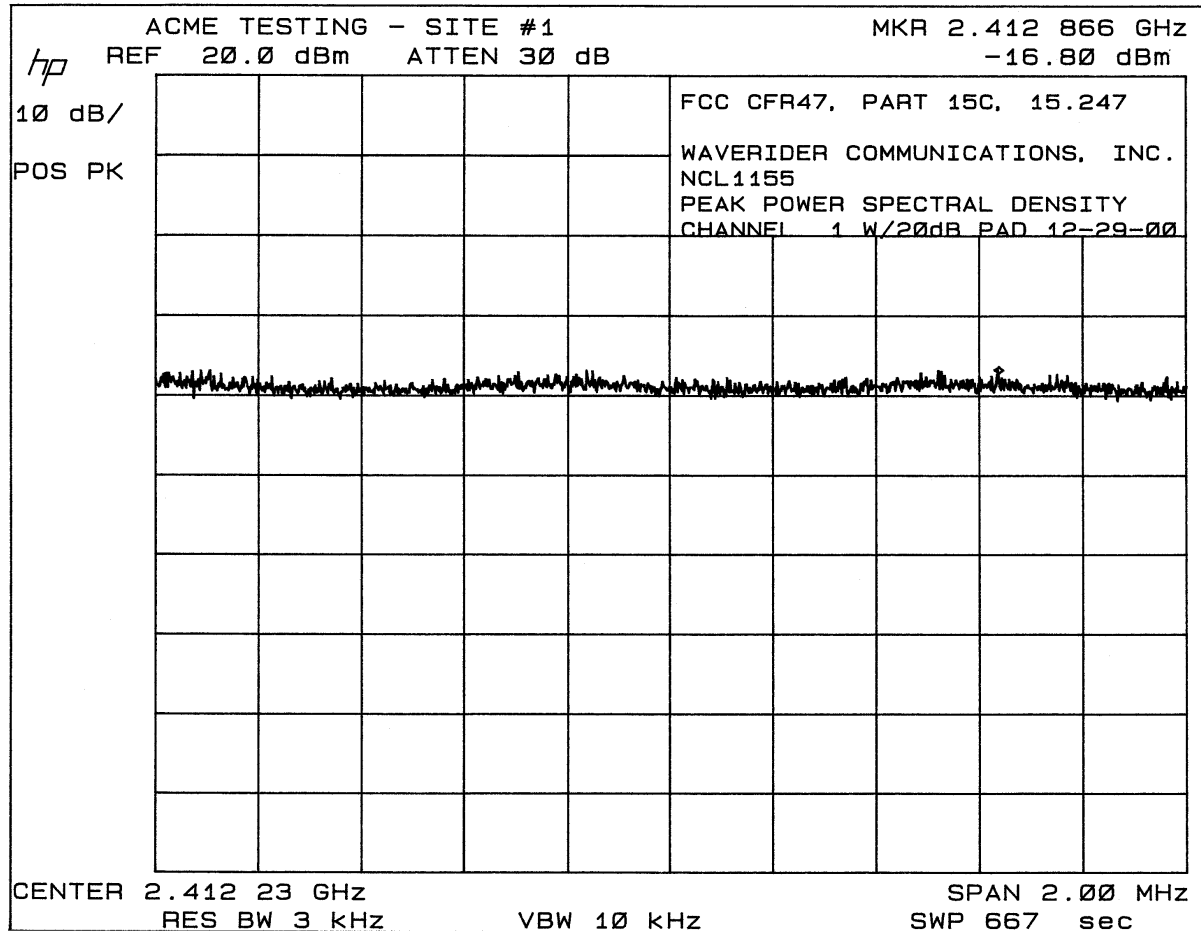

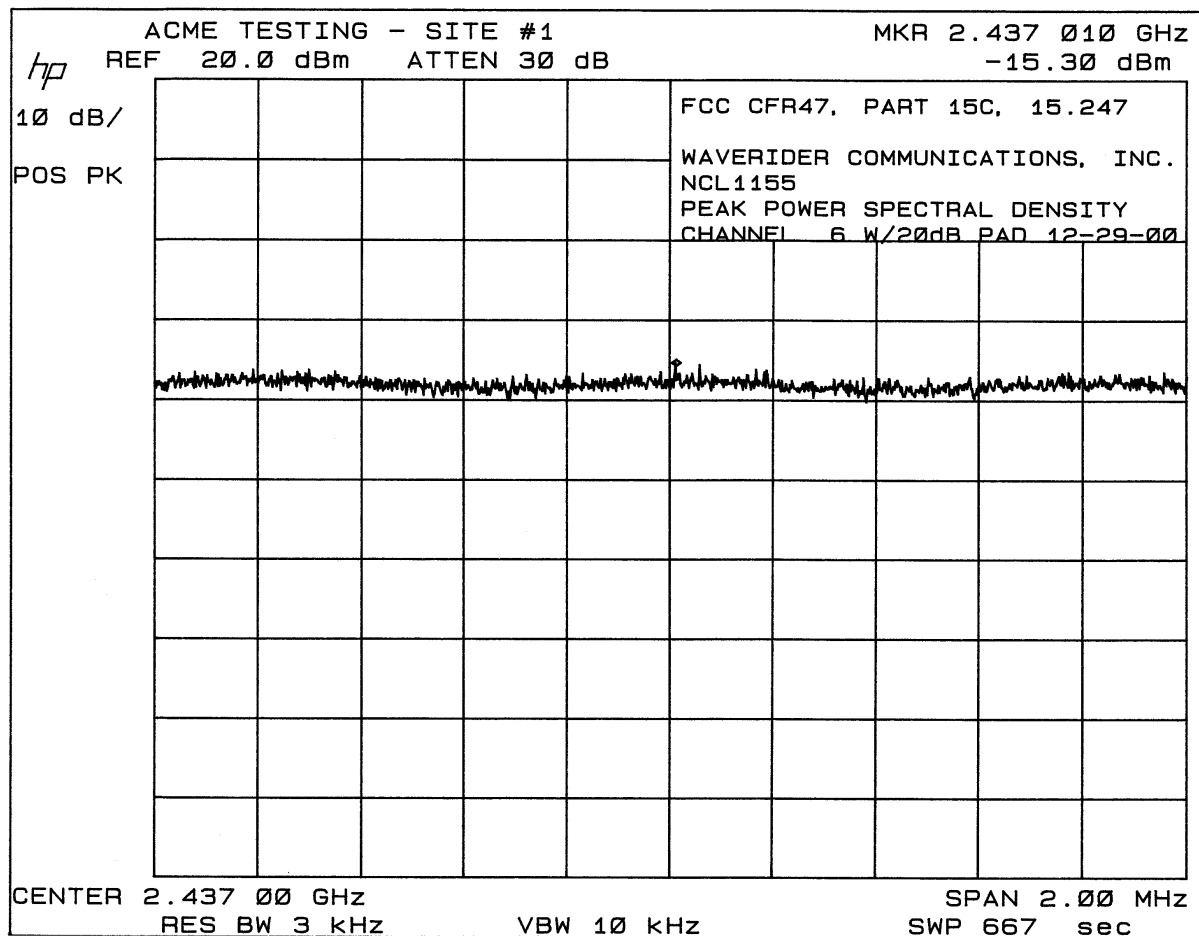

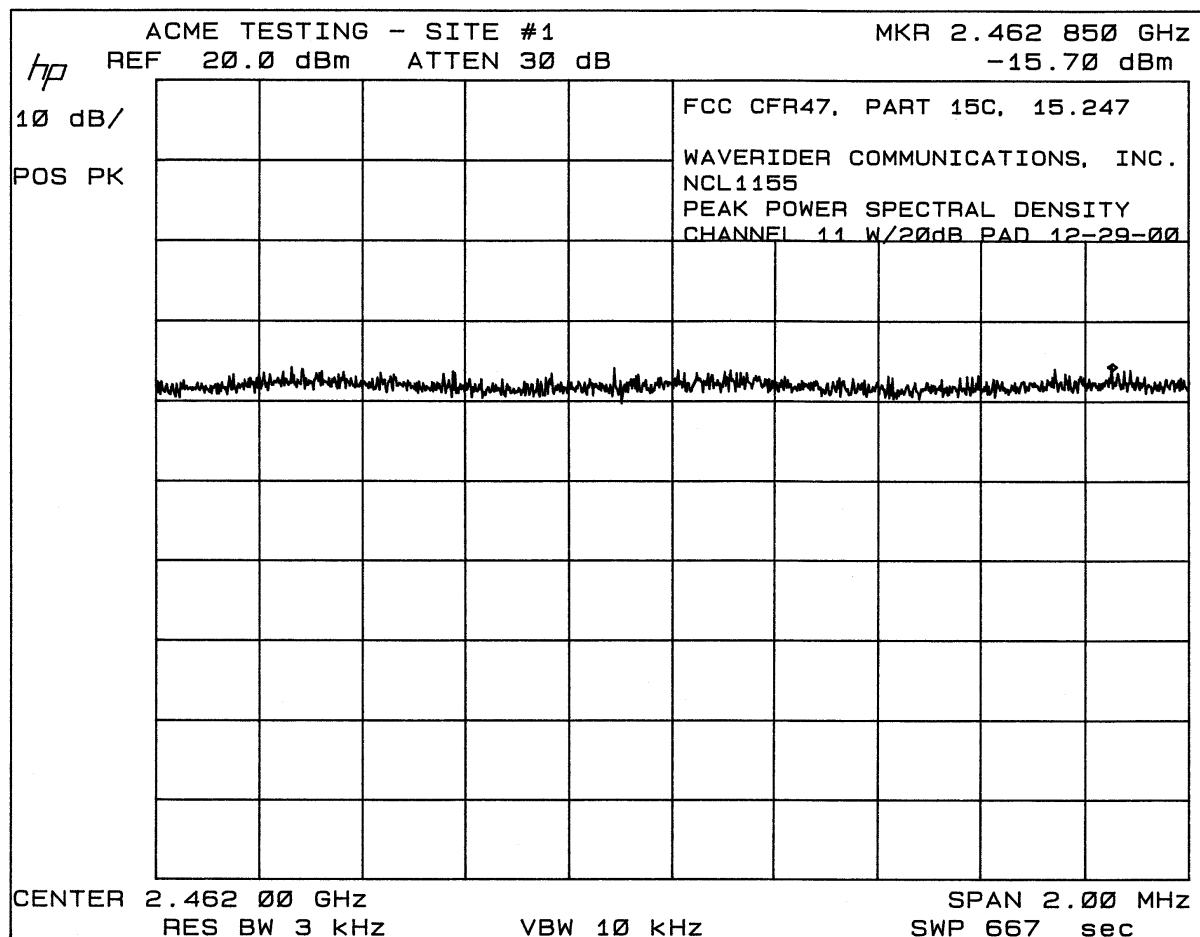

13. Process gain requirements

13.1 Regulation

The processing gain of a direct sequence system shall be at least 10 dB. The processing gain represents the improvement to the received signal-to-noise ratio, after filtering to the information bandwidth, from the spreading/despreading function. The processing gain may be determined using one of the following methods:

- (1) As measured at the demodulated output of the receiver: the ratio in dB of the signal-to-noise ratio with the system spreading code turned off to the signal-to-noise ratio with the system spreading code turned on.
- (2) As measured using the CW jamming margin method: a signal generator is stepped in 50 kHz increments across the passband of the system, recording at each point the generator level required to produce the recommended Bit Error Rate (BER). This level is the jammer level. The output power of the intentional radiator is measured at the same point. The jammer to signal ratio (J/S) is then calculated, discarding the worst 20% of the J/S data points. The lowest remaining J/S ratio is used to calculate the processing gain as follows: $G_p = (S/N)_o + M_j + L_{sys}$, where G_p = processing gain of the system, $(S/N)_o$ = signal-to-noise ratio required for the chosen BER, M_j = J/S ratio, and L_{sys} = system losses. Note that total losses in a system, including intentional radiator and receiver, should be assumed to be no more than 2 dB.

13.2 Result

Please see the process gain measurements in the attachments. The process gain of the product exceeds 10 dB.

14. Miscellaneous Comments and Notes

1. None.

15. List of Attachments

- 2 Process Gain Testing. (68)