



Report No.: SZ12080056E01



# FCC TEST REPORT

Issued to

Shenzhen Kemei Wireless communication Co., Ltd.

For

Bluetooth Stereo Headset

Model Name: S501  
Trade Name: evogue  
Brand Name: evogue  
FCC ID: OPK-S501  
Standard: 47 CFR Part 15 Subpart B  
Test date: August 21, 2012 – August 29, 2012  
Issue date: August 29, 2012

Shenzhen Morlab Communication Technology Co., Ltd.

Tested by Li Kexin  
Li Kexin  
Date 2012.8.29

Approved by Wu Xuewen  
Wu Xuewen  
Date 2012.8.29

Review by Huang Pulong  
Huang Pulong  
Date 2012.8.29



CTIA Authorized Test Lab  
LAB CODE 20081223-00  
IEEE 1725

OFTA  
OTA  
電訊管理局



TAF  
Testing Laboratory  
2004

GCF  
Official Chinese of  
Global Certification Forum

Bluetooth  
BQTF

FCC  
Reg. No.  
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Shenzhen MORLAB Communication Technology Co., Ltd.

JL-3, Building A, Fuyang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China 518101

Tel: +86 755 36698555 Fax: +86 755 36698525

## TABLE OF CONTENTS

|                                                 |           |
|-------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>             | <b>3</b>  |
| <b>1.1 EUT Description .....</b>                | <b>3</b>  |
| <b>1.2 Test Standards and Results .....</b>     | <b>4</b>  |
| <b>1.3 Facilities and Accreditations .....</b>  | <b>5</b>  |
| 1.3.1 Facilities .....                          | 5         |
| 1.3.2 Test Environment Conditions .....         | 5         |
| 1.3.3 Measurement Uncertainty .....             | 5         |
| <b>2. TEST CONDITIONS SETTING .....</b>         | <b>6</b>  |
| <b>2.1 Test Mode .....</b>                      | <b>6</b>  |
| <b>2.2 Test Setup and Equipments List .....</b> | <b>7</b>  |
| 2.2.1 Conducted Emission .....                  | 7         |
| 2.2.2 Radiated Emission .....                   | 8         |
| <b>3. 47 CFR PART 15B REQUIREMENTS .....</b>    | <b>11</b> |
| <b>3.1 Conducted Emission .....</b>             | <b>11</b> |
| 3.1.1 Requirement .....                         | 11        |
| 3.1.2 Test Description .....                    | 11        |
| 3.1.3 Test Result .....                         | 11        |
| <b>3.2 Radiated Emission .....</b>              | <b>14</b> |
| 3.2.1 Requirement .....                         | 14        |
| 3.2.2 Test Description .....                    | 14        |
| 3.2.3 Test Result .....                         | 14        |

| Change History |                 |                   |
|----------------|-----------------|-------------------|
| Issue          | Date            | Reason for change |
| 1.0            | August 29, 2012 | First edition     |
|                |                 |                   |
|                |                 |                   |

## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Type..... Bluetooth Stereo Headset  
Serial No. .... (n.a., marked #1 by test site)  
Hardware Version ..... REV 6  
Software Version..... 1200807  
Applicant..... Shenzhen Kemei Wireless communication Co., Ltd.  
F/2, Dapengche Building, Zerong industrial park, Huangmabu, Xixiang,  
Baoan, Shenzhen, Guangdong 518000. China  
Manufacturer..... Shenzhen Kemei Wireless communication Co., Ltd.  
F/2, Dapengche Building, Zerong industrial park, Huangmabu, Xixiang,  
Baoan, Shenzhen, Guangdong 518000. China  
Modulation Type..... FHSS  
Power supply ..... Battery  
Capacitance: 280mAh  
Rated Voltage: 3.7V  
Ancillary Equipment 1... AC Adapter (Charger for Battery)  
Rated Input: ~ 110-240V, 150mA, 50/60Hz  
Rated Output: = 5V, 1000mA

1. The EUT is a Bluetooth Stereo Headset. It supports ISM 2.4GHz Bluetooth band.
2. The EUT is equipped with a micro-USB port, and an aux in port for audio input.
3. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

| No. | Identity                            | Document Title          |
|-----|-------------------------------------|-------------------------|
| 1   | 47 CFR Part 15<br>(10-1-09 Edition) | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description        | Result |
|-----|---------|--------------------|--------|
| 1   | 15.107  | Conducted Emission | PASS   |
| 2   | 15.109  | Radiated Emission  | PASS   |

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4 2009.

## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |         |
|-----------------------------|---------|
| Temperature (°C):           | 15 - 35 |
| Relative Humidity (%):      | 30 - 60 |
| Atmospheric Pressure (kPa): | 86 -106 |

### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

|                                    |                    |
|------------------------------------|--------------------|
| Uncertainty of Conducted Emission: | $\pm 1.8\text{dB}$ |
| Uncertainty of Radiated Emission:  | $\pm 3.1\text{dB}$ |

## 2. TEST CONDITIONS SETTING

### 2.1 Test Mode

(1) The first test mode

The EUT configuration of the emission tests is EUT + PC.

During the measurement, the EUT has a built-in rechargeable battery which was charged by connecting with the USB port of your computer. Meanwhile, the EUT was connected with the PC through the audio cable and was working normally as a Music Player.

(2) The second test mode

The EUT configuration of the emission tests is EUT + PC + AC Adapter.


During the measurement, the EUT has a built-in rechargeable battery which was charged by the AC adapter. Meanwhile, the EUT was connected with the PC through the audio cable and was working normally as a Music Player.

NOTE: All test modes are performed and recorded in this report.

## 2.2 Test Setup and Equipments List

### 2.2.1 Conducted Emission

#### A. Test Setup:

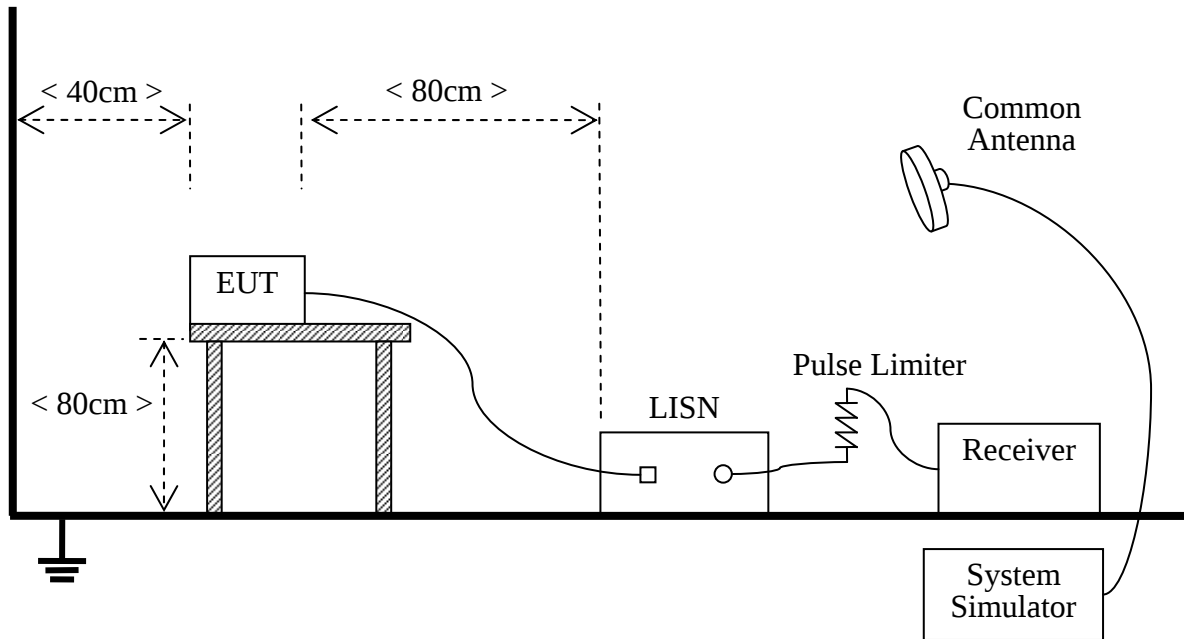

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


#### B. Equipments List:

| Description          | Manufacturer | Model       | Serial No. | Cal. Date |
|----------------------|--------------|-------------|------------|-----------|
| EMC Analyzer         | Agilent      | E7405A      | US44210471 | 2012.05   |
| Receiver             | Narda        | PMM 9060    | 001WX11001 | 2011.12   |
| Receiver             | Narda        | PMM 9010    | 595WX11007 | 2011.11   |
| LISN                 | Schwarzbeck  | NSLK 8127   | 812744     | 2012.05   |
| Pulse Limiter (20dB) | Schwarzbeck  | VTSD 9561-D | 9391       | (n.a.)    |
| System Simulator     | Agilent      | E5515C      | GB43130131 | 2012.05   |
| T-Flash Card         | SanDisk      | 256MB       | (n.a.)     | (n.a.)    |


## 2.2.2 Radiated Emission

### A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

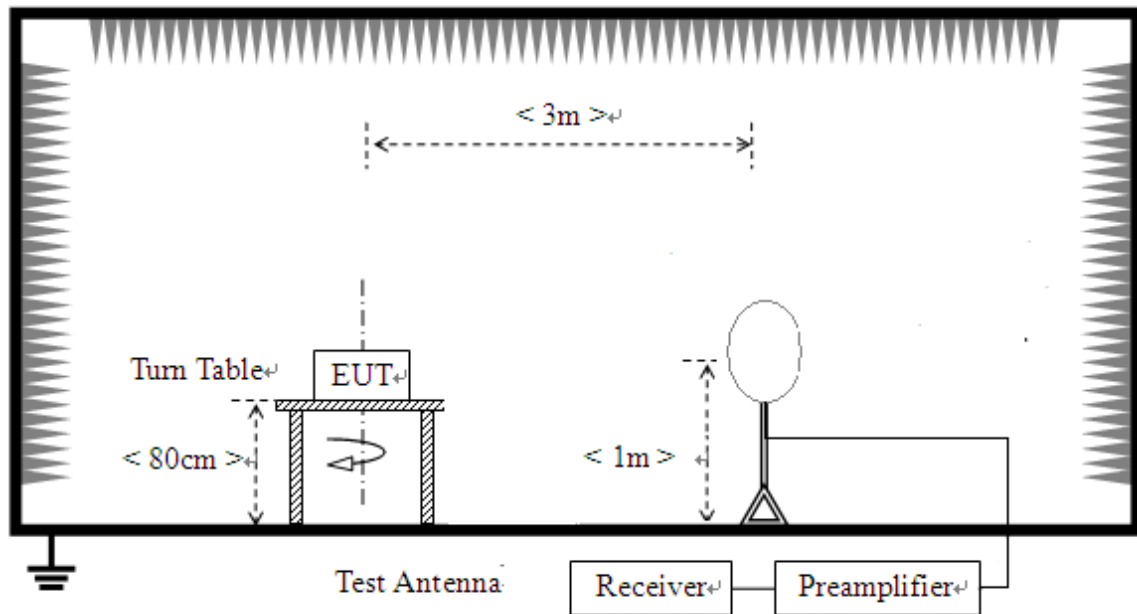

- 2) For radiated emissions from 30MHz to 1GHz

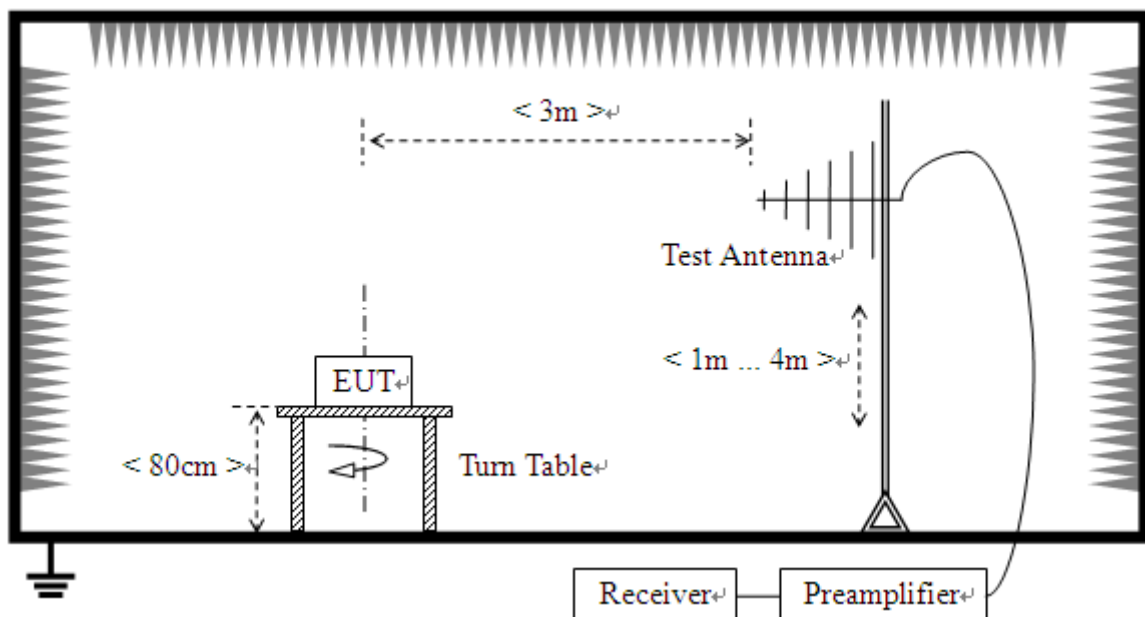

### 3) For radiated emissions above 1GHz

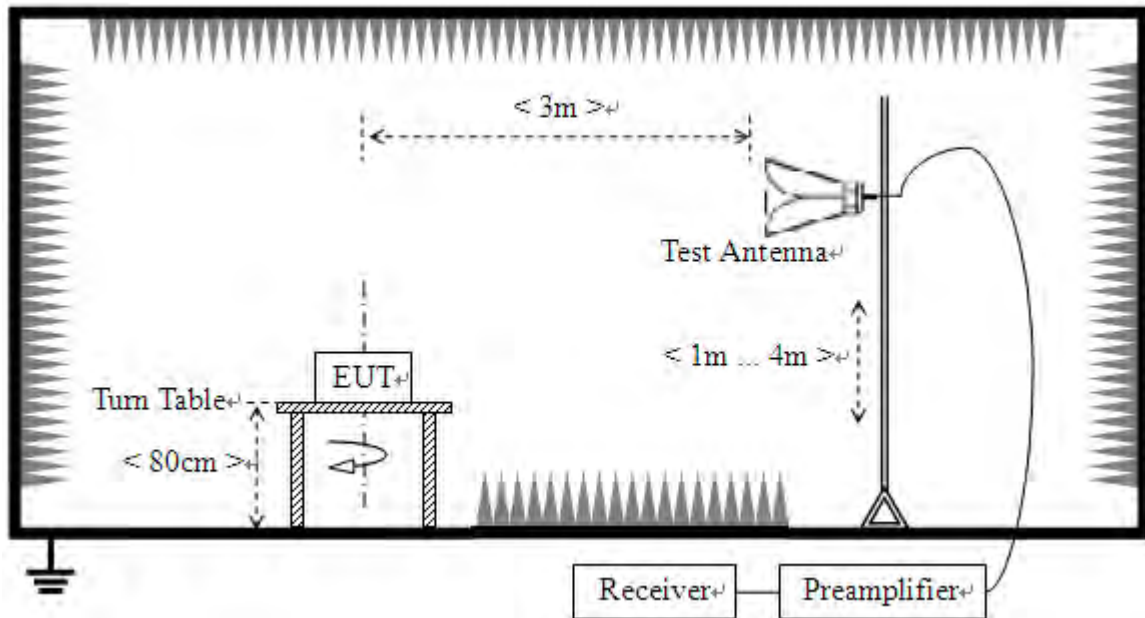

## B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna.

The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

- 2) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

## C. Equipments List:

| Description  | Manufacturer | Model    | Serial No. | Cal. Date |
|--------------|--------------|----------|------------|-----------|
| EMC Analyzer | Agilent      | E7405A   | US44210471 | 2012.05   |
| Receiver     | Narda        | PMM 9060 | 001WX11001 | 2011.12   |

| Description              | Manufacturer | Model      | Serial No. | Cal.<br>Date |
|--------------------------|--------------|------------|------------|--------------|
| Receiver                 | Narda        | PMM 9010   | 595WX11007 | 2011.11      |
| Semi-Anechoic<br>Chamber | Albatross    | 9m*6m*6m   | (n.a.)     | 2012.05      |
| Test Antenna - Bi-Log    | Schwarzbeck  | VULB 9163  | 9163-274   | 2012.05      |
| Test Antenna - Horn      | Schwarzbeck  | BBHA 9120D | 9120D-963  | 2012.05      |
| Test Antenna -Loop       | Schwarzbeck  | FMZB 1519  | 1519-022   | 2012.05      |
| T-Flash Card             | SanDisk      | 256MB      | (n.a.)     | (n.a.)       |

### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

| Frequency range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quasi-peak                   | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5 - 30                | 60                           | 50       |

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2 Test Description


See section 2.2.1 of this report.

##### 3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

##### 3.1.3.1 Test Mode

##### A. Test Plot and Suspicious Points for The First Test Mode:

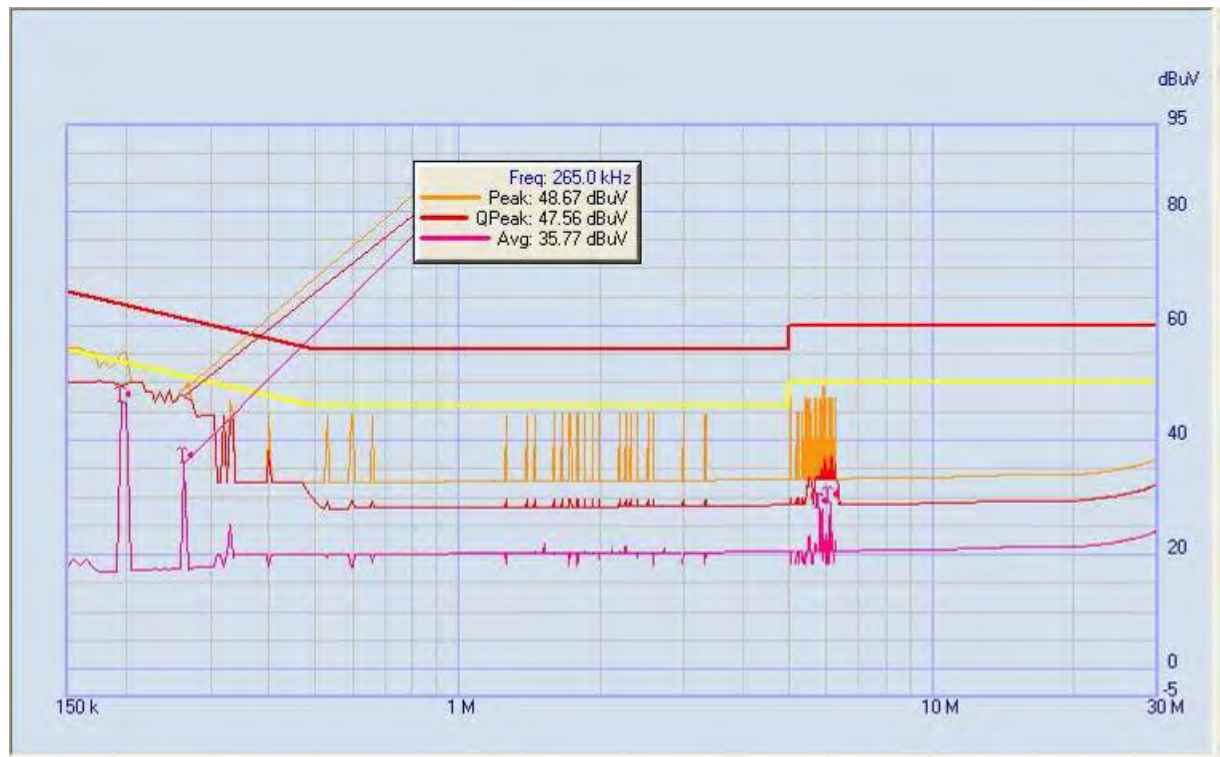


(Plot A: L Phase)

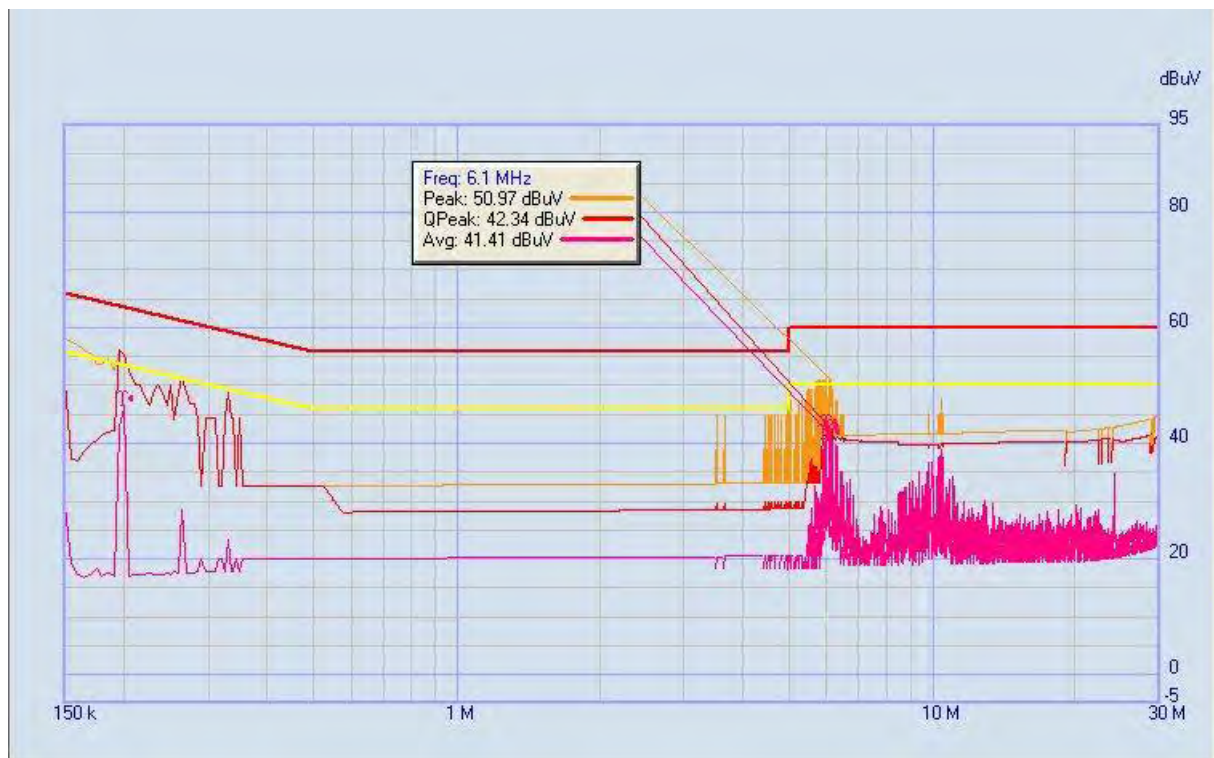


(Plot B: N Phase)

## B. Test Plot and Suspicious Points for The Second Test Mode:

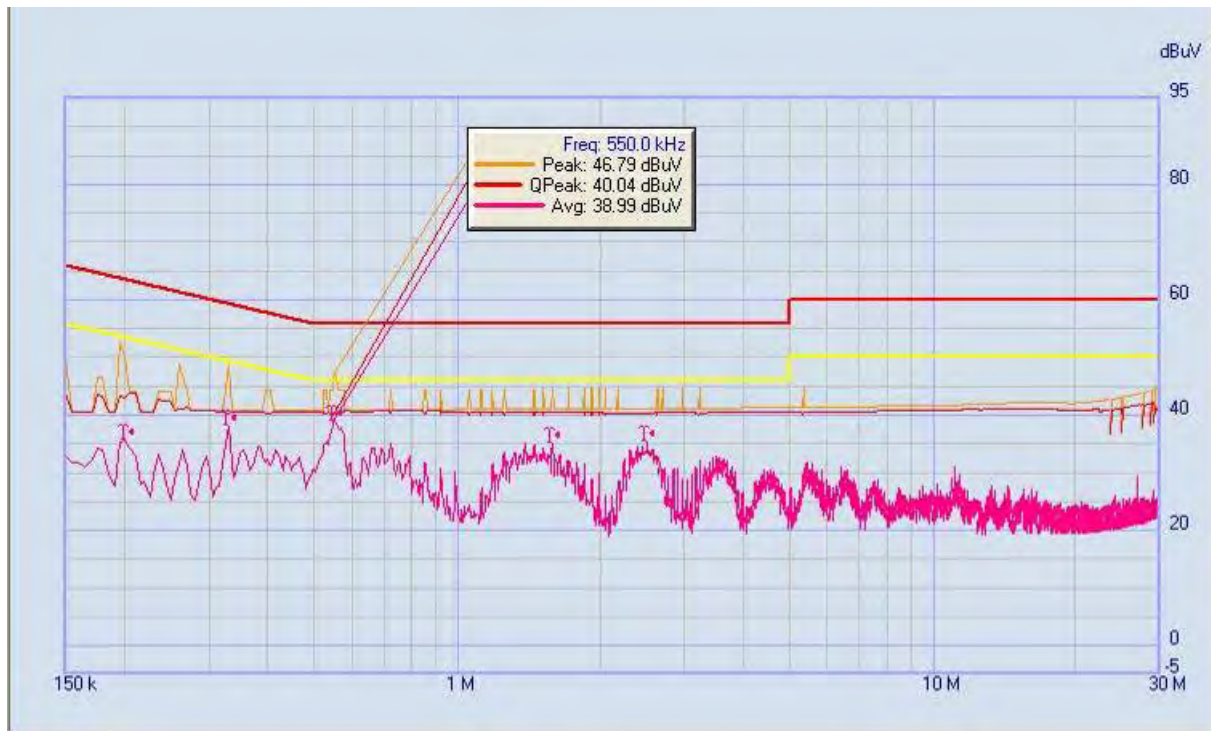

(Plot A: L Phase)

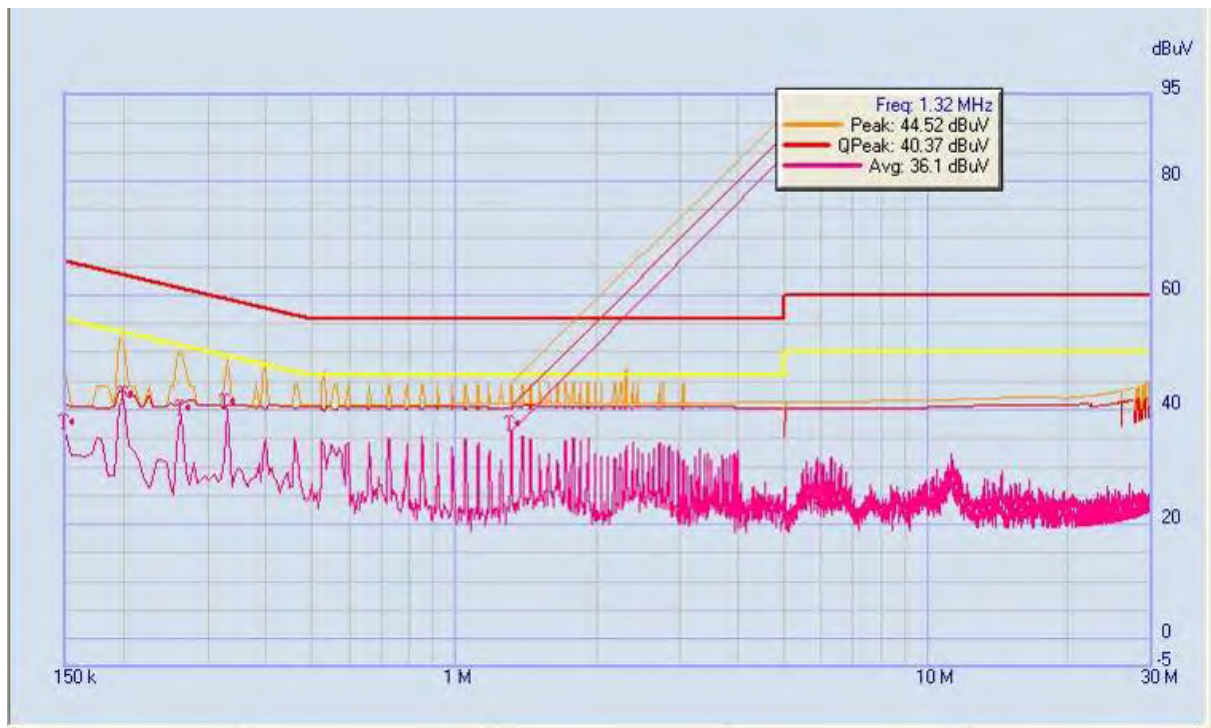

(Plot B: N Phase)

**Test Result: PASS**

## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency range (MHz) | Field Strength       |      | Field Strength Limitation at 3m Measurement Dist |                                  |
|-----------------------|----------------------|------|--------------------------------------------------|----------------------------------|
|                       | $\mu\text{V/m}$      | Dist | ( $\mu\text{V/m}$ )                              | ( $\text{dBuV/m}$ )              |
| 0.009 - 0.490         | $2400/F(\text{KHz})$ | 300m | $10000 * 2400/F(\text{KHz})$                     | $20\log 2400/F(\text{KHz}) + 80$ |
| 0.490 - 1.705         | $2400/F(\text{KHz})$ | 30m  | $100 * 2400/F(\text{KHz})$                       | $20\log 2400/F(\text{KHz}) + 40$ |
| 1.705 - 30.00         | 30                   | 30m  | $100 * 30$                                       | $20\log 30 + 40$                 |
| 30.0 - 88.0           | 100                  | 3m   | 100                                              | $20\log 100$                     |
| 88.0 - 216.0          | 150                  | 3m   | 150                                              | $20\log 150$                     |
| 216.0 - 960.0         | 200                  | 3m   | 200                                              | $20\log 200$                     |
| Above 960.0           | 500                  | 3m   | 500                                              | $20\log 500$                     |

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dBuV/m}$  is calculated by  $20\log \text{Emission Level}(\mu\text{V/m})$ .
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is  $30\mu\text{V/m}$ , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}$$

### 3.2.2 Test Description

See section 2.2.2 of this report.

### 3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to


perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

#### A. Test Plots and Suspicious Points for The First Test Mode:

NOTE: The emissions are too small to be measured and are at least 6 dB below the limit, So all the data of marked are pass.

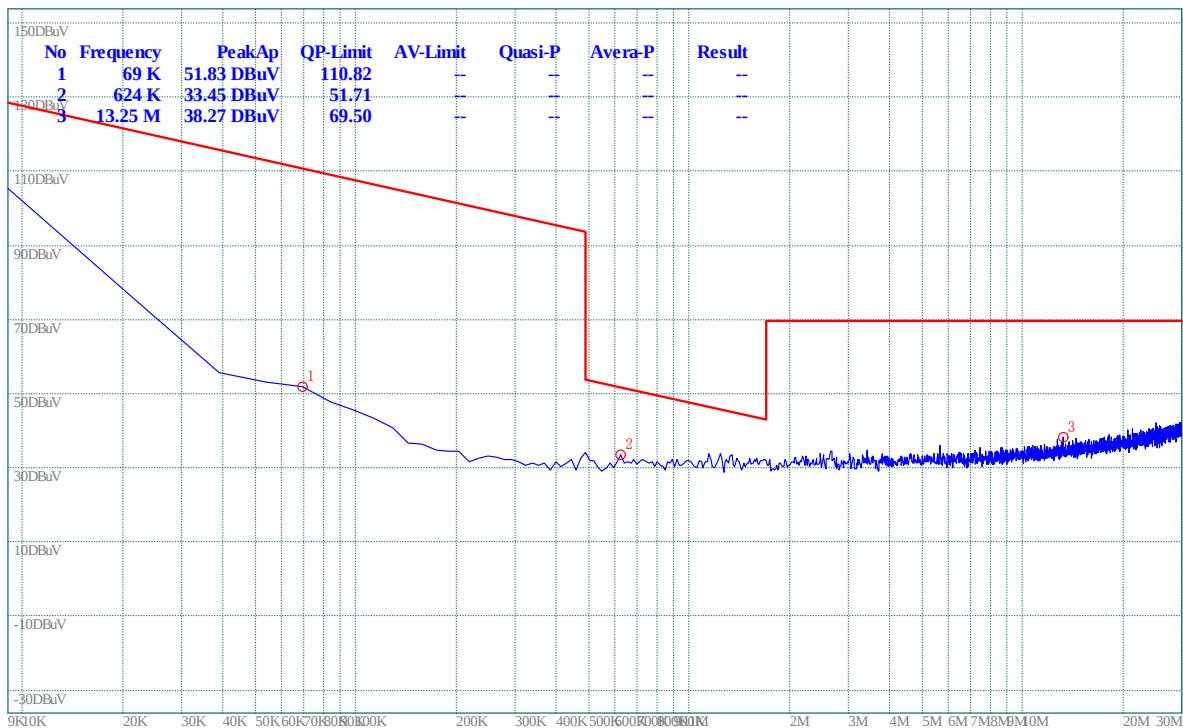


(Plot A: 9K – 30M)

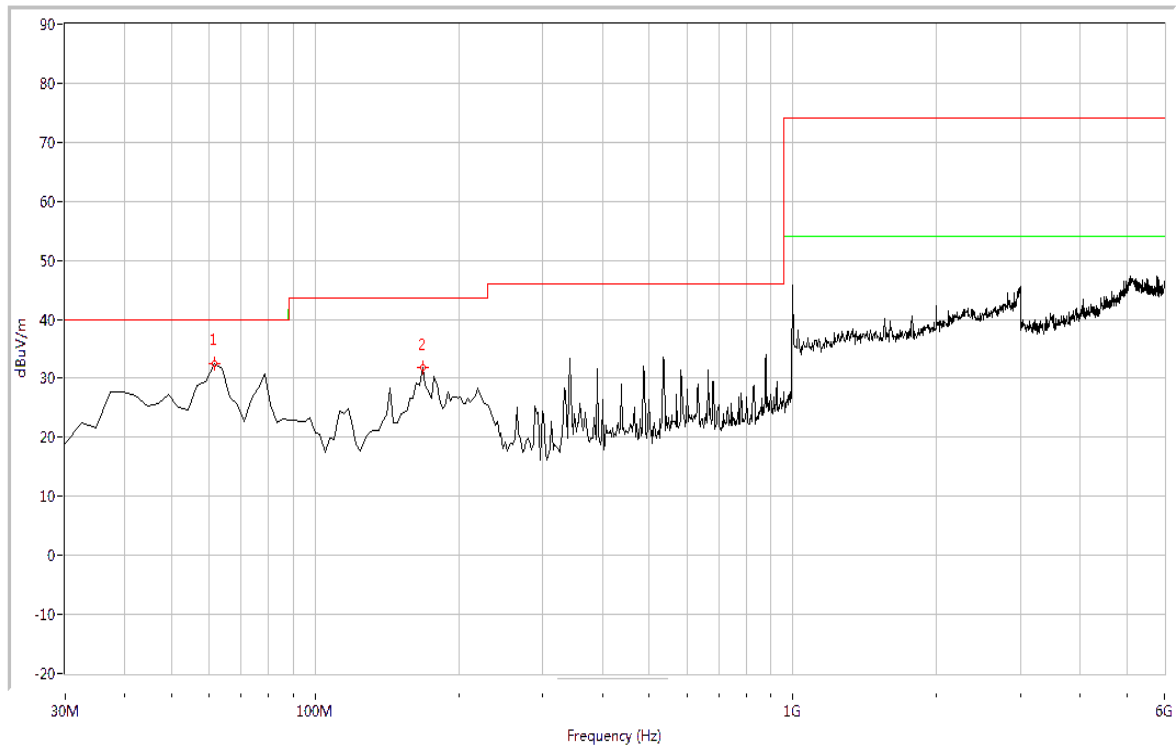

(Plot A: 30MHz – 6GHz, Test Antenna Vertical)

| NO. | Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-<br>PK | Limit-<br>QP | Limit-<br>AV | Antenna  | Verdict |
|-----|---------------|-------|-----|-----|--------------|--------------|--------------|----------|---------|
| 1   | 61.446        | 32.59 | N.A | N.A | N.A          | 40.0         | N.A          | Vertical | Pass    |
| 2   | 167.880       | 31.88 | N.A | N.A | N.A          | 43.5         | N.A          | Vertical | Pass    |

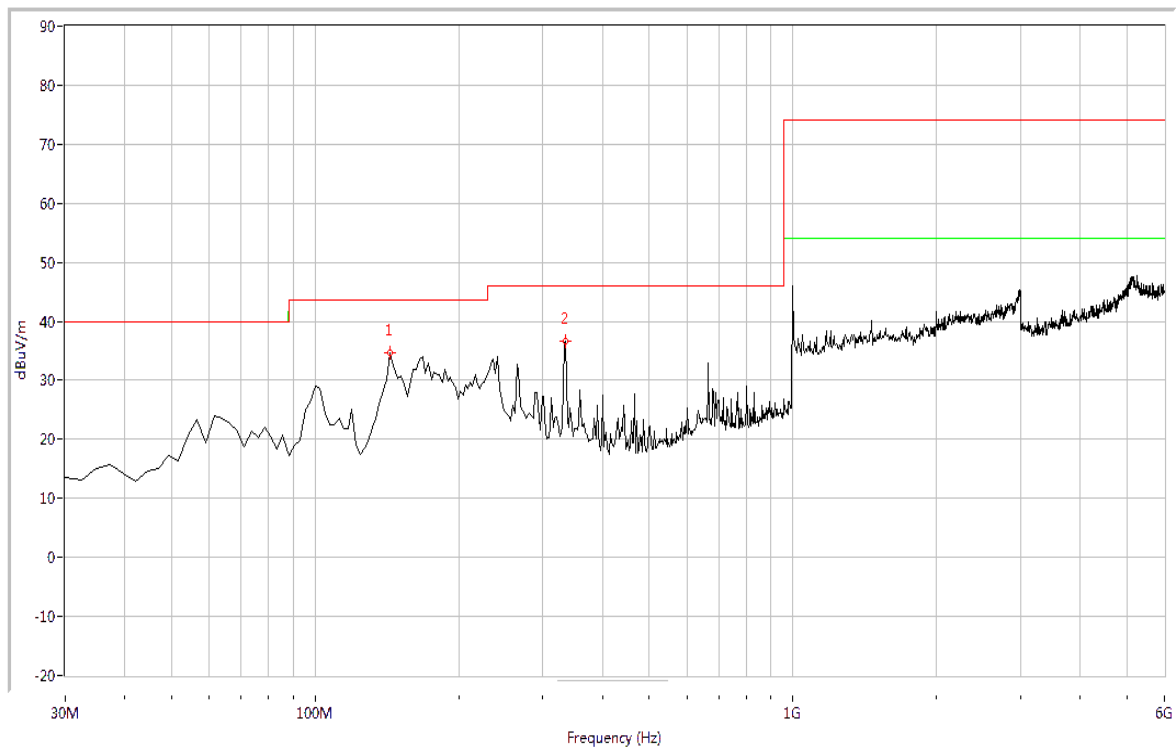


(Plot B: 30MHz – 6GHz, Test Antenna Horizontal)


| NO. | Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-<br>PK | Limit-<br>QP | Limit-<br>AV | Antenna    | Verdict |
|-----|---------------|-------|-----|-----|--------------|--------------|--------------|------------|---------|
| 1   | 143.691       | 34.76 | N.A | N.A | N.A          | 43.5         | N.A          | Horizontal | Pass    |
| 2   | 334.788       | 36.72 | N.A | N.A | N.A          | 46.0         | N.A          | Horizontal | Pass    |

## B. Test Plots and Suspicious Points for The Second Test Mode:

NOTE: The emissions are too small to be measured and are at least 6 dB below the limit, So all the data of marked are pass.

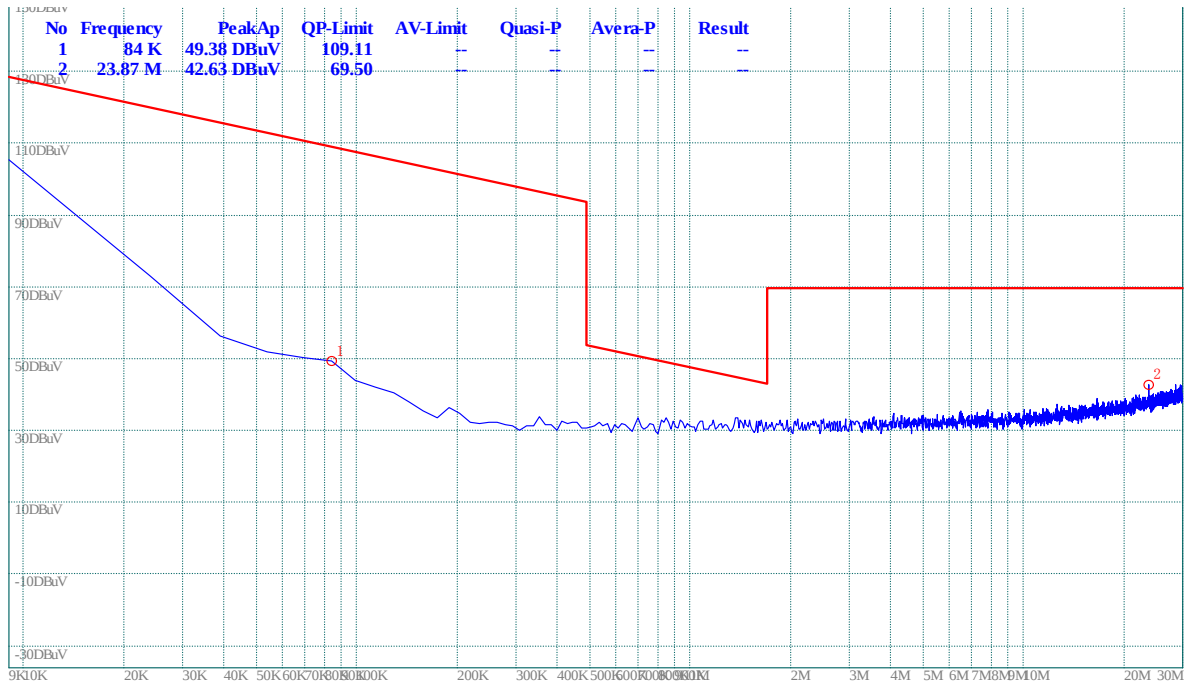


(Plot A: 9K – 30M)

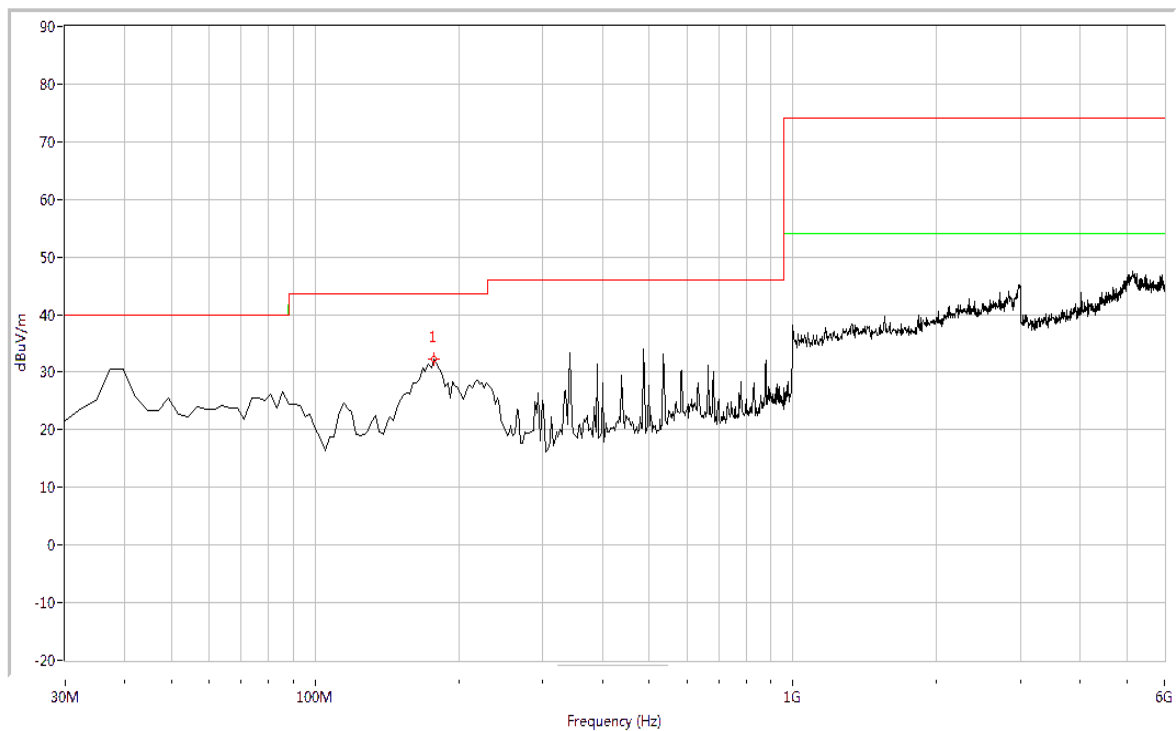

(Plot A: 30MHz – 6GHz, Test Antenna Vertical)

| NO. | Fre. (MHz) | Pk    | QP  | AV  | Limit-PK | Limit-QP | Limit-AV | Antenna  | Verdict |
|-----|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 1   | 177.556    | 32.27 | N.A | N.A | N.A      | 43.5     | N.A      | Vertical | Pass    |

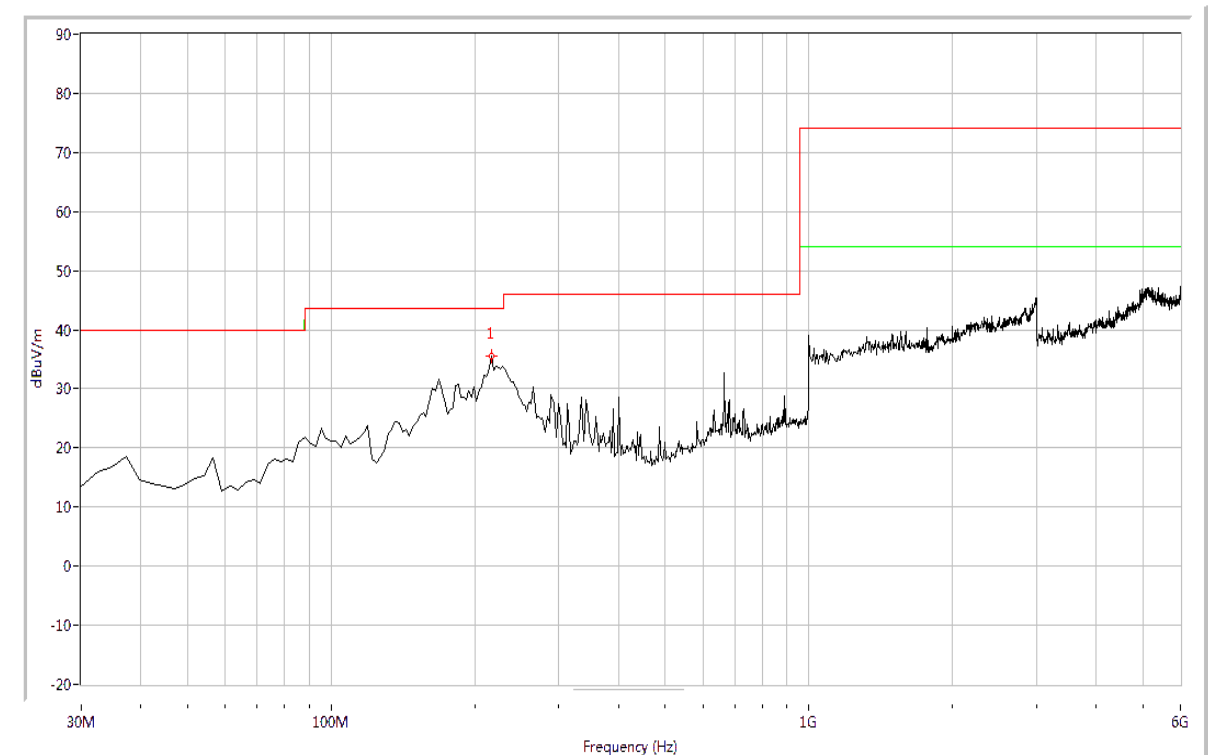

(Plot B: 30MHz – 6GHz, Test Antenna Horizontal)

| NO. | Fre.<br>(MHz) | Pk    | QP  | AV  | Limit-<br>PK | Limit-<br>QP | Limit-<br>AV | Antenna    | Verdict |
|-----|---------------|-------|-----|-----|--------------|--------------|--------------|------------|---------|
| 1   | 400.100       | 35.86 | N.A | N.A | N.A          | 46.0         | N.A          | Horizontal | Pass    |
| 2   | 700.050       | 33.07 | N.A | N.A | N.A          | 46.0         | N.A          | Horizontal | Pass    |

**Test Result: Pass**

**\*\* END OF REPORT \*\***