

EMISSION TEST REPORT

Test Report No. :

21CE0032-YW-1

Applicant: SHINKO ELECTRIC CO., LTD.

Type of Equipment: CMC (CMCBC, CMCBM, CMCTR)

Model No.: CMC (CMCBC, CMCBM, CMCTR)

Test standard: FCC Part 15 Subpart C

Test Result: Complies

This report may not be reproduced in full, partial reproduction may only be made with the written consent of the laboratory.

The results in this report apply only to the sample tested.

Date of test: October 20, 2000

Tested by: _____

Hiroya Tabata

Approved by: _____

Kazutoyo Nakanishi

Section Manager of EMC section

Issued date: October 31, 2000

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Table of Contents	Page
1 GENERAL INFORMATION	3
1.1 Product Description	4
1.2 Tested System Details	4
1.3 Tested Methodology	4
1.4 Test Facility	4
2 SYSTEM TEST CONFIGURATION	5
2.1 Operation Environment	5
2.2 Justification	5
2.3 EUT Exercise Software	5
2.4 Test Procedure	5
Figure 2.1 Configuration of Tested System	6
3 RADIATED MEASUREMENT PHOTOS	7
Figure 3.1 Radiated Measurement Photos	7
4 RADIATED EMISSION DATA	9
4.1 Field Strength Calculation	10
5 TEST EQUIPMENT USED	11
APPENDIX	12
Test Data	A1 – A4

1 GENERAL INFORMATION

APPLICANT : SHINKO ELECTRIC CO., LTD.

TRADE NAME : SHINKO

ADDRESS : 100 Takegahana-cho, Ise-shi,
Mie-ken 516-8550 Japan
Tel: +81-596-36-3180
Fax: +81-596-36-3974

REGULATION(S) : FCC Part 15 Subpart C

MODEL NUMBER : CMC (CMCBC, CMCBM, CMCTR)

SERIAL NUMBER : -

KIND OF EQUIPMENT : CMC (CMCBC, CMCBM, CMCTR)

TESTED DATE : October 20, 2000

RECEIPT DATE OF SAMPLE : October 20, 2000

TEST REPORT NUMBER : 21CE0032-YW-1

TEST SITE : A-PEX Yokowa NO. 2 Open Test Site

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

1.1 Product Description

Model: CMC (CMCBC, CMCBM, CMCTR), referred to as the EUT in this report, is a communication between vehicles and the ground side vehicle controller, that is realized by power line communication. About 300kHz-350kHz signals are superposed on the power line of non-contact power supply or communication line.

The clock frequency used in the EUT is 24 MHz. (Printed circuit board: NBV-BC)

Power Supply: DC 24V, 5V, $\pm 12V$

FSK modulation (285.7kHz, 315.8kHz)

1.2 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

Model	DoC or FCC ID	Description	Cable description	Backshell Material
(1) SHINKO M/N: CMCBC (EUT)	N/A	CMCBC	Shielded Interconnection Cable	P.V.C.
(2) SHINKO M/N: CMCBM (EUT)	N/A	CMCBM	Shielded Interconnection Cable	P.V.C.
(3) SHINKO M/N: CMCTR (EUT)	N/A	CMCTR	Shielded Interconnection Cable	P.V.C.
(4) SHINKO	N/A	HOST (Vehicle Controller)	Shielded Interconnection Cable	P.V.C.
(5) TAKASAGO M/N:GPT322 S/N:30290006	N/A (DC5V)	DC Power Supply	Shielded DC Power Cable	P.V.C.
(6) KIKUSUI M/N:PAB25-1TR S/N:30081818	N/A (DC24V)	DC Power Supply	Shielded DC Power Cable	P.V.C.
(7) TAKASAGO M/N:GPT601 S/N:25183147	N/A (DC $\pm 12V$)	DC Power Supply	Shielded DC Power Cable	P.V.C.

1.3 Tested Methodology

Radiated testing were performed according to the procedures in FCC/ANSI C63.4 (1992).

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on 108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 Japan.

This site has been fully described in a report submitted to FCC office, and listed on May 15, 2000(Registration number: 90411).

2 SYSTEM TEST CONFIGURATION

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

2.1 Operation Environment

Temperature : 21℃
Humidity : 78%
Power supply : DC 24V, 5V, ±12V

2.2 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

2.3 EUT Exercise Software

The EUT exercise program used during radiated testing was designed to exercise the various system components in a manner similar to typical use.

The sequence is used:

Operation Mode : Communication
Communication between vehicle and vehicle controller is realized by power line communication.
About 300kHz – 350kHz signals are superposed on the power line.

2.4 Test Procedure

Tabletop Equipment Radiated Emissions

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.
The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.
The measurement distance was 3m.

Testing Laboratory


A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Figure2.1 Configuration of Tested System

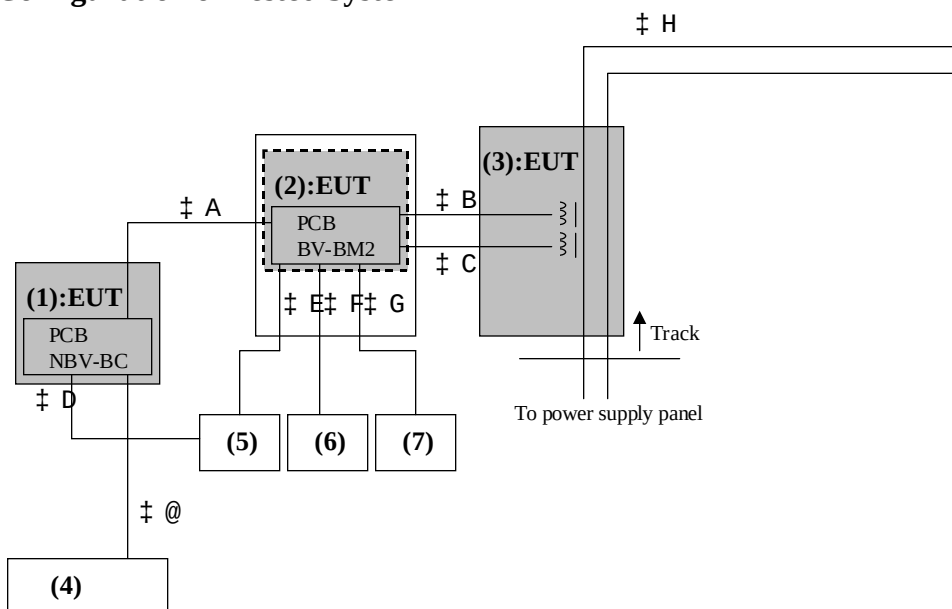

Cabling was taken into consideration and test data was taken under worse case conditions.

List of cables used

No.	Name	Length (m)	Shield	Remark
•	Interconnection Cable	3.0	Y	-
•	Interconnection Cable	3.0	Y	-
•	Interconnection Cable	3.0	Y	-
•	Interconnection Cable	3.0	Y	-
•	DC Power Cable	3.0	Y	-
•	DC Power Cable	3.0	Y	-
•	DC Power Cable	3.0	Y	-
•	DC Power Cable	3.0	Y	-
•	Power Supply Cable	4.0	N	-

3 RADIATED MEASUREMENT PHOTOS

Figure	3.1	Radiated	Measurement	Photos
--------	-----	----------	-------------	--------

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

4 RADIATED EMISSION DATA

The initial step in collecting radiated data was a spectrum analyzer peak scan of the measurement range (9kHz-30MHz).

The final data was reported in the worst-case emissions.

The minimum margin to the limit is as follows :

Frequency (MHz)	Receiver Reading (dB•V)	Correction Factor (dB•V)	Field Strength (dB•V/m)	Limit (dB•V/m)	Margin (dB•V)
3.1564	55.7	-3.9	51.8	69.5	17.7

* quasi-peak mode

* Fundamental: AV mode

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor and Antenna Pad, and subtracting the Amplifier Gain from the measured reading. The sample calculation is as follows :

$$FS = RA + AF + CF + AT - AG$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AT = Antenna Pad

AG = Amplifier Gain

Assume a receiver reading of 55.7 dB•V is obtained. The antenna Factor of 20.1 dB, Cable Factor of 0.4 dB and Antenna Pad of 6.0 dB is added. The Amplifier Gain of 30.4 dB is subtracted, giving a field strength of 51.8 dB•V/m.

$$FS = 55.7 + 20.1 + 0.4 + 6.0 - 30.4 = 51.8 \text{ dB} \cdot \text{V/m}$$

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

5 TEST EQUIPMENT USED

INSTRUMENTS	Mfr.	MODEL	C/N	Calibrated Until
• Pre Amplifier	Hewlett Packard	8447D	AF-01	November 16, 2000
• Pre Amplifier	Anritsu	MH648A	AF-03	November 16, 2000
• Attenuator	Anritsu	MP721B	AT-04	June 8, 2001
• Attenuator	Anritsu	MP721A	AT-07	June 8, 2001
• Biconical Antenna	Schwarzbeck	BBA9106	BA-01	April 28, 2001
• Biconical Antenna	Schwarzbeck	BBA9106	BA-05	April 28, 2001
• Logperiodic Antenna	Schwarzbeck	UKLP9140-A	LA-08	April 29, 2001
• Loop Antenna	Rohde & Schwarz	HFH2-Z2	LP-01	November 3, 2000
• LISN	Rohde & Schwarz	ESH2-Z5	LS-01	November 15, 2000
• LISN	Rohde & Schwarz	ESH3-Z5	LS-02	November 15, 2000
• LISN	Schwarzbeck	NSLK8127	LS-03	November 15, 2000
• LISN	Rohde & Schwarz	ESH3-Z5	LS-04	November 15, 2000
• LISN	Schwarzbeck	NNLK8121	LS-05	November 15, 2000
• LISN	Rolf Heine	NNB-4/200	LS-06	November 15, 2000
• LISN	Schwarzbeck	NNLK8126	LS-07	November 15, 2000
• LISN	Schwarzbeck	NSLK8127	LS-10	April 8, 2001
• Spectrum Analyzer	Hewlett Packard	8567A	SA-03	December 13, 2000
• Spectrum Analyzer	Hewlett Packard	8567A	SA-04	December 13, 2000
• Test Receiver	Rohde & Schwarz	ESHS-20	TR-01	March 30, 2001
• Test Receiver	Rohde & Schwarz	ESVS-30	TR-02	July 13, 2001
• Test Receiver	Rohde & Schwarz	ESVS-10	TR-04	July 13, 2001
• Test Receiver	Rohde & Schwarz	ESCS30	KTR-01	August 7, 2001

• • indicates EMI Test Equipment used.

*All measurement equipment is traceable to national standard.

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

APPENDIX

A : Test Data

Radiated emissions

A1 – A4

Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi, Mie-ken, 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232