

TA-5204-14-90 Sector

5250-5350 & 5725-5850 MHz



The TA-5204-14-90 is a vertically polarized 90 degree sectoral antenna. The antenna consists of a printed dipole array enclosed in an aluminum base with a UV stabilized radome for superior weatherability. The antenna is at DC ground to aid in lightning protection.

Electrical Specifications

Frequency Range: 5250-5350 & 5725-5850 MHz

Gain: 16 dBi min.

VSWR: 1.5:1

Front to Back Ratio: 25 dB min.

Polarization: Vertical

Power Rating: 5 Watts

H-Plane Beamwidth: 90 degrees

E-Plane Beamwidth: 5 degrees

Cross Pol. Discrimination: 20 dB min.

Impedance: 50 ohms nominal

Termination: N female

Typical mid band values. (For details, contact factory)

Mechanical Specifications

Length: 26.5 in. (673 mm)

Width: 6.25 in. (159 mm)

Depth: 2.0 in. (51 mm)

Weight (incl. Clamps): 6 lb. (2.72 kg)

Rated Wind Velocity: 125 mph (200 km/h)

Hor. Thrust at rated wind: 72 lb. (32.6 kg)

Mechanical Tilt: 0+/-16 degrees

Mounting Pipe: 0.75 - 2.0 in. (19 - 51 mm)

Materials


Radiating Elements: Plated Copper on PCB

Reflector: Iridized aluminum

Radome: Gray UV stabilized ASA

Clamps: Aluminum and HDG steel

H-Plane

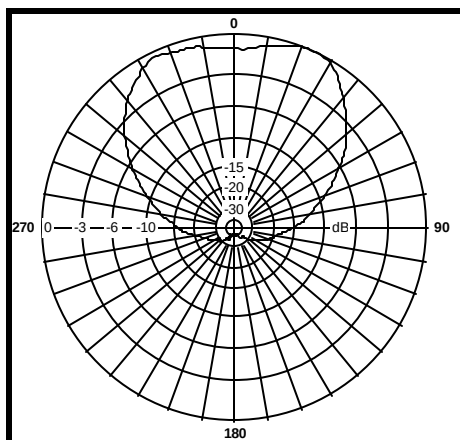

E-Plane

