



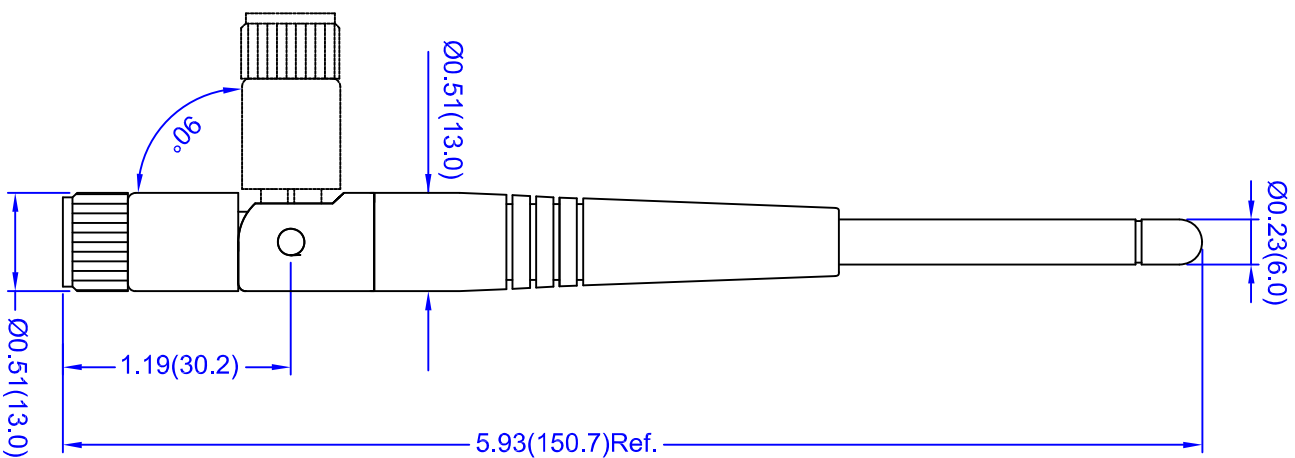

SMA type
connector

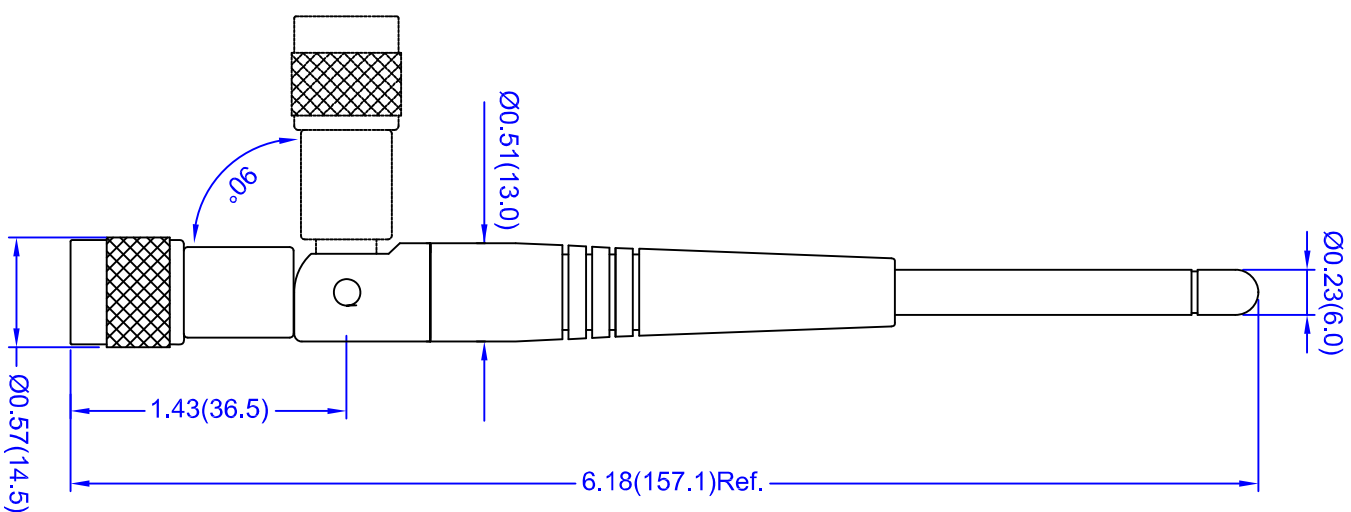

TNC type
connector

Electrical Properties:

Frequency Range: 2.4~2.5/4.9~5.35/5.725~5.85 GHz
 Impedance: 50Ω nominal
 VSWR: <2.0:1
 Gain: 2 dBi @ 2.45GHz
 2 dBi @ 5.25GHz
 2 dBi @ 5.75GHz
 Radiation: Omni
 Polarization: Vertical

Mechanical Properties:

Material: Polycarbonate(Black)
 Whip: Polycarbonate(Black)
 Swivel Mechanism: Brass with black chrome plating
 Connector: -20°C to +65°C
 Operation Temp.: -30°C to +75°C
 Storage Temp.:

This is a RoHS compliant product.

TITLE	Multi-Band Swivel Antenna -145 Model		Rev. Date 03/29/06	SHEET 1 of 2
UNIT	DWG. NO.	T145XX-2.4/4.9/5.X-S		
in.(mm)	NEARSON			
SCALE				
none				

NEARSON

Series Part Numbers

Connector Code -XX-	Description	P / N
AM	SMA Plug	T145AM-2.4/4.9/5.x-S
AH	SMA Plug Reverse Polarity	T145AH-2.4/4.9/5.x-S
TC	TNC Plug	T145TC-2.4/4.9/5.x-S
TR	TNC Plug Reverse Polarity	T145TR-2.4/4.9/5.x-S

Connector Interface

 SMA Plug (AM)	 TNC Plug (TC)
 SMA Plug Reverse Polarity (AH)	 TNC Plug Reverse Polarity (TR)

TITLE	Multi-Band Swivel Antenna		Rev. Date	SHEET
	-145 Model		03/29/06	2 of 2
UNIT	DWG. NO.	T145XX-2.4/4.9/5.x-S		
In.(mm)				
SCALE				
none				

NEARSON