



## **Instruction Manual for the use and the maintenance of the CCS**

Original instructions

**Part A: Information, instructions and general  
warnings**

**DYNAMIC+P SERIES**





# WARNING

**THIS PART OF THE MANUAL CONSISTS OF** Part A - Information, instructions and general warnings for the Autec Dynamic+P Series CCS. The Manual consists of Part A – General, Part B – Conformity and Frequencies, Part C – Remote station, Part D – Base station and Part E – Battery and Battery Charger, plus the Technical Data Sheet.

**THIS MANUAL, INCLUDING ALL PARTS THEREOF, AND ALL INSTRUCTIONS CONTAINED HEREIN, MUST BE READ CAREFULLY AND UNDERSTOOD BEFORE INSTALLING, USING, MAINTAINING OR REPAIRING THE AUTEC CCS.**

**FAILURE TO READ AND COMPLY WITH ALL APPLICABLE WARNINGS AND INSTRUCTIONS OR ANY ONE OF THE LIMITATIONS NOTED IN THIS MANUAL CAN RESULT IN SERIOUS BODILY INJURY OR DEATH, AND/OR PROPERTY DAMAGE.**

**THE AUTEC CCS IS NOT A STANDALONE PRODUCT AND IS INTENDED ONLY AS A COMPONENT ON A MACHINE:**

- **ON WHICH AND WHERE THE USE OF A CCS IS APPROPRIATE,**
- **THAT CAN BE OPERATED SAFELY AND IN ACCORDANCE WITH ALL APPLICABLE LAWS, REGULATIONS AND STANDARDS BY SUCH REMOTE CONTROL.**

**ACCORDINGLY, IT IS THE RESPONSIBILITY OF THE MACHINE MANUFACTURER ON WHICH THE AUTEC CCS IS INTENDED TO BE INSTALLED,** to perform an in-depth and accurate risk assessment to determine if the Autec CCS is suitable for operating a Machine in conditions of safety and operational effectiveness, taking into account the conditions of use, the intended uses and the reasonably foreseeable incorrect ones, so that the installation, maintenance and use of the Autec CCS, and all its components, are performed only and entirely in compliance with this Manual and in accordance with all local regulations, safety standards and regulations (referred to herein as "Laws, Regulations and Standards").

With reference to the USA market the Laws, Regulations and Standards include all safety rules and regulations of the Occupational Safety & Health Administration (OSHA) (<http://www.osha.gov>), all federal, state and local laws, regulations and building and electrical codes, and all applicable standards, including but not limited to ANSI Standards.

**It is also the responsibility of the Manufacturer and of the design professionals of the Machine on which the Autec CCS is to be installed and used to be certain that the structure, condition, organization and markings of the Machine as installed at the facility is appropriate for and will allow for the safe and reliable use and control of the Machine through the Autec CCS interface.**

**IT IS THE RESPONSIBILITY OF THE OWNER AND FACILITY OPERATOR, AND THEIR DESIGN PROFESSIONALS, that the installation, maintenance and operation of the Autec CCS and all of its components are done solely and completely in accordance with this Manual, and with all applicable Laws, Regulations and Standards, even local. It is also the responsibility of the Manufacturer of the Machine on which the Autec CCS is to be installed and used, and their design professionals, to be certain that the structure, condition, organization and markings of the Machine as installed at the facility is appropriate for and will allow for the safe and reliable use and control of the Machine through the Autec CCS interface.**

**ONLY QUALIFIED AND PROPERLY TRAINED PERSONNEL SHOULD BE PERMITTED TO OPERATE OR USE THE AUTEC CCS AND THE MACHINE OPERATED BY OR THROUGH THE AUTEC CCS. ONLY QUALIFIED AND PROPERLY TRAINED PERSONNEL SHOULD BE PERMITTED TO BE IN THE VICINITY OF MACHINE OPERATED BY OR THROUGH THE AUTEC CCS.**

**FAILURE TO PROPERLY INSTALL, OPERATE, MAINTAIN AND SERVICE THE AUTEC CCS CAN RESULT IN SERIOUS BODILY INJURY OR DEATH AND/OR PROPERTY DAMAGE. Refer to this Manual and each of its Parts for further assistance or contact Autec. Autec is not responsible for and shall not be held liable for any installation of the Autec CCS not performed by Autec or for any use of the Autec CCS not in complete compliance with, and/or not maintained in complete compliance with, all Autec instructions and warnings and all applicable Laws, Regulations and Standards, even local.**

**Autec is not responsible for and shall not be held liable for any alteration or modification of the Autec CCS, or the use of non-Autec components or products used with or incorporated into the Autec CCS.**

**IT IS THE RESPONSIBILITY OF THE OWNER AND FACILITY OPERATOR, AND THEIR DESIGN PROFESSIONALS, to be certain that the Autec CCS is properly maintained and serviced at all times in compliance with all Autec instructions and warnings, and with all applicable Laws, Regulations and Standards, even local.**

**IT IS THE RESPONSIBILITY OF THE OWNER AND FACILITY OPERATOR, AND THEIR OFFICERS, MANAGERS AND SUPERVISORS, to be certain that all Users of the Autec CCS and that all Persons who are or will be working with or near the Machine operated by or through the Autec CCS are fully and properly educated and trained by qualified Personnel in the proper and safe use of the Autec CCS and of the Machine, including without limitation complete familiarity with and understanding of Autec warnings and instructions, and all applicable Laws, Regulations and Standards, even local, and that such Users and other Persons do in fact at all times operate or work with the Autec CCS safely and ONLY in compliance with Autec instructions and warnings and with all applicable Laws, Regulations and Standards, even local. FAILURE TO DO SO CAN RESULT IN SERIOUS BODILY INJURY OR DEATH AND/OR PROPERTY DAMAGE.**

**IT IS THE RESPONSIBILITY OF THE OWNER AND FACILITY OPERATOR, AND THEIR OFFICERS, MANAGERS AND SUPERVISORS, to be certain that the areas in which the Machine operated by or through the Autec CCS is located and operates are clearly delineated and marked in accordance with all Autec warnings and instructions, and all applicable Laws, Regulations and Standards, even local, and otherwise sufficient to alert and warn ALL PERSONS that the Machine is operated by or through a CCS, and prohibiting any unauthorized access thereto. FAILURE TO DO SO CAN RESULT IN SERIOUS BODILY INJURY OR DEATH AND/OR PROPERTY DAMAGE.**

**FAILURE TO OPERATE THE AUTEC CCS SAFELY AND IN COMPLIANCE WITH AUTEC INSTRUCTIONS AND WARNINGS AND WITH APPLICABLE LAWS, REGULATIONS AND STANDARDS, EVEN LOCAL, AND/OR PERMITTING USERS OR OTHER PERSONS NOT PROPERLY TRAINED IN THE SAFE AND PROPER USE OF THE SYSTEM, OR THE MACHINE ON WHICH IT IS INSTALLED, CAN RESULT IN SERIOUS BODILY INJURY OR DEATH AND/ OR PROPERTY DAMAGE.**



# INDEX

<b>1</b>	<b>Information on the use of instructions .....</b>	<b>9</b>
1.1	Structure of the Instruction Manual .....	9
1.2	Caption and terminology .....	11
1.3	Symbols .....	13
1.4	To whom the instructions are addressed .....	13
1.5	Instruction storage .....	14
1.6	Intellectual property .....	14
<b>2</b>	<b>Brief product presentation .....</b>	<b>15</b>
2.1	Series, CCS and Station .....	15
2.2	Conformity with standards .....	15
2.3	Contacts and useful addresses .....	15
2.4	Warranty .....	15
2.5	Technical assistance and spare parts .....	15
<b>3</b>	<b>General safety warnings .....</b>	<b>16</b>
<b>4</b>	<b>CCS features .....</b>	<b>20</b>
4.1	Description of radio link .....	20
4.2	Control devices .....	22
4.3	CCS stop functions .....	22
4.4	Protection against unintended movements from the standstill position UMFS .....	29
4.5	Technical data .....	31
4.6	Identifying the CCS .....	31
4.7	Additional features of the "Take & Release" CCS .....	32
<b>5</b>	<b>CCS storage before installation or after removal .....</b>	<b>33</b>
<b>6</b>	<b>Installation .....</b>	<b>33</b>
6.1	Applications .....	33
6.2	Staff training: installation and maintenance .....	36
6.3	Classification of commands .....	36
6.4	Warnings for installation .....	37
<b>7</b>	<b>Safety .....</b>	<b>45</b>
7.1	Risk assessment for Machine controlled by the CCS .....	45
7.2	Delay in command response time .....	46
7.3	Inadvertent activation of commands .....	46
7.4	Activation and/or deactivation of commands due to failure .....	47
7.5	Latching functions .....	47
<b>8</b>	<b>Instructions for the User .....</b>	<b>48</b>
8.1	Staff training: use and working conditions .....	48
8.2	Warnings for the User .....	49
8.3	Operational use .....	53
<b>9</b>	<b>Maintenance .....</b>	<b>54</b>
9.1	CCS maintenance - general directions .....	54
9.2	Routine maintenance .....	55
9.3	Special maintenance .....	58
9.4	Additional maintenance operations in environments with corrosive agents .....	59
9.5	Preventive replacement of the CCS's electromechanical components .....	60

<b>10 Troubleshooting .....</b>	<b>62</b>
10.1 CCSs with "Data Feedback" function .....	62
10.2 CCSs with cable control .....	62
10.3 Solutions in case of malfunction .....	62
<b>11 Decommissioning and disposal .....</b>	<b>63</b>
11.1 Decommissioning .....	63
11.2 Disposal .....	63

## 1 Information on the use of instructions

---

### 1.1 Structure of the Instruction Manual

The Manual for the use and maintenance of Autec CCSs consists of different parts, that altogether form the Manual; the Manual must be read carefully, understood and applied by the CCS's Owner, User and by all those Persons that, for any reasons, may operate with the CCS or with the Machine where it is installed.

The following table describes the structure of the Instruction Manual for the use and the maintenance of the CCS.

Part	Title	Contents
A	General part	<ul style="list-style-type: none"> <li>- General information regarding the series,</li> <li>- directions for risk assessment of the "Machine+CCS" system,</li> <li>- warnings for installation of the CCS,</li> <li>- warnings for use and maintenance of the CCS,</li> <li>- instructions for correct transportation and storage of CCS.</li> </ul>
B	Conformity and frequencies	<ul style="list-style-type: none"> <li>- Operating frequency bands of the CCS,</li> <li>- conformity and law references of the CCS.</li> </ul>
C	Remote station	<p>Description and instructions concerning the Remote station, including:</p> <ul style="list-style-type: none"> <li>- description of operation,</li> <li>- commands,</li> <li>- light signals,</li> <li>- malfunctions,</li> <li>- additional instructions to the general part.</li> </ul>
D	Base station	<p>Description and instructions concerning the Base station, including:</p> <ul style="list-style-type: none"> <li>- description of operation,</li> <li>- light signals,</li> <li>- malfunctions,</li> <li>- additional instructions to the general part.</li> </ul>
E	Battery and battery charger	<p>Description, warnings and instructions concerning batteries and battery chargers, including:</p> <ul style="list-style-type: none"> <li>- description of operation,</li> <li>- light signals,</li> <li>- malfunctions,</li> <li>- instructions for the User.</li> </ul>

Usage and maintenance instructions are supplemented by the CCS's Technical Data Sheet, that:

- Describes the Remote station's configuration
- Indicates the relation between commands sent by the Remote station and those available on the Base station.

**INSTRUCTIONS FOR THE GENERAL PART:** The instructions contained in this general part of the Instruction Manual refer to all Autec CCSs in the Dynamic+P Series and to their single components and Stations; these instructions must be read and understood by their addressees before reading the instructions contained in the manuals of the single Stations.

Usage and maintenance instruction as a whole are to be considered as an integral part both of the Autec CCS and of the Machine, system, device or Machinery system where the CCS is installed.

The Manufacturer of the Machine on which the Autec CCS is installed, and the Owner and User of the Machine, must make sure that the Instruction Manual and all of its parts are included in the Instruction Manual of the Machine.

## 1.2 Caption and terminology

	Contact Autec if any of the instructions, symbols, warnings or images are not clear and understandable.
---	---

The terms listed below originate from the “IEC 62745: Safety of machinery - Requirements for cableless control systems of machinery” Standard, and have the stated meaning throughout the entire Manual, including all of its parts:

- **Remote station (Remote Station):** part of the CCS that is not physically connected to the Machine, and is intended to remotely control the operation of the Machine; it can be portable, movable (installed on a moving part) or fixed (installed on the Machine).
- **Cableless Control System or CCS (Cableless Control System):** control system consisting of one to two Remote Stations and of one Base Station communicating with each other through a radio link.
- **Remote station (Remote Station):** part of the CCS that is not physically connected to the Machine, and is intended to remotely control the operation of the Machine; it can be portable, movable (installed on a moving part) or fixed (installed on the Machine).
- **Base station (Base Station):** part of the CCS that is physically connected to the Machine's control system.
- **Radio link:** (cableless control) uninterrupted communication between a Remote station and a Base station without physical connection.
- **Active stop:** stop generated by the transmission of a command from the Remote station to the Base station.
- **Automatic stop:** safety stop initiated without manual activation of a device by a User.
- **Manual stop:** stop initiated with the manual activation of a device by a User.
- **Passive stop:** safety stop originated by the absence of radio link between the Remote station and the Base station.

	<p>The terms listed below will be replaced by the terms used in Standard “IEC 62745: Safety of machinery - Requirements for cableless control systems of machinery”:</p> <table border="1"> <thead> <tr> <th>Old terms</th><th>New terms</th></tr> </thead> <tbody> <tr> <td>Unit</td><td>Station</td></tr> <tr> <td>Radio Remote Control</td><td>CCS</td></tr> <tr> <td>Transmitting Unit</td><td>Remote station</td></tr> <tr> <td>Receiving Unit</td><td>Base station</td></tr> </tbody> </table>	Old terms	New terms	Unit	Station	Radio Remote Control	CCS	Transmitting Unit	Remote station	Receiving Unit	Base station
Old terms	New terms										
Unit	Station										
Radio Remote Control	CCS										
Transmitting Unit	Remote station										
Receiving Unit	Base station										

The terms listed here below have the stated meaning throughout the entire Manual, including all of its parts:

- **Machine:** the machine, as defined in the Directive 2006/42/EC and in any other local standards, and any other device, Machinery, equipment, Machinery system, application etc., where the Autec CCS is installed, or that is controlled by it.
- **Manufacturer:** the Person who plans and/or manufactures a Machine, an appliance, a device or a Machinery system and decides to install a CCS on it to control the Machine.
- **Installer:** the Person, qualified technician, who plans and/or performs the installation of an Autec CCS on a Machine to act on its commands.
- **User:** the Person who actually uses an Autec CCS to act on the commands of a Machine.
- **Maintenance Technician:** the Person, qualified technician, who carries out routine or special maintenance on an Autec CCS, to keep it whole and effective.
- **Manual or Instruction Manual:** document consisting of: Part A – General, Part B – Conformity and Frequencies, Part C – Remote station, Part D – Base station and Part E – Battery and Battery Charger, plus the Technical Data Sheet.
- **Installation Manual:** the specific manual containing specific instructions for the installation of the CCS on the Machine: the Installation Manual is specifically addressed to the Installer.
- **Person:** individual, natural or legal person and/or any entity, however it is considered
- **Owner:** the owner of the CCS.

Functions indicated for the Manufacturer, the Installer, the User and the Maintenance Technician may be performed by a single Person, if he/she has the needed competence and undertakes the resulting responsibilities. Each Person must be aware of the instructions contained in the Manual, depending on the activity they carry out.

For example, if a Manufacturer is also the Installer, and/or Maintenance Technician, he/she must also know and follow the instructions specifically addressed to those Persons. The same applies, for example, if a User is also the Manufacturer and/or the Installer.

### 1.3 Symbols

	<p>This symbol identifies the parts of text in the Manual that must be read with special attention.</p>
 <b>WARNING</b>	<p><b>This symbol identifies the parts of text in the Manual containing warnings, information and/or instructions that are particularly relevant with regards to safety; failure in understanding them or in complying with them may cause hazards for People and/or property.</b></p>

### 1.4 To whom the instructions are addressed

The Instruction Manual for the use and the maintenance of the CCS is addressed to Manufacturers, design engineers, Installers, assemblers, mechanics, electricians, Users, operators, drivers, workers, people responsible for productive activities, Maintenance Technicians and to all the people who, in any capacity and for any reason, work with an Autec CCS or with the Machine where it is installed.

The Manual must be read carefully, understood and applied in all its parts by:

- The Owner and/or Person responsible for the Machine and/or for the Autec CCS and/or for their operation
- The Machine Manufacturer, who decides to equip it with a CCS
- The CCS Installer or the Person who assembles it on a Machine, device, Machinery system, etc., and/or who has the responsibility for that operation
- The Person responsible for safety in the workplace where the CCS is used
- Users, that is to say, those who actually, and in any capacity, are qualified/authorised/appointed for the use of a CCS, or who work with it
- Maintenance Technicians
- Those who, in any capacity, work with the CCS and/or with the Machine, system, device and/or Machinery system where an Autec CCS is installed, or that are controlled by an Autec CCS.

 WARNING	<p><b>The instructions concerning the installation and maintenance of the CCS are addressed to qualified Personnel; their implementation requires qualified professional expertise: none of the operation for which qualified Personnel is required can be carried out by Persons or companies that do not have the required specific professional expertise.</b></p>
--	---

## **1.5 Instruction storage**

The Instruction Manual must be stored and made available to all its addressees, Users and technicians, for the whole life time of the CCS, in any moment it may need to be consulted.

No part of the Manual shall be altered, modified or damaged.

If this Manual is damaged, a written request of replacement shall be sent to Autec; replacement is at the applicant's expense.

When applying for it, the CCS's serial number is required.

## **1.6 Intellectual property**

The Manual, its structure and contents, the images and photos, the drawings, the instructions and all intellectual property rights included in the Manual are and remain exclusive property of Autec Srl.

They cannot be reproduced and/or disseminated in any form or by any means (including the internet and photocopying) without authorisation and written consent by Autec.

## **2 Brief product presentation**

### **2.1 Series, CCS and Station**

The object of this part of the Manual is the Autec Dynamic+P series CCS (see chapter 4). Autec Dynamic+P series' CCSs are designed to be used on Machines and provide a command interface to their command and control system, to be used from an appropriate distance and position.

Dynamic+P series CCSs may be made of one or two Remote Stations and one Base Station: the single Stations, their commands and their features are illustrated in the specific parts of the Manual and in their Technical Data Sheet.

A CCS is usually made of one Remote station and one Base station.

A "Take & Release" CCS is made of two Remote stations and one Base station.

### **2.2 Conformity with standards**

The conformity of CCSs with standards and with working requirements and conditions in the single Countries is provided in the related specific part "Conformity and frequencies" (Part B) of the Manual.

### **2.3 Contacts and useful addresses**

The CCSs are produced by Autec Srl – Via Pomaroli, 65 - 36030 Caldogno (VI) - Italy.

You can find contacts for Autec, its distributors, dealers and authorized service centres on the website [www.autecsafety.com](http://www.autecsafety.com).

### **2.4 Warranty**

General warranty conditions are indicated both in the relevant sheet provided together with this documentation, and in the specific page on the website [www.autecsafety.com](http://www.autecsafety.com).

### **2.5 Technical assistance and spare parts**

If you need technical services and/or spare parts, please refer to contacts provided in the website [www.autecsafety.com](http://www.autecsafety.com).

When applying for technical service to Autec, its distributors, dealers and authorized service centres, the CCS's serial number is required; you can find it on the identification plate on the Remote station and/or on the Base station.

### 3 General safety warnings

 WARNING	<p><b>All the warnings and instructions provided in this chapter are safety-relevant.</b></p> <p><b>Failure to follow the instructions contained in the Manual provided by Autec, as well as all applicable safety-related legislations, even local ones, regulations and standards may generate serious damage to people and property.</b></p> <p><b>The Machine Manufacturer and/or designer, the Installer, the Maintenance Technician and the people responsible for the use of the Machine and for the working place are responsible to ensure that the installation, maintenance and use of the Autec CCS and all its components are carried out in complete accordance with the instructions provided by Autec and in compliance with all the applicable safety-related standards and regulations in force in the countries where the Machine and the CCS are used.</b></p> <p><b>The Machine Manufacturer takes on the responsibility for the installation and use of the CCS on any application.</b></p>
--	---

The Manufacturer or those who want to use or install an Autec CCS on a Machine must first:

- Assess whether the Machine where they want to install the CCS can be used with a CCS safely and effectively.
- Carry out an in-depth, accurate risk assessment, taking into account the Machine's manufacturing, functional and/or performance features and characteristics, purpose of the Machine, the location and environment in which the Machine is to be used, the facility in which the Machine is to be or is installed, the interaction between the Machine and other equipment and Personnel, the safety conditions during operation of the Machine, the actual and potential different usage conditions, the conditions that may arise following the installation and use of a CCS, and the features and limitations of the Autec CCS.

For this purpose, by way of example and by no way of limitation, refer to standards ISO 12100 and ISO 14121, that prescribe the conditions for a correct risk assessment, which includes risk analysis and the adoption of the necessary protection and safeguarding actions.

Without limitation on the Laws, Regulations and Standards it is forbidden to use an Autec CCS if the Manufacturer or those who want to install it on the Machine are not able to or do not:

- Carry out an appropriate and comprehensive risk assessment in relation to the safety of the Machine, concerning the CCS adoption and installation.
- Ensure the required professional experience and/or technical competence to carry out the risk assessment correctly.
- Ensure the correct installation of the CCS in accordance with this Manual and all applicable Laws, Regulations and Standards, even local.
- Implement all safety conditions, so that the Machine equipped with the CCS can be used without creating dangerous situations.
- Adopt the appropriate technical solutions and informative actions to create the conditions for the User and the Maintenance Technician to safely operate the Machine equipped with the CCS.
- Implement all necessary and appropriate action and procedures to remove or reduce risks that may originate from the use of the Machine equipped with the CCS.

 <b>WARNING</b>	<p><b>ONLY IF THE COMPREHENSIVE RISK ASSESSMENT SUPPORTS THE INSTALLATION OF THE AUTEC CCS AS APPROPRIATE, EFFECTIVE AND SAFE FOR THE OPERATION OF THE MACHINE AND THE USE OF THE CCS ON THE MACHINE IS PERMITTED BY AND IS IN COMPLIANCE WITH APPLICABLE LAWS, REGULATIONS AND STANDARDS, EVEN LOCAL, AND THIS MANUAL, MAY THE AUTEC CCS SYSTEM BE INSTALLED AND USED ON SUCH MACHINE.</b></p> <p><b>THE MACHINE MANUFACTURER OR ALL THOSE WHO DECIDE TO INSTALL THE AUTEC CCS ON A MACHINE IS HELD COMPLETELY RESPONSIBLE FOR:</b></p> <ul style="list-style-type: none"> <li>- THE RISK ASSESSMENT</li> <li>- THE DETERMINATION TO USE THE AUTEC CCS ON THE MACHINE</li> <li>- TAKING ALL ACTIONS NECESSARY OR ADVISABLE TO REDUCE OR REMOVE RISKS OCCASIONED BY THE MACHINE AND, WITHOUT LIMITATION, THE USE OF A CCS TO OPERATE THE MACHINE</li> <li>- THE OBSERVANCE OF STANDARDS AND REGULATIONS AIMING AT PRESERVING SAFETY.</li> </ul>
---	---

 WARNING	<p><b>THE AUTEC CCS IS NOT A STANDALONE PRODUCT AND IS INTENDED ONLY AS A COMPONENT ON A MACHINE:</b></p> <ul style="list-style-type: none"><li>- ON WHICH AND WHERE THE USE OF A CCS IS APPROPRIATE</li><li>- THAT CAN BE OPERATED SAFELY AND IN ACCORDANCE WITH ALL APPLICABLE LAWS, REGULATIONS AND STANDARDS BY SUCH REMOTE CONTROL.</li></ul> <p><b>AUTEC IS NOT RESPONSIBLE FOR AND SHALL NOT BE HELD LIABLE FOR THE COMPATIBILITY OF THE CCS WITH THE MACHINE OR DESIRED APPLICATION, EVEN IF IT IS AMONG THE PERMITTED APPLICATIONS, OR FOR ANY ISSUE RELATING TO THE SUITABILITY OF THE MACHINE AND ITS CONTROL SYSTEM TO BE CCSLED.</b></p> <p><b>SIMILARLY, AUTEC IS NOT RESPONSIBLE FOR AND SHALL NOT BE HELD LIABLE FOR THE RISK ASSESSMENT THAT MUST BE CARRIED OUT WHEN CONSIDERING A CCS GENERALLY OR THIS AUTEC CCS SPECIFICALLY, OR THE SUITABILITY OF OPERATING A MACHINE BY A CCS GENERALLY OR THIS AUTEC CCS SPECIFICALLY, WHETHER WITH REGARD TO THE MACHINE, THE FACILITY IN WHICH THE MACHINE IS TO BE USED OR IS USED, OR THE ENVIRONMENTAL AND/OR WORKING CONDITIONS IN WHICH THE MACHINE WILL BE OR IS USED.</b></p>
--	---

Without limitation on the foregoing, Autec is not responsible for and shall not be held liable for:

- Installation that is faulty or in any way not in conformity with this Manual and any other instructions provided by Autec, and with all applicable Laws, Regulations and Standards, even local
- Installation on Machines, appliances, devices, equipment and/or Machinery systems on which the use of a CCS is not allowed by its Manufacturer or under applicable Laws, Regulations and Standards, even local, or on which the installation and/or the use of a CCS may generate safety issues or other risk situations that cannot be adequately removed and/or reduced, in conformity with applicable Laws, Regulations and Standards, even local
- Use of the Autec CCS system that is in any way not in conformity with this Manual and any other instructions provided by Autec, and with all applicable Laws, Regulations and Standards, even local

- Use of the CCS in facilities or environments, or in weather and/or climate conditions, in which the use of the CCS is not permitted or advisable under applicable Laws, Regulations and Standards, even local, not permitted according to the instructions contained in this Manual, or that may pose the risk of damage and/or incorrect operation of the CCS (by way of example: temperature exceeding the limits indicated in paragraph 8.3, situations where the risk of explosion exists, risk of contact with liquids or fluids);
- Use of the CCS in working conditions that do not allow the User to maintain full and continuous observation of the movements of the Machine and, if applicable, of the load
- Use of the CCS in a different way or for different purposes from the permitted ones, and/or use not in complete compliance with the instructions for use and the maintenance contained in this Manual
- Inadequate or missing maintenance of the CCS, referring to both routine and special maintenance
- Damage to and/or deterioration of any component or feature of the Autec CCS
- Failure to take the Autec CCS out of service if there is any damage to or malfunction of the CCS or any component thereof
- Use of parts or components in the Autec CCS that are not manufactured or supplied by Autec
- Service of the Autec CCS system by anyone other than Autec or an Autec authorized service provider.

## 4 CCS features

---

Dynamic+P series' CCSs are used to control Machines from a distance, without physical connection (by way of example: wires or connecting cables) between the Remote station handled by the User and the Base station installed on the Machine, hence between the User and the Machine.

They usually consist of a portable Remote station, from which the User can remotely control a Machine, and a Base station installed on board the Machine itself.

Images of the single Stations belonging to the CCS can be found in the specific manual that refers to each Station.

	The relation between the commands sent by the Remote station and those available in the Base station is decided by the Installer of the CCS on the Machine.
---	---

### 4.1 Description of radio link

---

The Remote station communicates with the Base station through a radio link. Such link must be continuous to promote safety in the use of the Machine. Every time this link is incorrect or interrupted, the Base station stops the commands and orders the Machine to stop.

 <b>WARNING</b>	<b>The Machine stops only if the wiring between the Base station and the Machine itself is correct.</b>
---	---

The Stations of a CCS encode their messages through an address that is unique (produced by Autec only once and non repeatable for other CCSs) and univocal (specific for each CCS and associated to it).

Each Station can only decode messages coming from the Station with the same address.

This prevents messages from other radio equipment from activating any "Machine+CCS" system function.

The radio link is interrupted in the following cases:

- Stop (see paragraph 4.3)
- Low battery
- Automatic switch off
- No power supply in the Base station
- Working range exceeded (see paragraph 4.5)
- Presence of metal obstructions.

 <b>WARNING</b>	<p><b>WARNING:</b> The operating working range may be significantly and unpredictably reduced compared to the value indicated in the technical data (see paragraph 4.5) when special conditions occur in the working environment (by way of example: temporary presence of electromagnetic interference and/or metal obstructions).</p> <p><b>WARNING:</b> The operating working range may be extended up to ten times compared to the value indicated in the technical data (see paragraph 4.5) when there are no interference elements in the working environment (by way of example: no electromagnetic interference and/or metal obstacles).</p>
---	--

When a radio link is interrupted:

- All outputs of the Base station are disabled
- It is not possible to enable or disable the Machine commands through the Remote station until the CCS is started up again.

 <b>WARNING</b>	<p><b>When the START pushbutton is pressed to re-start the CCS, the commands that are not monitored during start up (see Technical Data Sheet), if active, immediately activate the Machine functions that are associated with them.</b></p> <p><b>The Machine's Manufacturer or those who integrate the CCS in the Machine must take this CCS behaviour into account when carrying out the risk assessment. The Machine Manufacturer or those who integrate the CCS on the Machine must inform the User if they believe that the reactivation of such Machine functions may entail hazardous situations that cannot be reduced by reasonable technical measures implemented on the Machine itself.</b></p>
---	---

## 4.2 Control devices

---

### 4.2.1 Start up and switch off

Start up and switch off functions are described in chapter "General instructions for operation" included in "Part C" of the Instruction Manual. Therefore, please refer to that part of the Manual.

## 4.3 CCS stop functions

---

The CCS has two stop functions that bring the Machine to a safe state every time it is necessary to stop it due to a potentially hazardous situation:

- Automatic stop function (ATS): this function is activated automatically (see chapter 4.3.3).
- Manual stop function: this stop function may be a General Safe Stop (GSS, see paragraph 4.3.1) or an EMergency Stop (EMS, see paragraph 4.3.2).

The automatic stop function (ATS) and the manual stop function are both safety functions (see paragraph 4.5).

 WARNING	<p>The GSS function and the EMS function are never present simultaneously in a CCS. The Machine Manufacturer and/or the Installer have the responsibility to decide which one is the correct/suitable one in accordance with the requirements for such function.</p> <p><b>THE USER MUST AT ALL TIMES PAY FULL ATTENTION TO THE SAFE AND PROPER OPERATION OF THE MACHINE IN ACCORDANCE WITH THE INSTRUCTIONS AND WARNINGS PROVIDED IN THIS MANUAL AND WITH THE MANUAL, INSTRUCTIONS AND WARNINGS FOR THE MACHINE AND WITH ALL APPLICABLE LAWS, REGULATIONS AND STANDARDS, EVEN LOCAL.</b></p> <p><b>ACTIVATING THE PUSHBUTTON RELATED TO THE STOP FUNCTION (GSS or EMS) MAY NOT RESULT IN AN IMMEDIATE STOP OF THE MACHINE.</b></p>
--	---


 WARNING	<p>THE ACTIVATION OF THE PUSHBUTTON RELATED TO THE STOP FUNCTION (GSS OR EMS) CONTROLS THE MACHINE'S STOP FUNCTION, BUT THE TIME AND DISTANCE WITHIN WHICH THE LATTER WILL BE BROUGHT TO A SAFE STATE MAY VARY FROM MACHINE TO MACHINE, FOR EXAMPLE DUE TO THE PRESENCE OR ABSENCE OF A BRAKE. THE USER MUST BE FULLY AWARE OF THE MACHINE'S MOVEMENTS AND OPERATING ZONES AND MUST ALLOW FOR SUFFICIENT SAFE FUNCTIONING OF THE MACHINE, INCLUDING SUCH RESPONSE TIMES AND STOPPING DISTANCES.</p> <p>FAILURE TO DO SO CONTINUOUSLY AND CORRECTLY MAY RESULT IN SEVERE INJURY OR DEATH, OR PROPERTY DAMAGE.</p>
--	--

	<p>Depending on the Machine's risk assessment, it may be necessary to arrange, on the Machine or nearby, an additional restore device to be used after the GSS or the EMS function has been activated by the Remote station. This device must be placed in a fixed position in such a way as to enable the User to perfectly see the whole Machine's working area.</p>
---	--

#### 4.3.1 General Safe Stop function (GSS)

The User activates the GSS function by using the pushbutton identified with GSS or General Safe Stop in the Remote station.

This manual stop first generates an active stop and then it switches off the Remote station. This working logic implicates that the Base station brings the Machine to a safe state when it receives the command generated by the active stop. If this does not happen due to interference causing incorrect or broken radio link, the passive stop will activate the automatic stop function in the Base station.

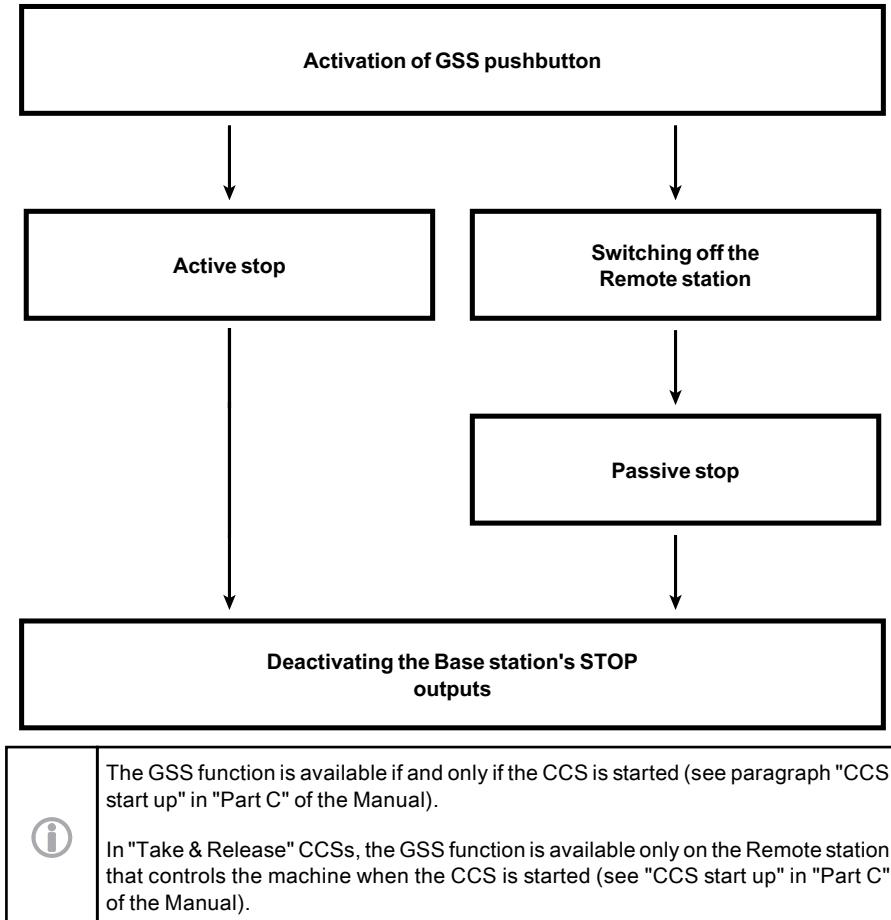

 WARNING	<p><b>Never leave the Remote station unguarded to avoid uncertainty about the availability or unavailability of the GSS function.</b></p> <p>The “mission time” of the GSS function, as defined in international standards and requirements, is 20 years. In any case, the CCS must be replaced within this period. The “mission time” must not be considered as a warranty period.</p> <p><b>After the activation of the GSS or General Safe Stop pushbutton on the Remote station, the Machine is not controlled by the CCS any more. Any possible risks that may arise from the activation of the stop function must be taken into account by the Installer of the CCS, and by the Manufacturer and the Owner of the Machine where the CCS is installed. The CCS User must be properly trained about this.</b></p>
--	---

#### 4.3.2 EMergency Stop (EMS) function




**The EMS function is never available in "Take&Release" CCSs.**

The User activates EMS function by using the red pushbutton on a yellow background identified with EMS in the Remote station.

This manual stop first generates an active stop and then it switches off the Remote station. This working logic implicates that the Base station brings the Machine to a safe state when it receives the command generated by the active stop. If this does not happen due to interference causing incorrect or broken radio link, the passive stop will activate the automatic stop function in the Base station.

The red pushbutton in use complies with the IEC 60204-1 and with the IEC 60947-5-5.

The EMS function complies with the ISO 13850.

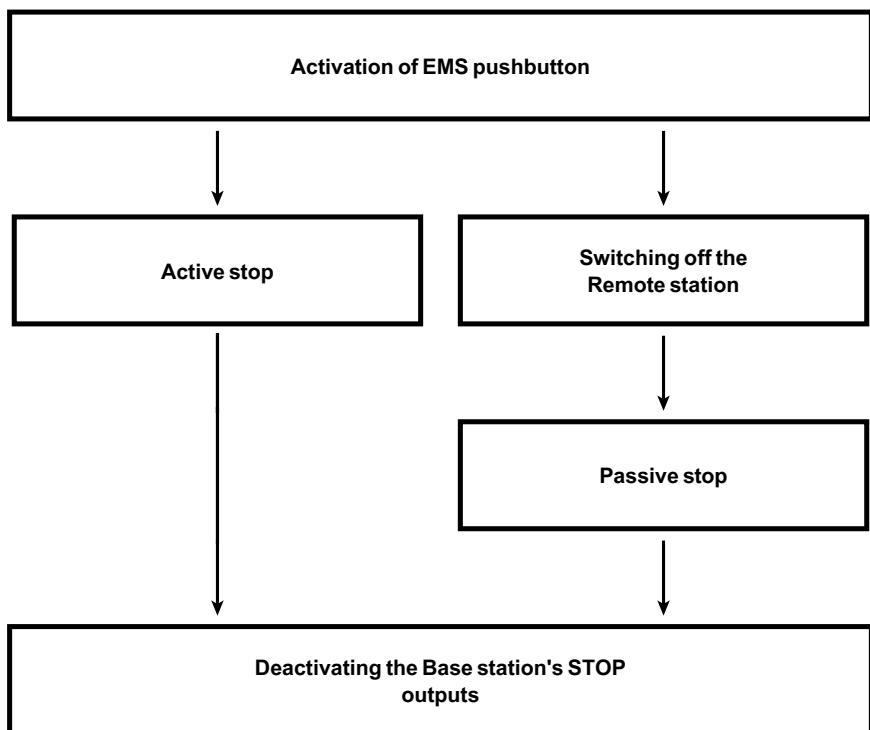

The EMS function is available if and only if the CCS is started (see paragraph "CCS start up" in "Part C" of the Manual).



WARNING

**The CCS's stop function can be considered EMS only if:**

- It belongs to a Machine's emergency stop function compliant with the requirements of the Machinery Directive 2006/42/EC and of the ISO 13850 standard
- It belongs to a Machine's emergency stop function that is always available and operational, independently from the Machine's working mode
- The Remote station is the only control station of the Machine. If, on the other hand, there is another non-remote control station, the EMS function present in the CCS must always be made available and operational.

**The red pushbutton on the Remote station must not be the only means to initiate the emergency stop function in the Machine.**

**Never leave the Remote station unguarded to avoid uncertainty about the availability or unavailability of the EMS function.**


**The "mission time" of the EMS function, as defined in international standards and requirements, is 20 years. In any case, the CCS must be replaced within this period. The "mission time" must not be considered as a warranty period.**

**After the activation of the red pushbutton on the Remote station, the Machine is not controlled by the CCS any more. Any possible risks that may arise from the activation of the stop function must be taken into account by the Installer of the CCS, and by the Manufacturer and the Owner of the Machine where the CCS is installed. The CCS User must be properly trained about this.**

#### 4.3.3 Automatic stop function (ATS)

The automatic stop function (ATS) prevents hazardous operation of the Machine and brings it to a safe state. This function is activated automatically:

- By the Base station due to passive stop, when the Base station does not receive correct messages in a given time span (see paragraph 4.1).
- When a CCS malfunction is detected.

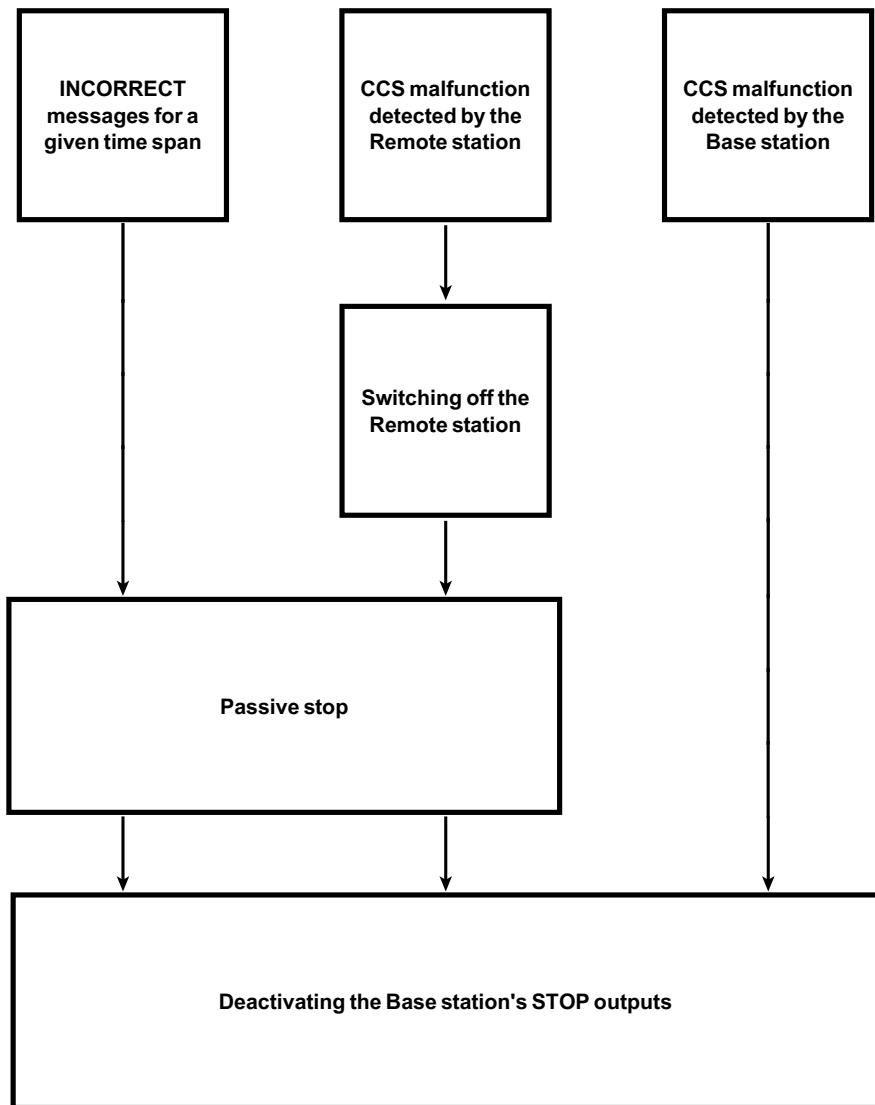

#### 4.4 Protection against unintended movements from the standstill position UMFS

 <b>WARNING</b>	<p><b>Unintended movements of the Machine, that is Machine movements that are not activated by movements of the actuators, may occur due to electrical or mechanical failure or malfunction that may affect the CCS.</b></p>
---	--

The rest position of the actuators on the Remote station is the neutral position. When all the actuators related to commands protected by the UMFS function (such commands are indicated in the Technical Data Sheet as COMMAND+SAFETY) are in the neutral position, the CCS keeps the Base station's SAFETY outputs deactivate, regardless of the status of all the outputs related to the commands.

When all the actuators of commands protected by the UMFS function are in their neutral position, the UMFS function reduces the risk of accidentally activating Machine's movements in case of electrical failure in the CCS.

	<p>During the CCS start up, if all actuators related to commands protected by the UMFS function are in their neutral position, possible movement commands due to electrical failure do not activate the SAFETY outputs.</p> <p>If all actuators related to the commands protected by UMFS function are released, SAFETY outputs are deactivated after about 1 second (for the ADD Base station only, such delay cannot occur: see "SAFETY delay time" in the Installation Manual).</p> <p>The UMFS function prevents the CCS from starting if an electrical failure of movement commands is detected.</p>
---	---

 <b>WARNING</b>	<p><b>THE UMFS FUNCTION WORKS CORRECTLY IF AND ONLY IF "SAFETY" OUTPUTS ARE CONNECTED CORRECTLY (SEE INSTALLATION MANUAL).</b></p>
---	--



MOVEMENT OF THE MACHINE MAY OCCUR WHENEVER AN ACTUATOR RELATED TO MOVEMENT COMMANDS IN THE REMOTE STATION IS MOVED FROM ITS NEUTRAL POSITION. EVEN INADVERTENT ACTIVATION OF COMMANDS MAY CAUSE MACHINE MOVEMENTS (SEE PARAGRAPH 7.3). EVEN THOUGH THIS CCS IS EQUIPPED WITH ALL THE REASONABLE MEASURES TO PREVENT ACCIDENTAL ACTIVATION, IT CANNOT DETECT IF THE ACTUATOR HAS BEEN MOVED INTENTIONALLY OR ACCIDENTALLY.

THE UMFS FUNCTION MUST NOT BE INTENDED AS A PROTECTION AGAINST ACCIDENTAL ACTIVATION OF ACTUATORS, BUT IT HAS BEEN DESIGNED TO PREVENT UNINTENDED ACTIVATION OF MOVEMENTS IN CASE OF ELECTRICAL FAILURE OF COMMANDS PROTECTED BY THE UMFS FUNCTION.

THE UMFS FUNCTION IS NOT A SUBSTITUTE WHATSOEVER FOR THE PROPER USE AND PROTECTION OF THE REMOTE STATION IN ACCORDANCE WITH THE INSTRUCTIONS CONTAINED IN THIS MANUAL (INCLUDING ALL OF ITS PARTS); THE USER MUST AT ALL TIMES PAY FULL ATTENTION TO THE SAFE AND PROPER OPERATION OF THE MACHINE IN ACCORDANCE WITH THE INSTRUCTIONS AND WARNINGS PROVIDED IN THIS MANUAL AND IN THE MANUAL FOR THE MACHINE AND WITH ALL APPLICABLE LAWS AND STANDARDS, EVEN LOCAL.

## 4.5 Technical data

Performance of the automatic stop function (ATS)	SIL 3 / PL e ; cat.4 (4-wire wiring) SIL 2 / PL d ; cat.3 (2-wire wiring)
Performance of the General Safe Stop (GSS) function	SIL 3 / PL e ; cat.4 (4-wire wiring) SIL 2 / PL d ; cat.3 (2-wire wiring)
Performance of the Emergency Stop (EMS) function	SIL 3 / PL e ; cat.4 (4-wire wiring) SIL 2 / PL d ; cat.3 (2-wire wiring)
Performance of the UMFS function	SIL 2 / PL d ; cat.3
Cut in time of the automatic stop function (ATS)	0.5s
Cut in time of the manual active stop function (GSS or EMS)	<160ms
Cut in time of the manual passive stop function (GSS or EMS)	0.5s
Hamming distance	≥15
Probability of undetected error	<10 <sup>-15</sup>
(Typical) working range	100m (330ft)
Command response time	80-130ms

The technical data related to the single Stations belonging to the Dynamic+P series are provided in the specific parts of the Manual and in their Technical Data Sheets.

## 4.6 Identifying the CCS

A serial number (S/N) univocally identifies each CCS.

The serial number is provided in the CCS' identification plate on each Station.

This is the only reference to be used for maintenance operations and for any other situation when you need to precisely identify the CCS.

The serial number must be mentioned in any communication with Autec, its dealers, Installers, Maintenance Technicians of the CCS and with the people who, in any capacity, need information, spare parts or technical data concerning the CCS.

	<p>Plates must not be removed from their position: removal immediately voids the warranty.</p> <p>Plates must not be altered or damaged, contact Autec for replacement.</p>
---	---

 <b>WARNING</b>	<p><b>The Machine Manufacturer, the Installer, the Maintenance Technician and the People in charge for the usage of the Machine and of the working place are responsible for making sure that the CCS's identification plate is a sufficient means to explain the correspondence between the Remote station and the Base station. If that were the case, it is necessary to provide additional, more visible identification.</b></p>
---	--

#### 4.7 Additional features of the "Take & Release" CCS

It consists of two Remote stations, from which two Users can remotely control a single Machine, and of a Base station installed on board the Machine itself. The Base station can be controlled by a single Remote station independently (of other Remote station) and exclusively (the Base station cannot be controlled by both Remote stations at the same time), so as to avoid command overlap.

The Remote stations belonging to a "Take & Release" CCS are named "TU No.1" and "TU No.2". The names of the Remote stations belonging to the "Take & Release" CCS are provided in the Technical Data Sheet and on the panel of each Remote station.

##### 4.7.1 Description of radio link

The Base station can decode only the messages coming from the Remote stations of the "Take & Release" CCS to which it belongs.

Each Remote station can decode only the messages coming from the Base station of the "Take & Release" CCS to which it belongs.

##### 4.7.2 Base station statuses

The Base station of a "Take & Release" CCS can have two different statuses:

- Free: the Base station is not controlled by any Remote station.
- Engaged: the Base station is controlled by one of the Remote stations and cannot be controlled by the other Unit until it is released.

The Base station switches from the engaged to the free status in the following cases:

- if it is disconnected from its power source for at least one second,
- if it is released by the Remote station that was controlling it.

Only when the Base station is free, it can be engaged by the first Remote station that performs such operation by acting on the TAKE command, or by performing the start up procedure (see "Part C" in the Instruction Manual).

	<p>When a Remote station is switched off without releasing the Base station beforehand (see "Part C" in the Instruction Manual), the latter remains in "engaged" status.</p>
---	--

## 5 CCS storage before installation or after removal

CCSs must always be transported and stored inside their packing until they are installed on the Machine.

The CCS system and all components are to be shipped and maintained according to the following environmental parameters and conditions:

	Temperature	Relative Humidity	Air pressure
Transportation	from -40 to +70°C (from -40 to +158°F)	95%	from 70 to 106kPa
Storage	from -40 to +85°C (from -40 to +185°F)	from 5 to 95%	from 70 to 106kPa

## 6 Installation

The chapter "Installing the Base station" in "Part D" of the Instruction Manual contains the warnings for the installation that add to those provided in this chapter. Therefore, please refer to that part of the Manual.

### 6.1 Applications

An Autec Dynamic+P series CCS can be used for several applications: the Manufacturer must establish if the CCS is suitable for each different application, especially with regards to safety.

The Dynamic+P series is used most frequently for the following types of Machines:

- Machines for lifting and moving materials, objects, general loads (by way of example: hydraulic cranes, concrete pumps)
- Machines for raising and moving people (by way of example: elevated work platforms, telehandlers)
- Drilling Machines.

	<p>Make sure that the application's requirements are compatible with the value "(Typical) Working range" (see paragraph 4.5).</p> <p>Be aware that such value may vary (see paragraph 4.1).</p>
---	---

 WARNING	<p><b>The Autec CCS may not be installed on Machines where it is used for applications or functions not permitted under this Manual and applicable Laws, Regulations and Standards, even local. INSTALLATION OF AN AUTEC CCS ON OTHER MACHINE OR FOR OTHER FUNCTIONS MAY CAUSE SERIOUS INJURY OR DEATH OR PROPERTY DAMAGE.</b></p> <p><b>Autec is not and cannot be held responsible if the CCS is used in unsafe or poor safety conditions. Assessment shall be made by the Machine Manufacturer to establish possible additional protection measures for the actuators (by way of example: commands requiring two-hand operation, "dead-man" function) if particular environments, equipment and working modes could cause accidental bumps to the actuators.</b></p> <p><b>"Take &amp; Release" CCSs are not suitable to be used in Machines requiring simultaneous consent from different Remote stations to start the Machine itself or to perform operations.</b></p>
--	---



WARNING

In addition to the above, Dynamic+P series' CCSs cannot be installed:

- On Machines that are intended for the use in environments requiring explosion-proof features or in any CCS usage situation that may pose the risk of explosion
- On machines where the Base station power supply does not come from a battery or from a power supply unit with safety isolating transformer
- On Machines that control loads that are not isolated from alternating current (AC) power supply (if applicable)
- On Machines that create or can create dangerous situations if they stop due to the loss of radio link
- On Machines that do not allow a risk-free installation of a CCS, due to their functions or features and/or to the risks related to their use
- On any kind of lifting accessory (by way of example: magnets, grippers, suction cups) whenever the loss of radio link or the deactivation of commands may cause the release of the load, resulting in the risk of damage to People and/or property. The Machine Manufacturer may allow the installation and use of the CCS for such applications under their own responsibility
- If the applicable safety-related laws in the country where the Machine is used, regulations and standards (even local ones), even concerning safety in the workplace, do not allow the use of CCSs to control the Machines.

**INSTALLATION OF AN AUTEC CCS ON MACHINES AND IN THE ABOVE-MENTIONED SITUATIONS MAY CAUSE SERIOUS INJURY OR DEATH OR PROPERTY DAMAGE.**

## **6.2 Staff training: installation and maintenance**

---

All installation and maintenance operations relating to the Autec CCS system must be carried out ONLY by qualified technicians. Without limitation on the foregoing, such technicians must be trained and qualified with respect to:

- The activity to perform
- Warnings resulting from the risk assessment, concerning the CCS installation and/or maintenance
- All applicable Laws, Regulations and Standards, even local, including also safety rules
- Operations and requirements of the Machine on which the CCS is to be installed
- Instructions and warnings provided in the Manual and any other documents related to the CCS and to the Machine equipped with CCS
- Directions by the Machine Manufacturer and by the Person in charge for safety in the workplace where the system "Machine + CCS" is used.

General instructions for installation and maintenance are provided in chapter 6 and in chapter 9 respectively.

Instructions for the different Stations are described in the specific parts of the Manual that relate to the Stations.

Therefore, please refer to that parts of the Instruction Manual.

## **6.3 Classification of commands**

---

This paragraph describes the classification of commands in the CCS: such information is useful during installation and maintenance.

### **6.3.1 Command type: analogue, digital or direction command**

Commands sent by the Remote station can either be analogue, digital or direction commands. Analogue commands generate proportional outputs as a function of the position of the corresponding actuator.

Digital commands switch the status of their corresponding output, according to the position of the related actuator. This status can either be on or off.

Direction commands are digital commands paired with analogue commands, and are used to enable the movement in a specific direction.

### **6.3.2 Name of commands**

All commands activated by the Remote station are identified with abbreviations such D1, D2, H1, L1, etc.

Those abbreviations are provided in the Technical Data Sheet that must be used when installing the system, and in particular:

- In the drawing of the Remote station, where commands and their layout are indicated
- In the wiring diagram of the Base station.

This is helpful to highlight the relation between the commands sent by the Remote station and those available on the Base station.

## 6.4    **Warnings for installation**

The Installer of the CCS must always read, understand and follow all the instructions and warnings contained in this Manual. These instructions and warnings are not exhaustive. In addition, for a correct installation, the Installer must abide and comply with all Laws, Regulations and Standards, even local, including all the technical specifications and standards applicable to the Autec CCS to which this Manual applies (by way of example: IEC 60204-1, IEC 60204-32). The Installer of the CCS must also observe all the instructions, provisions and technical directions provided by the Machine Manufacturer.

	<p>Instructions and warnings provided in this chapter 6 are general. Specific instructions for the installation of the CCS are provided in the Installation Manual: please refer to it for this information. The Installer must use and comply with that Installation Manual to complete the tasks for which he is appointed.</p>
---	---

### 6.4.1    General warnings for installation

 <b>WARNING</b>	<p><b>Always follow the instructions provided in the Technical Data Sheet and respect values given in the technical data to carry out correct installation.</b></p> <p><b>The electrical connection of the Base station must meet the requirements set by clause 9.1 of standard IEC 60204-1 and/or standard IEC 60204-32.</b></p> <p><b>ONLY QUALIFIED PERSONNEL MAY INSTALL THE CCS. SUCH PERSONNEL MUST HAVE MASTERED THE TECHNICAL KNOWLEDGE REQUIRED TO CARRY OUT THESE PROCEDURES CORRECTLY AND SAFELY AND BE QUALIFIED ACCORDING TO THE APPLICABLE LAWS AND REGULATIONS AND HAVE ALL NECESSARY CERTIFICATIONS.</b></p> <p><b>FAILURE TO INSTALL THE AUTEC CCS CORRECTLY MAY RESULT IN PERSONAL INJURY OR DEATH, OR PROPERTY DAMAGE.</b></p>
---	--


#### 6.4.2 Mounting and fastening the Base station in the best position

Place the Base station so as to avoid damage due to incidental contact.

Place the Base station so that it can be easily reached in case of need.

Place the Base station so that it can be easily reached, and far from heat sources (e.g. exhaust pipes, heat exchangers, radiators).


Place the Base station vertically, with the cable gland or the plug facing down.



**NO**



**NO**



**YES**





WARNING

Fix the Base station in four points, using the specific holes in the housing.

Do not perforate the Base station in any case.



When installing on Machines that are subject to intense mechanical stress (by way of example: vibrations, rough paths, sudden movements), it is recommended to fix the Base station to the Machine with the appropriate vibration dampers.




#### 6.4.3 Positioning the antenna

The Base station may be configured with internal antenna or external antenna (see Technical Data Sheet). If the antenna is external, it cannot be mounted directly on the Base station's casing, but it must be installed with the antenna cable-extension kit.

If the antenna is inside the Base station, install the Base station in a free and easily accessible area of the Machine: protections, panels, parts, surfaces or anything else should not be present, so that shields, structures or materials do not obstruct the radio link. In particular, the Base station must be placed at least 50 cm far from metal objects in its surroundings and must never be placed inside closed metal containers.

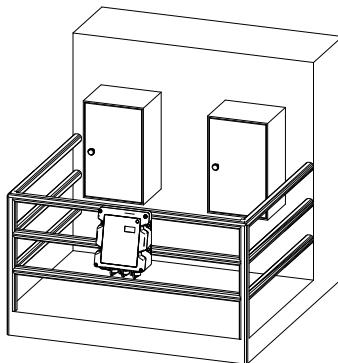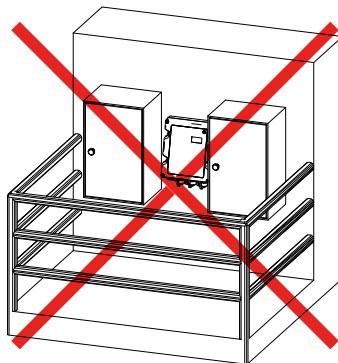

**NO**

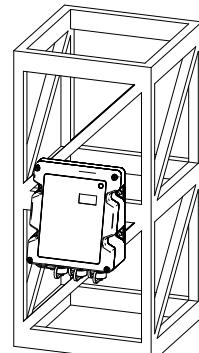


**YES**

If the antenna is external to the Base station, install the antenna vertically as far as possible from the Base station and from other electrical and electronic devices. The antenna must not be placed inside closed metal containers. Install the antenna at least 50 cm far from metal objects in the surroundings, in a free area of the Machine; protections, panels, parts, surfaces or anything else should not be present, so that shields, structures or materials do not obstruct the radio link.

 **WARNING**



**NO**

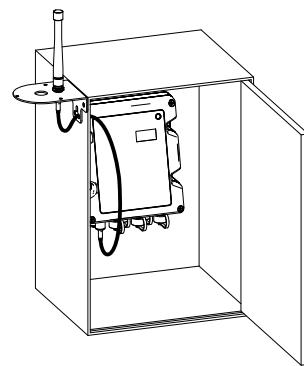

**YES**

#### 6.4.4 Wiring

Wiring is understood as the electrical cable connections that can be found:

- Inside the Base station
- Between the Base station and the Machine.

 <b>WARNING</b>	<p><b>ALL ELECTRICAL CONNECTIONS MUST BE PERFORMED AND MADE IN COMPLIANCE WITH THE NATIONAL ELECTRIC CODE AND ALL APPLICABLE LAWS, REGULATIONS AND STANDARDS, EVEN LOCAL. IF INSTRUCTIONS PROVIDED BY AUTEC ARE INCONSISTENT WITH SUCH APPLICABLE LAWS, REGULATIONS OR STANDARDS, DO NOT INSTALL THE AUTEC CCS WITHOUT CONSULTATION WITH AUTEC. AUTEC IS NOT RESPONSIBLE FOR AND SHALL NOT BE HELD LIABLE FOR ANY MALFUNCTIONS OR ACCIDENTS THAT MAY OCCUR DUE TO ANY IMPROPER INSTALLATION OR INCONSISTENCY BETWEEN ITS INSTRUCTIONS AND SUCH LAWS, REGULATIONS OR STANDARDS.</b></p> <p><b>FAILURE TO INSTALL THE AUTEC CCS CORRECTLY MAY RESULT IN PERSONAL INJURY OR DEATH, OR PROPERTY DAMAGE.</b></p> <p>The power supply of the Base station must have a switch that allows power supply disconnection during installation, wiring and/or maintenance operations. Connect the Base station immediately downstream of the Machine main switch or of the electrical panel main switch (see the Installation Manual).</p> <p>Make sure that the Base station's power supply:</p> <ul style="list-style-type: none"> <li>- Complies with technical data (see chapter "Technical Data" in "Part D" in the Instruction Manual)</li> <li>- Is protected against short circuit (see paragraph "Wiring" in "Part D" in the Instruction Manual)</li> <li>- Is provided by a battery or by a class 1 (ES1) electrical energy source, according to standard EN 62368-1.</li> </ul> <p>Never connect power supply positive or negative pole to the outputs. Such connections damage the outputs and make ineffective the UMFS and STOP safety functions. In this case the Machine may be in a dangerous condition, out of the User's control.</p>
---	---



WARNING

The Installer must avoid that a power supply positive or negative pole is connected to the outputs.

If a Base station's output is connected to a direct current inductive load (by way of example: solenoid valves, relays), it is advisable to connect a freewheeling diode in anti-parallel with the driven load, to reduce the effects of demagnetizing currents.

A 12 or 24 V--- voltage must always be applied to the power supply input of solid state outputs.

Common wire related to diodes of solid state outputs must be connected with the common of all the Machine's freewheeling diodes. If that is not possible, connect it to the Base station's power supply negative.

Pay special attention to the currents flowing in the STOP and SAFETY outputs: they shall not exceed the maximum permitted values (see rated current of STOP and SAFETY outputs in chapter "Technical Data" in "Part D" of the Instruction Manual).

Wiring of STOP outputs is crucial to define the safety level for the STOP function (see the Installation Manual).

Wiring of SAFETY outputs is crucial to define the safety level for the UMFS protection function (see the Installation Manual).

Single-insulation wiring cables shall be placed inside the Base station, in such a way that they do not jeopardize the insulation amongst the circuits.

The Installer is in any case responsible for carrying out wiring in such a way as to ensure the safety level required according to the risk analysis; in particular, the connection of power supply's positive or negative pole to the STOP outputs must be avoided.

In compliance with article 9.2.7.4 of IEC Standard 60204-1 and of article 9.2.7.5 of IEC 60204-32, as far as "Take & Release" CCSs are concerned, one or more signals (lamps or horns) must be installed; dedicated outputs on the Base station must be used for that purpose. Such signalling devices indicate which Remote station is controlling the Base station.

 WARNING	<p>Since the "Take &amp; Release" CCS consists of two Remote Stations and one Base Station, the Installer must carefully assess the risks generated by the presence of multiple Stations, and adopt the necessary risk reduction measures.</p>
--	--

#### 6.4.5 At the end of installation

 WARNING	<p>Make sure that during installation the protection measures on the CCS and/or in the Machine have not been made ineffective by improper installation works.</p> <p>Look up in the Technical Data Sheet and check that the frequency band set in the CCS is permitted in the country of use.</p> <p>Correctly close the Base station as indicated in "Part D" of the Instruction Manual.</p>
--	---

#### 6.4.6 Testing

	<p>The Installer must check and fill in the Technical Data Sheet in all its parts, adding the date in which the Machine controlled by the CCS has been put into service, their stamp and signature.</p>
 WARNING	<p><b>After installing and wiring the Base station, test the Machine controlled by the Cableless control system and verify that the operations carried out correspond exactly to the commands sent, including in particular but not limited to the functionality of the STOP command.</b></p> <p><b>Make sure that the SAFETY outputs (of UMFS function) only activate after the CCS has started, and when at least one movement command is sent to the Machine. Also make sure that the SAFETY outputs disable when all the movement commands are released.</b></p> <p><b>In case of malfunction, disable the system “Machine+CCS” until the problem has been completely solved and the installation and functionality is confirmed to be correct..</b></p>

## 7 Safety

---

### 7.1 Risk assessment for Machine controlled by the CCS

---

The Manufacturer of the Machine on which the CCS is to be installed shall make a full and proper risk assessment to determine whether the use and installation of the Autec CCS is appropriate for the safe and effective operation of the Machine by a CCS in the facility and for the purposes intended, also taking into account the reasonably foreseeable misuse, so that the installation, maintenance and operation of the Autec CCS and all of its components are done solely and completely in accordance with this Manual, and with all local applicable laws, safety rules and standards (all of the foregoing referred to herein as "Laws, Regulations and Standards").

When carrying out the risk assessment to determine whether the CCS may be installed on a Machine, the Manufacturer and/or Installer of the CCS must comply with all Laws, Regulations and Standards, even local, regarding safety of the Machine and/or the installation, as well as the following warnings:

- Some Machines cannot be operated with a CCS, such as set forth in paragraph 6.1).
- The radio link between the Stations may interrupt (see paragraph 4.1).
- All warnings regarding the installation, use and maintenance provided by Autec (see chapters 6, 8 and 9 ) must be considered.
- The "Take & Release" CCS consists of two Remote stations.
- There is a delay between the release of a command in the Remote station and the deactivation of the corresponding output in the Base station (see paragraph 7.2).
- There is a delay between the activation of a command in the Remote station and the activation of the corresponding output in the Base station (see paragraph 7.2).
- Additional protection measures for the actuators may be necessary (see paragraph 7.3).
- It is possible that a command be enabled or disabled due to electrical and/or mechanical failure (see paragraph 7.4).
- The Machine may be subject to stresses that might generate dangerous situations (by way of example: inertia, swinging load...) if, when a movement is performed, a joystick is released very fast, or the stop function is enabled.

## 7.2 Delay in command response time

 <b>WARNING</b>	<p>Under normal conditions, the delay between the activation/deactivation of a command in the Remote station and the activation/deactivation of the corresponding output in the Base station requires the "Command response time" indicated in the Technical Data (see paragraph 4.5). With poor radio link (by way of example: EM interference, exceeded working range) this delay may protract up to the "Cut in time of the automatic stop function (ATS)" indicated in the Technical Data (see paragraph 4.5). As for the SAFETY outputs only, the "UMFS cut-in time" (see technical data in "Part D" of the Instruction Manual) adds up to this time.</p> <p><b>The Manufacturer, the Installer, the Owner, the User and/or the Maintenance Technician, must make sure that these delays never lead to a dangerous situation in the specific uses.</b></p>
---	---

## 7.3 Inadvertent activation of commands

The User shall operate with the Remote station in a correct manner, in accordance with the instructions for use and maintenance.

 <b>WARNING</b>	<p>If the Station is used correctly, accidental contact with the User's body parts or with external bodies does not cause inadvertent activation of the actuators.</p> <p>Any action carried out on the Remote station, or on part of it, aiming at activating the actuators in a different way from the one indicated in the instructions for use constitutes an improper use of the CCS.</p> <p>The User must use the CCS in conformity with the instruction for use and maintenance and with all the Laws, the Regulations and the Standards, even local, in force in the country where the CCS and the Machine are used; moreover, the User must always have the control of the CCS and remain in the usage position, as described in the relevant specific part concerning the Remote station.</p>
--	---

 <b>WARNING</b>	<p><b>The Machine Manufacturer and/or the Installer must assess and adopt possible additional protection measures for the actuators (by way of example: commands requiring two-hand operation, "dead-man" function) if particular environments, equipment and working modes could generate risk situations, and if Laws, Regulations and Standards in force in the country where the CCS and the Machine are used should require it.</b></p>
---	--

#### 7.4 Activation and/or deactivation of commands due to failure

 <b>WARNING</b>	<p><b>It is possible that a command be activated or deactivated due to electrical and/or mechanical failure, that may affect the CCS and/or the Machine.</b></p> <p><b>The Machine Manufacturer and/or the Installer of the CCS must carefully evaluate the possible consequences of such malfunction. If required by the risk assessment, implement protection measures to prevent, reduce and report potential hazardous situations.</b></p>
---	--

	<p>For further information see paragraph 4.4.</p>
---	---

If a command is activated and/or deactivated due to failure, carry out the following procedure:

1. Press the GSS or EMS pushbutton to bring the Machine to a safe state.
2. Disable the CCS and stop using the system "Machine+CCS" until the problem has been solved by implementing the necessary technical operations.

#### 7.5 Latching functions

 <b>WARNING</b>	<p><b>Latching functions possibly available on the CCS cannot be used for Machine's hazardous functions because they are never safety functions.</b></p> <p><b>These latching functions are available on the CCS only upon request by the Machine Manufacturer and/or Installer, who has/have the responsibility to check if they are appropriate for a safe use of the Machine.</b></p>
---	--

## 8 Instructions for the User

The chapter "Instructions for the User" in "Parts C" of the Instruction Manual contains the warnings and instructions for the use that add to those provided in this chapter. Therefore, please refer to that part of the Manual.

FAILURE TO READ, UNDERSTAND AND FOLLOW ALL INSTRUCTIONS AND WARNINGS CONTAINED IN ALL PARTS OF THIS MANUAL FOR THE AUTEC CCS MAY RESULT IN PERSONAL INJURY OR DEATH, OR PROPERTY DAMAGE.


### 8.1 Staff training: use and working conditions

To ensure the correct use of the Station, the following must always be observed:

- Instructions and warnings provided in the Manual and any other documents related to the CCS and to the Machine equipped with the CCS
- All current provisions on safety at work and on work accident prevention
- All applicable Laws, Regulations and Standards, even local.

 <b>WARNING</b>	<p><b>When the CCS is installed on Machines on board vehicles, switch off the Base station while the vehicle is travelling.</b></p>
---	---

Some drawings illustrating an incorrect use of a CCS are provided here, by way of example and by no way of limitation. Those images do not cover all possible dangerous situations or incorrect use of a CCS that must be considered and avoided by the Machine Manufacturer and the User.




**NO**



**NO**



**NO**

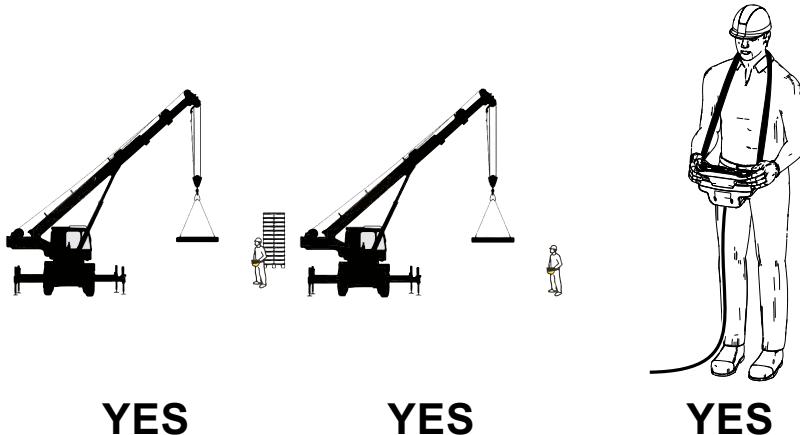

## **8.2      Warnings for the User**

The User must:

- Observe and comply with all instructions and warnings provided by the Machine Manufacturer.
- Observe and comply with all instructions and warnings provided by the Installer.
- Observe and comply with all instructions and warnings provided by the Person responsible for the Machine commissioning or making the Machine available for work.
- Observe and comply with all instructions and warnings provided in the CCS Manual.
- Observe and comply with all applicable Laws, Regulations and Standards, even local.
- Operate the Autec CCS only in accordance with this Manual and all of its Parts, and with all Autec warnings and instructions, and with applicable Laws, Regulations and Standards, even local.
- Operate the Machine operated by or through the Autec CCS only in accordance with the Machine Manufacturer's instructions and warnings, and with applicable Laws, Regulations and Standards, even local.
- Operate the Machine operated by or through the Autec CCS only when he is in a safe condition and can perfectly see the whole Machine's working area.
- Immediately inform his supervisors and/or the people in charge for the working place and/or for the Machine about any possible failure, damage, loosening, anomalous wear, detachment and/or any other anomaly that may cause malfunction to the CCS and/or to the Machine, or that may cause damage to people and/or property.
- Keep the Remote station secure and out of reach of unauthorized and unqualified Personnel.

The User must not:

- Use the CCS without receiving prior complete training by qualified personnel, and if he does not completely master the instructions and warnings regarding the CCS usage
- Use the CCS if he suspects malfunction on the CCS, the Machine, or one of their components
- Use the CCS if the warnings and labels on the Machine or the symbols on the CCS cannot be read, are worn or dirty
- Allow the use of the CCS to unauthorised and/or untrained Personnel.

	ADDITIONAL WARNINGS AND INSTRUCTIONS THAT ARE CONTAINED IN THE OTHER PARTS OF THIS MANUAL MUST BE FOLLOWED.
---	---

	If the CCS User wears electronic devices (by way of example: pacemaker, implantable cardiac defibrillator, hearing aids), the Remote station must be kept at least 15 cm away from those devices when in use.
---	---

#### 8.2.1 Before starting to work

	<p>Before starting the CCS to work, the User must be positioned in a place that allows him:</p> <ul style="list-style-type: none"> <li>- The direct control of the Machine and of the load movements, and, at the same time</li> <li>- A safe position with regard to the operation of the Machine and/or the load movement, and with regard to other operations and/or activities and/or processes taking place in the working place.</li> </ul> <p>In addition to the above, when the cable control is used, the User must position themselves in a place that prevents them from stumbling on the cable control's cable and from being trapped/blocked by it.</p> <p>Always check that the mechanical operation of the GSS or EMS pushbutton is correct. If it is impossible or difficult to press this pushbutton, do not use the CCS.</p> <p>Never start up or use the Remote station if the working conditions pose the risk of losing balance or of tripping.</p>
--	--

 WARNING	<p><b>Start up the Remote station only to use it according to its intended use or for operational needs (by way of example: maintenance, checks): improper use may cause dangerous situations.</b></p> <p><b>Never start up or use the Remote station in closed spaces, with no or poor visibility, or outside the CCS working range: in such cases it is still possible to establish a radio link between the Remote station and the Base station, thus causing the risk that unwanted commands be carried out by the Machine.</b></p> <p><b>Get familiar with the relation between the actuators and the Machine's movements (this is indicated in the attached Technical Data Sheet) and learn symbols on the Remote station's panel (the used symbols are defined by the Machine Manufacturer and/or by the Installer depending on the effectiveness and the functions the Machine requires).</b></p>
--	---

#### 8.2.2 During normal operation

 WARNING	<p><b>Pay attention to the entire work area. Immediately press the GSS or the EMS pushbutton when a hazardous situation occurs.</b></p> <p><b>Visually and directly follow all movements of the Machine and its load and remain inside the CCS working range.</b></p> <p><b>Pay particular attention to warnings and visual and acoustic signals, and take all measurements and steps to avoid that movements of the Machine controlled by the CCS may lead to hazardous situations for people and/or property.</b></p> <p><b>In case of malfunction, switch off the Remote station and disconnect power supply from the Base station: this way, the system "Machine+CCS" is disabled; it must not be used until the problem has been solved by implementing the necessary technical operations.</b></p>
--	--

 <b>WARNING</b>	<p><b>Pay attention to low battery signals: all dangerous operations (by way of example: hanging load) must be concluded before the battery is completely flat.</b></p> <p><b>Use the Remote station with the complements provided with the CCS (by way of example: pouch with belt, waist belt, shoulder harness) to avoid that it accidentally falls, or that actuators come into contact with external bodies, or that the Station is used improperly.</b></p> <p><b>When "Take &amp; Release" CCSs are used, by releasing a Machine the User gives an explicit consent to the other Users, thus enabling them to take control of the Machine itself. Therefore, when a User releases a Machine or part of it, they must pay highest attention to possible Machine's movements, as it is no more under their control.</b></p>
---	--

### 8.2.3 After using the CCS

 <b>WARNING</b>	<p><b>Switch off the Remote station when the CCS is not being used to control the Machine, or when work is otherwise interrupted, even for short periods. Do not leave a load hanging, and do not leave the Machine in dangerous conditions (even when recharging the Station or replacing a flat battery).</b></p> <p><b>Never leave the Remote station unguarded in order to prevent unauthorised or non supervised use.</b></p> <p><b>FAILURE TO DO SO CAN RESULT IN SERIOUS BODILY INJURY OR DEATH AND/OR PROPERTY DAMAGE.</b></p>
--	--

### 8.3 Operational use

---

The use of CCSs is strictly limited to properly trained personnel.

All instructions for correct use are given in "Part C" of the Manual (related to the Remote station).

 WARNING	<b>When the CCS is installed on Machines on board vehicles, switch off the Base station while the vehicle is travelling.</b>
--	--

Environmental working conditions are given in the following table.

	<b>Temperature</b>	<b>Relative Humidity</b>	<b>Air pressure</b>
Remote station usage	from -25 to +55°C (from -13 to +130°F)	from 5 to 95%	from 70 to 106kPa
Base station usage	from -25 to +70°C (from -13 to +158°F)	from 5 to 95%	from 70 to 106kPa

## 9 Maintenance

---

### 9.1 CCS maintenance - general directions

---

The Maintenance Technician must:

- Observe and comply with all instructions and warnings provided by the Machine Manufacturer.
- Observe and comply with all instructions and warnings provided by the Installer.
- Observe and comply with all instructions and warnings provided by the Person responsible for the Machine commissioning or making the Machine available for work.
- Observe and comply with all instructions and warnings provided in the CCS Manual.
- Observe and comply with all applicable Laws, Regulations and Standards, even local.
- Operate the Autec CCS only in accordance with this Manual and all of its Parts, and with all Autec warnings and instructions, and with applicable Laws, Regulations and Standards, even local.
- Operate the Machine operated by or through the Autec CCS only in accordance with the Machine Manufacturer's instructions and warnings, and with applicable Laws, Regulations and Standards, even local.
- Operate the Machine operated by or through the Autec CCS only when he is in a safe condition and can perfectly see the whole Machine's working area.
- Immediately inform his supervisors and/or the people in charge for the working place and/or for the Machine about any possible failure, damage, loosening, anomalous wear, detachment and/or any other anomaly that may cause malfunction to the CCS and/or to the Machine, or that may cause damage to people and/or property.
- Keep the Remote station secure and out of reach of unauthorized and unqualified Personnel.



ADDITIONAL WARNINGS AND INSTRUCTIONS THAT ARE CONTAINED IN THE OTHER PARTS OF THIS MANUAL MUST BE FOLLOWED.

All fine-tuning, checking and maintenance actions carried out on the CCS shall be verified and recorded by the Person in charge of carrying out maintenance on the Machine.

 <b>WARNING</b>	<p><b>Before any maintenance operation, disconnect the Base station from the power supply, using the devices and instructions provided by the Machine Manufacturer and by the Installer.</b></p> <p><b>After each maintenance operation, always make sure that all commands sent by the Remote station activate only the corresponding expected operations.</b></p> <p><b>In case of malfunction, switch off the Remote station and disconnect power supply from the Base station: this way, the system "Machine+CCS" is disabled; it must not be used until the problem has been solved by implementing the necessary technical operations.</b></p> <p><b>If the Station has been opened, close it correctly after each maintenance operation, in order to maintain its protection degree from dust, contaminants and water:</b></p> <ul style="list-style-type: none"> <li>- Make sure that the gasket is intact and correctly seated.</li> <li>- Check that the housing parts correctly fit so that they overlap.</li> <li>- Tighten the screws.</li> </ul>
---	--

## 9.2 Routine maintenance

---

Routine maintenance consists of operations needed to preserve the CCS normal usage conditions, thus implementing fine-tuning, checks, planned replacement actions that necessarily arise from the normal use of the product.

All given instructions must be followed correctly at each commissioning, that is:

- Whenever the CCS and/or the Machine is installed or assembled
- Whenever the Machine location/placing changes
- After special maintenance.

Routine maintenance carried out as described in this Manual is fundamental for using the CCS safely.

Special applications may require more specific routine maintenance actions to be carried out at different periods (by way of example: if the working environment is particularly dirty, or temperature is very high or very low (see limits provided in paragraph 8.3), or in case of heavy application, or if it is used very frequently, some maintenance actions may be required more frequently depending on the instructions provided by the Machine Manufacturer and/or by the Installer).

 WARNING	<b>When carrying out maintenance on the Machine, always disconnect power supply from the Base station. In the event of necessary maintenance on the Machine (by way of example: welding), disconnect all the electrical connections of the Base station.</b>
--	--

### 9.2.1 Daily routine maintenance

Before starting to work:

- Make sure that the symbols on panel on the Remote station and on the Base station are clearly visible and replace the panel if necessary.
- Make sure that the plates on the Remote station and on the Base station are readable and intact (refer to the specific part in the Manual concerning the Remote station and the Base station).
- Check that the mechanical operation of the GSS or EMS pushbutton is correct (refer to paragraphs 9.2.2 and 9.2.3 for the maintenance of the related relays).
- Make sure that the Remote station and the Base station are undamaged in all their parts.
- Check the Base station status and remove any material from it (dust, remnants, object, etc.): never use solvents or flammable/corrosive materials for cleaning, and do not use high-pressure water cleaners or steam cleaners.
- Check that the wiring of the Base station is intact and connected.

During normal operation:

- Do not damage the Remote station (avoid falls, bumps, contact with water, fluids or liquids, etc.).
- Pay attention not to let materials (by way of example: concrete, sand, grease, dirt, lime, dust, etc.) deposit on the Remote station because they can compromise its use and safety.

After using the CCS:

- Clean the Remote station: never use solvents or flammable/corrosive materials and do not use water jet cleaners, or air pressure or steam pressure cleaners.
- Store the Remote station in clean and dry places.

### 9.2.2 Monthly routine maintenance

If the CCS's "Performance of stop functions" (see Technical Data Sheet) is PLe, do the following every month:

- Start the CCS and check in the Base Station that the STOP outputs get closed. Then press the GSS or the EMS pushbutton and check in the Base Station that the STOP outputs get open.

 <b>WARNING</b>	<p><b>Before testing the STOP outputs, make sure that no dangerous situations may arise due to the activation of the STOP outputs in the Base station.</b></p>
---	--

### 9.2.3 Three-month routine maintenance

At least every three months:

- Check the correct correspondence between the commands that are sent and the manoeuvres that are carried out by the Machine.
- Make sure that the SAFETY outputs (of UMFS function) only activate after the CCS has started, and when at least one movement command is sent to the Machine. Also make sure that the SAFETY outputs disable when all the movement commands are released. This is safety critical maintenance: it is necessary to keep a record (date, signature, comments) showing that this check has been regularly carried out. Keep the record together with other installation documents.
- Make sure that all the outputs in the Base station operate correctly, and check that each output activates when the corresponding operation is enabled and deactivates when the operation is disabled.
- If the "Performance of stop functions" of the CCS (see Technical Data Sheet) is PLd, start the CCS and make sure that the STOP outputs in the Base Station get closed. Then press the GSS or the EMS pushbutton and check in the Base Station that the STOP outputs get open.

 <b>WARNING</b>	<p><b>Before testing the STOP outputs, make sure that no dangerous situations may arise due to the activation of the STOP outputs in the Base station.</b></p>
---	--

### 9.3 Special maintenance

---

Special maintenance consists of repairs needed due to CCS failure, damage or malfunction, and their aim is to restore the original usage and working conditions.

 WARNING	<p><b>Special maintenance may be performed only by qualified Maintenance Technicians, that is to say, by skilled technical Personnel with specific competence and knowledge of Autec CCS, belonging to the Autec's service network, or explicitly authorised by Autec.</b></p> <p><b>When performing special maintenance operations, the Instruction Manual for the use and maintenance of the Autec CCS must be available and undamaged in all its parts.</b></p> <p><b>Only original Autec spare parts and materials provided by Autec shall be used for the replacement of parts and/or for special maintenance operations.</b></p>
--	--

When seeking assistance or replacement parts from Autec or its authorized distributors or service centres, the following must be provided:

- CCS serial number
- Purchase date
- Description of the problem found
- Address and telephone number of the place where the CCS is being used (with the name of the Person to contact)
- Local CCS supplier.

## 9.4 Additional maintenance operations in environments with corrosive agents

If the CCS is used in environments where corrosive agents are present (by way of example: sea water, salt fog, salt...), apply grease to the electrical connections to protect them.

 <b>WARNING</b>	<p><b>Only use electrically non-conductive, polyalphaolefin and silicate-based grease for electrical contacts.</b></p> <p><b>Do not use polyether-, polyoilester- and polyphenyl ether-based grease.</b></p>
---	--

One possible grease to be used is Electric Grease CN 4070 (Macon Research). Check and replace grease as frequently as shown in the following table:

Type of connection	Grease check frequency	Re-greasing frequency
Connector for external antenna	every 4-6 months	If dirt and impurities are found
Base station's plug	every 4-6 months	If dirt and impurities are found
Connectors for cable control of Remote station and of Base station	1 month	If dirt and impurities are found, and once a year anyway
Contacts of Remote station, battery charger and battery	weekly	If dirt and impurities are found, and once every three months anyway

	<p>It is recommended to disconnect the cable control cable and to store it in a protected place when it is not in use.</p>
---	--

When carrying out this kind of maintenance operations, follow these recommendations:


- Make sure that the surface of electrical connections is covered with a layer of grease and add it if necessary.
- Contact the support service of the Machine Manufacturer if evident oxidation is detected.


## 9.5 Preventive replacement of the CCS's electromechanical components

### 9.5.1 Actuators (joysticks, pushbuttons and switches)

As provided by the Manufacturer of each actuator in the corresponding technical specification, each actuator of the Remote station can be used for a defined “maximum number of operations”, as shown in the table below. The “maximum number of operations” must not be considered as a warranty period.

 <b>WARNING</b>	<p><b>The Maintenance Technician must replace joysticks, pushbuttons and selectors on the Remote station before they reach the maximum number of operations, even though they are still working.</b></p> <p><b>This replacement prevents possible failure and dangerous situations (by way of example: inadvertent activation and/or deactivation of the command activated by the actuator).</b></p>
---	--

Actuator	Max. operations	Actuator	Max. operations
	$5 \times 10^6$		$5 \times 10^6$
	$5 \times 10^6$		$10^6$
	$3 \times 10^6$		$6 \times 10^6$

Actuator	Max. operations	Actuator	Max. operations
	$5 \times 10^4$		$10^6$
	$10^5$		

## 10 Troubleshooting

---

If the CCS does not work correctly, carry out the following preliminary checks:

1. Move all other Remote stations in the working area away from the Autec Remote station in use to avoid possible radio interference.
2. Bring the Autec Remote station closer to the matching Autec Base station to avoid possible radio interference, always positioning yourself in a safe place and with full view of the Machine, its operational area and the load, if any. In a "Take & Release" CCS, if you cannot take control of the Base station, even from a short distance, make sure that it is not already controlled by the other Remote station.
3. Determine if the problem lies with the CCS or with the Machine: to that purpose, you need to try to control the Machine with another control station (if any), different from the CCS. If the problem persists after this attempt, you need to fix the Machine: follow the instructions provided by the Machine Manufacturer. Otherwise, the problem lies with the Autec CCS, so you need to carry out further checks (see paragraph 10.3).

### 10.1 CCSs with "Data Feedback" function

---

It is still possible that the Remote station sends commands to control the Machine even if the Data Feedback function does not work properly (refer to "Data Feedback function" in "Part C" of the Manual), or if there is no information and/or signals coming from it.

 <b>WARNING</b>	<p><b>When the display or the LED array does not work, please contact the support service of the Machine Manufacturer, even if none of the problems indicated in paragraph 10.3 has been detected.</b></p>
---	--

### 10.2 CCSs with cable control

---

Possibly use the wire control to check if radio interference occurs.

On the contrary, if you want to check that the wire control works properly:

1. Connect the cable to the Remote station and to the Base station.
2. Check that the movement carried out by the Machine correspond to the commands sent by the Remote station.

### 10.3 Solutions in case of malfunction

---

Refer to "Part C" and/or to "Part D" of the Manual to identify the CCS malfunction signalled by light signals on the Stations.

If the problem persists after attempting the suggested solution, contact the support service of the Machine Manufacturer.

## 11 Decommissioning and disposal

---

### 11.1 Decommissioning

---

If you want to remove the Base station from the Machine:

- Make sure that the Base station and the Machine are not powered.
- Remove all electrical connections between the Base station and the Machine.

If the CCS needs to be stored after it has been decommissioned, follow the directions provided in chapter 5.

If the CCS needs to be dismantled after it has been decommissioned, follow the directions provided in paragraph 11.2.

### 11.2 Disposal

---


When disposing of a CCS, its components must be managed as separate waste. When disposing of the different Stations of the CCS, please comply with the provisions and/or the regulations in force in the country where it is used.

#### 11.2.1 Waste disposal in the European Union: Directive 2012/19/EU

In the European Union, all electrical and electronic equipment (EEE) such as CCSs must be correctly managed to reduce their environmental impact and protect human health. Therefore, different collection and recycling systems are set out for such equipment.

The symbol consisting of a crossed-out wheeled bin indicates that such EEE must be disposed of in conformity with Directive 2012/19/EU.

The symbol with a crossed-out bin provided on the CCS indicates that this product must be separately collected from other waste at the end of its life cycle. Separate collection of end-of-life CCSs is set up and managed by the manufacturer.



Users who want to dispose of CCSs need to contact their manufacturer to receive directions about the separate collection system chosen for end-of-life products.

As an alternative, it is possible to bring any equipment with no dimension more than 25 cm to retail shops with sales areas relating to EEE of at least 400 m<sup>2</sup>, free of charge and with no obligation to buy any new equivalent equipment.

Proper separate collection of end-of-life CCSs and their subsequent recycling, treatment and environmentally sound disposal contributes to preventing possible negative impacts on the environment and on human health, and fosters the reuse and/or recycling of materials CCSs are made of.



Via Pomaroli, 65 - 36030 Caldogno (VI) - Italy  
Tel. +39 0444 901000 - Fax +39 0444 901011  
[info@autecsafety.com](mailto:info@autecsafety.com) - [www.autecsafety.com](http://www.autecsafety.com)

MADE IN ITALY