



TEST REPORT nr. R14206501

Federal Communication Commission (FCC)

Test item

Description: TRANSCEIVER UNIT

Trademark: AUTECH

Model/Type: Model RMH
Type NA00M

FCC ID: OQA-RMHNA00M

Test Specification

Standard: FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 249

Client's name: AUTECH S.r.l.

Address: Via Pomaroli, 65 – 36030 Caldogno (VI) – ITALY

Manufacturer's name : Same as client

Address: --

Report

Tested by: G. Gandini – Technician

Approved by: R. Beghetto – Laboratory Manager

Date of issue: 21.05.15

Contents: 57 pages

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.



Index

1. SUMMARY	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS	4
5. PHOTOGRAPH(S) OF EUT	5
5.1 PHOTOGRAPH(S) OF EUT	5
6. EQUIPMENT LIST	7
7. MEASUREMENT UNCERTAINTY	8
8. REFERENCE DOCUMENTS	9
9. DEVIATION FROM TEST SPECIFICATION	10
10. TEST CASE VERDICTS	10
11. RESULTS	11
11.1 ANTENNA REQUIREMENTS	12
11.2 CONDUCTED EMISSIONS	13
11.3 RADIATED EMISSIONS	17
11.4 PEAK OUTPUT POWER	29
11.5 BAND EDGE	44
11.6 SPURIOUS EMISSION	55



1. Summary

Standard:

FCC Rules & Regulations, Title 47:2014
Part 15 paragraph(s): 203, 204, 207, 209 and 249

Test specifications	Environmental Phenomena	Tests sequence	Result
Part 15.203	Antenna requirements	1	Complies
Part 15.207	Conducted emissions	2	Complies
Part 15.209	Radiated emissions	3	Complies
Part 15.209 and 15.249	Peak Output Power	5	Complies
Part 15.249 (d)	Band edge	6	Complies
Part 15.209	Spurious emission	7	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification



2. Description of Equipment under test (EUT)

Nominal frequency: 902 – 928 MHz

2.1 Test Site

Test site facility's IC registration number : 9055A

3. Testing and sampling

Internal identification : adhesive label with the product number
P141151

4. Operative conditions

EUT exercising : EUT in continuous transmission at maximum power





5. Photograph(s) of EUT

5.1 Photograph(s) of EUT





CMC
Centro Misure Compatibilità S.r.l.
Via dell'Elettronica, 12/C
36016 Thiene (VI)

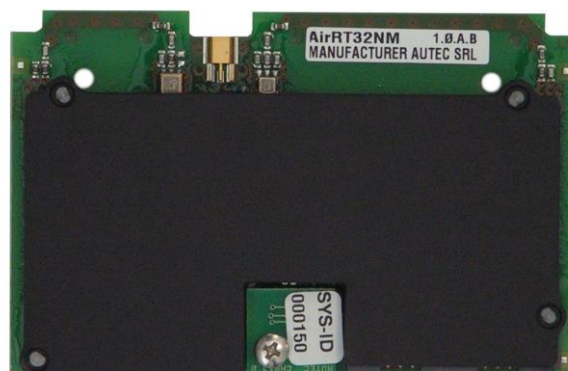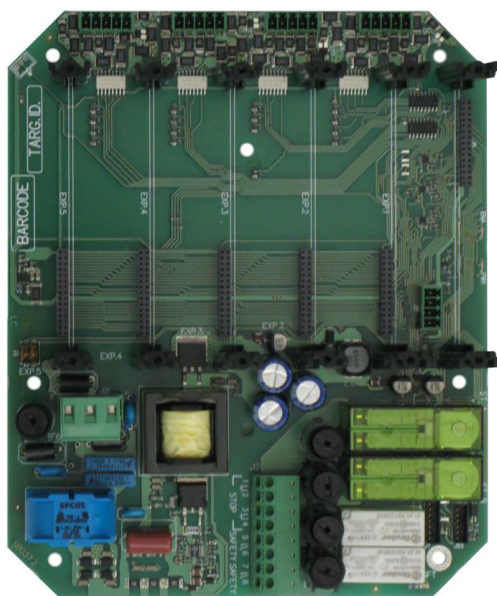



6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '14	January '15
CMC S108	EMCO	3115	Horn Antenna	9811-5622	May '13	May '16
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	January '13	January '16
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9136-205	May '13	May '16
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '14	January '15
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '14	January '15
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '14	January '15



7. Measurement uncertainty

Test	Expanded Uncertainty	note
Conducted Emission		
(50 Ω /50 μ H AMN) - (9 kHz – 150 kHz)	± 3.8 dB	1
(50 Ω /50 μ H AMN) - (150 kHz – 30 MHz)	± 3.3 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	± 3.3 dB	1
(50 Ω /5 μ H AMN) - (150 kHz – 108 MHz)	± 2.8 dB	1
Discontinuous Conducted Emission		
Conducted Emission (50 Ω /50 μ H AMN) - (150 kHz – 30 MHz)	± 3.3 dB	1
Disturbance Power (30 MHz – 300 MHz)		
	± 3.9 dB	1
Radiated Emission		
(0,150 MHz – 30 MHz)	± 4.3 dB	1
(30 MHz – 1000 MHz)	± 4.4 dB	1
(1 GHz – 6 GHz)	± 4.6 dB	1
Electromagnetic field EMF		
	± 15.0 %	1
Harmonic current emissions test		
	± 2.7 %	1
Voltage fluctuation and flicker test		
	± 2.9 %	1
Insertion loss test		
	± 2.7 dB	1
Radiated electromagnetic disturbance test (loop antenna)		
	± 2.7 dB	1
Radiated electromagnetic field immunity test		
	0.77 V/m at 3V/m	1
Pulse modulated radiated electromagnetic field immunity test		
	0.77 V/m at 3V/m	1
Injected currents immunity test		
	0.48 V at 3V	1
Bulk current		
	5.3 mA at 60 mA	1
Power frequency magnetic field immunity test		
	0.1 A/m at 10 A/m	1
Effective radiated power (F < 1GHz)		
	± 4.4 dB	1
Effective radiated power (F > 1GHz)		
	± 3.9 dB	1
Frequency error		
	$< 1 \times 10^{-7}$	1
Modulation bandwidth		
	$< 1 \times 10^{-7}$	1
Adjacent channel power		
	± 2.6 dB	1
Blocking		
	± 2.6 dB	1
Electrostatic discharge immunity test		
		2
Electrical fast transients / burst immunity test		
		2
Surge immunity test		
		2
Pulse magnetic field immunity test		
		2
Damped oscillatory magnetic field immunity test		
		2
Short interruption immunity test		
		2
Voltage transient emission test		
	± 2.2 %	1
Transient immunity test		
		2

Notes

Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of $p = 95\%$

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k = 2$.



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2014	--
ANSI C63.4:2009	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 8.2 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector.

At the frequencies where the measures exceed the limit or within 6 dB from it, the test was repeated with quasi-peak detector and/or average detector.

10. Test case verdicts

Test case does not apply to the test object..... : N.A.

Test item does meet the requirement..... : Complies

Test item does not meet the requirement..... : Does not comply

Test not performed : N.E.






11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 8.2.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
The sample is Complies.	The sample is Complies.	The sample is Not Complies.	The sample is Not Complies.
The measurement results is within the specification limit when the measurement uncertainty is taken into account.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



11.1 Antenna requirements

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

--
Measurement uncertainty: See clause 7 of this test report

Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	45

Result

Antenna Type	External R.F. power amplifier	Gain	Remarks	Results
External	Not Present	--	--	Complies
Embedded	Not Present	0 dBi	--	Complies

Result: The requirements are met



11.2 Conducted emissions

Test set-up and execution

- FCC Rules and Regulation;
Titles 47 Part 15.207
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Shielded chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S010, CMC S200, CMC S227
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Main port
Frequency range: 150 kHz – 30 MHz

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
23	101	42

Acceptance limits

Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50



Setup

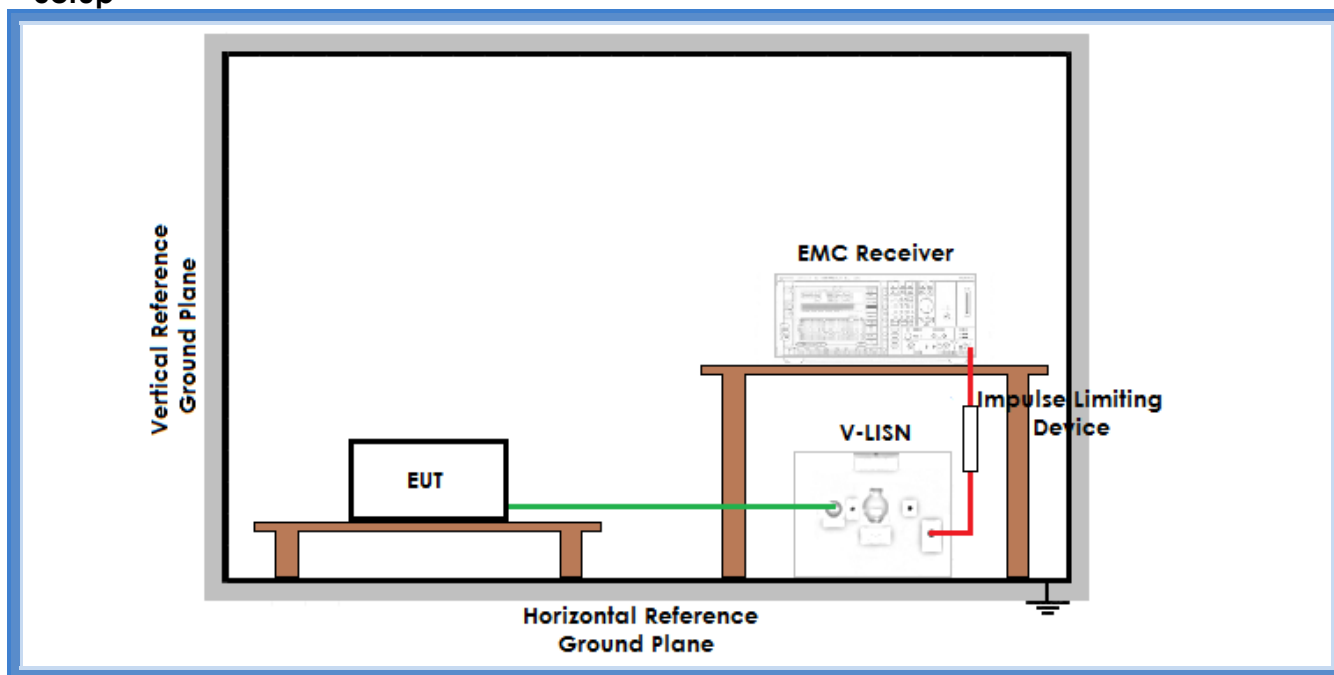

Result

Line	Graphs	Remarks	Result
L1	G14206523	--	Complies
N	G14206524	--	Complies
Remarks: External antenna			


Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X



Graphs


G14206523

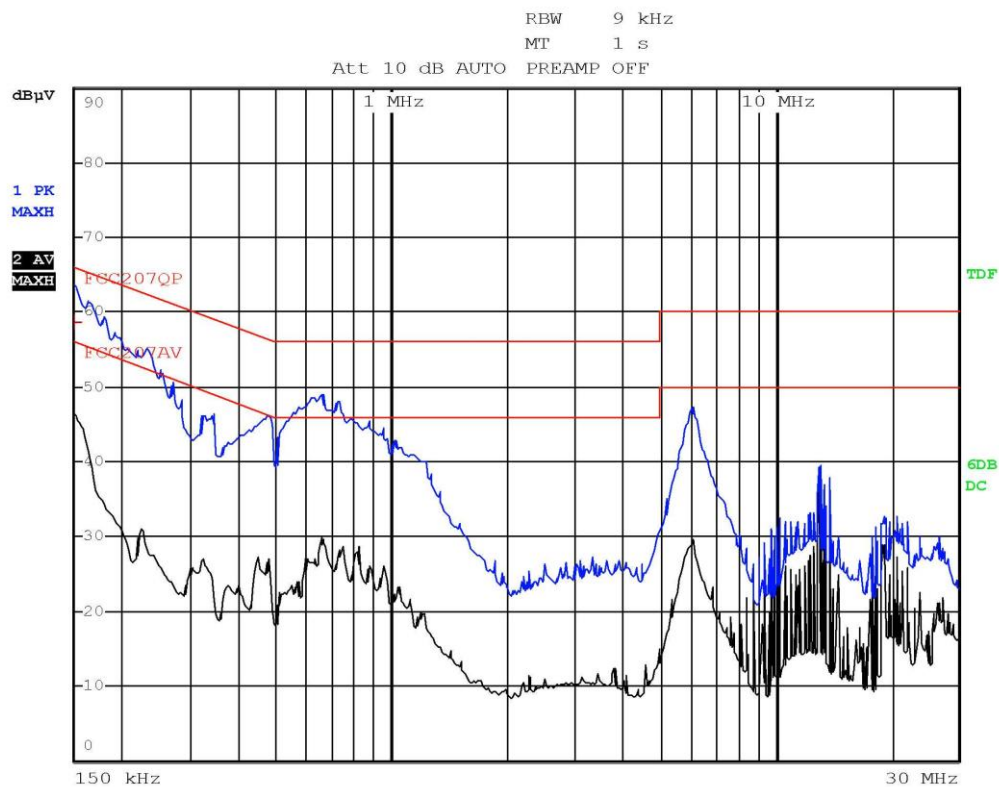

Gandini 14206523-Line L-Tx-Rx Ant. Ext 5m



G14206524

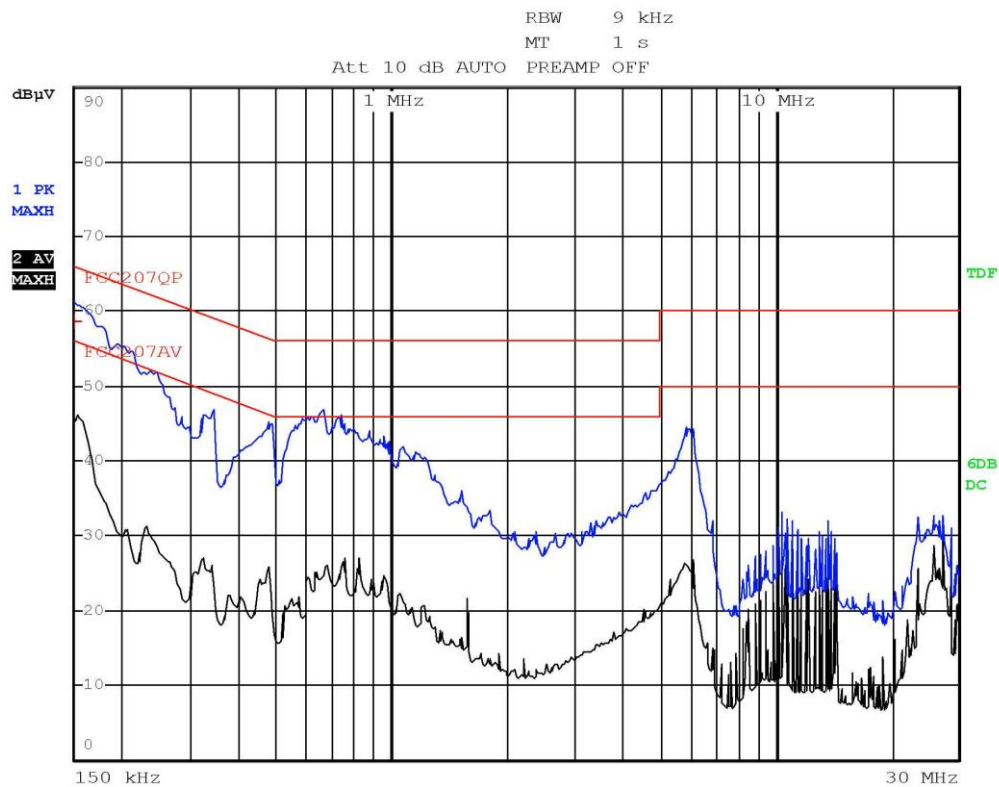

Gandini 14206524-Line N-Tx-Rx Ant. Ext 5m

Result: The requirements are met



11.3 Radiated emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S127, CMC S136, CMC S164
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 1000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
EUT – Antenna distance: 3 m

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
23	101	40


Acceptance limits

Frequency range (MHz)	Limits [dB(μV/m)]
0,009 to 0,490	128,51 to 93,80
0,490 to 1,705	73,80 to 62,97
1,705 to 30	69,54
30 to 88	40
88 to 216	43,52
216 to 960	46,02
Above 960	53,98

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.



Setup

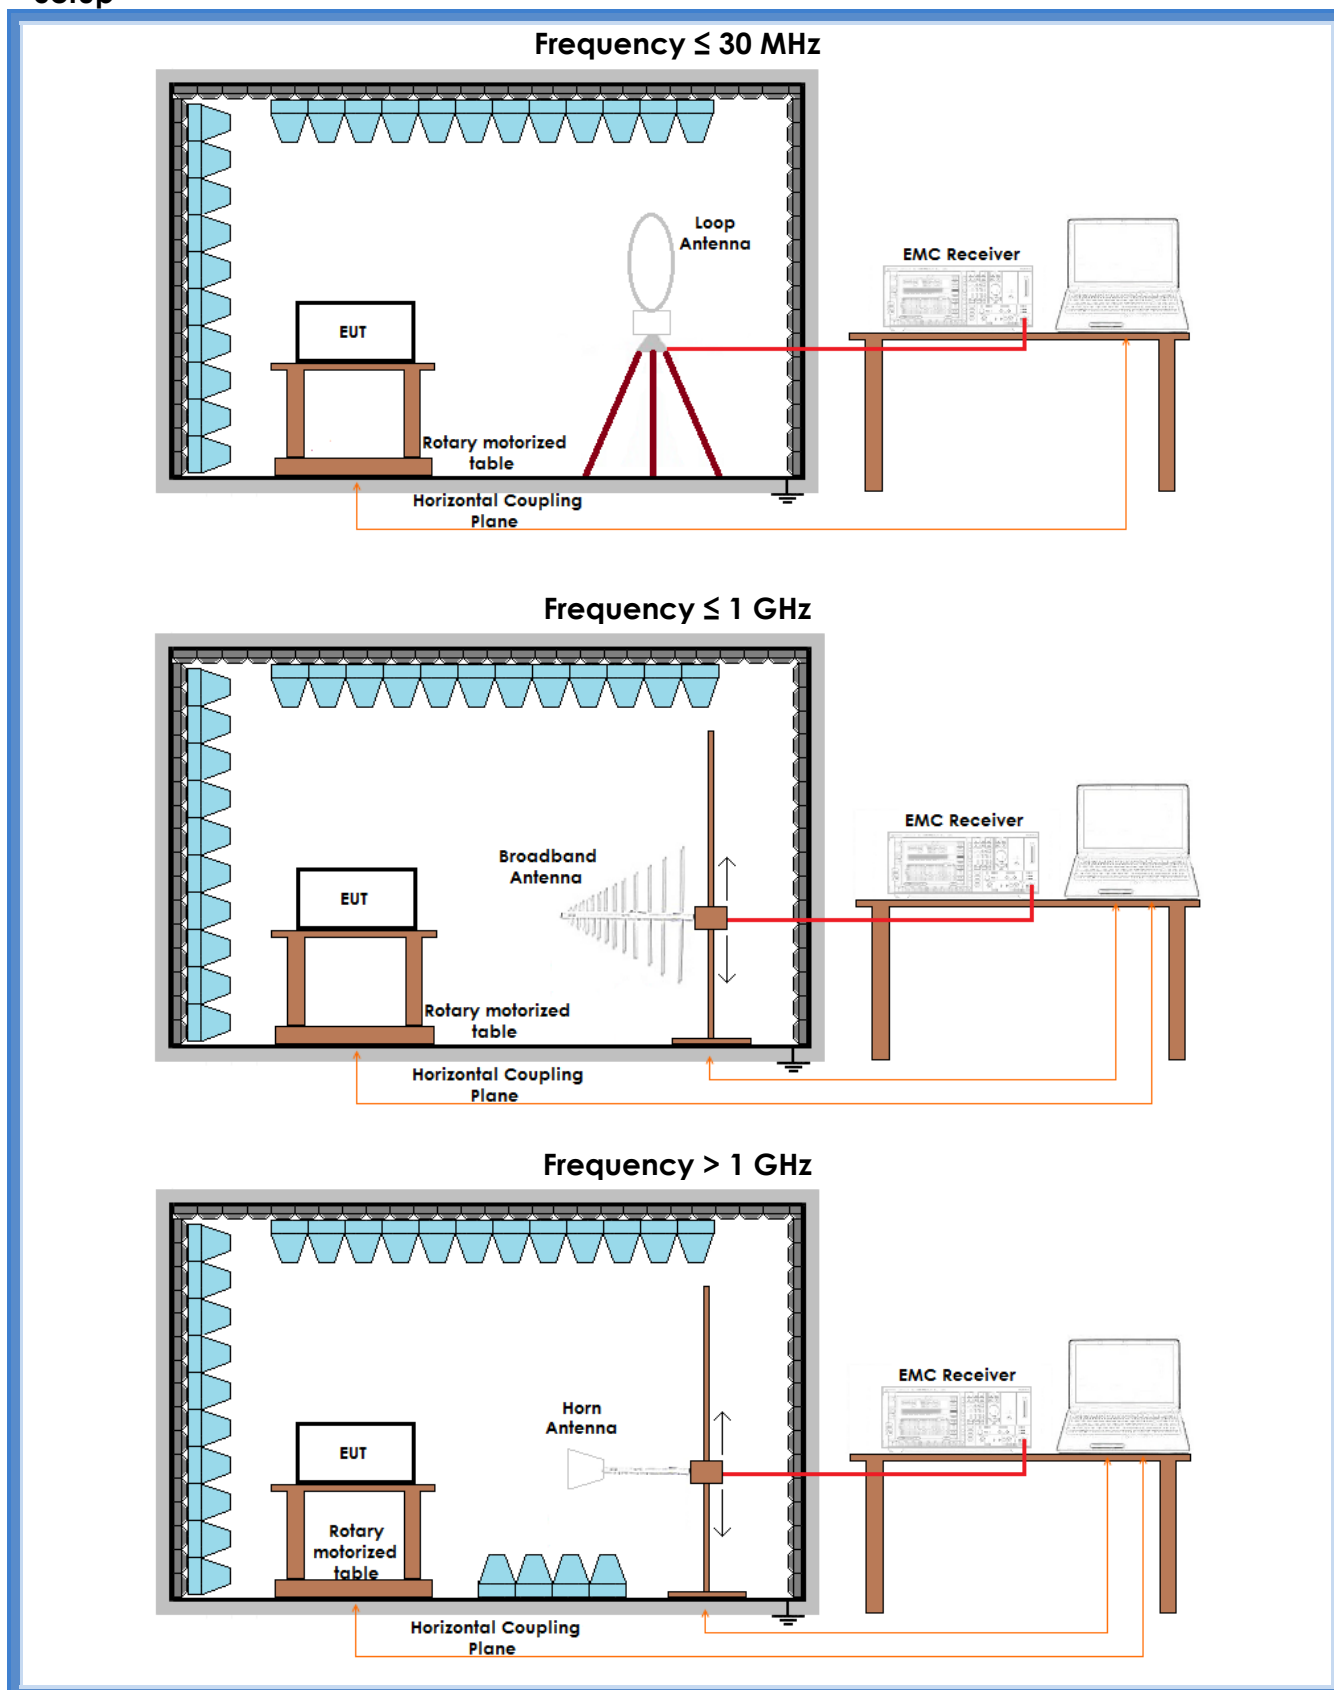



Result

Channel	Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
915,05 MHz	V	30 – 1000	G14206507	--	Complies
915,05 MHz	H	30 – 1000	G14206508	--	Complies
915,05 MHz	V	1000 – 10000	G14206501	--	Complies
915,05 MHz	H	1000 – 10000	G14206502	--	Complies
921,00 MHz	V	30 – 1000	G14206506	--	Complies
921,00 MHz	H	30 – 1000	G14206505	--	Complies
927,75 MHz	V	30 – 1000	G14206503	--	Complies
927,75 MHz	H	30 – 1000	G14206504	--	Complies
--	Loop	0,009 – 30	G14206509	--	Complies

Remarks: External antenna

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +


AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs

G14206501

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Ant. Ext. 5m
Operator Gandini 14206501
Test Spec
Horiz

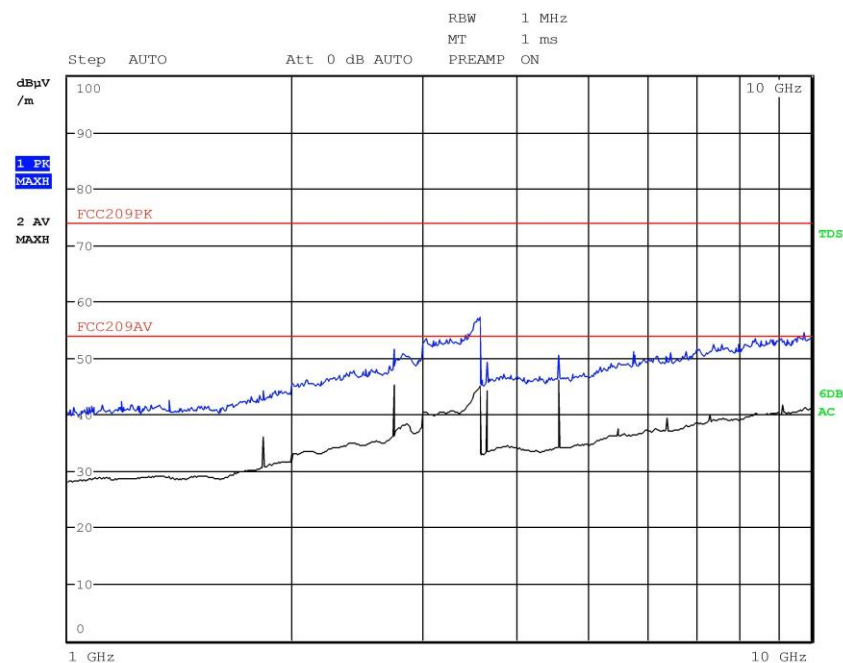


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G14206502

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Ant. Ext. 5m
Operator Gandini 14206502
Test Spec
Vert

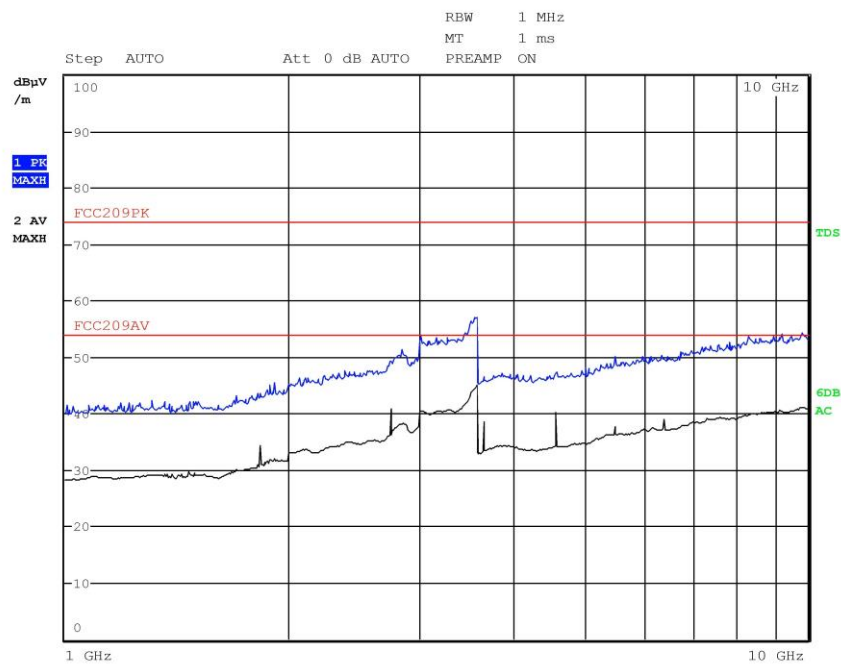


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G14206503

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Fmax - Ant. Ext. 5m
Operator Gandini 14206503
Test Spec
Vert

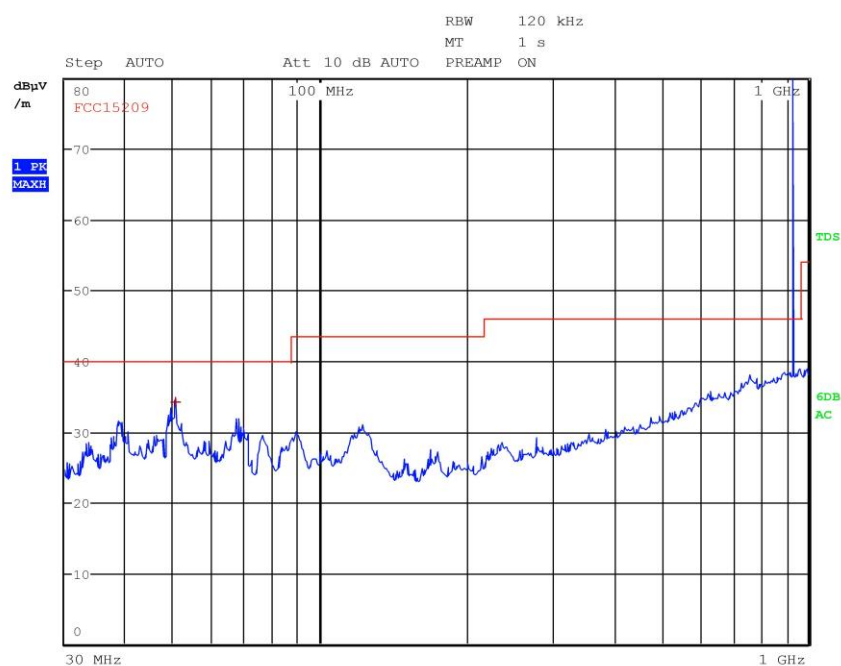

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 1

Trace	Frequency	Level (dBμV/m)	Detector	Delta Limit/dB
1	50.600000000 MHz	34.12	Quasi Peak	-5.88



G14206504

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Fmax - Ant. Ext. 5m
Operator Gandini 14206504
Test Spec
Horiz

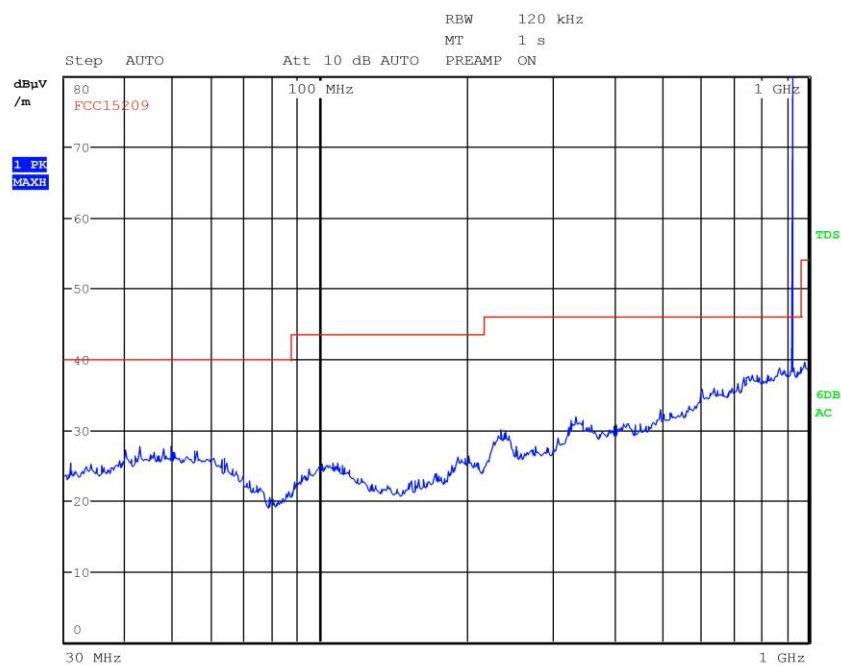


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G14206505

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Fmed - Ant. Ext. 5m
Operator Gandini 14206505
Test Spec
Horiz

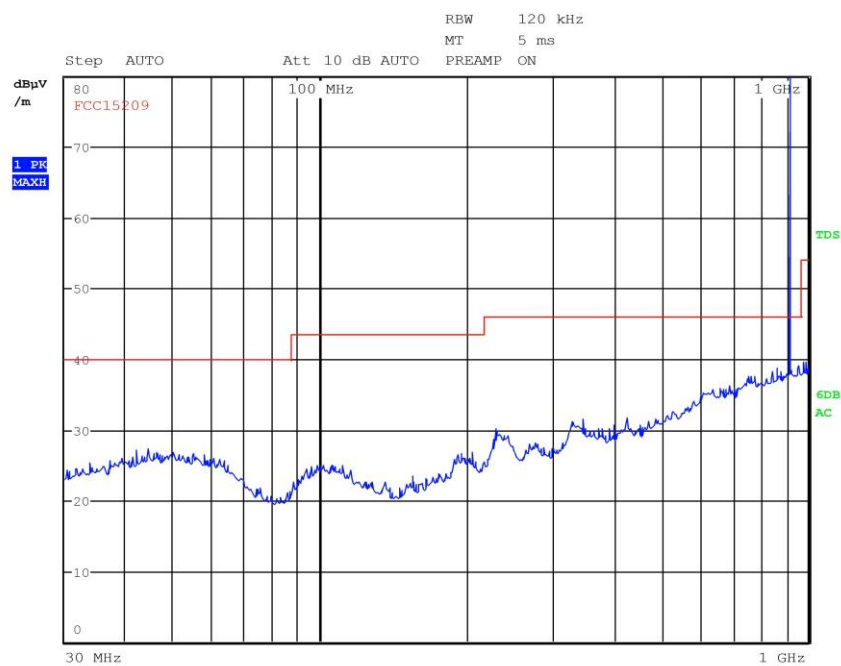


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G14206506

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Fmed - Ant. Ext. 5m
Operator Gandini 14206506
Test Spec
Vert

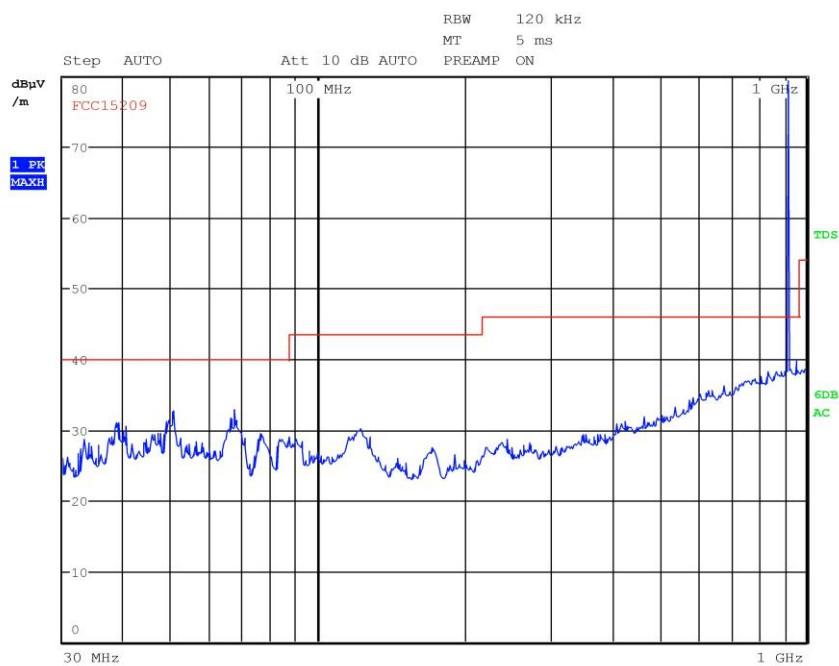


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G14206507

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Fmin - Ant. Ext. 5m
Operator Gandini 14206507
Test Spec
Vert

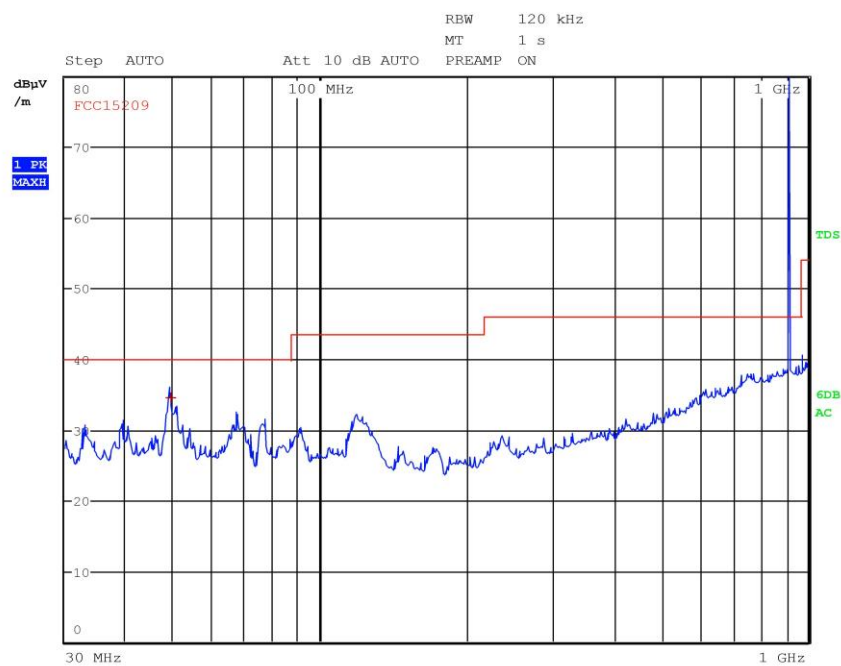

Final Measurement


Meas Time: 1 s
Margin: 6 dB
Subranges: 1

Trace	Frequency	Level (dB μ V/m)	Detector	Delta Limit/dB
1	49.315448718 MHz	34.58	Quasi Peak	-5.42



G14206508

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Fmin - Ant. Ext. 5m
Operator Gandini 14206508
Test Spec
Horiz

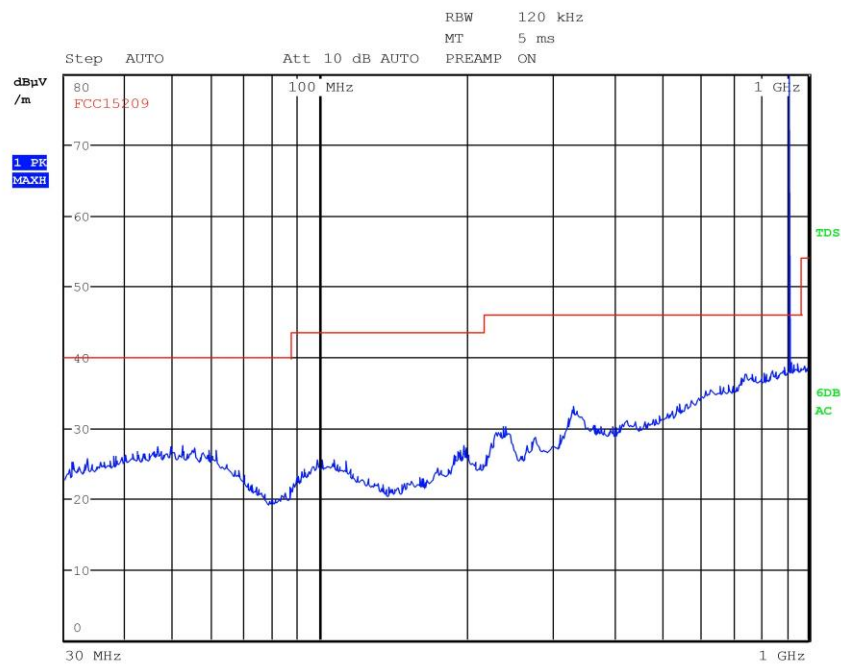


Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0



G14206509

Meas Type Emission
Equipment under Test
Manufacturer
OP Condition Tx-Rx - Ant. Ext. 5m
Operator Gandini 14206509
Test Spec
Loop

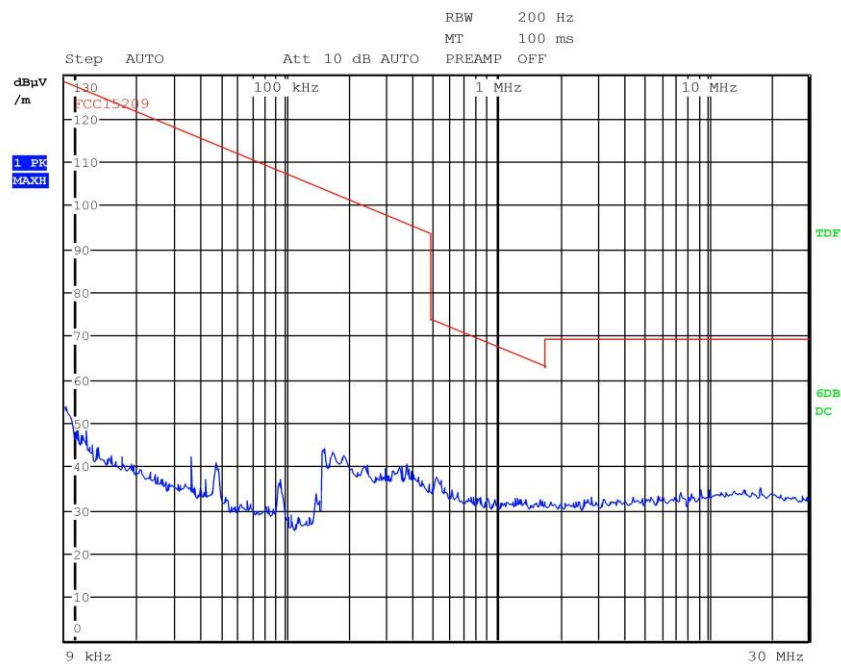

Final Measurement

Meas Time: 1 s
Margin: 6 dB
Subranges: 0

Result: The requirements are met