



TEST REPORT nr. R18015201

Federal Communication Commission (FCC)

Test item

Description: TRANSCEIVER UNIT
Trademark: AUTEC
Model/Type: Model SK4 Type LA0PH
FCC ID: OQA-SK4LA0PH

Test Specification

Standard: FCC Rules & Regulations, Title 47:2017
Part 15 paragraph(s): 203, 207, 209 and 247

Client's name: AUTEC S.r.l.
Address: Via Pomaroli, 65 – 36030 Caldogno (VI) – ITALY

Manufacturer's name : Same as client
Address: --

Report

Tested by: G. Gandini
Approved by: R. Beghetto – Laboratory Manager
Date of issue: 19.07.19
Contents: 93 pages

Giovanni Gandini
.....
R. Beghetto
.....

This test report shall not be reproduced except in full without the written approval of CMC.
The test results presented in this report relate only to the item tested.



Index

1. SUMMARY.....	3
2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT).....	4
2.1 TEST SITE	4
3. TESTING AND SAMPLING	4
4. OPERATIVE CONDITIONS.....	4
5. PHOTOGRAPH(S) OF EUT	5
5.1 PHOTOGRAPH(S) OF EUT	5
6. EQUIPMENT LIST.....	7
7. MEASUREMENT UNCERTAINTY	8
8. REFERENCE DOCUMENTS.....	10
9. DEVIATION FROM TEST SPECIFICATION.....	11
10. TEST CASE VERDICTS.....	11
11. RESULTS.....	12
11.1 ANTENNA REQUIREMENTS	13
11.2 RADIATED EMISSIONS.....	14
11.3 20 DB BANDWIDTH.....	53
11.4 CHANNEL SEPARATION	58
11.5 NUMBER OF HOPPING CHANNELS	61
11.6 TIME OF OCCUPANCY	64
11.7 BAND EDGE.....	68
11.8 PEAK OUTPUT POWER	81
11.9 SPURIOUS EMISSION	86
11.10 RF EXPOSURE ANALYSIS.....	91



1. Summary

Standard:

FCC Rules & Regulations, Title 47:2017

Part 15 paragraph(s): 203, 204, 205, 207, 209 and 247

Test specifications	Environmental Phenomena	Tests sequence	Result
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	1	Complies
Part 15.203	Antenna requirements	2	Complies
Part 15.207	Conducted emissions	--	N.A. (+)
Part 15.209	Radiated emissions	3	Complies
Part 15.247	20 dB Bandwidth	4	Complies
Part 15.247	Channel Separation	5	Complies
Part 15.247	Number of Hopping Channel	6	Complies
Part 15.247	Time of occupancy	7	Complies
Part 15.247	Band edge	8	Complies
Part 15.209 and 15.247	Peak Output Power	9	Complies
Part 15.209	Spurious emission	10	Complies
KDB 447498 D01	RF Exposure Analysis	11	Complies


(+) Devices which only employ battery power. See FCC Part 15.207 (c)

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification



5. Photograph(s) of EUT

5.1 Photograph(s) of EUT

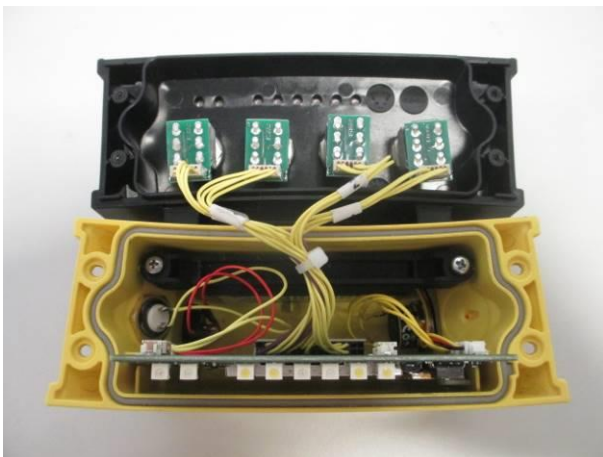




CMC
Centro Misure Compatibilità S.r.l.
Via della Fisica, 20
36016 Thiene (VI)



LAB N° 0168

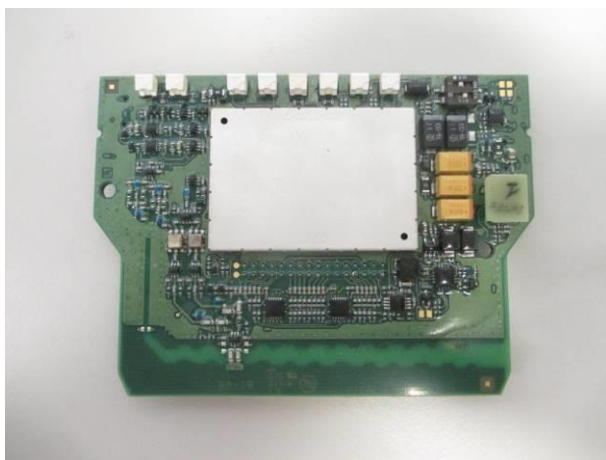



6. Equipment list

Equipment list for Time of occupancy test, performed on July 16th, 2019

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9163-205	June '19	June '22
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '19	January '20

Equipment list for all other tests, performed between May 8th, 2018 and June 28th, 2018

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	---	January '18	January '19
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '16	June '19
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '13	November '18
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9163-205	June '16	June '19
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '18	January '19
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '18	January '19
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '18	January '19
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '17	November '18
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '17	November '18
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '17	November '18
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '17	November '18
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '17	November '18
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '16	June '19
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3GHz)	9111B-203	June '16	June '19
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '17	November '18



7. Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	2,8 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,6 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,2 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,5 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,4 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	1,5 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	3,8 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,3 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,1 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	3,6 dB	1
Human Exposure to electromagnetic fields	PE005_01	15,0 %	1
Harmonic current emissions test	PE006_01	10 mA + 1,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,2 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,24 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,24 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,20 % 0,22 V a 10V	1



Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	3,8 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,3 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04	4,3 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_05	5,5 dB	1
Frequency error	PR002_01+02	< 1x10 ⁻⁷	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission	PR002_01+02	1,2 dB	1
Adjacent channel power	PR002_01+02	1,2 dB	1
Blocking	PR002_01+02	1,2 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Rev_18_01 date 30/01/2018			

Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of K=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2



8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2017	--
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure Procedure
Internal procedure INC_M rev. 9.0 (Quality Manual)	Measurement uncertainty calculation



9. Deviation from test specification

None

10. Test case verdicts

Test case does not apply to the test object : N.A.

Test item does meet the requirement : Complies

Test item does not meet the requirement : Does not comply

Test not performed : N.E.





11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC_M rev. 9.0.

Judgement of compliance:

Case 1	Case 2	Case 3	Case 4
			
The sample complies with the requirement.	The sample complies with the requirement.	The sample does not comply with the requirement.	The sample does not comply with the requirement.
The measurement results is within the specification limit when the measurement uncertainty is taken into account.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



11.1 Antenna requirements

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- DA 00-705
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Laboratory

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

--
Measurement uncertainty: See clause 7 of this test report

Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

Environmental conditions

Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
20	100	45

Result

Antenna Type	External R.F. power amplifier	Gain	Remarks	Results
Externa antenna	Not Present	0 dBi	--	Complies

Result: The requirements are met



11.2 Radiated emissions

Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- DA 00-705
- Internal procedure PM001
- See clause 4 of this test report

Test configuration and test method

Test site:
Semi-anechoic chamber

Auxiliary equipment:
See clause 4 of this test report

EUT exercising

See clause 4 of this test report

Test equipment used

CMC S108, CMC S127, CMC S164, CMC S271, CMC S287
Measurement uncertainty: See clause 7 of this test report

Test specification

Port: Enclosure
Frequency range: 0,009 MHz – 10000 MHz
Antenna polarization: Horizontal (H) – Vertical (V)
10 m for frequencies ≤ 1000 MHz
3 m for frequencies > 1000 MHz

Environmental conditions


Temperature (°C)	Atmospheric pressure (kPa)	Relative humidity (%)
22	100	45

Acceptance limits

Frequency range (MHz)	Test distance (m)	Limits [dB(μV/m)]	
0,009 to 0,490	300	48,5 to 13,8	
0,490 to 1,705	30	33,8 to 22,9	
1,705 to 30	30	29,5	
30 to 88	3	40	
88 to 216	3	43,5	
216 to 960	3	46,0	
Above 960	3	53,9	
	Test distance (m)	Linear average detector [dB(μV/m)]	Peak detector [dB(μV/m)]
Above 1000	3	53,9	73,9

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Setup

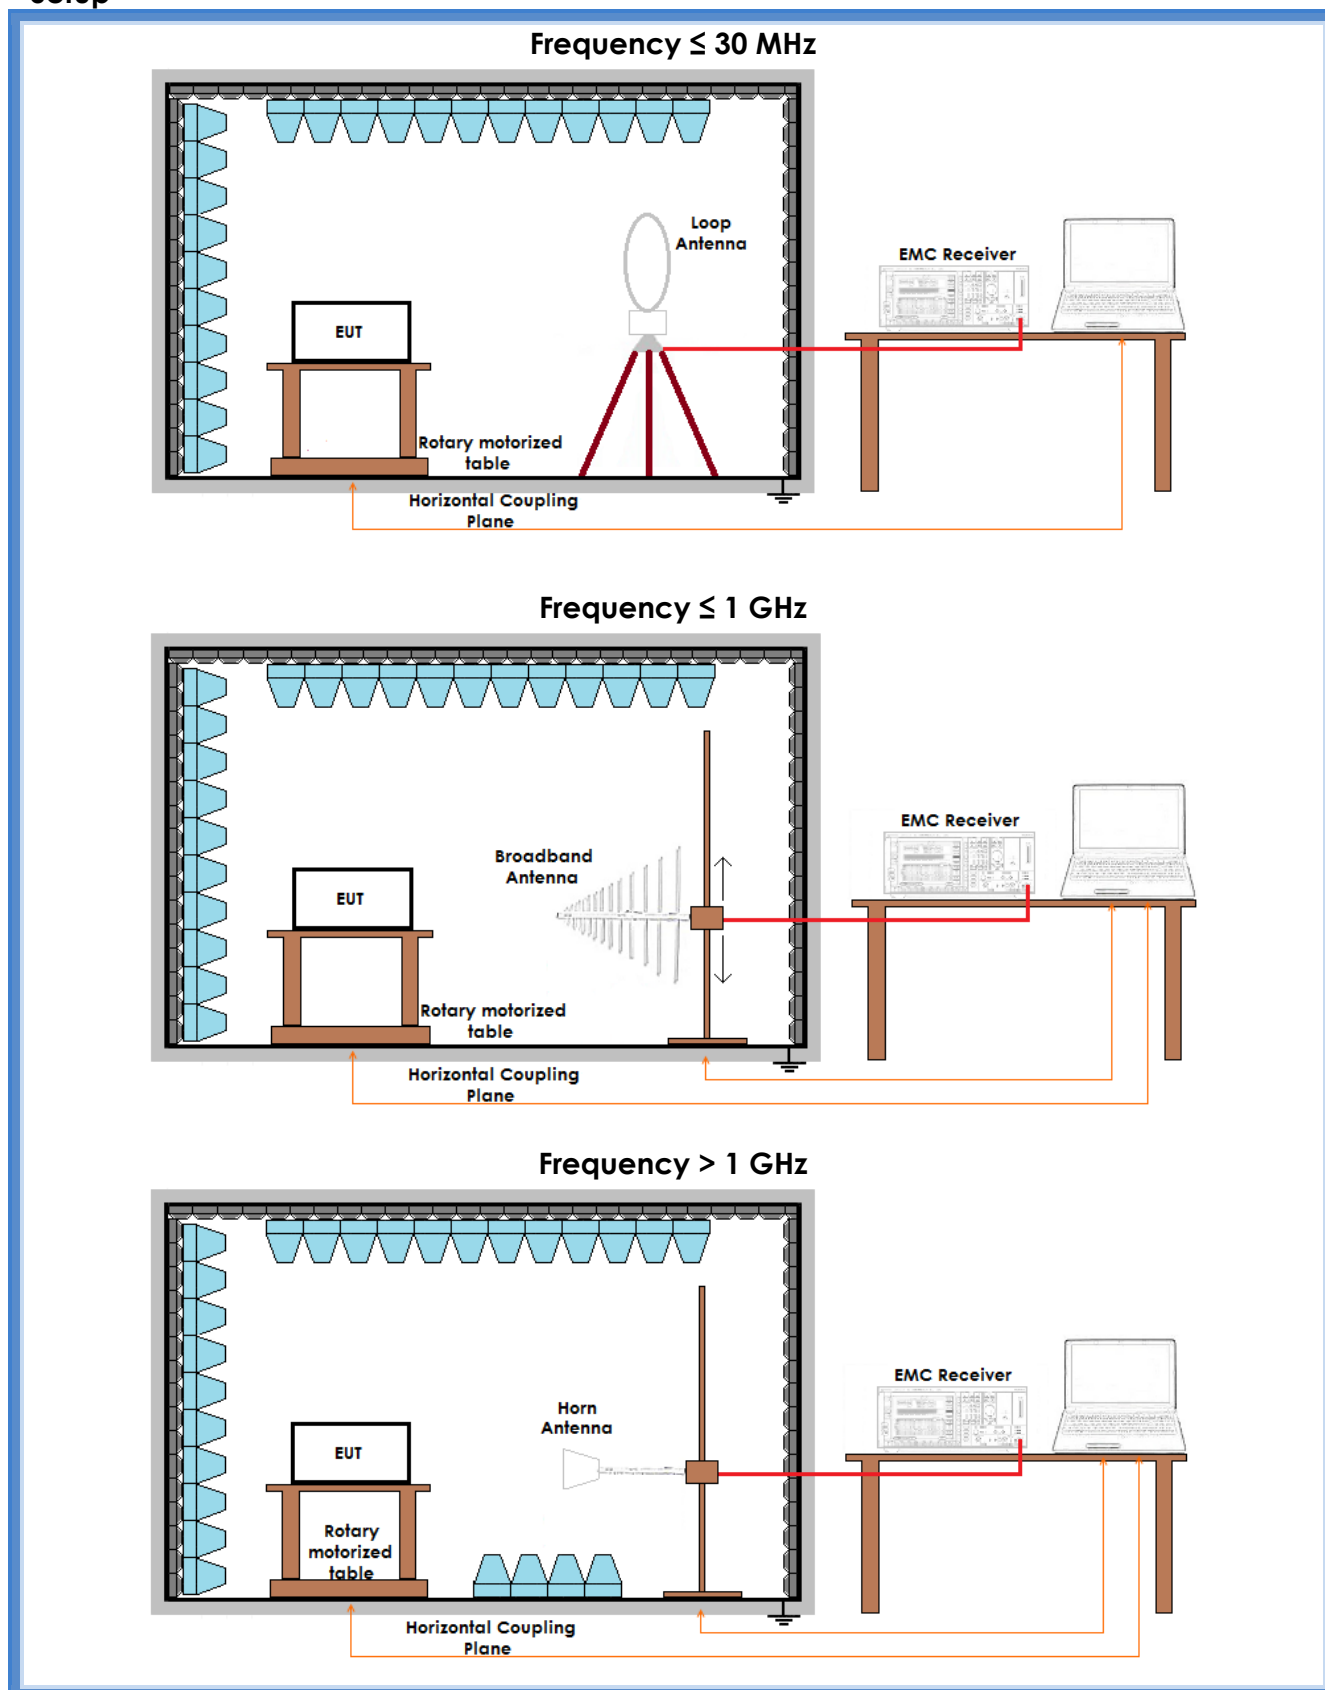



Result


Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
V	300 – 1000	G18015201	Lowest channel	Complies
H	300 – 1000	G18015202	Lowest channel	Complies
H	300 – 1000	G18015203	Medium channel	Complies
V	300 – 1000	G18015204	Medium channel	Complies
V	300 – 1000	G18015205	Highest channel	Complies
H	300 – 1000	G18015206	Highest channel	Complies
H	30 – 300	G18015207	Highest channel	Complies
V	30 – 300	G18015208	Highest channel	Complies
V	30 – 300	G18015209	Medium channel	Complies
H	30 – 300	G18015210	Medium channel	Complies
H	30 – 300	G18015211	Lowest channel	Complies
V	30 – 300	G18015212	Lowest channel	Complies
Loop	0,009 – 30	G18015213	Worst case	Complies
V	1000 – 10000	G18015214	Lowest channel	Complies
H	1000 – 10000	G18015215	Lowest channel	Complies
H	1000 – 10000	G18015216	Highest channel	Complies
V	1000 – 10000	G18015217	Highest channel	Complies
V	1000 – 10000	G18015246	Medium channel	Complies
H	1000 – 10000	G18015247	Medium channel	Complies
Remarks: Measurements at frequencies lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with FCC 3A10 factor. Peaks above the limits are caused by the nominal transmitting frequencies. Final measurements have been performed only for values with margin lower than 20 dB from limit				

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a x



Graphs


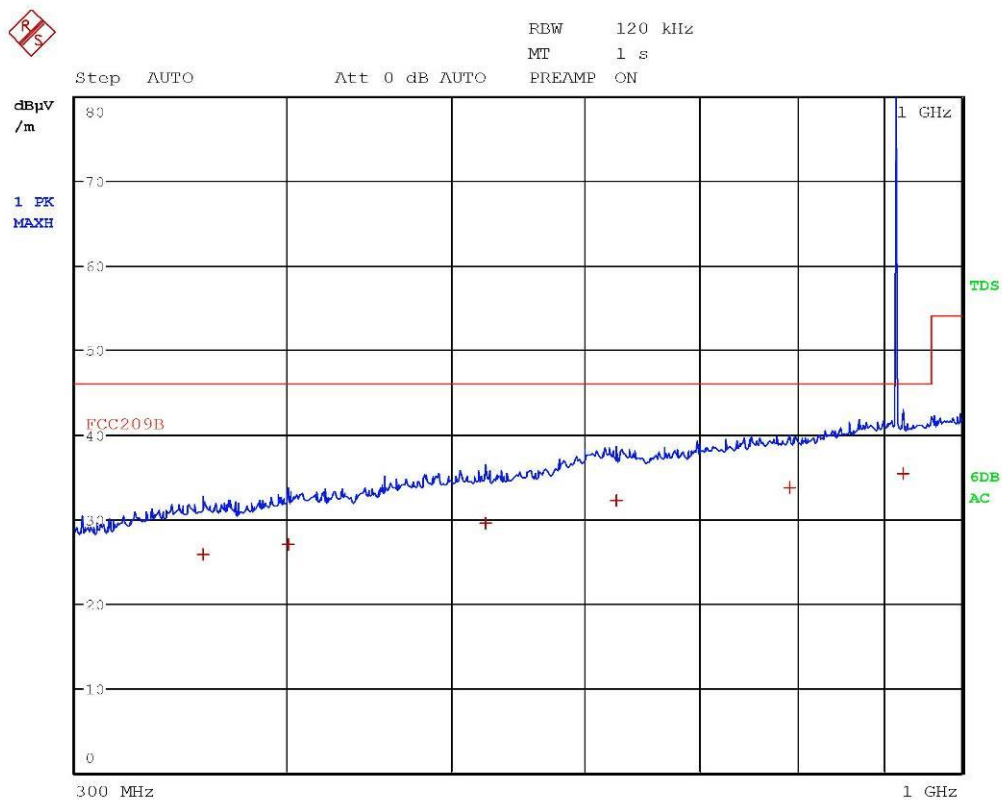


Gandini 18015201-Vert-Tx Fmin



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	357.12 MHz	25.77	-20.24
1 Quasi Peak	400.84 MHz	26.95	-19.06
1 Quasi Peak	523.96 MHz	29.48	-16.53
1 Quasi Peak	626.04 MHz	32.14	-13.87
1 Quasi Peak	791.36 MHz	33.64	-12.37
1 Quasi Peak	924.56 MHz	35.40	-10.62

Gandini 18015201-Vert-Tx Fmin

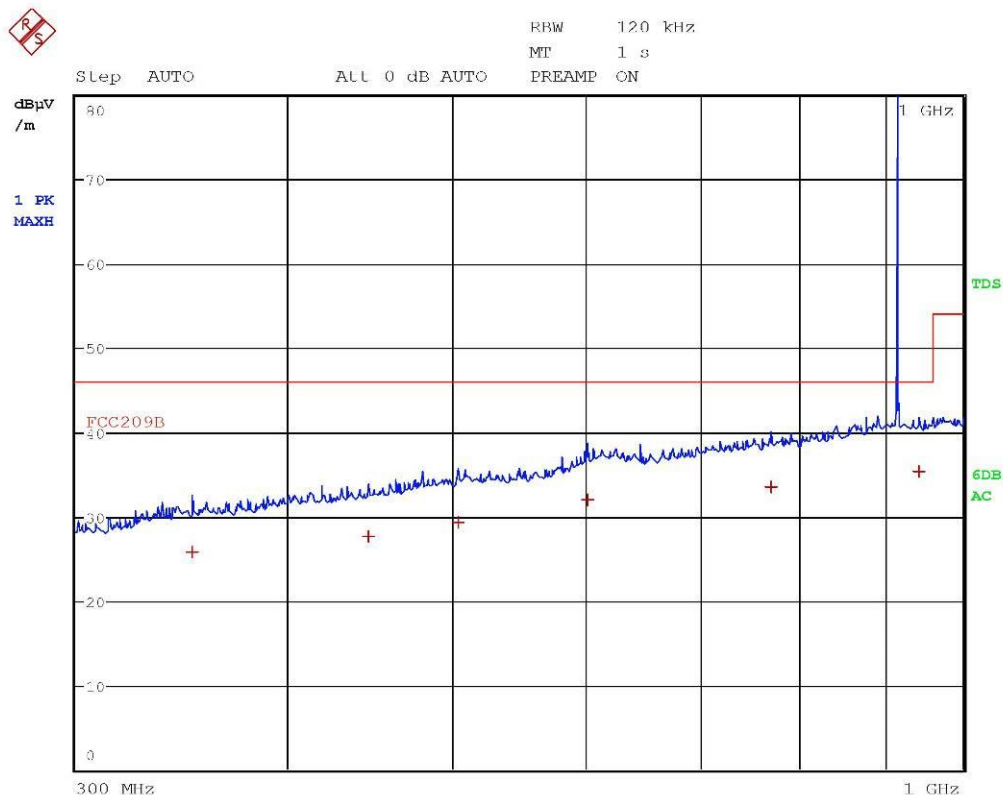
**LAB N° 0168**

Gandini 18015202-Horiz-Tx Fmin



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV/m	DELTA LIMIT dB
1 Quasi Peak	351.4 MHz	25.85	-20.16
1 Quasi Peak	446.24 MHz	27.58	-18.43
1 Quasi Peak	503.76 MHz	29.27	-16.74
1 Quasi Peak	600.4 MHz	31.97	-14.04
1 Quasi Peak	770.92 MHz	33.57	-12.44
1 Quasi Peak	942.16 MHz	35.45	-10.56

Gandini 18015202-Horiz-Tx Fmin


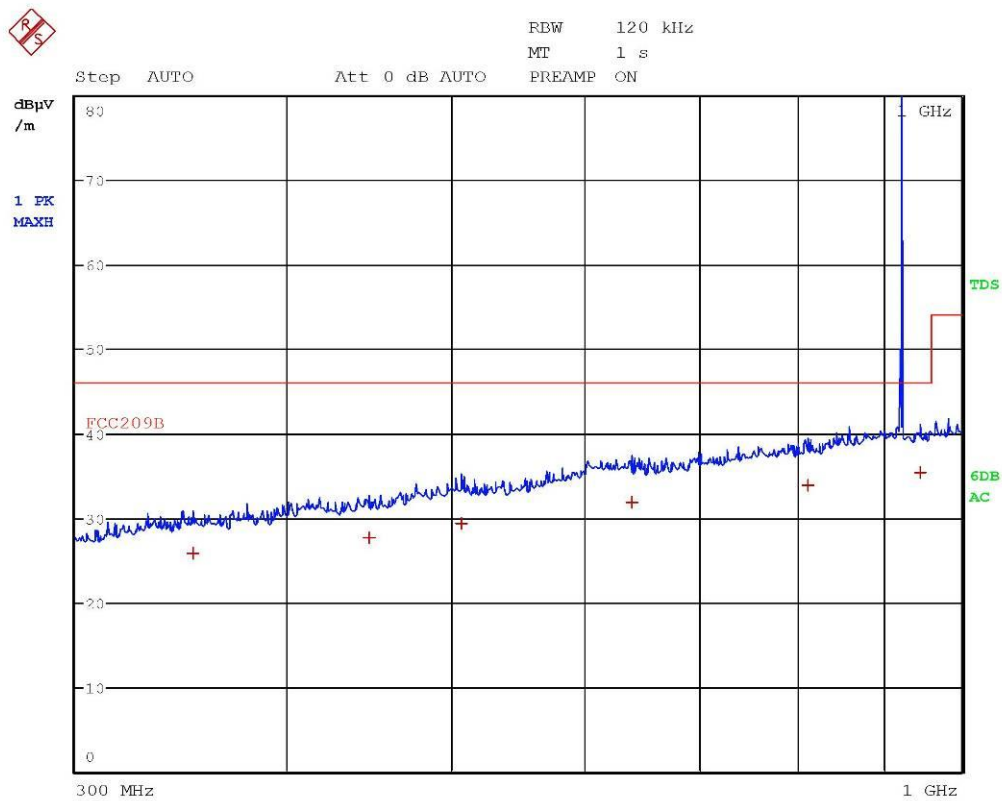


Gandini 18015203-Horiz-Tx Fmid



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	352.4 MHz	25.80	-20.21
1 Quasi Peak	447.24 MHz	27.68	-18.33
1 Quasi Peak	506.76 MHz	29.26	-16.75
1 Quasi Peak	638.64 MHz	31.85	-14.16
1 Quasi Peak	812.44 MHz	33.79	-12.22
1 Quasi Peak	945.92 MHz	35.45	-10.56

Gandini 18015203-Horiz-Tx Fmid

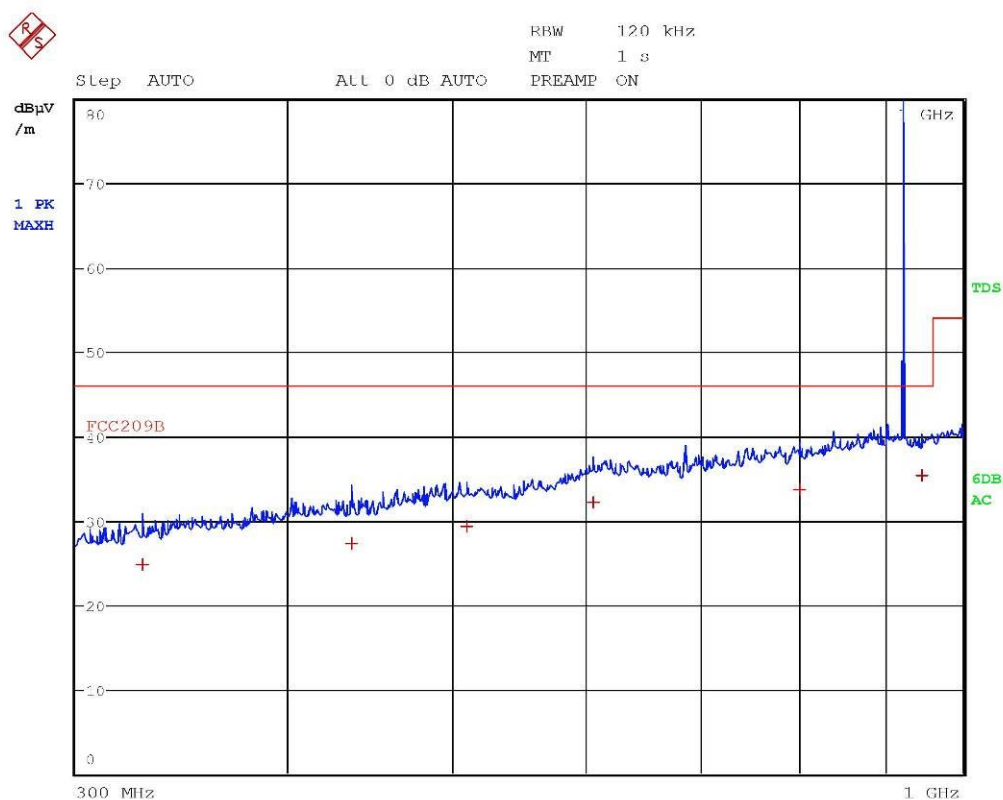


Gandini 18015204-Vert-Tx Fmid



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	328.32 MHz	24.74	-21.27
1 Quasi Peak	436.04 MHz	27.27	-18.74
1 Quasi Peak	509.48 MHz	29.34	-16.67
1 Quasi Peak	605.48 MHz	32.13	-13.88
1 Quasi Peak	800.44 MHz	33.75	-12.26
1 Quasi Peak	946.08 MHz	35.36	-10.65

Gandini 18015204-Vert-Tx Fmid

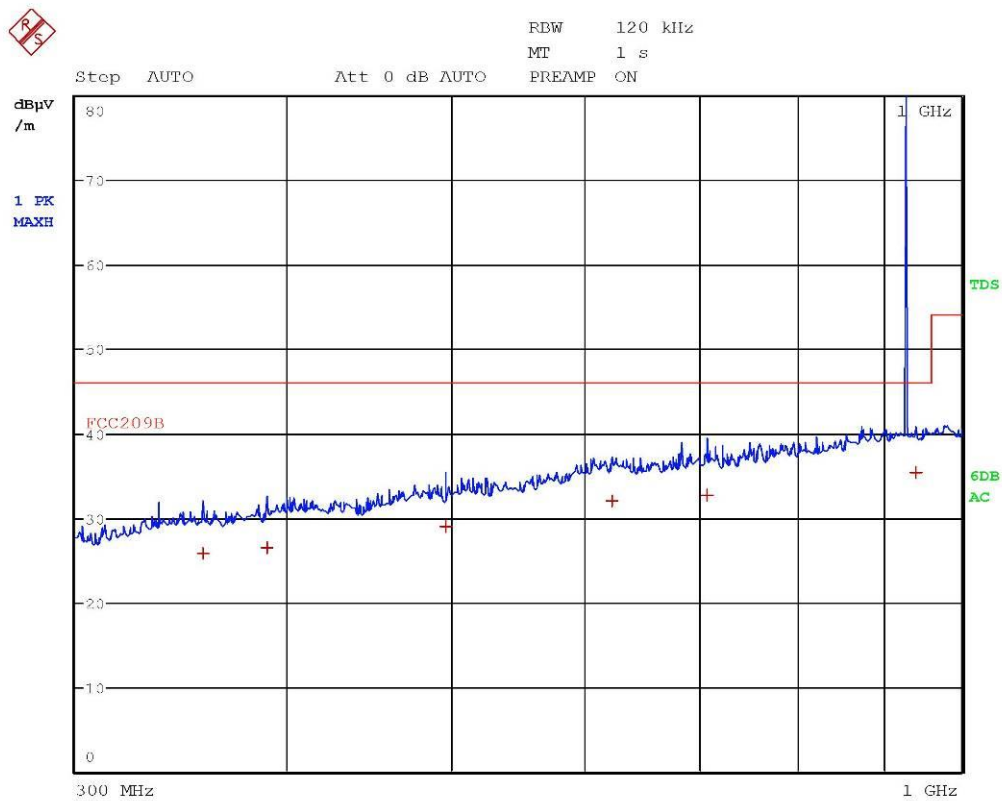


Gandini 18015205-Vert-Tx Fmax



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	356.8 MHz	25.83	-20.19
1 Quasi Peak	389.4 MHz	26.41	-19.60
1 Quasi Peak	496.32 MHz	29.03	-16.98
1 Quasi Peak	622.48 MHz	32.08	-13.93
1 Quasi Peak	708.52 MHz	32.70	-13.32
1 Quasi Peak	940.4 MHz	35.40	-10.61

Gandini 18015205-Vert-Tx Fmax

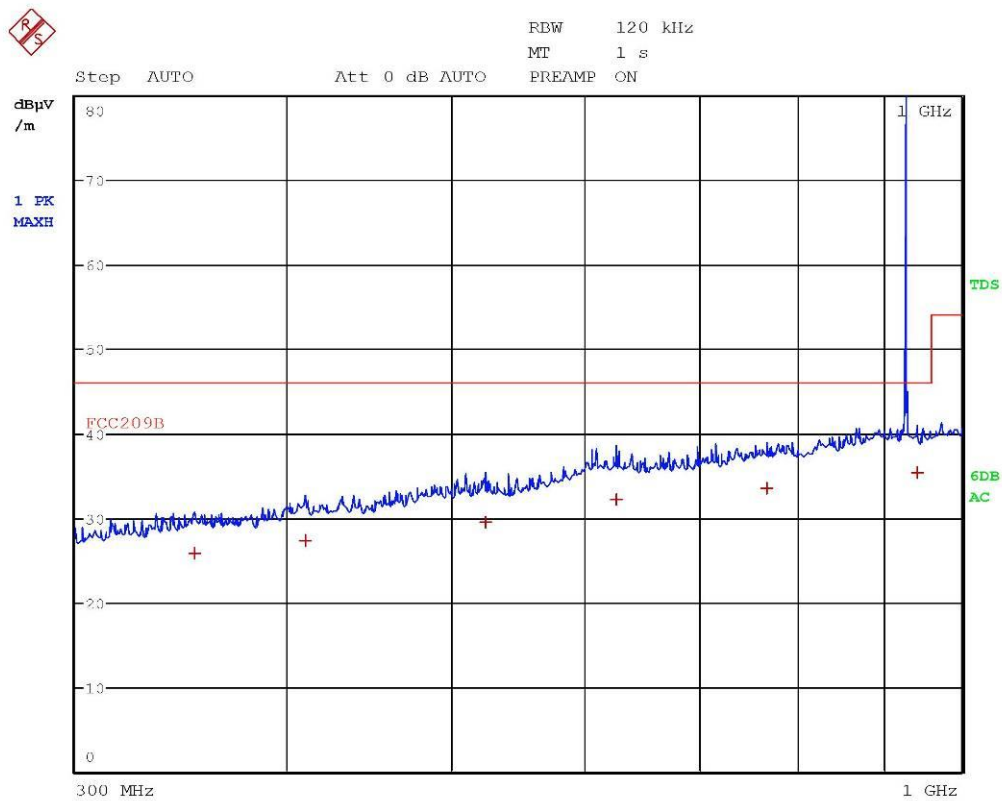


Gandini 18015206-Horiz-Tx Fmax



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	352.48 MHz	25.81	-20.20
1 Quasi Peak	409.72 MHz	27.23	-18.78
1 Quasi Peak	523.88 MHz	29.41	-16.60
1 Quasi Peak	626.16 MHz	32.15	-13.86
1 Quasi Peak	767.64 MHz	33.48	-12.53
1 Quasi Peak	941.76 MHz	35.42	-10.59

Gandini 18015206-Horiz-Tx Fmax

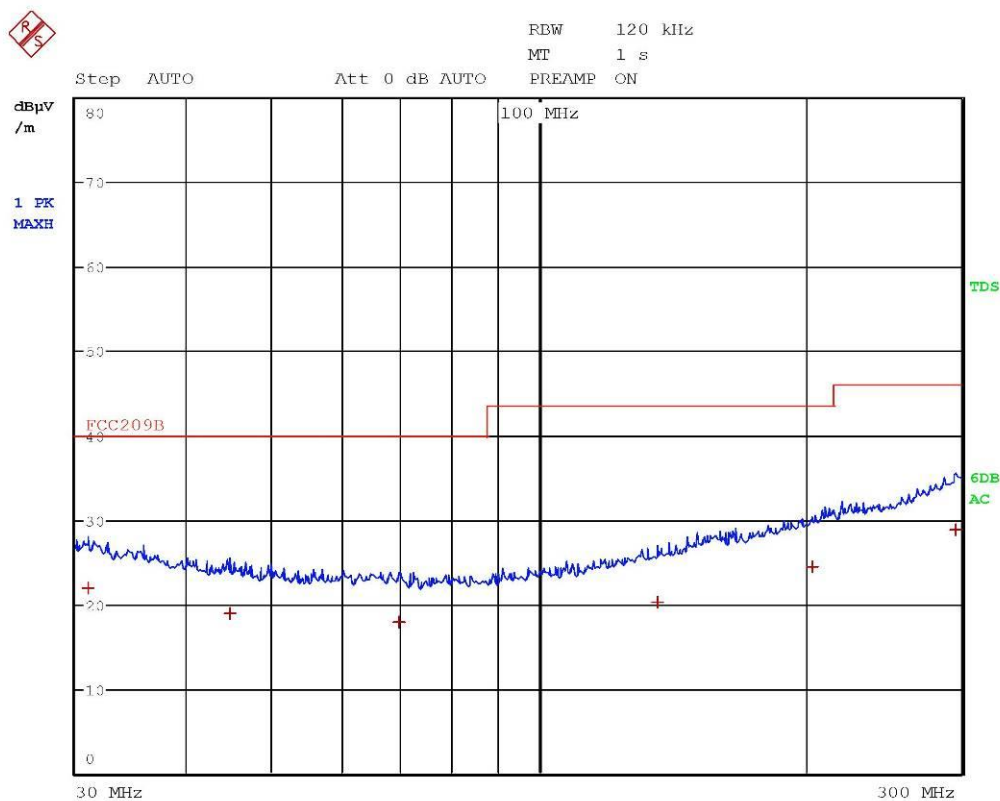


Gandini 18015207-Horiz-Tx Fmax




EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	31 MHz	22.01	-17.98
1 Quasi Peak	44.76 MHz	18.82	-21.17
1 Quasi Peak	69.56 MHz	17.85	-22.14
1 Quasi Peak	136.2 MHz	20.29	-23.22
1 Quasi Peak	203.68 MHz	24.42	-19.09
1 Quasi Peak	295.48 MHz	28.88	-17.14

Gandini 18015207-Horiz-Tx Fmax

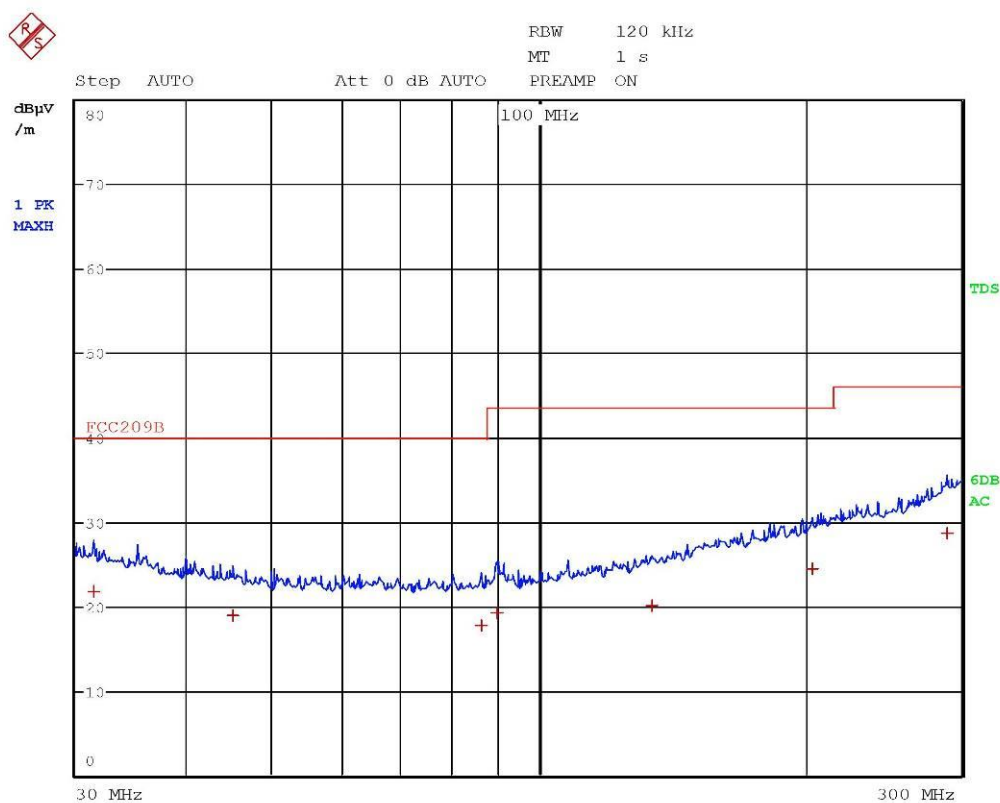

Gandini 18015208-Vert-Tx Fmax

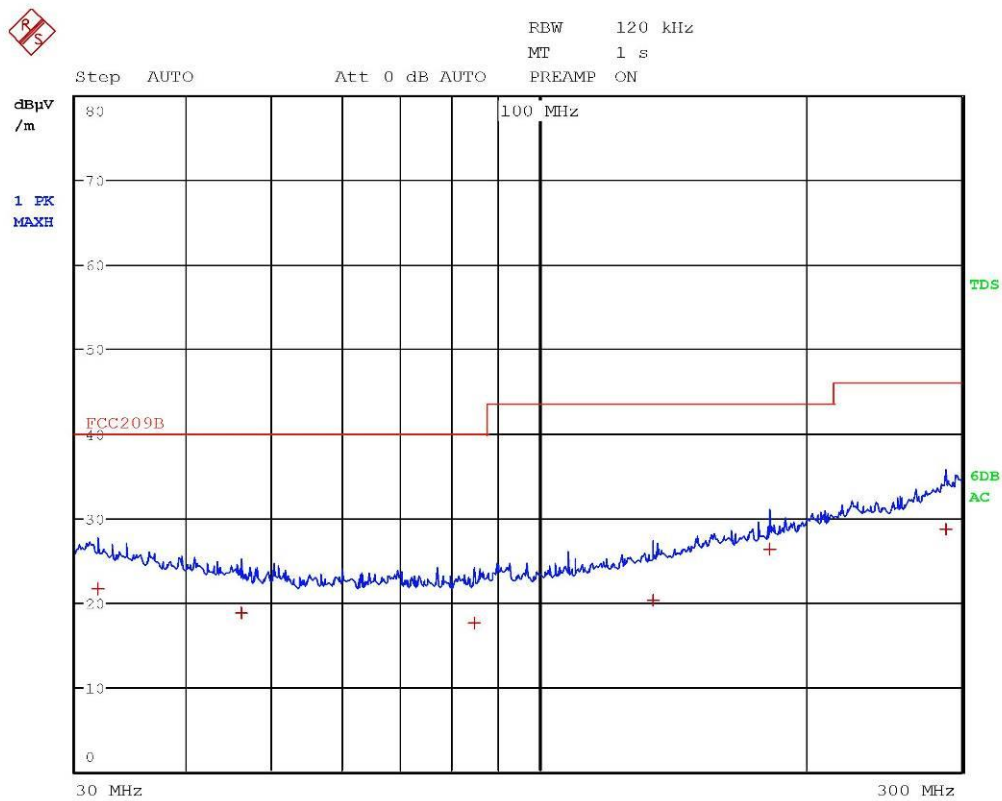


Gandini 18015209-Vert-Tx Fmid



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	31.84 MHz	21.57	-18.42
1 Quasi Peak	46.24 MHz	18.80	-21.20
1 Quasi Peak	84.56 MHz	17.49	-22.50
1 Quasi Peak	134.84 MHz	20.22	-23.29
1 Quasi Peak	182.12 MHz	26.36	-17.15
1 Quasi Peak	288.36 MHz	28.66	-17.35

Gandini 18015209-Vert-Tx Fmid

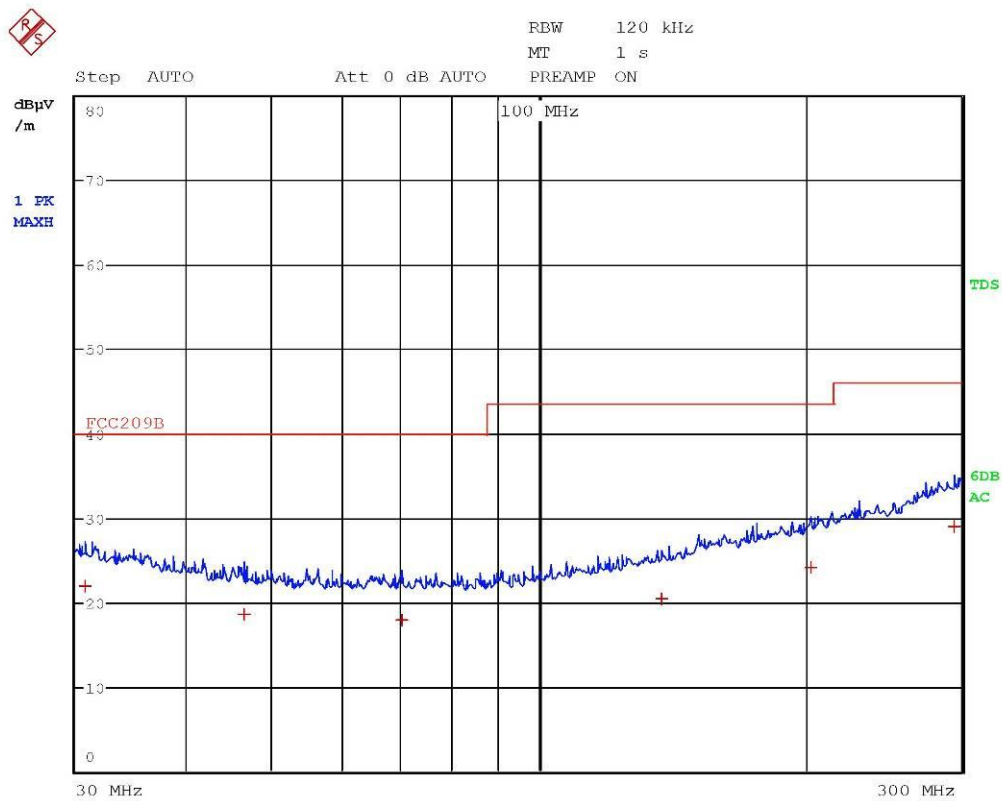


Gandini 18015210-Horiz-Tx Fmid



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	30.72 MHz	21.94	-18.05
1 Quasi Peak	46.52 MHz	18.62	-21.37
1 Quasi Peak	69.96 MHz	17.92	-22.07
1 Quasi Peak	137.84 MHz	20.36	-23.15
1 Quasi Peak	202.52 MHz	24.12	-19.39
1 Quasi Peak	294 MHz	28.95	-17.06

Gandini 18015210-Horiz-Tx Fmid

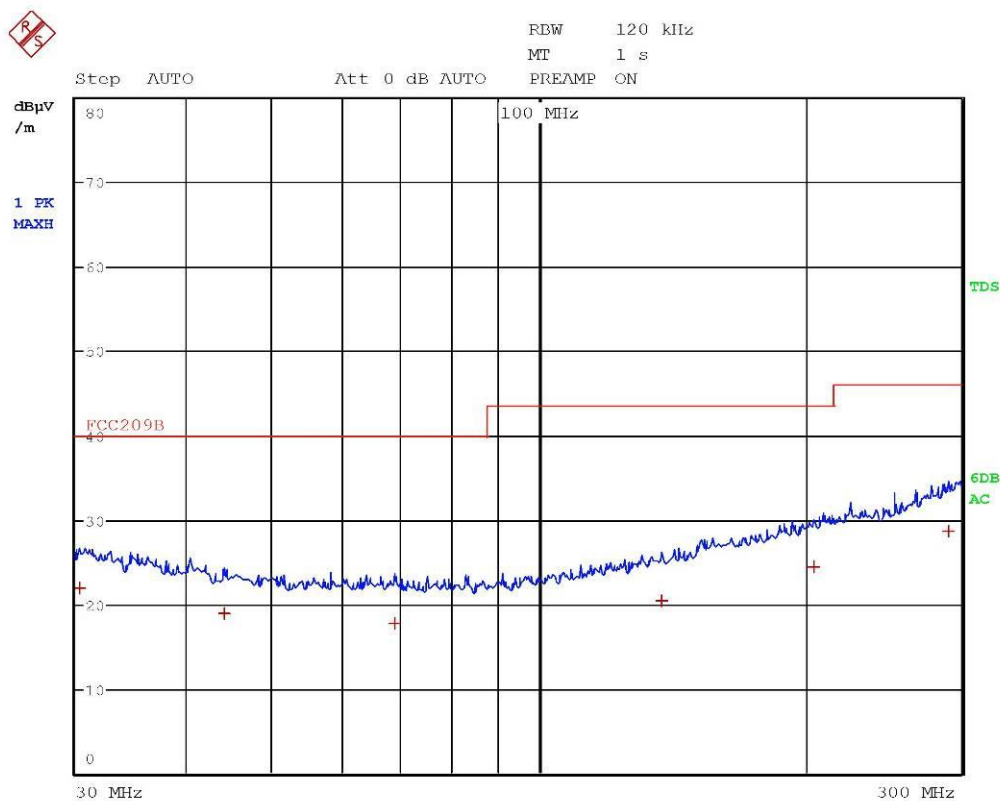


Gandini 18015211-Horiz-Tx Fmin



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	30.32 MHz	21.92	-18.07
1 Quasi Peak	44.2 MHz	18.82	-21.17
1 Quasi Peak	68.88 MHz	17.71	-22.28
1 Quasi Peak	137.52 MHz	20.41	-23.10
1 Quasi Peak	204.16 MHz	24.50	-19.02
1 Quasi Peak	290.52 MHz	28.68	-17.33

Gandini 18015211-Horiz-Tx Fmin

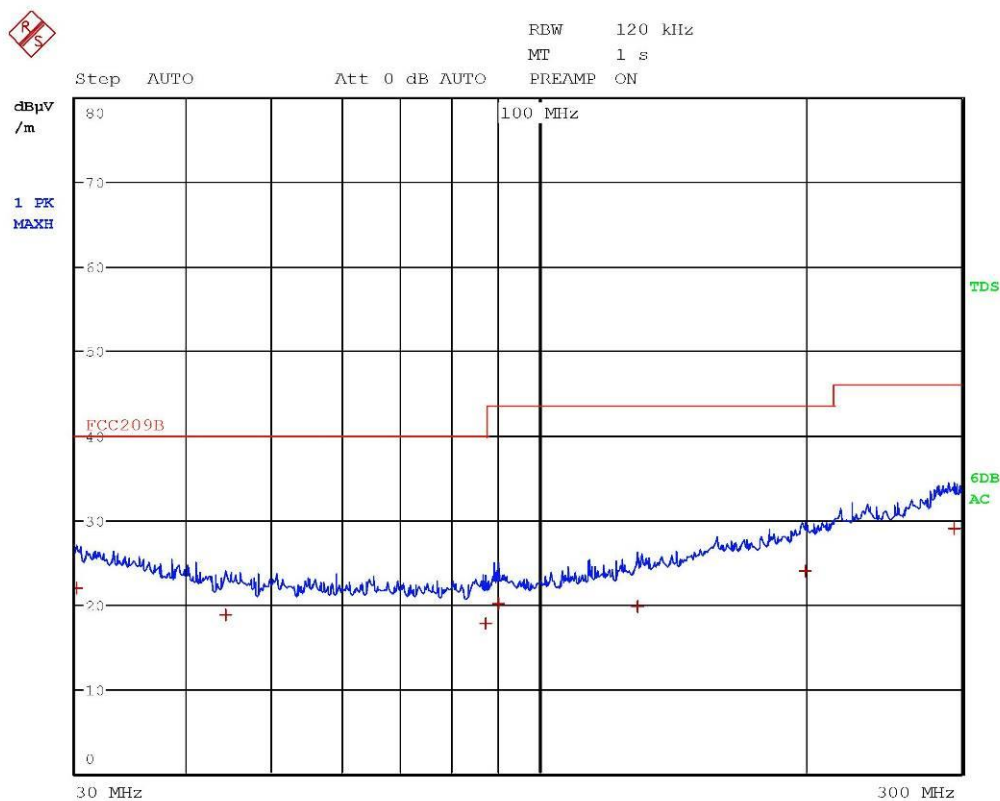


Gandini 18015212-Vert-Tx Fmin




EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	30.08 MHz	21.86	-18.13
1 Quasi Peak	44.36 MHz	18.79	-21.20
1 Quasi Peak	87.04 MHz	17.74	-22.25
1 Quasi Peak	89.96 MHz	20.16	-23.35
1 Quasi Peak	129.12 MHz	19.82	-23.69
1 Quasi Peak	199.92 MHz	23.99	-19.52
1 Quasi Peak	294 MHz	28.99	-17.02

Gandini 18015212-Vert-Tx Fmin

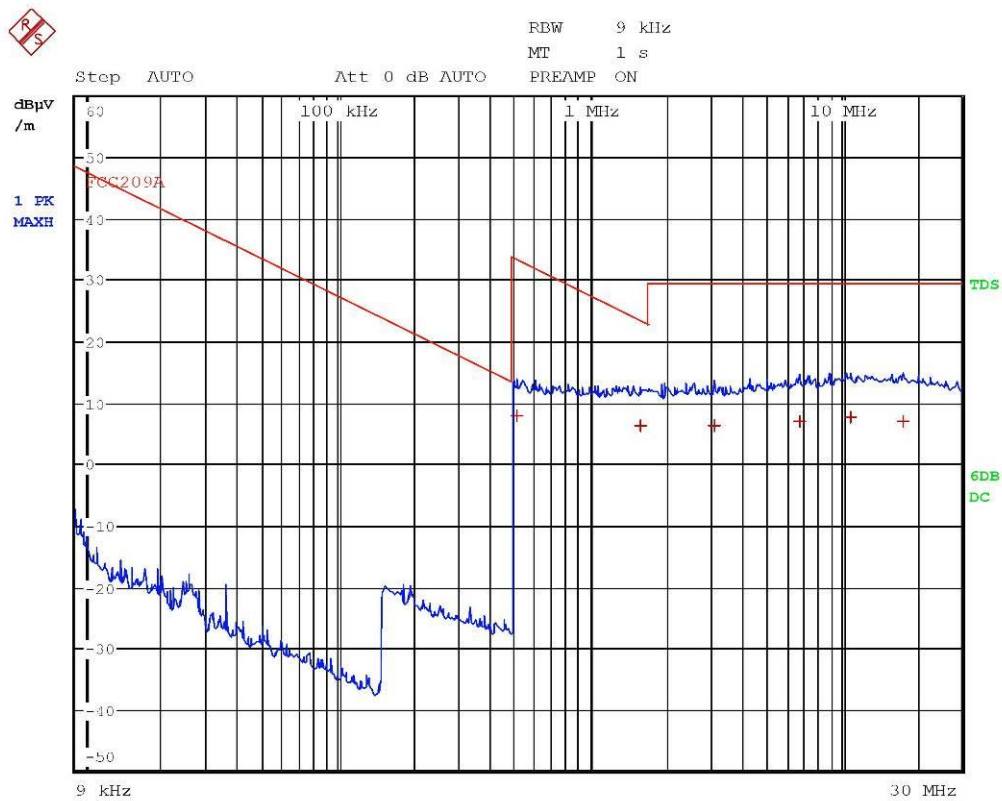

Gandini 18015213-Vert-Tx

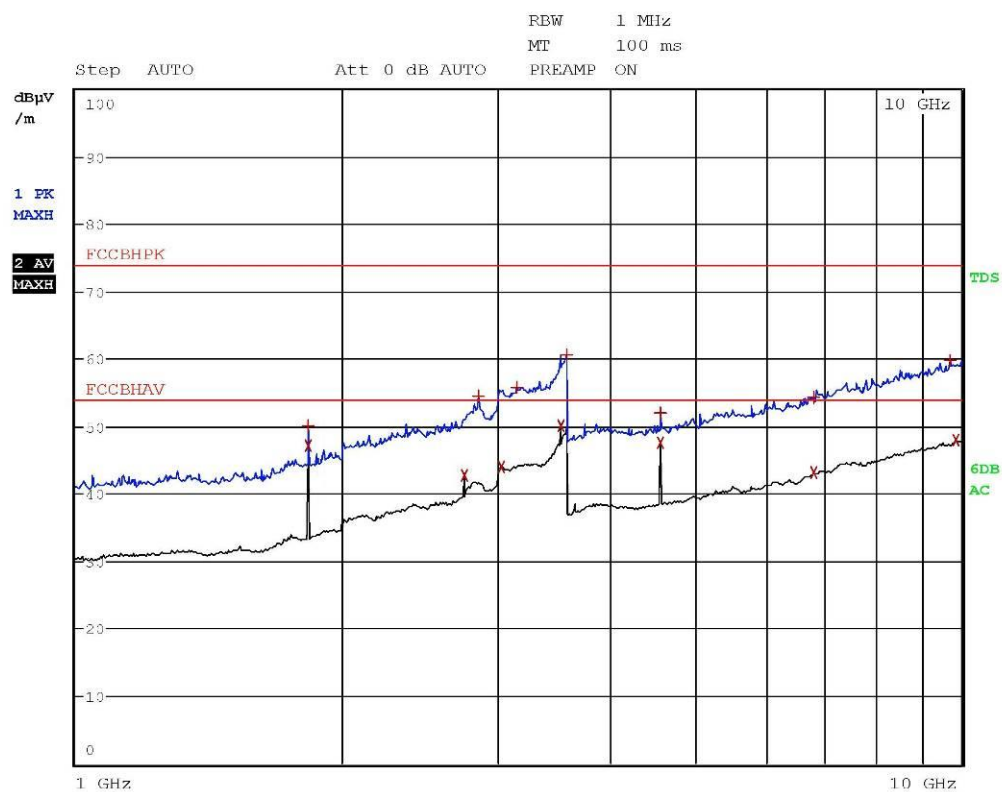


Gandini 18015214-Vert-Tx Fmin



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
2 Average	1.83 GHz	47.25	-6.72
1 Max Peak	1.83 GHz	50.12	-23.85
2 Average	2.7452 GHz	42.66	-11.31
1 Max Peak	2.8468 GHz	54.41	-19.56
2 Average	3.0248 GHz	44.09	-9.88
1 Max Peak	3.1508 GHz	55.74	-18.23
2 Average	3.5256 GHz	50.19	-3.78
1 Max Peak	3.5936 GHz	60.62	-13.35
2 Average	4.5752 GHz	47.51	-6.46
1 Max Peak	4.5752 GHz	52.00	-21.97
1 Max Peak	6.8108 GHz	54.37	-19.60
2 Average	6.8116 GHz	43.14	-10.83
1 Max Peak	9.6944 GHz	59.77	-14.21
2 Average	9.8396 GHz	48.00	-5.97

Gandini 18015214-Vert-Tx Fmin

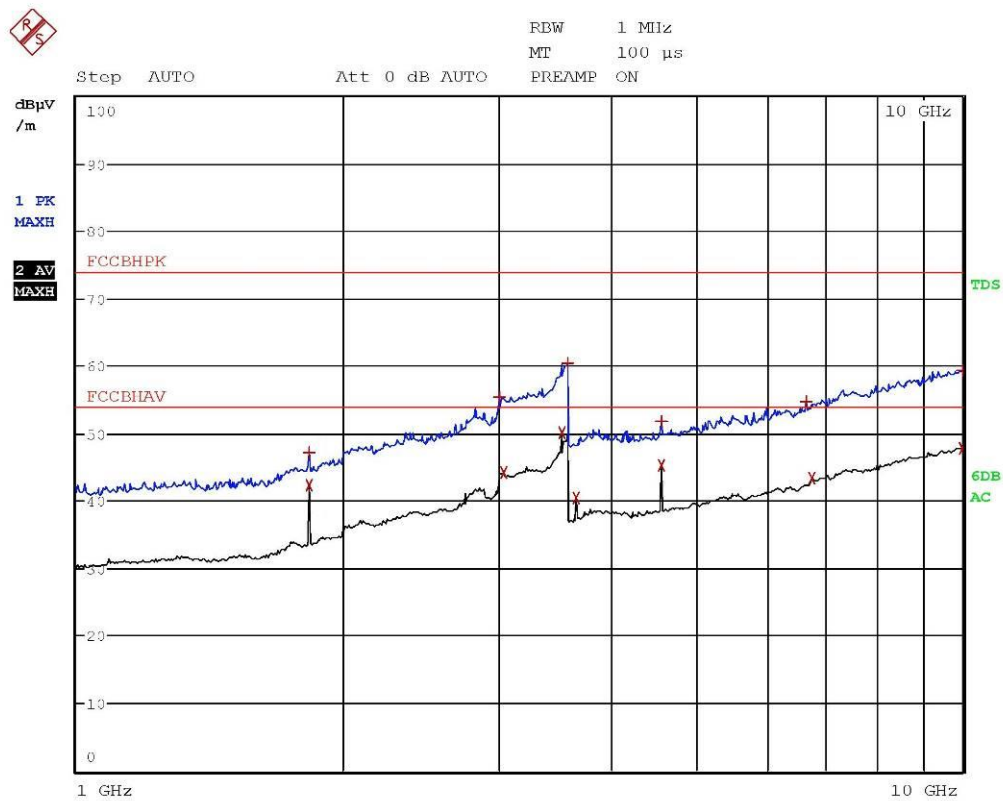


Gandini 18015215-Horiz-Tx Fmin



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Max Peak	1.83 GHz	47.16	-26.81
2 Average	1.83 GHz	42.27	-11.71
1 Max Peak	3.0044 GHz	55.38	-18.59
2 Average	3.0384 GHz	44.14	-9.83
2 Average	3.5256 GHz	50.15	-3.82
1 Max Peak	3.596 GHz	60.49	-13.48
2 Average	3.6604 GHz	40.54	-13.43
2 Average	4.5752 GHz	45.23	-8.74
1 Max Peak	4.5756 GHz	51.73	-22.24
1 Max Peak	6.6552 GHz	54.70	-19.27
2 Average	6.7748 GHz	43.32	-10.65
2 Average	9.9976 GHz	47.88	-6.10
1 Max Peak	9.998 GHz	59.45	-14.52

Gandini 18015215-Horiz-Tx Fmin

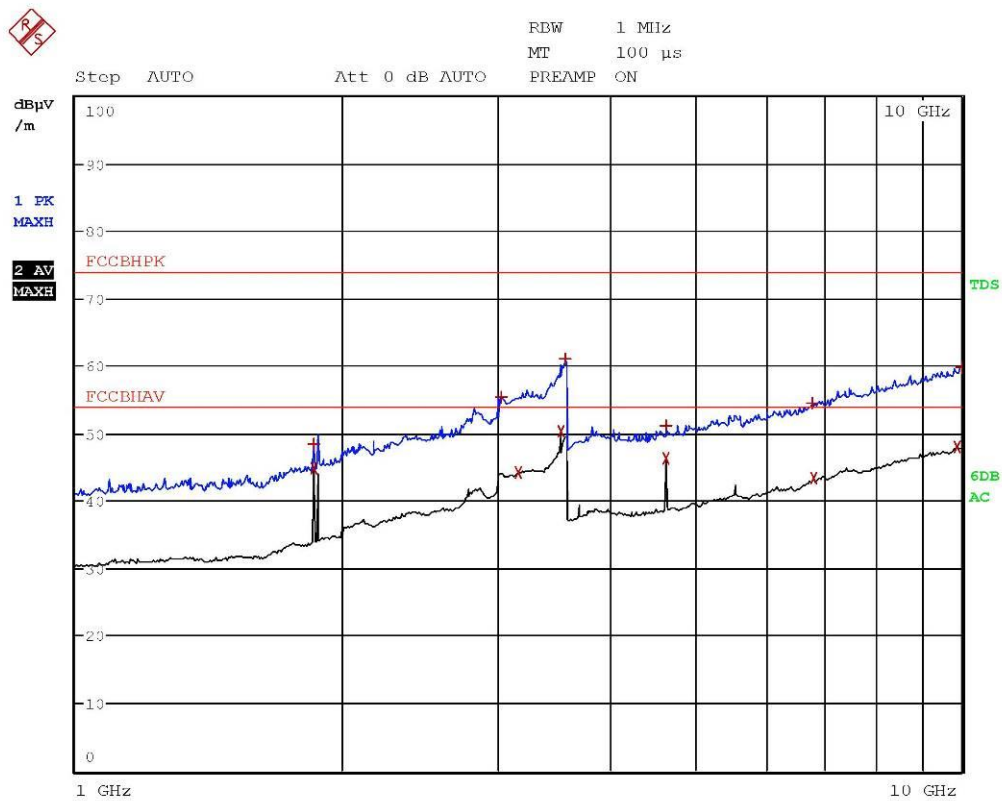

Gandini 18015216-Horiz-Tx Fmax



EDIT PEAK LIST (Prescan Results)			
Trace1:	FCCBHPK		
Trace2:	FCCBHAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
2 Average	1.8556 GHz	44.77	-9.20
1 Max Peak	1.8556 GHz	48.40	-25.57
1 Max Peak	3.0288 GHz	55.25	-18.72
2 Average	3.158 GHz	44.25	-9.72
2 Average	3.5256 GHz	50.35	-3.62
1 Max Peak	3.5688 GHz	61.09	-12.88
2 Average	4.6392 GHz	46.41	-7.56
1 Max Peak	4.6392 GHz	51.21	-22.76
1 Max Peak	6.7896 GHz	54.57	-19.40
2 Average	6.8108 GHz	43.31	-10.66
2 Average	9.8952 GHz	47.94	-6.03
1 Max Peak	9.992 GHz	59.71	-14.26

Gandini 18015216-Horiz-Tx Fmax