



**EMC Compliance
Management Group**
670 National Avenue
Mountain View, CA 94043
Tel. (650) 988-0900
Fax (650) 988-6647

Competent Body Approval #: 14082
NVLAP Lab code: 200068-0

EMC TEST REPORT

On Model: WT-968H
Prepared for Well Task (Asia) Ltd.

According to FCC Part 15 Class B
CERTIFICATION REPORT

<i>FCC ID#:</i>	<i>OQEWT968H49</i>
<i>Prepared by:</i>	<i>Tian Wang</i>
<i>QC Manager:</i>	<i>Michael J. Azar</i>

DECLARATION OF CONFORMITY

According to FCC Part 15

Responsible Party Name : Well Task (Asia) Ltd.

Address : Unit 708-B, 7/F, Fibres & Fabrics Ind.
Centre, No. 7, Shing Yip St., Kwun Tong
kln., Hong Kong

Telephone : 2433-3333

Declares that product : Toy Walkie Talkie (Receiver Portion)

Model Name : WT-968H

Complies with Part 15 of the FCC Rules.

This device complies with Part 15 of the FCC rules. Operations is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Responsible Party:

Date: _____

Phone: _____

Fax: _____

Signature: _____

Test Laboratory:

This is the result of tests, that were carried out from the submitted product sample(s) in conformity with the specification of the respective standards. The certification holder has the right to affix the FCC label on the product complying with the inspection sample.



670 National Ave. Mountain View, CA 94043
650-988-0900 650-988-6647(Fax)



Accreditation #: 200068-0

Table of Contents

<i>DISCLAIMER NOTICE</i>	<i>1</i>
<i>REPRODUCTION CLAUSE</i>	<i>1</i>
<i>ADMINISTRATIVE DATA</i>	<i>2</i>
<i>EUT DESCRIPTION</i>	<i>2</i>
<i>TEST SUMMARY</i>	<i>3</i>
<i>TEST LOCATION</i>	<i>4</i>
<i>ACCREDITATION BODIES</i>	<i>4</i>
<i>ANTENNA REQUIREMENT 15.203</i>	<i>5</i>
<i>PRODUCT LABELING</i>	<i>6</i>
<i>TEST SYSTEM JUSTIFICATION</i>	<i>7</i>
<i>EQUIPMENT MODIFICATION</i>	<i>8</i>
<i>TEST SYSTEM DETAILS</i>	<i>9</i>
<i>CONFIGURATION OF TESTED SYSTEM</i>	<i>10</i>
<i>ATTACHMENT 1 CFR 15.235 (A) FIELD STRENGTH RESULTS (202-R-01)</i>	<i>11</i>
<i>ATTACHMENT 2 CFR 15.235 (B) & 15.209 HARMONICS MEASUREMENT RESULTS (202-R-02)</i>	<i>13-15</i>

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from EMC Compliance Management Group, 670 National Ave., Mountain View, CA 94043.

ADMINISTRATIVE DATA

Test Sample : WT-968H

Part Number : N/A

Manufacturer : Well Task (Asia) Ltd.
Unit 708-B, 7/F, Fibres & Fabrics Ind.
Centre, No. 7, Shing Yip St., Kwun Tong
Kln, Hong Kong

Telephone : 2433-3333

Fax : 2708-9496

EUT Description

Well Task (Asia) Ltd., model WT-968H (referred to as the EUT in this report) is Toy Walkie Talkie (Receiver Portion).

Test Summary

The Electromagnetic Compatibility requirements on Model WT-968H for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

<i>Emission Tests</i>			
<i>Specifications</i>	<i>Test Results</i>	<i>Test Point</i>	<i>Remark</i>
<i>CFR 47 Part 15 Section 15.209</i>	<i>Conducted Emission (100% Battery Operated)</i>	<i>AC Input Port</i>	<i>N/A</i>
<i>CFR 47 Part 15 Section 15.235 (a)</i>	<i>Field Strength</i>	<i>Enclosure</i>	<i>Attachment 1</i>
<i>CFR 47 Part 15 Section 15.235 (b) & 15.209</i>	<i>Harmonics Measurement</i>	<i>Enclosure</i>	<i>Attachment 2</i>

Test Location

EMC Compliance Management Group is located at 670 National Ave., Mountain View, CA 94043, USA.

Accreditation Bodies

EMC Compliance Management Group is a fully accredited Test Laboratory for ITE, ISM and Telecommunications Products.



Laboratory Assessment #: 14082, Approved by Assessment Services, A U. K. Competent Body, as meeting the requirements of EN45001 and ISO Guide 25.



In compliance with the site registration requirements of Section 2.948 of the FCC Rules to perform EMI measurements for the general public.



Accredited by the National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code # 200068-0.



Registered in accordance with Japanese VCCI Regulations.

Antenna Requirement 15.203

The transmitter uses a permanently connected antenna.

Product Labeling

WELL TASK INDUSTRIAL




WELL TASK (ASIA) LIMITED

UNIT 708-B, 7/F,
FIBRES & FABRICS IND. CENTRE,
NO. 7, SIUNG YIP ST.,
KWUN TONG, KLN., H.K.
Tel: 2433-3333 Fax: 2708-9496

8 October, 1999

SAMPLE LABEL



Scale 1 : 1
For Model "WT-968H"
Label Size : 32.0 x 15.0 mm

FCC ID : OQEW968H49



This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

For Model "WT-968H"

Label Size : 32.0 x 15.0 mm

This is to certify that the label shown above will be the production label to be used on production units of model WT-968H. FCC ID number: OQEW968H49.

Mr. Ng Kwok Wai
General Manager



FCC ID #: OQEW968H49

Prepared for Well Task (Asia) Ltd.

Prepared by EMC Compliance Management Group

Page 6 of 15

System Test Justification

Handset units were tested both horizontal and vertical to give maximized reading.

Equipment Modification

*To achieve compliance to FCC Part 15 Class B ,
the following change(s) were made by EMC
Compliance Management Group during
compliance testing:*

- a. Added 6.8pf capacitor between B & E of Q1.*

*The above modifications will be implemented in
all production models of this equipment.*



Applicant Signature

PAUL F. Chen

Typed/Printed Name


Lab Director

Position

Test System Details

<i>EUT</i>	
<i>Model Number:</i>	<i>WT-968H</i>
<i>Description:</i>	<i>Toy Walkie Talkie (Receiver Portion)</i>
<i>Manufacturer:</i>	<i>Well Task (Asia) Ltd.</i>
<i>Support Equipment</i>	
<i>None</i>	

Configuration of Tested System

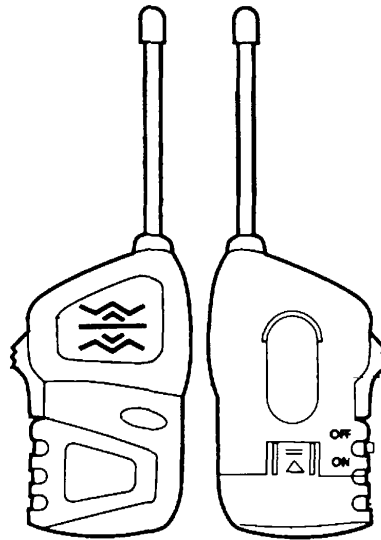

ATTACHMENT 1 CFR 15.235 (a) FIELD STRENGTH RESULTS (202-R-01)

CLIENT:	Well Task (Asia) Ltd.	TEST REFERENCE:	CFR 47 Part 15 Section 15.235 (a)
EUT MODEL:	WT-968H	PRODUCT:	Toy Walkie Talkie (Receiver Portion)
SERIAL NO.:	N/A	EUT DESIGNATION:	Residential Use
TEMPERATURE:	25°C	HUMIDITY:	71%
ATM PRESSURE:	1017 Mbar	GROUNDING:	Battery Powered
TESTED BY:	Paul F. Chen	DATE OF TEST:	10/15/99
SETUP METHOD:	ANSI C63.4: 1992, CISPR 16-1:1993		
TEST PROCEDURE:	<p>The EUT is set up according to the guidelines of ANSI C63.4:1992 for radiated emissions. An EMI receiver peak scan is made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination is then performed and the significant peaks marked. These peaks are then average in the frequency range of 30 MHz to 1GHz at OATS.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor is given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 1,000MHz		
TEST VOLTAGE:	9 Volts Battery (<u>before test : 9.13 Volts; after test 9.02 Volts</u>)		
RESULTS:	The EUT meet the requirements of test reference for Radiated Emissions on vertical polarization <u>by 2.0 dB at 44.1125MHz</u> . The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There are modifications installed by EMC Compliance Management Group test personnel. Please see attached photo as followed.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

FCC ID #: OQEW968H49**Prepared for Well Task (Asia) Ltd.****Prepared by EMC Compliance Management Group****Page 11 of 15**

Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB μ V/m]	Delta, AVE [dB]	3 Meters Limits [dB μ V/m]	Correction Factors [dB/m]
Set-up/Configuration: The RX/TX antenna of EUT was tested at both polarization.					
44.1125	V	38.0	-2.0	40.0	12.9
45.1545	H	35.4	-4.6	40.0	12.9
Note: According to CFR 15.35. All readings are AVERAGED unless stated otherwise, using an IF bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used.					

Test Equipment	Manufacturer/ Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	HP 85462A	3650A00363	05/21/99	05/21/00
RF Filter	HP 85460A	3704A00349	05/21/99	05/21/00
Antenna	CHASE CBL6112A	2274	11/15/98	11/15/99
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).				

SIGNED:

REVIEWED:

ATTACHMENT 2 CFR 15.235 (b) & 15.209 HARMONICS MEASUREMENT RESULTS

CLIENT:	Well Task (Asia) Ltd.	TEST REFERENCE:	CFR 47 Part 15 Section 15.235 (b) and 15.109
EUT MODEL:	WT-968H	PRODUCT:	Toy Walkie Talkie (Receiver Portion)
SERIAL NO.:	N/A	EUT DESIGNATION:	Residential Use
TEMPERATURE:	25°C	HUMIDITY:	71%
ATM PRESSURE:	1017 Mbar	GROUNDING:	Battery Powered
TESTED BY:	Paul Chen	DATE OF TEST:	10/17/99
SETUP METHOD:	ANSI C63.4: 1992, CISPR 16-1:1993		
TEST PROCEDURE:	<p>The EUT is set up according to the guidelines of ANSI C63.4:1992 for radiated emissions. An EMI receiver peak scan is made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination is then performed and the significant peaks marked. These peaks are then average in the frequency range of 30 MHz to 1GHz at OATS.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor is given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 1,000MHz		
TEST VOLTAGE:	9 Volts Battery (<u>before test : 9.1 Volts; after test 9.02 Volts</u>)		
RESULTS:	The EUT meet the requirements of test reference for Radiated Emissions on horizontal polarization by 1.0 dB at 398.8317MHz. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There are modifications installed by EMC Compliance Management Group test personnel. Please see attached photo as followed.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

FCC ID #: OQEW968H49**Prepared for Well Task (Asia) Ltd.****Prepared by EMC Compliance Management Group****Page 13 of 15**

Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB μ V/m]	Delta, QP [dB]	3 Meters Limits [dB μ V/m]	Correction Factors [dB/m]
Set-up/Configuration: The RX/TX antenna of EUT was tested at both vertical and horizontal polarization.					
398.8317	H	45.0	-1.0	46.0	19.9
398.8317	V	44.9	-1.1	46.0	19.9
797.6561	V	44.5	-1.5	46.0	26.5
299.1236	V	44.5	-1.5	46.0	16.2
847.3137	H	43.2	-2.8	46.0	27.2
847.5000	V	43.0	-3.0	46.0	27.2
797.6663	H	41.1	-4.9	46.0	26.5
348.9725	V	37.7	-8.3	46.0	18.1
299.1182	H	37.6	-8.4	46.0	16.2
299.1224	H	37.4	-8.6	46.0	16.2
448.6635	V	36.7	-9.3	46.0	20.8
648.0861	V	36.0	-10.0	46.0	24.3
548.3803	V	31.7	-14.3	46.0	22.7
Note: All readings are Quasi-Peaked unless stated otherwise, using an IF bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used.					

Test Equipment	Manufacturer/ Model	Serial No.	Last Cal.	Cal. Due Date
EMI Receiver	HP 85462A	3650A00363	05/21/99	05/21/00
RF Filter	HP 85460A	3704A00349	05/21/99	05/21/00
Antenna	CHASE CBL6112A	2274	11/15/98	11/15/99
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).				

SIGNED:



REVIEWED:

