

Accredited EMC-Test-Laboratory

accredited by:

Regulatory Authority for Telecommunications and Posts (Reg TP)
DAR-No.: TTI-P-G-166/98

Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97 from January –19-1999

Listed by
FEDERAL COMMUNICATIONS COMMISSION (FCC)
Registration Number: 90462
FCC Website: WWW.FCC.GOV

Test report no.: 4-0471/01_1_3
Type identification : Telit GM825

Table of Content

1 General Information	3
1.1 Notes	3
1.2 Statement of Compliance.....	3
1.3 Testing laboratory	4
1.4 Details of applicant	4
1.5 Application details	4
1.6 Test item	5
1.7 Test specifications	5
1.7.1 RF exposure limits.....	5
2 Technical test.....	6
2.1. Summary of test results.....	6
2.2 Test environment	6
2.3 Test equipment used	6
2.4 Test results (Head SAR)	7
2.5 Test results (Body SAR).....	7
2.6 Tissue dielectric properties	8
2.7 Tissue parameters	8
2.8 Measurement uncertainties	9
2.9 System validation.....	10
Appendix 1: System performance verification	11
Appendix 2: Measurement results (printout from DASY TM).....	12
Appendix 3: Photo documentation.....	18
Appendix 4: Calibration parameters of E-field probe	27

1 General Information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.6. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Statement of Compliance

The SAR values found for the GM825 GSM 1900 mobile phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992 and the NCRP Report Number 86 for uncontrolled environment.

Tester operator:



16.11.2001 Fabien Coulet

Date

Name

Signature

Technical responsibility for area of testing:



16.11.2001 Bernd Rebmann

Date

Name

Signature

1.3 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6-10, D-66117 Saarbrücken

Germany

Telephone: +49 681 598 - 0

Fax: + 49 681 598 - 8475

e-mail: info@ict.cetecom.de

Internet: <http://www.cetecom.com>

State of accreditation: The Test laboratory SAR is accredited according to DIN EN 45001.

DAR-No.: TTI-P-G-166/98

Test location, if different from CETECOM ICT Services GmbH

Name: ---

Street: ---

Town: ---

Country: ---

Phone: ---

Fax: ---

1.4 Details of applicant

Name: Telit Mobile Terminals S.p.A.

Street: Viale Stazione Prosecco. 5/b

Town: 34010 Sgonico - Trieste

Country: Italy

Phone: +39 040 4192 262

Fax: +39 040 2512 57

Contact: Mr. Tomaz Petaros

Phone: +39 040 4192 262

1.5 Application details

Date of receipt of application: October 22, 2001

Date of receipt of test item: October 22, 2001

Date of test: October 23- November 7, 2001

Person who have been present during the test: ---

1.6 Test item

Description of test item: GSM 1900 mobile phone

Type designation: GM825

IMEI No: 004400441860044
HW version: 0
SW version: 3.01.002
Frequency: 1850.2 MHz (channel 512) to 1909.8 MHz (channel 810)
Used battery: 3.6 V DC battery Ni-Mh PP55
Ancillary equipment: Earpiece SN001
Manufacturer: see applicant

Output power: 28.54 dBm Peak cond.

1.7 Test specifications

Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
Draft IEEE Std 1528-200X: Version 6.4: July 2001

1.7.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 1: RF exposure limits

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

2 Technical test

2.1. Summary of test results

- ☒ No deviations from the technical specification(s) were ascertained in the course of the tests performed.
- ☐ The deviations as specified in 2.4 and 2.5 were ascertained in the course of the tests performed.

2.2 Test environment

Ambient temperature: 21°C – 23°C

Tissue simulating liquid: 21°C – 23°C

2.3 Test equipment used

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1558	February 20, 2001
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1559	February 20, 2001
Schmid & Partner Engineering AG	900 MHz System Validation Dipole	D900V2	102	February 13, 2001
Schmid & Partner Engineering AG	1800 MHz System Validation Dipol	D1800V2	287	February 13, 2001
Schmid & Partner Engineering AG	Data acquisition electronics	DAE3V1	413	January 15, 2001
Schmid & Partner Engineering AG	Software	DASY 3 V3.1c	---	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	SAM	---	Calibration isn't necessary
Rohde & Schwarz	Universal Radio Communication Tester	CMU 200	U-972406/000	August 30, 2001
Hewlett Packard	Network Analyser S-Param. Test Set	HP 8510C HP 8515 A	2643A03725 2723A01379	January 18, 2001
Agilent	Dielectric Probe Kit	Agilent 85070C	US99360146	March 8, 2001

2.4 Test results (Head SAR)

The table contain the measured SAR values averaged over a mass of 1 g				
Channel (frequency)	Position	Left hand position	Right hand position	Limit
661 (1880.1 MHz)	Cheek:	0.184 W/kg	0.120 W/kg	1.6 W/kg
661 (1880.1 MHz)	Tilted 15°:	0.163 W/kg	0.135 W/kg	1.6 W/kg

Table 2: Test results (Head SAR)

Note: Upper and lower frequencies were not measured because the values at the middle frequency did not exceed 1.27 W/kg (1.60 W/kg reduced of 2dB)

2.5 Test results (Body SAR)

The table contain the measured SAR values averaged over a mass of 1 g			
Channel (frequency)	Position	Touch on the flat phantom	Limit
661 (1880.1 MHz)	Front	0.176 W/kg	1.6 W/kg
661 (1880.1 MHz)	Back	0.712 W/kg	1.6 W/kg

Table 3: Test results (Body SAR)

Note: Measured with the earpiece as ancillary equipment
Upper and lower frequencies were not measured because the values at the middle frequency did not exceed 1.27 W/kg (1.60 W/kg reduced of 2dB)

2.6 Tissue dielectric properties

The following materials are used for producing the tissue-equivalent materials:

Ingredients (% by weight)	Frequency (MHz)									
	☐ 450		☐ 835		☐ 915		☒ 1900		☐ 2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.40	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7

Table 4: Tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

2.7 Tissue parameters

Used Target Frequency [GHz]	Target Head Tissue		Target Body Tissue		Measured Head Tissue		Measured Body Tissue		Measured Date
	Permit- tivity	Conduc- tivity [S/m]	Permit- tivity	Conduc- tivity [S/m]	Permit- tivity	Conduc- tivity [S/m]	Permit- tivity	Conduc- tivity [S/m]	
☐ 450	43.5	0.87	56.7	0.94	---	---	---	---	---
☐ 835	41.5	0.90	55.2	0.97	---	---	---	---	---
☐ 900	41.5	0.97	55.0	1.05	---	---	---	---	---
☐ 915	41.5	0.98	55.0	1.06	---	---	---	---	---
☒ 1900	40.0	1.40	53.3	1.52	40.5	1.45	54.6	1.60	12 th October 01
☐ 2450	39.2	1.80	52.7	1.95	---	---	---	---	---

Table 5: Parameter of the tissue simulating liquid

Note: The dielectric properties have been measured by the contact probe method at 22°C.

2.8 Measurement uncertainties

The overall combined measurement uncertainty of the measurement system is $\pm 12,1\%$ ($K=1$). The breakdown of the individual uncertainties is as follows:

Calibration Error:					
	Probability Distribution	Standard Uncertainty			
		900 MHz	1500 MHz	1800 MHz	
Incident power	Rectangular	+/- 1,2 %	+/- 1,2 %	+/- 1,2 %	
Mismatch uncertainty	Rectangular	+/- 0,6 %	+/- 0,6 %	+/- 0,6 %	
Exp. fitting error (95% confidence)	Normal	+/- 0,4 %	+/- 0,2 %	+/- 0,2 %	
Liquid permittivity	Rectangular	+/- 2,3 %	+/- 2,8 %	+/- 2,9 %	
Probe positioning	Normal	+/- 0,5 %	+/- 0,8 %	+/- 1.0 %	
Field homogeneity	Rectangular	+/- 0,6 %	+/- 1,2 %	+/- 1,4 %	
Combined Standard Uncertainty		+/- 2,8 %	+/- 3,4 %	+/- 3,6 %	
E-Field Probe Error:					
Error Description	Error	Probability Distribution	Weight	Standard Uncertainty	
Isotropy around axis	+/- 0,2 dB	U-shape	0,5	+/- 2,4 %	
Spherical Isotropy	+/- 0,4 dB	U-shape	0,5	+/- 4,8 %	
Isotropy from gradient	+/- 0,5 dB	U-shape	0		
Spatial resolution	+/- 0,5 %	normal	1	+/- 0,5 %	
Linearity error	+/- 0,2 dB	rectangular	1	+/- 2,5 %	
Calibration error	+/- 3,6 %	normal	1	+/- 3,6 %	
Combined Standard Uncertainty:				+/- 6,9 %	
Source Uncertainty:					
Error Description	Error	Probability Distribution	Weight	Standard Uncertainty	
Device positioning	+/- 6%	normal	1	+/- 6%	
Laboratory set-up	+/- 3 %	normal	1	+/- 3%	
Combined Standard Uncertainty:				+/- 6,7 %	
SAR Evaluation Error					
Error Description	Error	Probability Distribution	Weight	Standard Uncertainty	Offset
Data acquisition error	+/- 1%	rectangular	1	+/- 0,6 %	
ELF and RF disturbances	+/- 0,25 %	normal	1	+/- 0,25 %	
Conductivity assessment	+/- 10 %	rectangular	1	+/- 5,8 %	
Extrapolation and boundary effects	+/- 3 %	normal	1	+/- 3 %	+ 5 %
Probe positioning	+/- 0,1 mm	normal	1	+/- 1 %	
Integration and cube orientation	+/- 3 %	normal	1	+/- 3 %	
Cube shape inaccuracies	+/- 2 %	rectangular	1	+/- 1.2 %	
Combined Standard Uncertainty:				+/- 7.4 %	

Combined Uncertainties		
Error Description	Standard Uncertainty	Offset
E-field probe errors	+/- 6.9 %	
SAR evaluation error	+/- 7.4 %	+/- 5 %
Source uncertainty	+/- 6,7 %	
Combined Standard Uncertainty:	+/- 12.1 %	
Expanded Uncertainty (k=2):	+/- 24,2 %	

Table 6: Measurement uncertainties

The measurement uncertainties were performed by Schmid & Partner Engineering AG.


2.9 System validation

The system validation is used for verifying the accuracy of the complete measurement system and performance of the software. The system validation is performed with 1800 MHz head tissue equivalent material according IEEE Std 1528-200X: 2001. (graphic plot attached).


Validation Kit	Frequency	Target SAR _{1g}	Target SAR _{10g}	Measured SAR _{1g}	Measured SAR _{10g}	Measured date
D1800V2, S/N:287	1800 MHz	9.50 mW/g	4.95 mW/g	8.64 mW/g	4.67 mW/g	10/23/2001


Table 7: Results system validation


Appendix 1: System performance verification

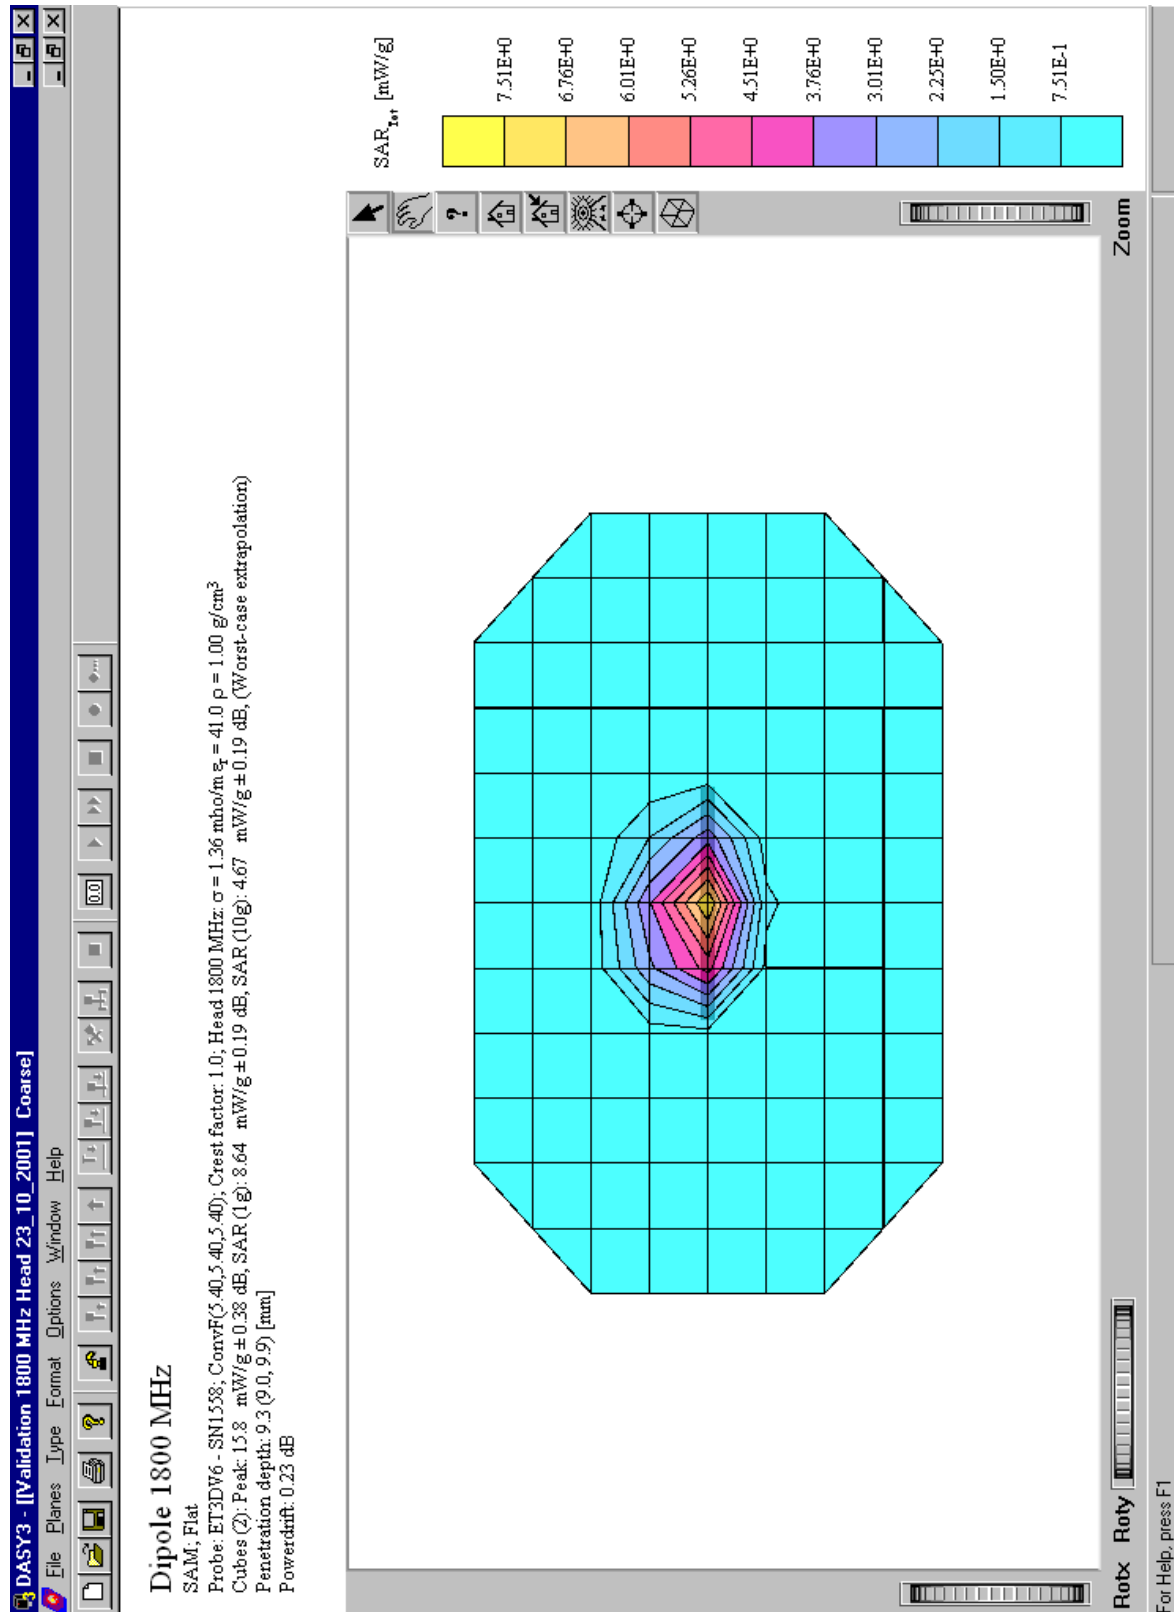



Input power 250mW

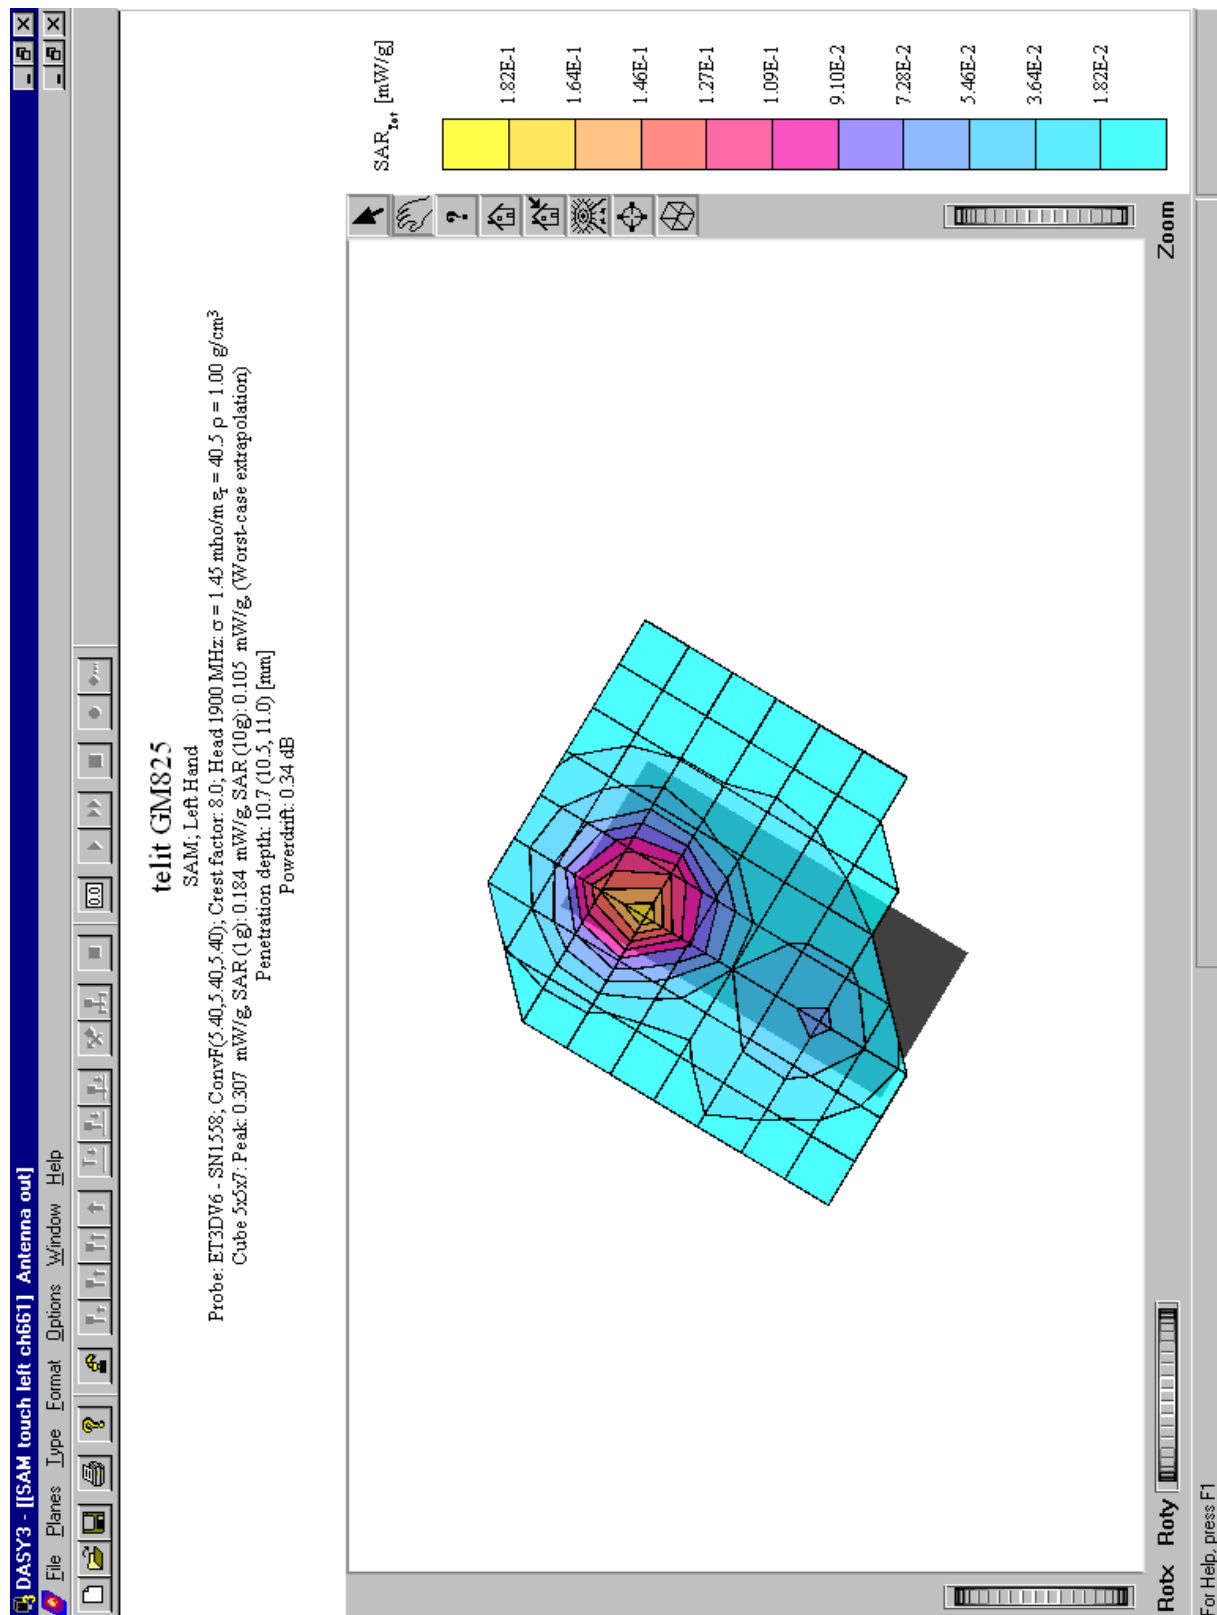
Appendix 2: Measurement results (printout from DASYTM)

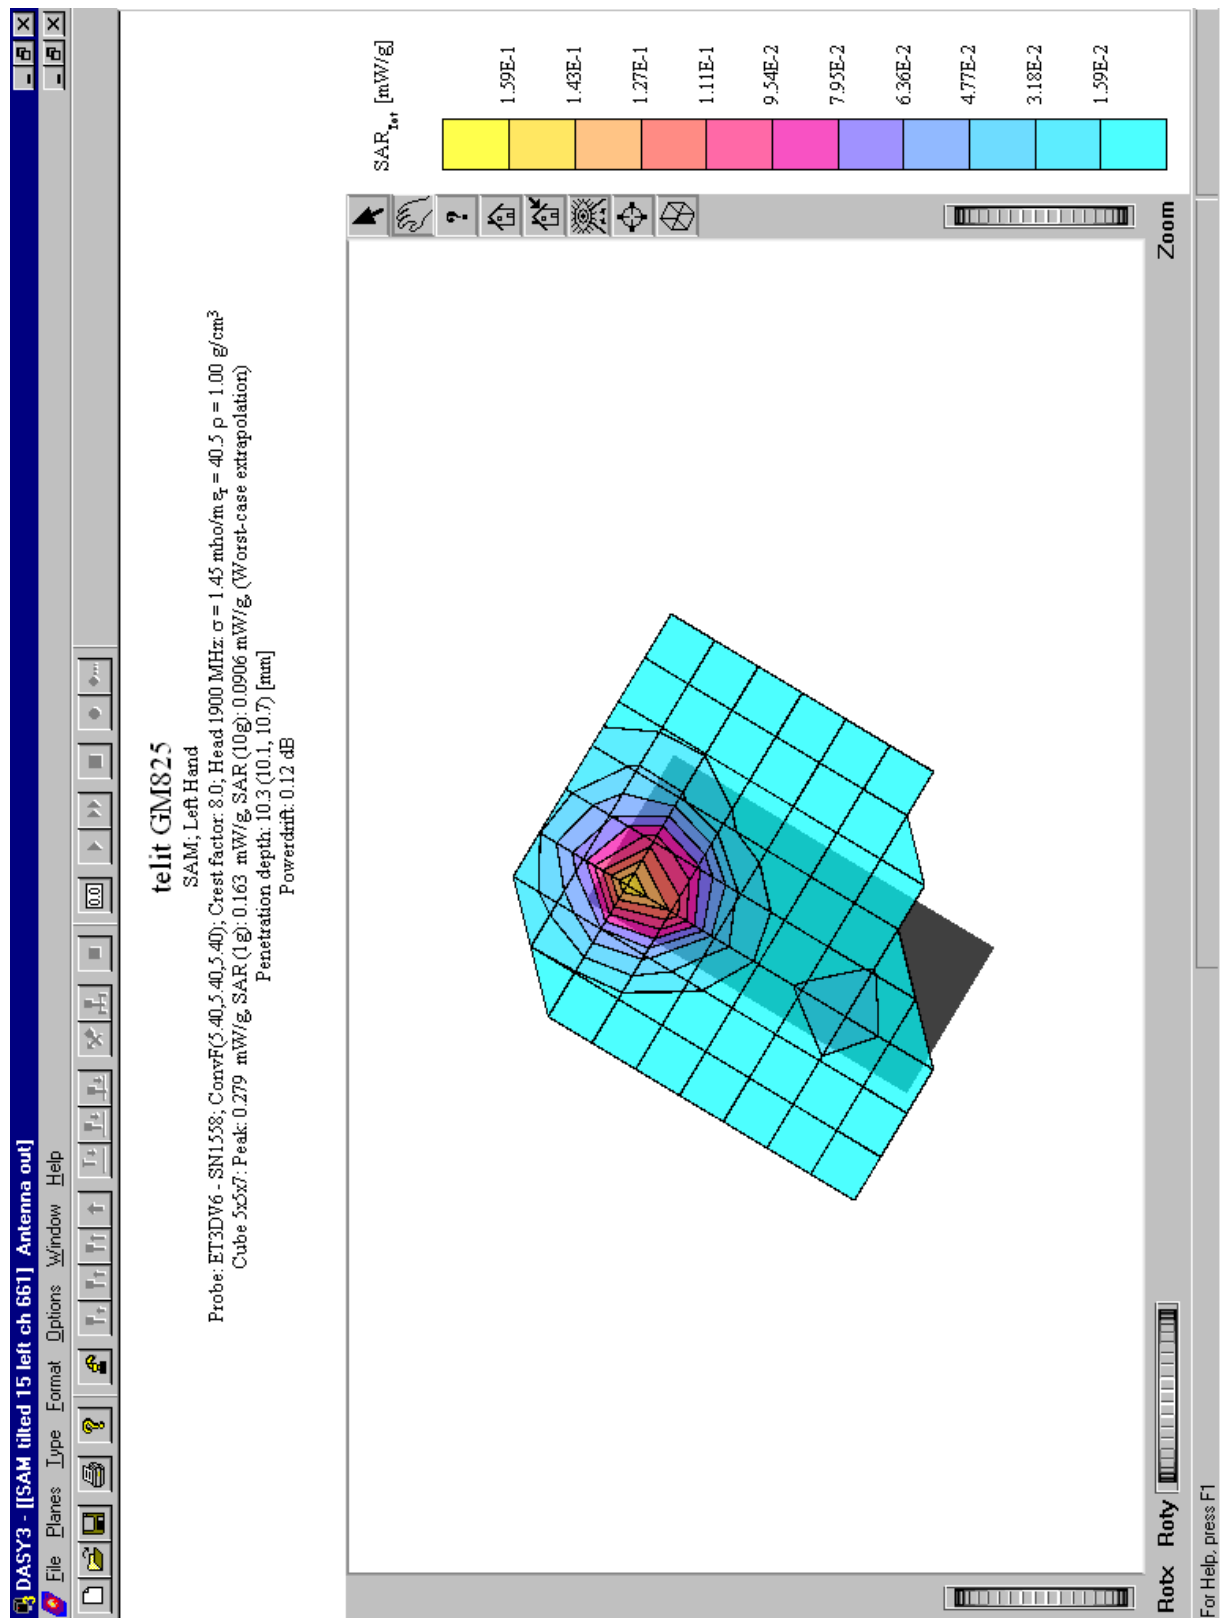

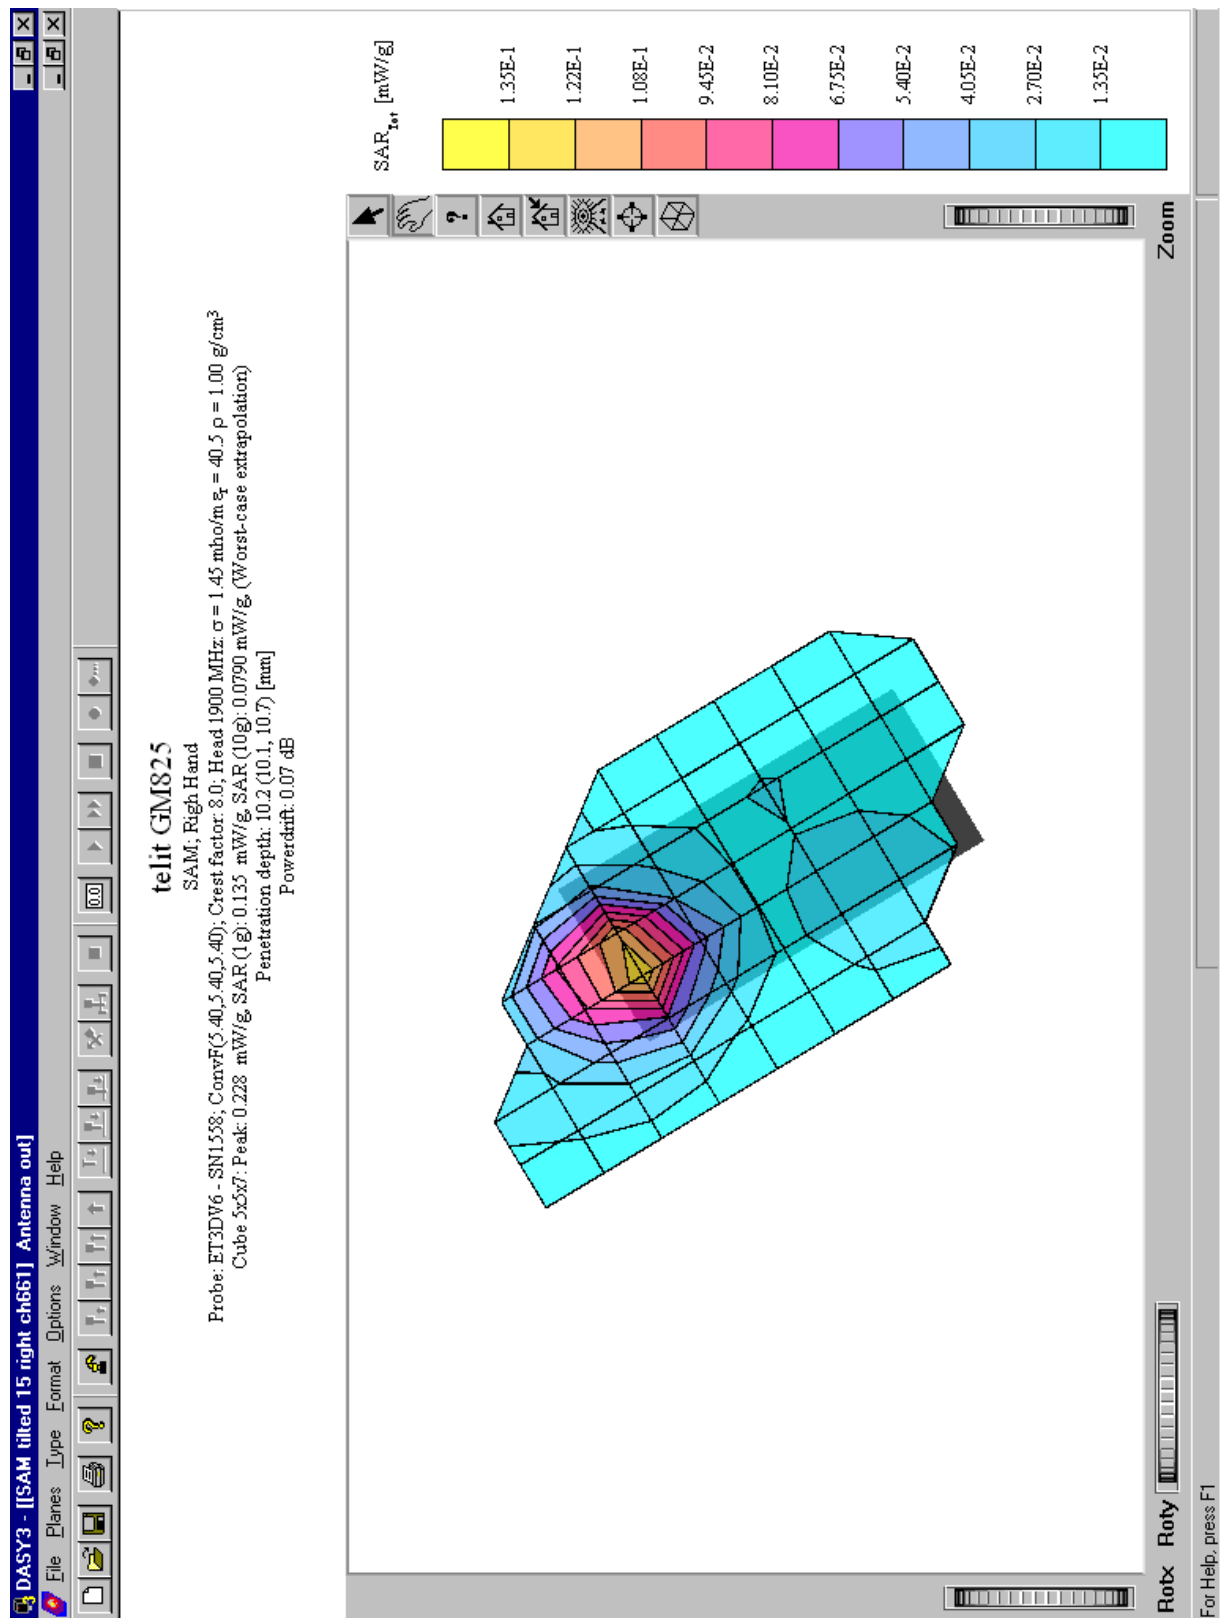

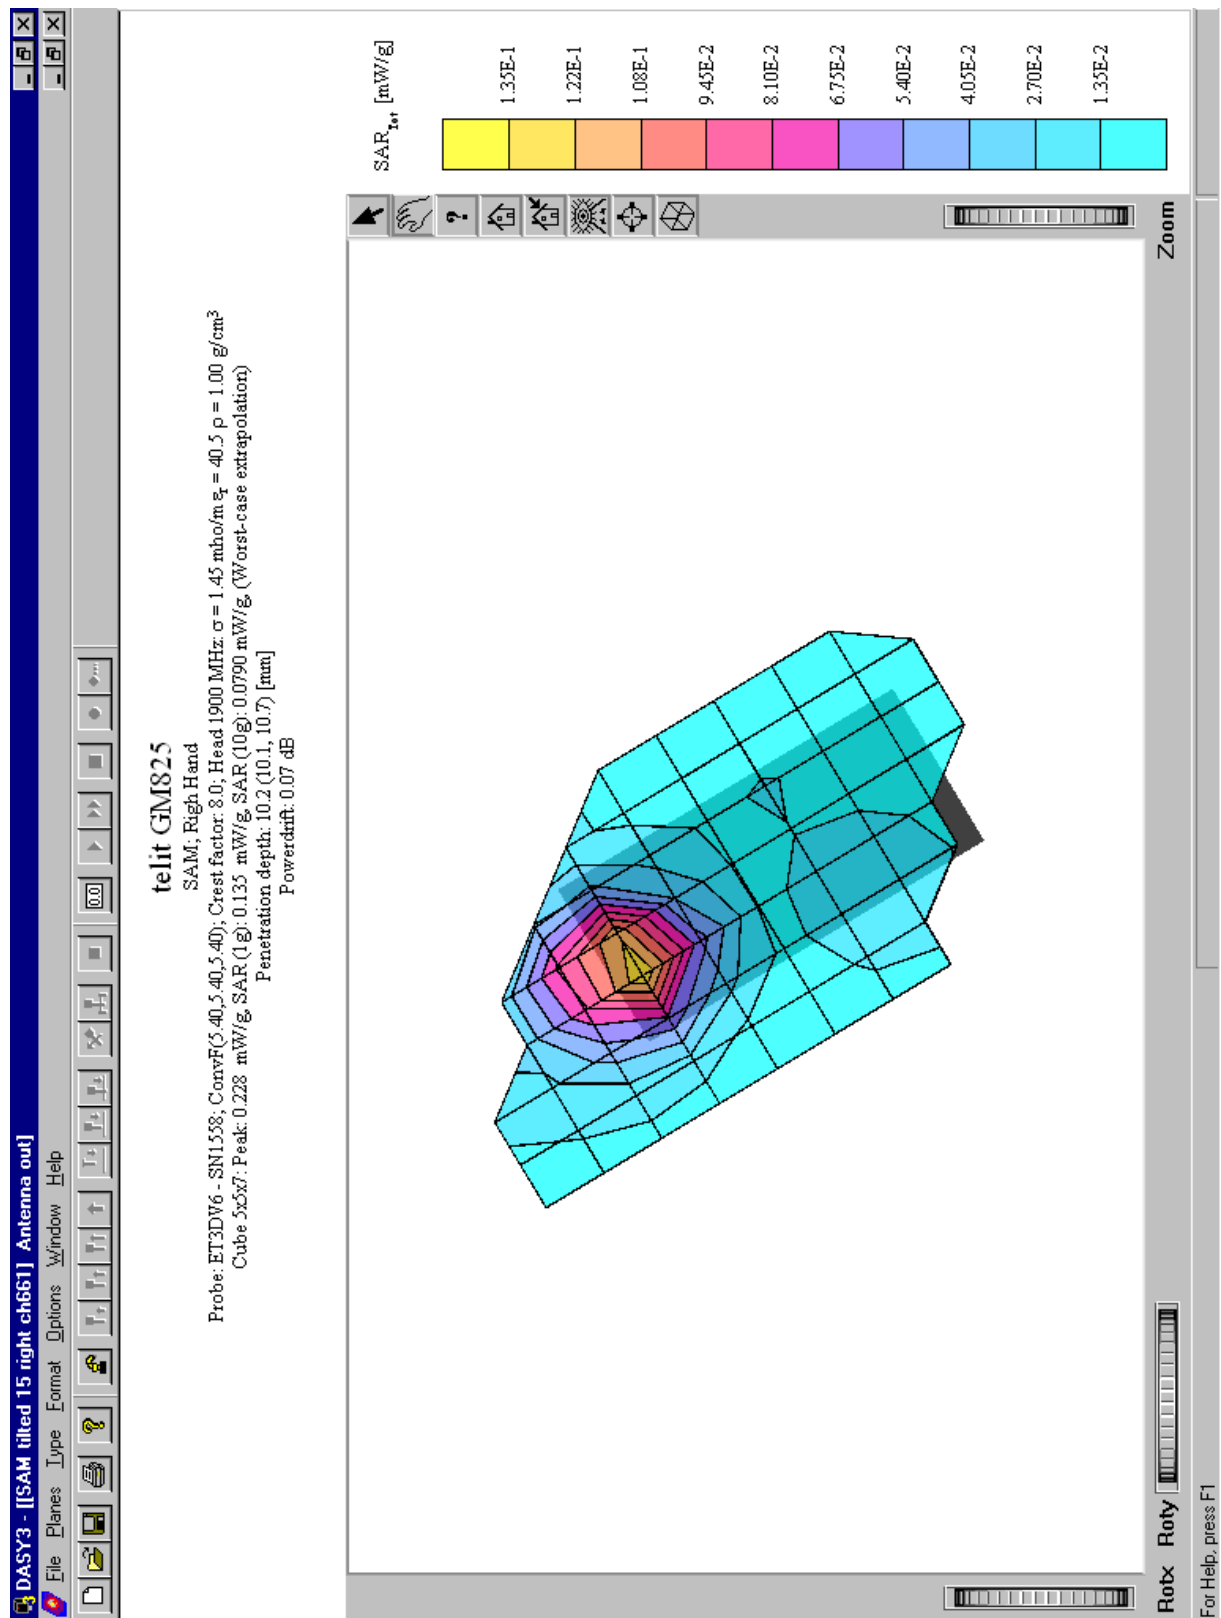

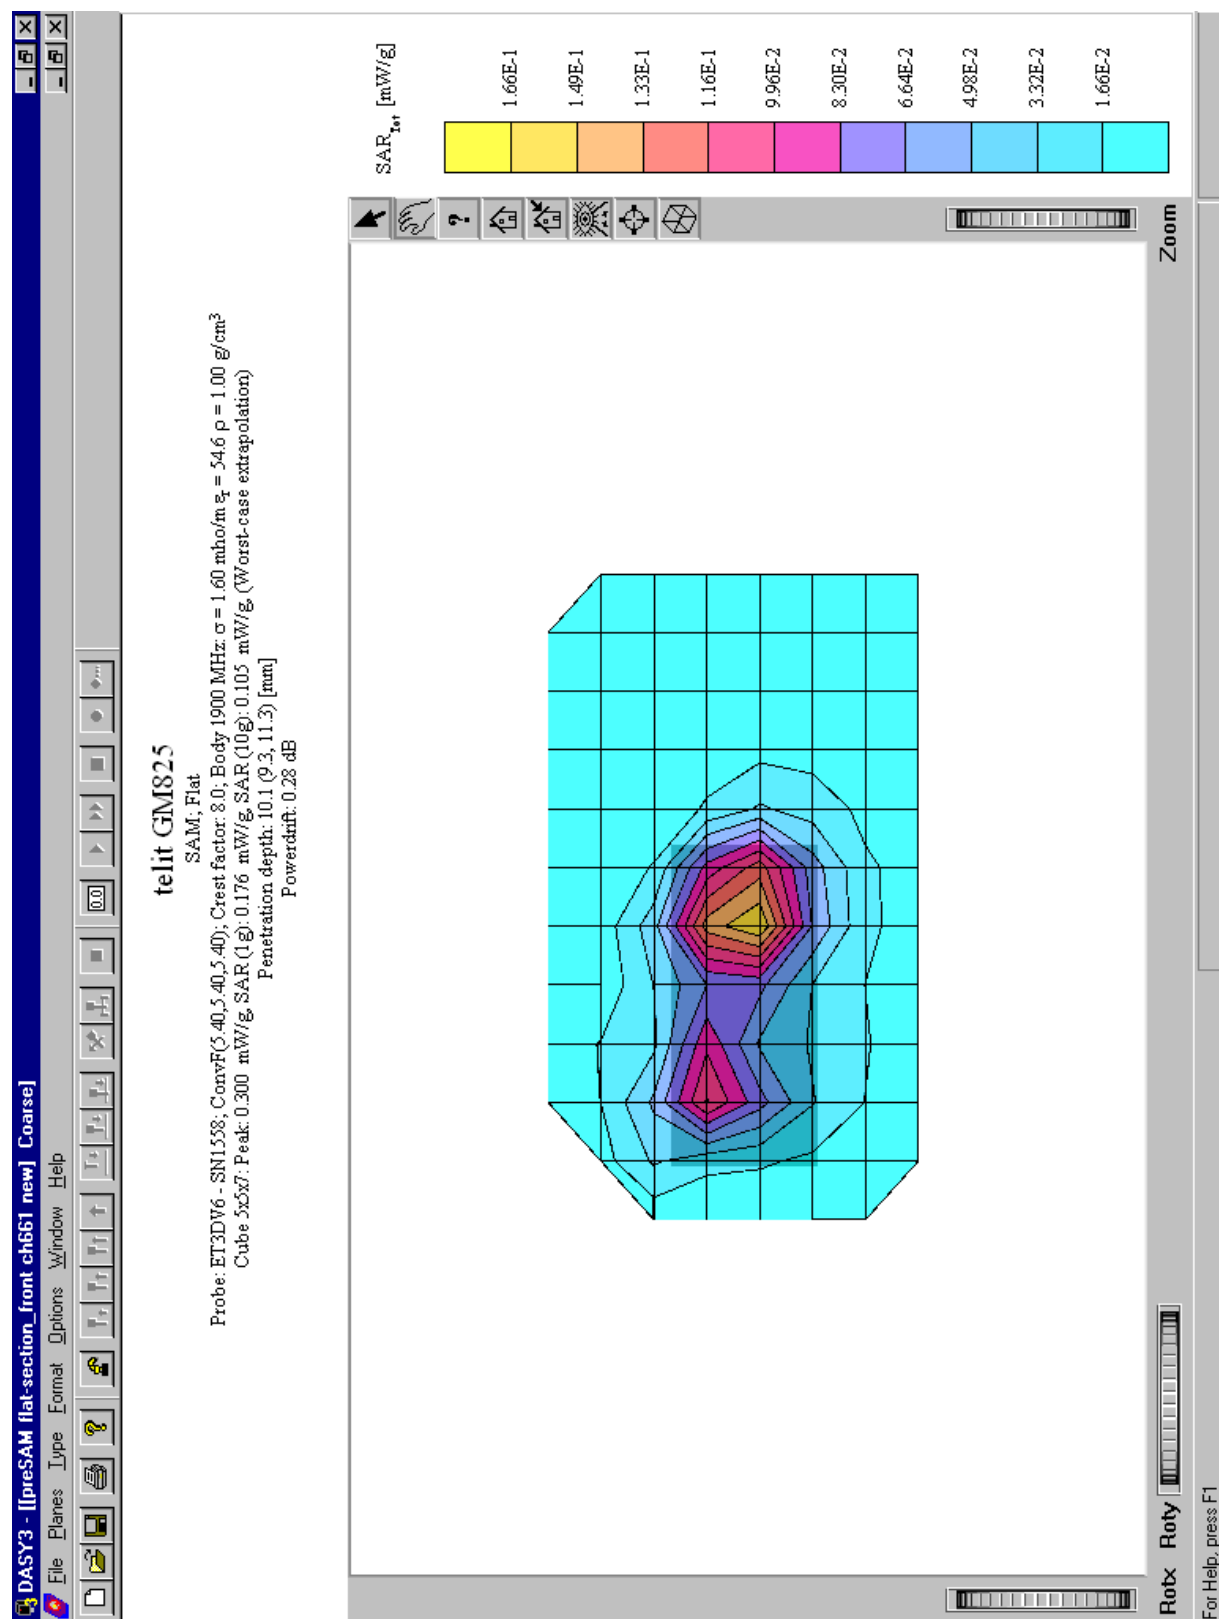

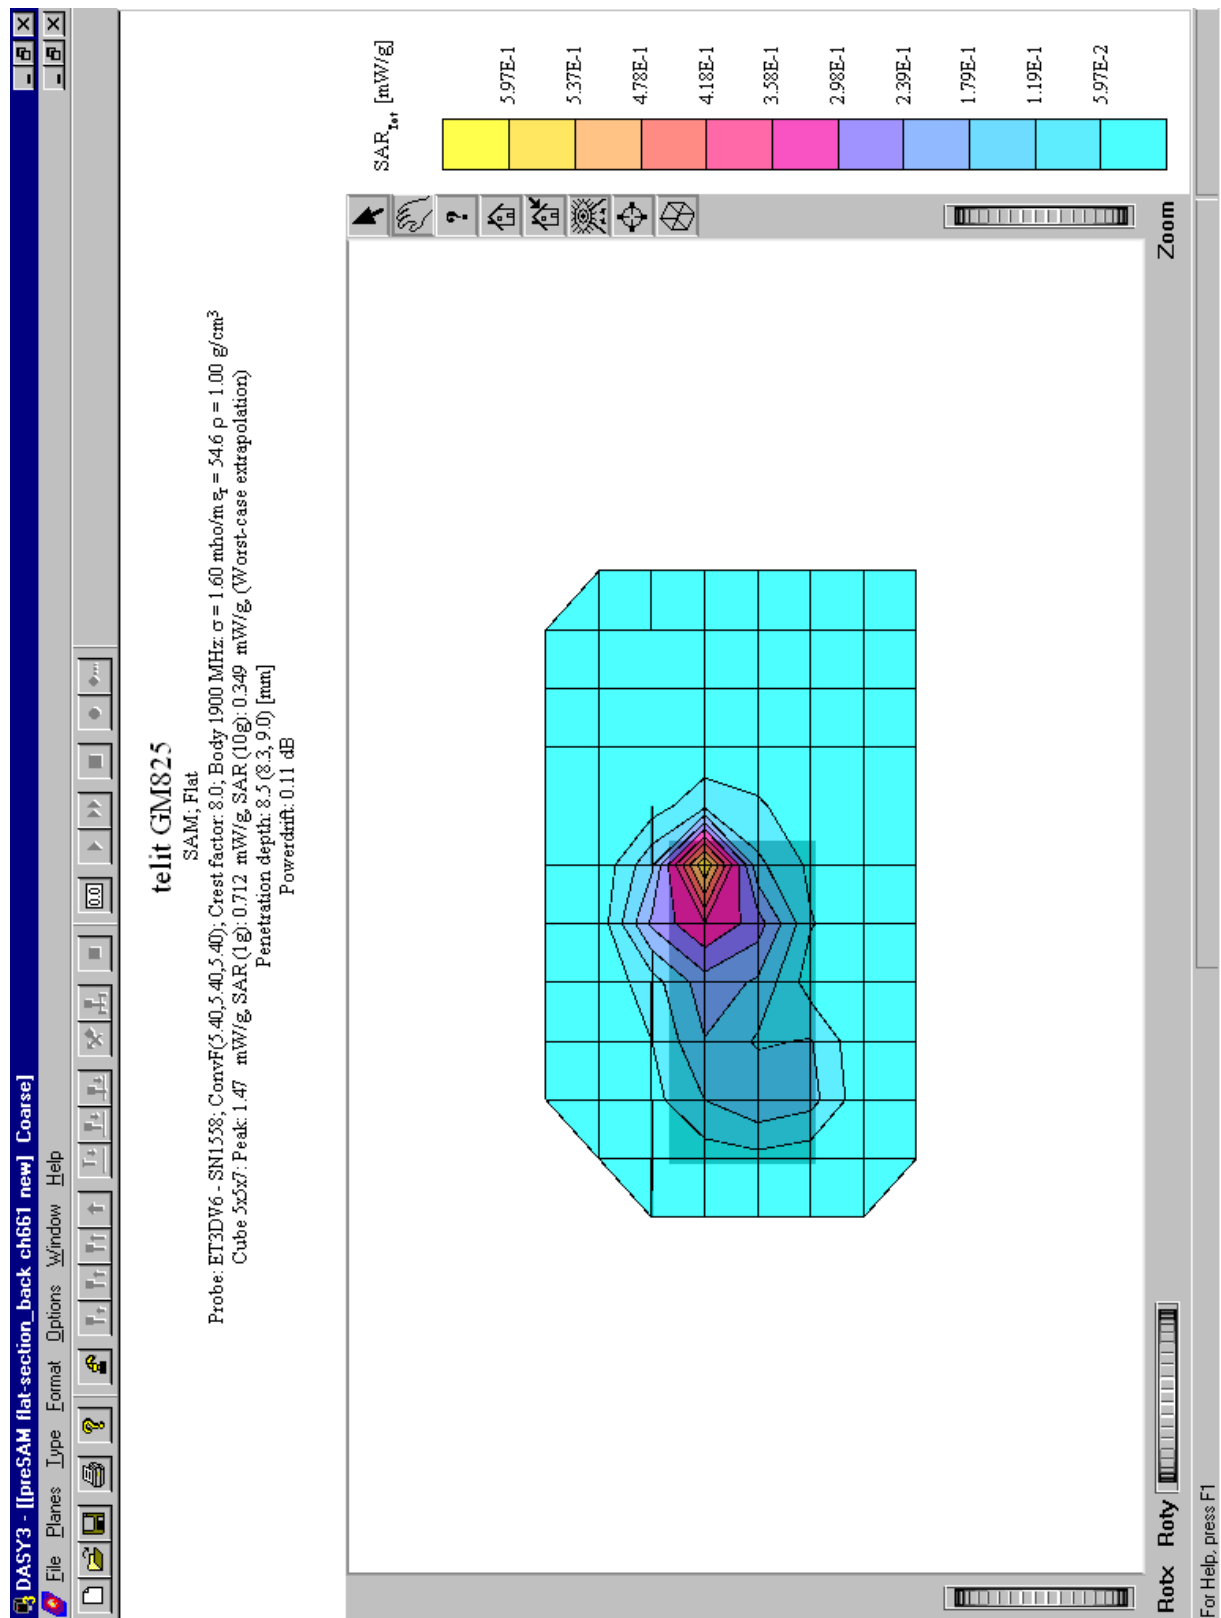

Appendix 3: Photo documentation



Photo 1: Measurement System DASY 3



Photo 2: Position tilted 15° (head SAR measurement)



Photo 3: Position cheek-touch (head SAR measurement)

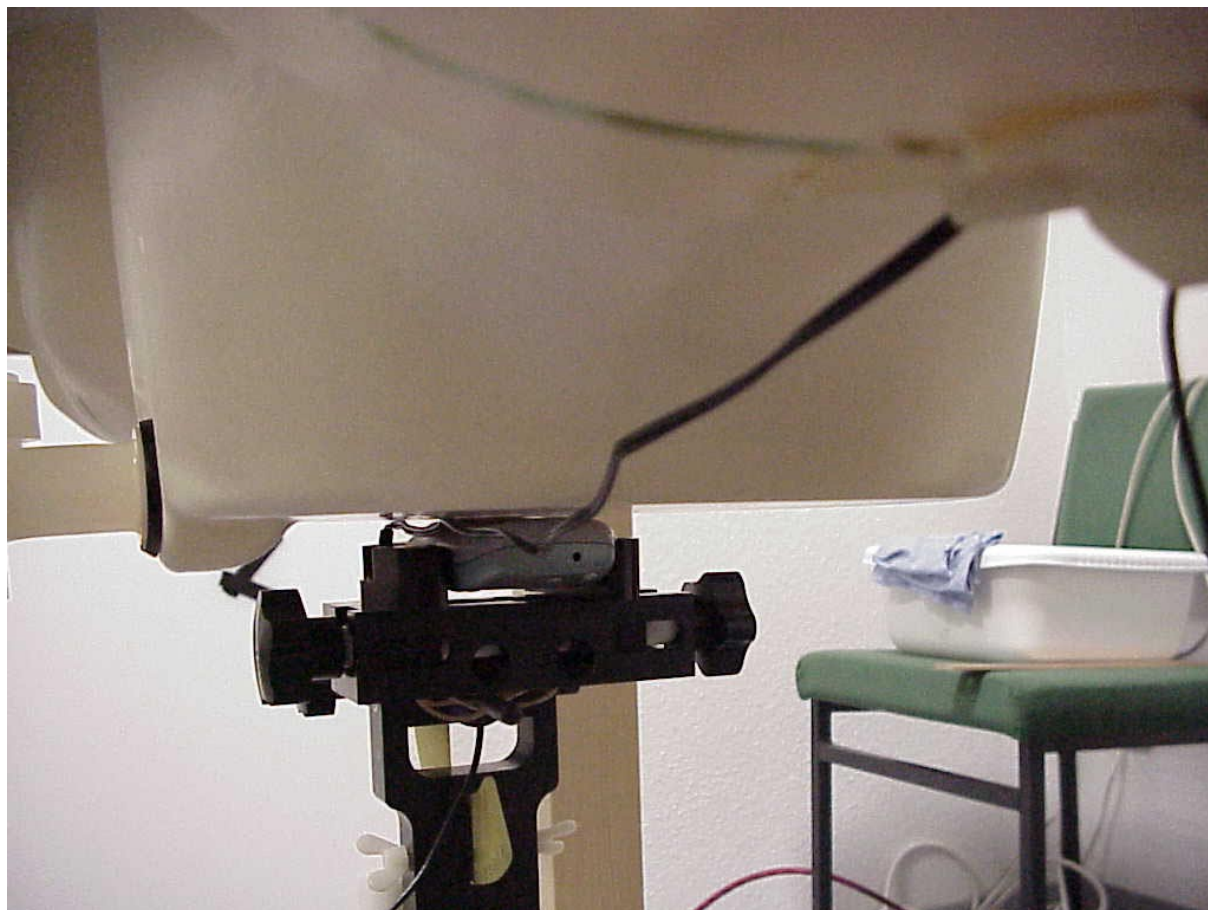


Photo 4: Body measurement (flat phantom)



Photo 5: EUT front side

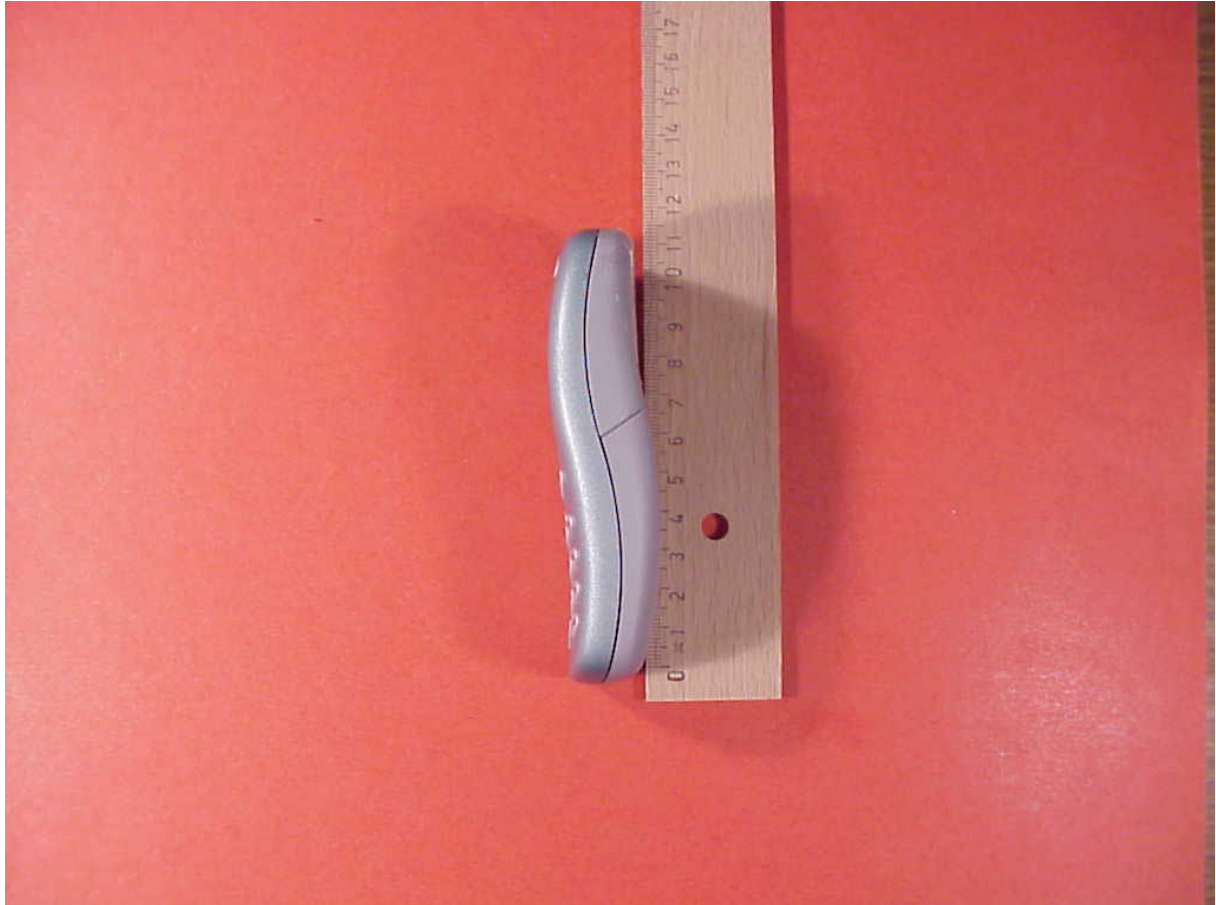


Photo 6: EUT right side



Photo 7: EUT rear side



Photo 8: battery



Photo 9: EUT front side with earpiece

Appendix 4: Calibration parameters of E-field probe

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1558

Place of Calibration:

Zurich

Date of Calibration:

Feb. 20, 2001


Calibration Interval:

12 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:



ET3DV6 SN:1558

DASY3 - Parameters of Probe: ET3DV6 SN:1558**Sensitivity in Free Space**

NormX	1.48 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.35 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.40 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	100 mV
DCP Y	100 mV
DCP Z	100 mV

Sensitivity in Tissue Simulating Liquid

Head	450 MHz	$\epsilon_r = 43.5 \pm 5\%$	$\sigma = 0.87 \pm 10\% \text{ mho/m}$
ConvF X	7.12 extrapolated	Boundary effect:	
ConvF Y	7.12 extrapolated	Alpha	0.18
ConvF Z	7.12 extrapolated	Depth	3.71
Head	900 MHz	$\epsilon_r = 42 \pm 5\%$	$\sigma = 0.97 \pm 10\% \text{ mho/m}$
ConvF X	6.55 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	6.55 $\pm 7\%$ (k=2)	Alpha	0.27
ConvF Z	6.55 $\pm 7\%$ (k=2)	Depth	3.26
Head	1500 MHz	$\epsilon_r = 40.4 \pm 5\%$	$\sigma = 1.23 \pm 10\% \text{ mho/m}$
ConvF X	5.78 interpolated	Boundary effect:	
ConvF Y	5.78 interpolated	Alpha	0.39
ConvF Z	5.78 interpolated	Depth	2.65
Head	1800 MHz	$\epsilon_r = 40 \pm 5\%$	$\sigma = 1.40 \pm 10\% \text{ mho/m}$
ConvF X	5.40 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	5.40 $\pm 7\%$ (k=2)	Alpha	0.45
ConvF Z	5.40 $\pm 7\%$ (k=2)	Depth	2.35

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.9 $\pm$ 0.2	mm