

TEST REPORT

According to : FCC 47CFR part 15 subpart C § 15.247

Test Report No. : CTK-2013-01652
Date of Issue : October 26, 2013
FCC ID : ORI-ZBNODE
Model/Type No. : K-LCS [Node]
Kind of Product : ZB Node
Applicant : KMW INC.
Applicant Address : 183-6 Youngchun-ro, Dongtan-myun, Hwasung-si, Kyungki-do, Republic of Korea
Manufacturer : KMW INC.
Manufacturer Address : 183-6 Youngchun-ro, Dongtan-myun, Hwasung-si, Kyungki-do, Republic of Korea
Contact Person : Sung Seok / Principal Research Engineer
Telephone : +82-31-370-8621
Received Date : August 21, 2013
Test period : Start : September 7, 2013 End : October 26, 2013
Test Results : In Compliance Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by



Young-taek Lee
Test Engineer
Date: October 26, 2013

Reviewed by



Young-Joon, Park
Technical Manager
Date: October 26, 2013



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
October 26, 2013	Issued (CTK-2013-01652)	All
December 27, 2013	Add items to Duty Cycle	Page 5

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency	4
1.2 Duty Cycle	5
1.3 Model Differences	5
1.4 Device Modifications	5
1.5 Peripheral Devices	5
1.6 Calibration Details of Equipment Used for Measurement	6
1.7 Test Facility	6
1.8 Laboratory Accreditations and Listings	6
2.0 Summary of tests	7
2.1 Technical Characteristic Test	8
2.1.1 6dB Bandwidth	8
2.1.2 Maximum peak Conducted Output Power	11
2.1.3 Power Spectral Density	14
2.1.4 Band - edge	17
2.1.5 Field Strength of Emissions	22
2.1.6 AC Conducted Emissions	31
APPENDIX A – Test Equipment Used For Tests	34



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

1.0 General Product Description


Equipment model name : K-LCS [Node]
Serial number : Prototype
EUT condition : Pre-production, not damaged
Antenna type : Planar Inverted F antenna Gain 2.59 dBi
Frequency Range : 2405 MHz – 2480 MHz (DSSS)
RF output power : 6.25 dBm Peak Conducted
Number of channels : 16
Type of Modulation : OQPSK
Rated Channel spacing : 5 MHz
Power Source : DC 15 V

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2405	2445	2480

1.2 Duty Cycle

Duty Cycle	100 %
-------------------	-------

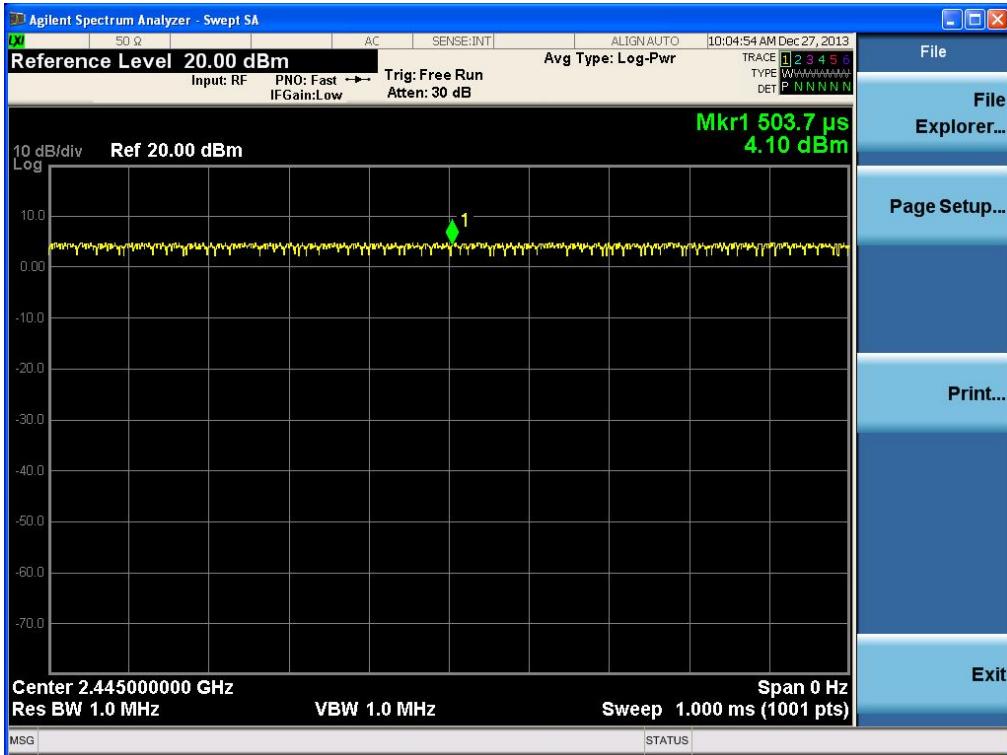

1.3 Model Differences

Not applicable

1.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.5 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	TOSHIBA CORPORATION	PSL48K-00L00K	Z7037782R
AC/DC ADAPTER	TOSHIBA CORPORATION	ADP-75SB	708W15Y01MK

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site	 C-986, T-1843 R-3627, G-387
KOREA	KCC	EMI (3 m & 10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Maximum Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	NA

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in 558074 D01 DTS Meas Guidance.



CTK Co., Ltd.

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 300 kHz (VBW \geq 3 x RBW)

Sweep = auto

Trace = Max hold

Detector function = peak

Measurement Data:

Test mode : Continuous modulated carrier

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2405	11	1.519	Complies
2445	19	1.519	Complies
2480	26	1.526	Complies

Minimum Standard:

6 dB Bandwidth > 500kHz


See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

CH 11 (2405 MHz)

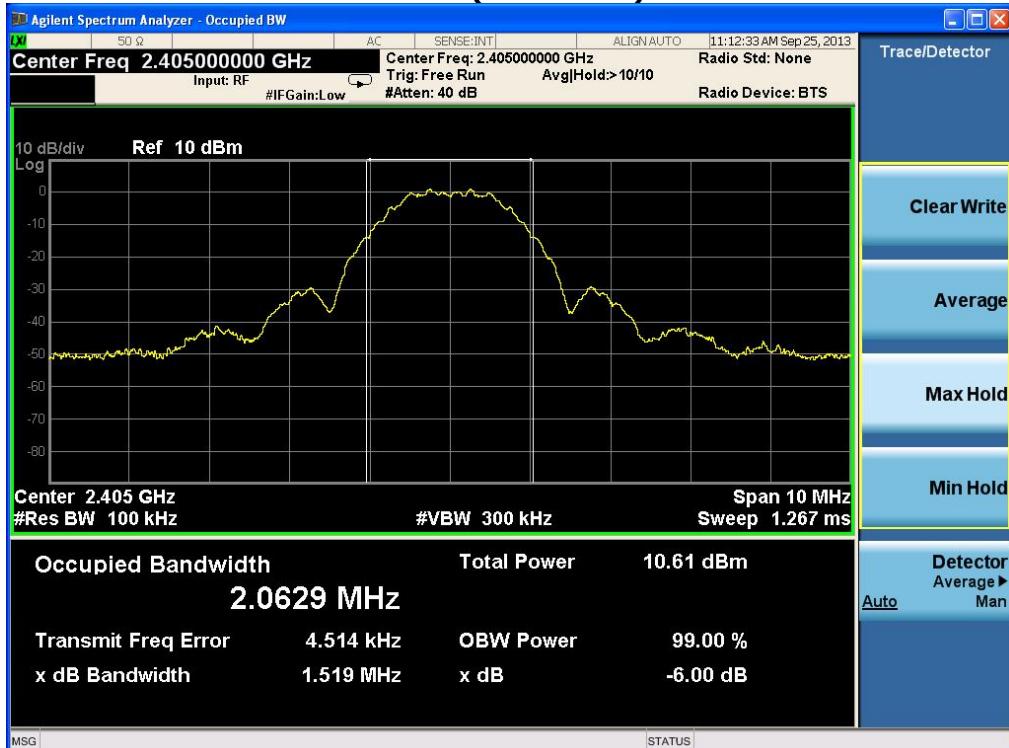

CH 19 (2445 MHz)

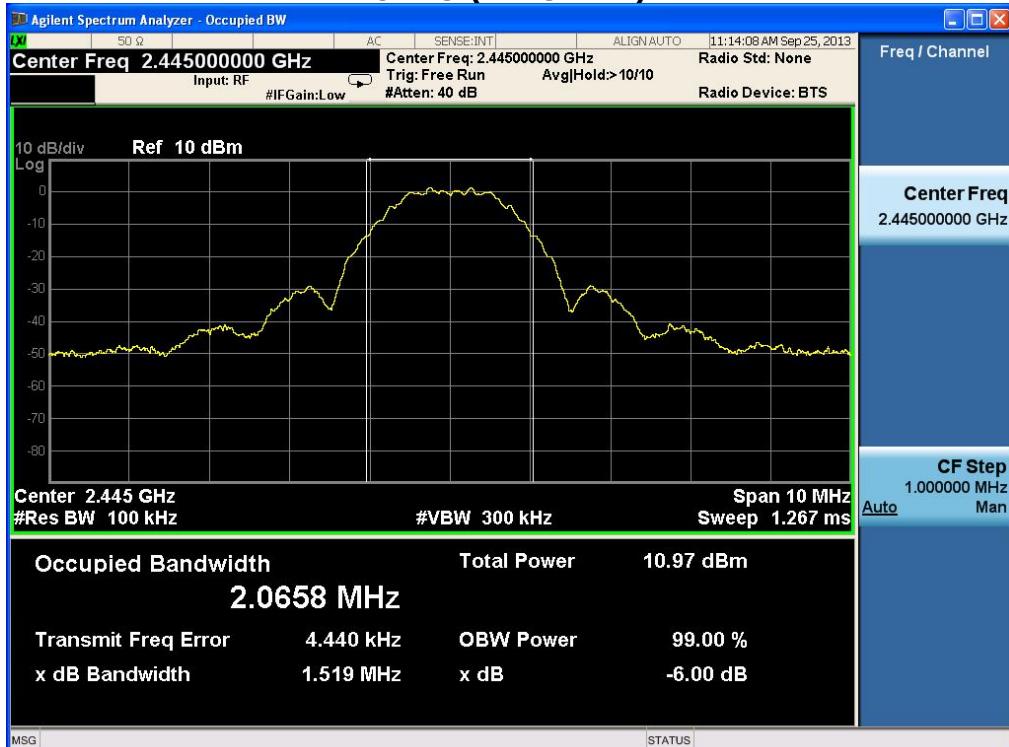



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

CH 26 (2480 MHz)



2.1.2 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

Maximum Peak Output Power from the EUT were measured according to the dictates Integrated band power measurement procedure in section 9.1.2 of KDB 558074.

This procedure shall be used when the maximum available RBW of measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1 MHz
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth
- d) Sweep time = auto couple
- e) Detector = peak
- e) Trace mode= max hold
- f) Allow trace to fully stabilize.
- g) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Limit

< 1 W (30 dBm)

Test Results

Test mode : Continuous modulated carrier

Frequency (MHz)	Channel No.	Reading power(dBm)	Cable loss (dB)	Test results	
				Peak output power (dBm)	Result
2405	11	5.62	0.63	6.25	Complies
2445	19	5.43	0.66	6.09	Complies
2480	26	5.54	0.68	6.22	Complies

See next pages for actual measured spectrum plots.

CH 11 (2405 MHz)



CH 19 (2445 MHz)



CH 26 (2480 MHz)



2.1.3 Power Spectral Density

Procedure:

Power Spectral Density from the EUT were measured according to the dictates PKPSD measurement procedure in section 10.2 of KDB 558074.

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center freqeucy.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- d) Set the VBW $\geq 3 \times \text{RBW}$
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceed limit, reduce RBW(no less than 3 kHz) and repeat.

Test mode : Continuous modulated carrier

Frequency (MHz)	Ch.	Test Results	
		dBm	Result
2405	11	2.033	Complies
2445	19	2.287	Complies
2480	26	2.386	Complies

Minimum Standard:

Power Spectral Density	< 8dBm @ 3 kHz BW
------------------------	-------------------

See next pages for actual measured spectrum plots.

Power Density Measurement

CH 11 (2405 MHz)



CH 19 (2445 MHz)





CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

CH 26 (2480 MHz)





CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.1.4 Band - edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 300 kHz (VBW \geq 3 x RBW)

Span = 50 MHz

Detector function = peak

Trace = Max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

Minimum Standard:	> 20 dBc
--------------------------	----------

See next pages for actual measured spectrum plots.

Band-edge Measurements



**Band – edge (at 20 dB blow) – Low channel(11)
Frequency Range = 30 MHz ~ 10th harmonic**



Band – edge (at 20 dB blow) – Mid channel(19)
Frequency Range = 30 MHz ~ 10th harmonic



Band – edge (at 20 dB blow) – High channel(26)
Frequency Range = 30 MHz ~ 10th harmonic



2.1.5 Field Strength of Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
- 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)
RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

VBW \geq RBW

Sweep = auto

Limit

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475- 156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



CTK Co., Ltd.

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 1 MHz for peak measurement and 10 Hz for average measurement.

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

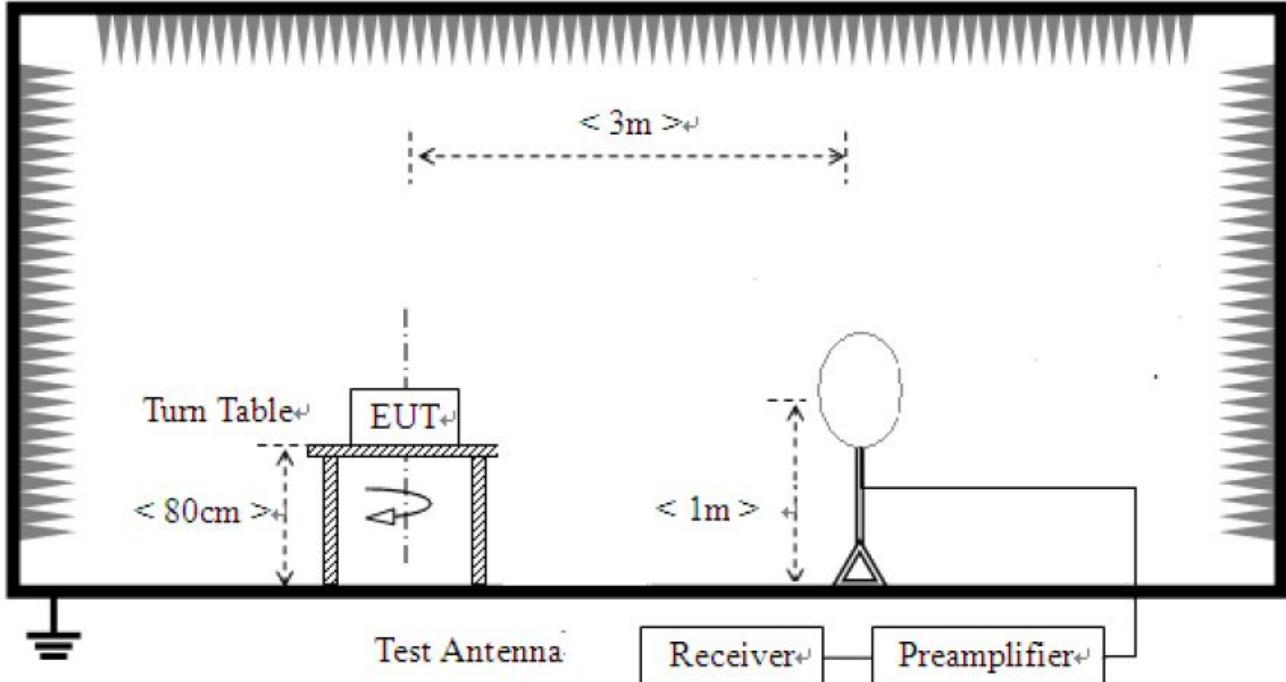

2) For field strength of emissions from 30 MHz to 1 GHz

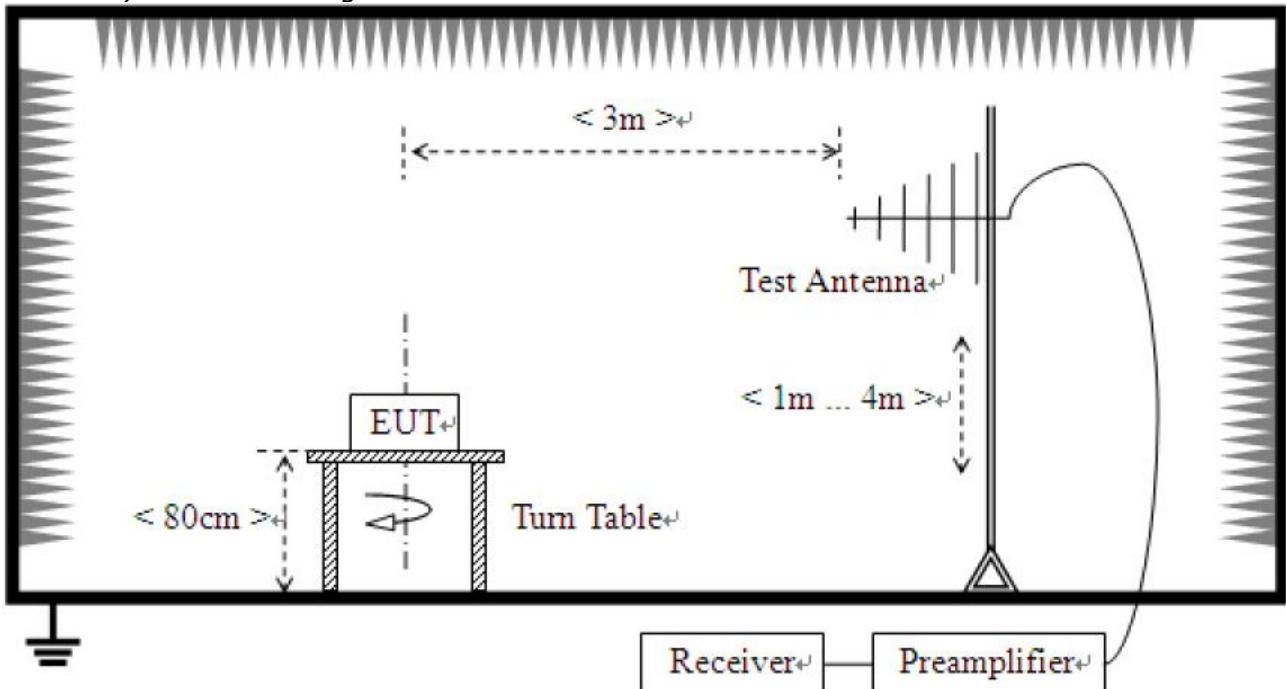

3) For field strength of emissions above 1 GHz

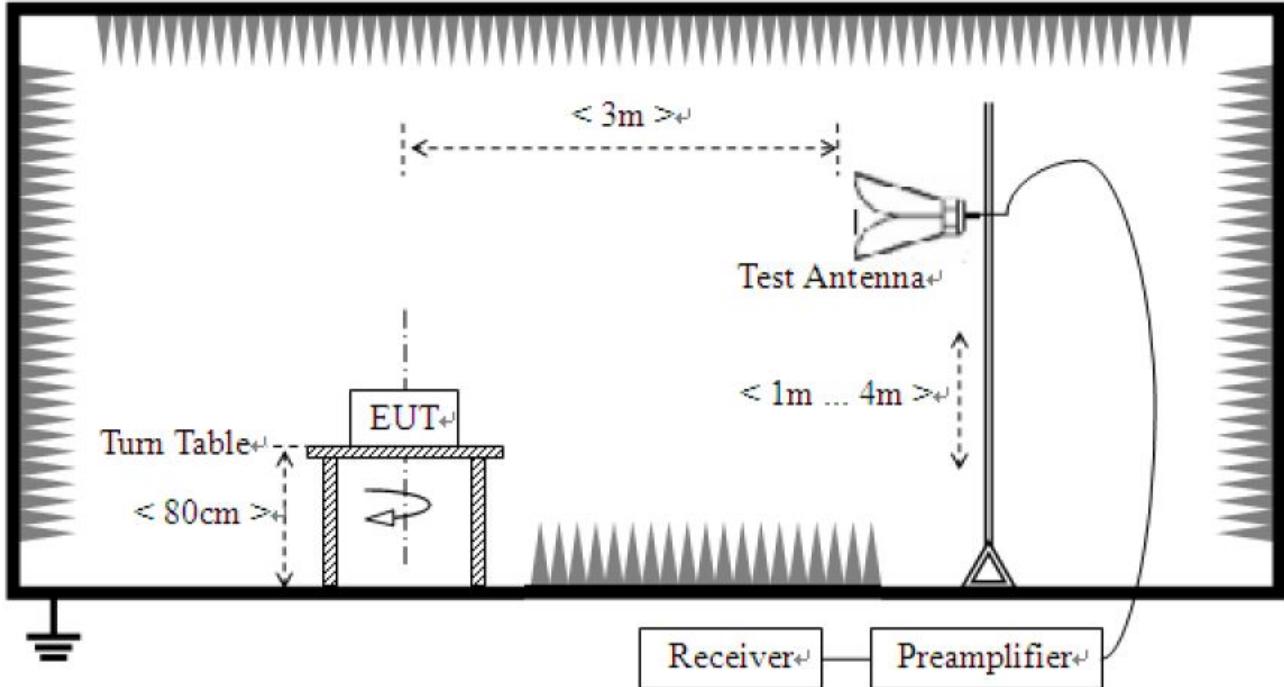

Test Results

1) 9 kHz to 30 MHz

EUT	ZB Node	Measurement Detail	
		Frequency Range	9 kHz – 30 MHz
Model	K-LCS [Node]	Detector function	Quasi-Peak
Test mode	Continuous modulated carrier		

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)

2) 30 MHz to 1 GHz

Test mode : Continuous modulated carrier, Channel 19


EUT	ZB Node	Measurement Detail	
Model	K-LCS [Node]	Frequency Range	Below 1000MHz
Mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
191.99	30.7	12.8	Quasi-peak

Test Data

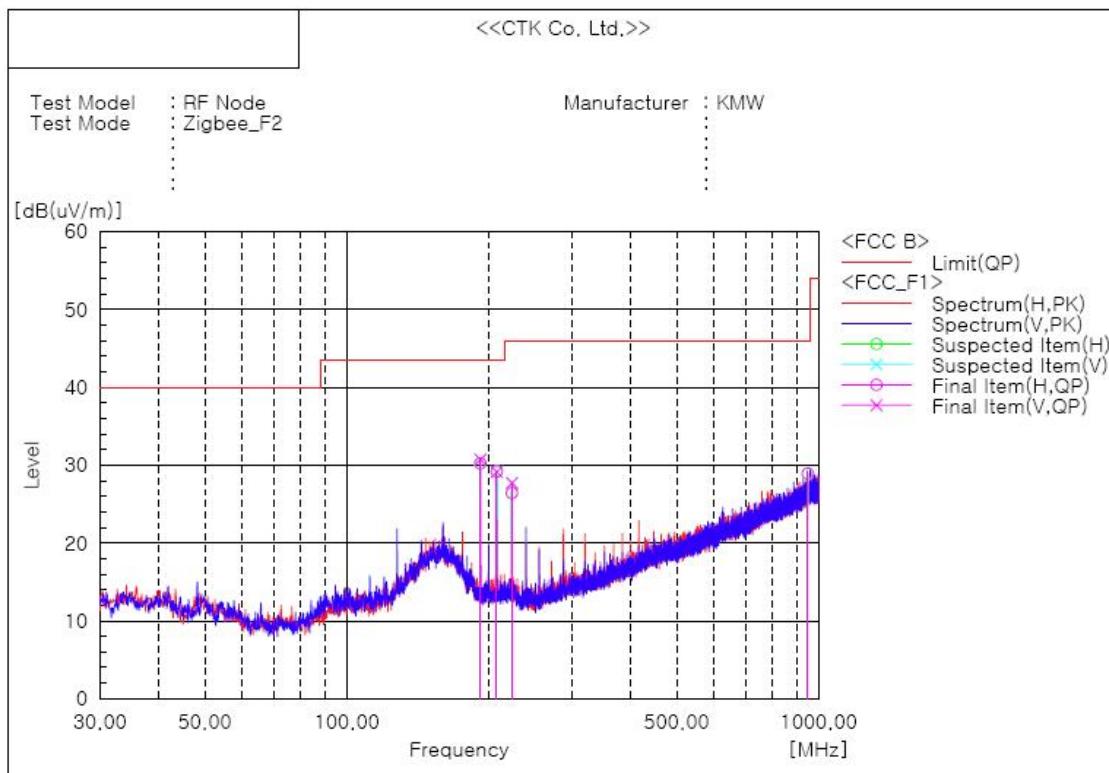

Final Result

No.	Frequency [MHz]	(P) QP [dB(uV)]	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	191.990	V	42.0	-11.3	30.7	43.5	12.8	100.0	0.0
2	191.990	H	41.5	-11.3	30.2	43.5	13.3	209.0	252.0
3	207.995	H	40.5	-11.3	29.2	43.5	14.3	100.0	129.0
4	207.995	V	40.4	-11.3	29.1	43.5	14.4	100.0	104.0
5	224.000	V	39.4	-11.7	27.7	46.0	18.3	100.0	0.0
6	224.000	H	38.1	-11.7	26.4	46.0	19.6	100.0	241.0
7	949.196	H	24.7	4.2	28.9	46.0	17.1	400.0	29.0



CTK Co., Ltd.

CTK Co., Ltd.
 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
 Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

3) above 1 GHz

EUT	ZB Node	Measurement Detail	
Model	K-LCS [Node]	Frequency Range	1-25GHz
Channel	Channel 11 (2405 MHz)	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
3365.55	44.9	9.1	Average

Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
3365.55	36.5 : 48.0	H	1.0	8.4	54.0 : 74.0	44.9 : 56.4	9.1 : 17.6
4810.94	31.2 : 42.0	H	2.0	12.7	54.0 : 74.0	43.9 : 54.7	10.1 : 19.3

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2390.00	27.9 : 42.8	H	1.0	5.1	54.0 : 74.0	33.0 : 47.9	21.0 : 26.1



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

EUT	ZB Node	Measurement Detail	
Model	K-LCS [Node]	Frequency Range	1-25GHz
Channel	Channel 19 (2445 MHz)	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4888.97	45.3	8.7	Average

Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor		Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable				
3421.36	31.3 : 43.9	H	1.0	8.5		54.0 : 74.0	39.8 : 52.4	14.2 : 21.6
4888.97	32.4 : 44.1	H	2.0	12.9		54.0 : 74.0	45.3 : 57.0	8.7 : 17.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

EUT	ZB Node	Measurement Detail	
Model	K-LCS [Node]	Frequency Range	1-25GHz
Channel	Channel 26 (2480 MHz)	Detector function	Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
2483.5	45.7	8.3	Average

Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
3470.64	30.4 : 42.6	H	1.0	8.8	54.0 : 74.0	39.2 : 51.4	14.8 : 22.6
4961.03	30.4 : 41.5	H	2.0	13.1	54.0 : 74.0	43.5 : 54.6	10.5 : 19.4

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	40.3 : 52.7	H	1.0	5.4	54.0 : 74.0	45.7 : 58.1	8.3 : 15.9



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.1.6 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:


Complies

Test mode : Channel 11(2405 MHz)

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
13.110	39.6	10.4	Average

Test Data

[L1]

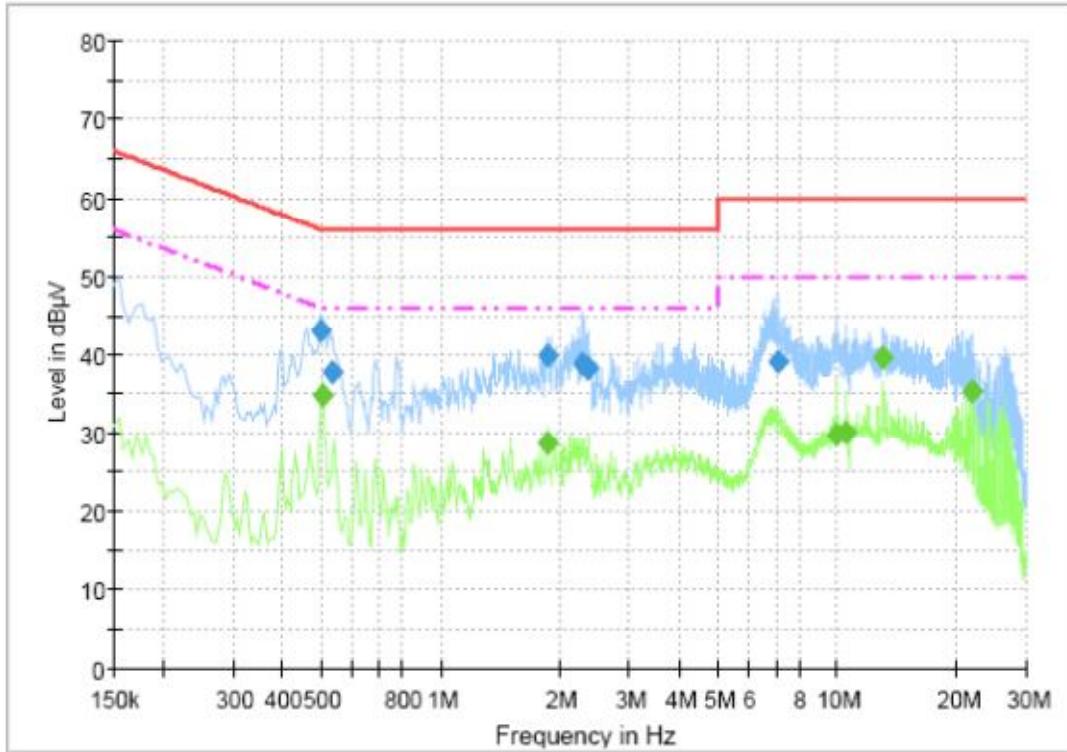


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.501000	43.1	1000.0	9.000	On	L1	10.2	12.9	56.0
0.537000	37.9	1000.0	9.000	On	L1	10.2	18.1	56.0
1.869000	39.9	1000.0	9.000	On	L1	9.8	16.1	56.0
2.292000	38.9	1000.0	9.000	On	L1	9.8	17.1	56.0
2.364000	38.3	1000.0	9.000	On	L1	9.8	17.7	56.0
7.125000	39.1	1000.0	9.000	On	L1	9.6	20.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.505500	34.9	1000.0	9.000	On	L1	10.2	11.1	46.0
1.864500	28.7	1000.0	9.000	On	L1	9.8	17.3	46.0
10.005000	29.9	1000.0	9.000	On	L1	9.7	20.1	50.0
10.558500	30.2	1000.0	9.000	On	L1	9.7	19.8	50.0
13.110000	39.6	1000.0	9.000	On	L1	9.8	10.4	50.0
21.781500	35.4	1000.0	9.000	On	L1	10.0	14.6	50.0

[NEUTRAL]

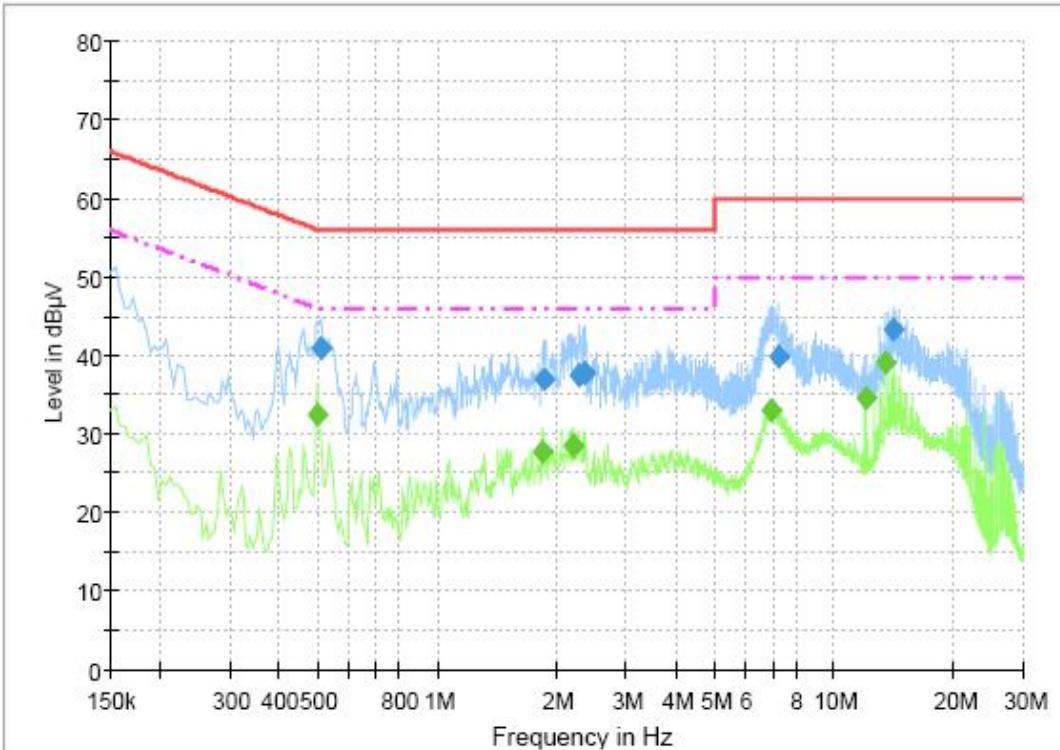

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.510000	41.0	1000.0	9.000	On	N	10.2	15.0	56.0
1.855500	37.0	1000.0	9.000	On	N	9.8	19.0	56.0
2.283000	37.4	1000.0	9.000	On	N	9.8	18.6	56.0
2.359500	37.8	1000.0	9.000	On	N	9.8	18.2	56.0
7.287000	39.7	1000.0	9.000	On	N	9.6	20.3	60.0
14.109000	43.2	1000.0	9.000	On	N	9.9	16.8	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.501000	32.5	1000.0	9.000	On	N	10.2	13.5	46.0
1.851000	27.8	1000.0	9.000	On	N	9.8	18.2	46.0
2.211000	28.5	1000.0	9.000	On	N	9.8	17.5	46.0
6.963000	33.1	1000.0	9.000	On	N	9.6	16.9	50.0
11.998500	34.7	1000.0	9.000	On	N	9.8	15.3	50.0
13.551000	39.2	1000.0	9.000	On	N	9.8	10.8	50.0



CTK Co., Ltd.

CTK Co., Ltd.
386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2012-11-08	2013-11-08
2	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2012-12-14	2013-12-14
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2012-12-14	2013-12-14
4	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2013-06-27	2014-06-27
5	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2012-06-11	2014-06-11
6	Horn Antenna	ETS-Lindgren	3115	00078895	2013-02-28	2015-02-28
7	DOUBLE RIDGE HORN ANTENNA	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
8	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2012-06-06	2014-06-06
9	Attenuator	Rohde & Schwarz	DNF	272.4110.50	2012-11-09	2013-11-09
10	PREAMPLIFIER	Agilent	8449B	3008A02307	2012-11-09	2013-11-09
11	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-21	2014-03-21
12	LISN	Rohde & Schwarz	ENV216	101235	2013-08-02	2014-08-02
13	LISN	Rohde & Schwarz	ENV216	101236	2013-08-02	2014-08-02
14	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483-2375/2505-50/10EE	2	2013-09-09	2014-09-09
15	Signal Generator	Agilent	E4432B	US40054094	2012-11-08	2013-11-08
16	Signal Generator	HP	8341B	2819A01563	2012-11-08	2013-11-08
17	DC Power Supply	Topward	6303D	711196	2013-03-21	2014-03-21