



L. S. Compliance, Inc.
W66 N220 Commerce Court
Cedarburg, Wisconsin 53012

Phone: 414 - 375 - 4400 Fax: 414 - 375 - 4248

L. S. Compliance, Inc.

Compliance Testing of:

Hydro Electronic Devices

900 MHz remote transmitter

Prepared for:

Mr. Jim Kitzerow

Test Report Number: 90245

Date(s) of Testing:

September 30, October 4, 1999

All results of this report relate only to the items that were tested.

LSC- H.E.D. 90245



This report may not be reproduced, except in full, without written approval of L. S. Compliance, Inc.



Table of Contents

Section	Description	Page #
	Index	1
1.1	Description of Measurement Facilities	2
1.2	Signature Page	3
1.3	Summary of Test Report	4
1.4	Introduction	5
1.5	Purpose	5
1.6	Radiated Emission Test Setup	5
1.7	Radiated Emission Test Procedure	6
1.8	Radiated Emission Test Equipment Utilized	7
1.9	Conducted Emission Measurements	7
1.10	Restricted Bands (Frequencies and Limits)	8
1.11	Photos taken during testing	9
1.12	Summary of Results and Conclusions	11
1.13	Test Equipment List	12
Appendic es		
A	Sample Calculations: i. Calculation of Radiated Emissions Limits	13 14
B	Data Charts	15
C	Graphs	18



Section 1.1

DESCRIPTION OF MEASUREMENT FACILITIES

Site on File with the FCC

ID Number: 31040/SIT

1300F2

Site on file with Industry Canada:

ID Number: IC 3088

“The site referenced above has been found to comply with the test site criteria found in ANSI C63.4-1992 and 47CFR Section 2.948.”



THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

L.S. COMPLIANCE, INC.
Cedarburg, WI

for technical competence in the field of

Electrical (EMC) Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 30th day of December, 1998.




Pete Blaue
President
For the Accreditation Council
Certificate Number 1255.01
Valid to January 31, 2001

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



Section 1.2

SIGNATURE PAGE

Tested By:

13 Dec
1999



Thomas T Lee, EMC Engineer

Date

Prepared By:

13 Dec
1999




Kenneth L. Boston, EMC Lab Manager

Date

Approved By:

13 Dec
1999



Kenneth L. Boston, EMC Lab Manager

Date

PE #31926

Registered Professional Engineer

(State of Wisconsin)



1.3 SUMMARY OF TEST REPORT

MANUFACTURER: Hydro Electronic devices
MODEL: T900
SERIAL: pre-production
DESCRIPTION: 900 MHz data transmitter
FREQUENCY RANGE: 903.37 to 921.37 MHz (8 channels)

The transmitter was found to “**meet**” the radiated emission specification of Title 47 CFR FCC, Part 15, subpart C. for an intentional radiator



1.4 INTRODUCTION

On September 30 and October 4 of 1999, a series of Radiated Emissions tests were performed on one sample model of the H. E. D. T900, a 900 MHz transmitter module designed to be used in a variety of remote controlled automotive accessories. These tests were performed using the test procedures outlined in ANSI C63.4-1992 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.249 for a low power transmitter. These tests were performed by Thomas T Lee of L. S. Compliance, Inc.

1.5 PURPOSE

The above mentioned tests were performed in order to determine the compliance of the T900 with limits contained in various provisions of Title 47 CFR, FCC Part 15, including:

15.109	15.209
15.205	15.249

All radiated emissions tests were performed to measure the emissions in the frequency bands described by the above sections, and to determine whether said emissions are below the limits established by the above sections. These tests were performed in accordance with the procedure described in the American National Standard for methods of measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-1992). Another document used as reference for the EMI receiver specification was the International Special Committee on Radio Interference (CISPR) number 16-1 (1993).

1.6 RADIATED EMISSIONS TEST SETUP

The test sample was operated within the 3 meter Semi-Anechoic, FCC listed chamber located at L.S. Compliance in Cedarburg, WI. The sample was placed on an 80cm high wooden pedestal, which was centered on the flush-mounted 2m diameter metal turntable. Each test sample was powered via a short cable to the battery operated interface board, operating from a 6-volt battery. The test sample was configured to run in a continuous transmit mode (either cw carrier or a repetitive data string) during the radiated emission measurements. The test sample was set to operate on one of three standard channels and was tested as an intentional radiator, in order to determine compliance within a frequency range of 902-928 MHz, as determined by FCC part 15.31m

Please refer to Section 1.11 for pictures of the test setup.



1.7 RADIATED EMISSION TEST PROCEDURE

The fundamental and spurious (harmonic) emissions of the transmitter were tested for compliance to Title 47 CFR, FCC Part 15.249 limits for low power devices. For the calculations used to determine the limits applicable for the test sample (at the respective operating frequencies) refer to Appendix A. These limits are expressed in decibels (dB) above 1 microvolt per meter ($\mu\text{V}/\text{m}$). The samples were tested from the lowest frequency generated by the transmitter (without going below 9 kHz) to the 10th harmonic of the fundamental frequency generated by the device. These frequencies, and their associated limits, are referenced in Appendix A. The sample was placed on a nonconductive (wooden) pedestal in the 3 Meter chamber and the antenna mast was placed such that the antenna was 3m from the test object. A biconical antenna was used to measure emissions from 30 to 200 MHz, a log periodic was used to measure emissions from 200 to 1000 MHz, and a double ridged waveguide horn was used to measure emissions above 1 GHz. The test object was programmed to operate in continuous transmit, and the resultant signals were maximized by rotating the turntable 360 degrees, and by raising and lowering the antenna between 1 and 4 meters. The test object was also given several different orientations to determine the maximum signal levels, using both horizontal and vertical antenna polarities.

Significant emissions, which were investigated, include the transmitter fundamental, and some harmonics. For the frequency range 30-9280 MHz, the samples were tested for transmitter emissions to CFR 47; 15.249. Emissions in the frequency range of 5 to 9.28 GHZ were measured at a distance of 1 meter, to enable sufficient dynamic range with the test equipment used.



1.8 TEST EQUIPMENT UTILIZED FOR RADIATED EMISSIONS TEST

A list of the test equipment and antennas used for the tests can be found in Section 1.13, which includes the calibration information as well as the equipment description. All equipment is calibrated and used according to the user manuals supplied by the manufacturer. All antenna calibrations were performed at a N.I.S.T traceable site, and the resultant correction factors were entered into the Hewlett Packard 8546A EMI receiver software database. The connecting cables used were also measured for loss using a calibrated signal generator and the HP 8546A EMI receiver. The resulting loss factors were entered into the HP 8546A database. This allowed for automatic changes in the antenna correction factor, as well as cable loss or other corrections, to be added to the EMI receiver display while taking measurements. Thus, the resulting data taken from the HP 8546A is an actual reading and can be entered into the database as a corrected meter reading. The HP 8546A EMI receiver was operated with a bandwidth of 120 kHz when receiving signals below 1 GHz, and with a bandwidth of 1 MHz when receiving signals above 1 GHz, in accordance with CISPR 16. Both the Average and Quasi-peak detector functions were used.

1.9 CONDUCTED EMISSION TEST

Due to the fact that this product operates on 6 volts DC as supplied by an auxiliary circuit, as opposed to using a power cord, it was not necessary to perform a test for Conducted Emissions.




Manufacturer: H. E. D. Inc
Model: T900
Serial Number(s): pre-production

1.10 - Restricted Bands affecting this product

Frequency (MHz)	Limit (μ V)	Limit (dB/ μ V/m)
960-1240	500	54.0
1300-1427	500	54.0
1435-1626.5	500	54.0
1645.5-1646.5	500	54.0
1660-1710	500	54.0
1718.8-1722.2	500	54.0
2200-2300	500	54.0
2310-2390	500	54.0
2483.5-2500	500	54.0
2655-2900	500	54.0
3260-3267	500	54.0
3332-3339	500	54.0
3345.8-3358	500	54.0
3600-4400	500	54.0
4500-5150	500	54.0
5350-5460	500	54.0
7250-7750	500	54.0
8025-8500	500	54.0
9000-9200	500	54.0

1.11 – Photos taken during testing

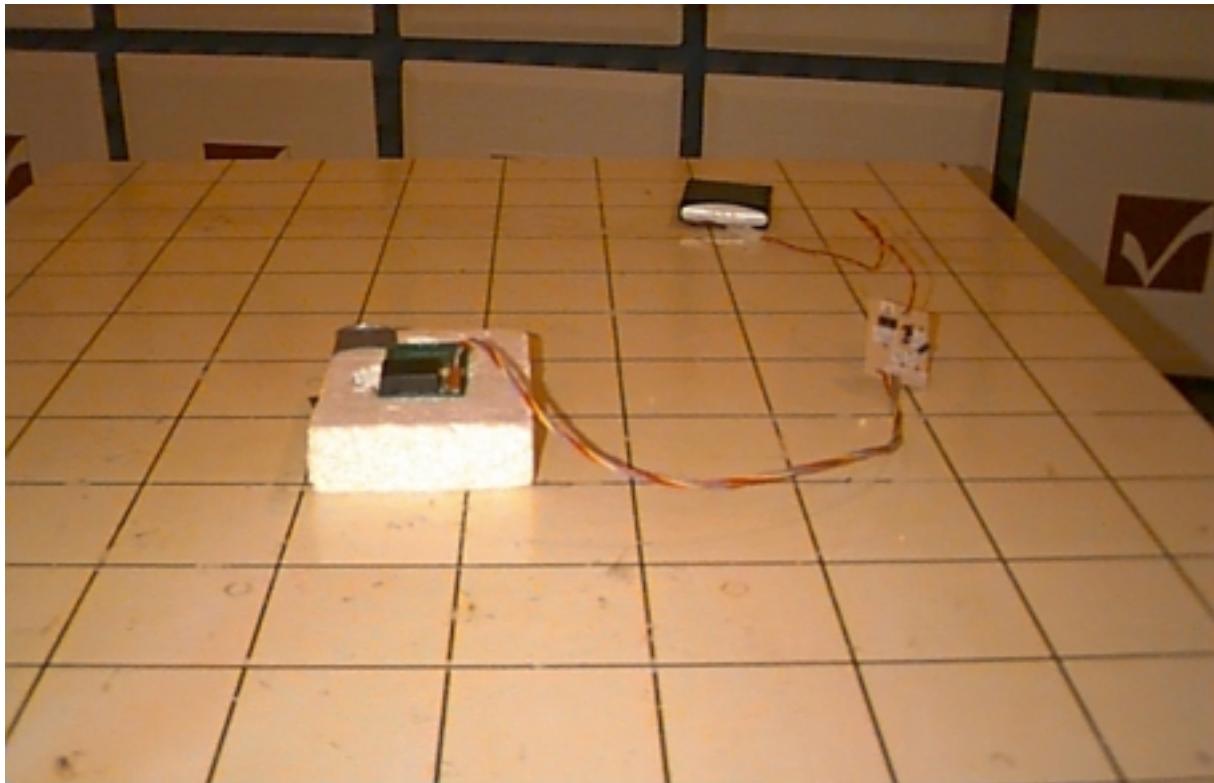

View of the T900 during the Radiated Emissions tests. PC board TX (green PCB) with dc supply/battery.



View of the T900 during the Radiated Emissions tests. This view shows the sample during the measurements above 5 GHz, while at the 1 meter range.



1.12 SUMMARY OF RESULTS AND CONCLUSIONS

Based on the procedures outlined in this report, and the test results included in appendices B and C, it can be determined that the does “**meet**” the emission requirements of Title 47 CFR, FCC Part 15 Subpart C for an intentional radiator. The level of the fundamental carrier is found to be only 3.1 dB below the limit at 903.4 MHz (channel 0), and the second harmonic only 1.8 dB or 1.9 dB below the limit (channel 4 and 7). As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

The enclosed test results pertain to the samples of the test item listed, and only for the tests performed on the data sheets. Any subsequent modification or changes to the test items could invalidate the data contained herein, and could therefore invalidate the findings of this report.



1.13 - Test Equipment

Asset #	Manufacturer	Model #	Serial#	Description	Due Date
AA960004	EMCO	3146	9512-4276	Log Periodic Antenna	3aug2000
AA960005	EMCO	3110B	9601/2280	Biconical Antenna	3aug2000
AA960007	EMCO	3115	99111-4198	Double Ridge Horn Antenna	1aug2000
EE960004	EMCO	2090	9607-1164	Mast/Ttable controller	I.O.
EE960003	HP	85460	3617A00320	EMI receiver Display section	23aug2000
EE960003	HP	85462	3205A00103	EMI receiver Preselector section	23aug2000
CC000221	HP	E4407b	Us39160256	26.5 GHz Spectrum Analyzer	16june2000
--	LSC	Cable	0011	3 meter Heliax	23feb2000
--	LSC	Cable	0038	1 meter RG214	30dec1999
--	LSC	Cable	0050	10 meter RG214	30dec1999



APPENDIX A:

SAMPLE CALCULATIONS



Manufacturer: H.E. D. inc.
Model: T900
Serial Number(s): pre-production

Calculation of Radiated Emissions limits for FCC Part 15.249 (902-928 MHz)

FIELD STRENGTH OF FUNDAMENTAL FREQUENCIES:

Limit of 50,000 uV/m; in dB; $20 \log(50,000) = 94$ dBuV/m

FIELD STRENGTH OF HARMONIC FREQUENCIES:

Limit of 500 uV/m; in dB; $20 \log(500) = 54$ dBuV/m

FIELD STRENGTH OF SPURIOUS/ FREQUENCIES:BY 15.249 (C)

Limit of -50 dBc of the fundamental limit; $94 - 50 + 44$ dBuV/
Except where the 15.209 limits will allow a higher limit to be used.(**)

Frequency (MHz)	limit (uV/m)	limit (dB uV/m)
902-928	50,000	94
f2,f3,f4....	500	54
Spurs; 30-88	159	44
Spurs; 88-216	159	44
Spurs; 216-960	500	46 (**)
Spurs; 960-9280	500	54 (**)



APPENDIX B:
DATA CHARTS



Measurement of Electromagnetic Radiated Emission within 3 Meter FCC Listed Chamber

Frequency Range inspected: 30 to 9280 MHz

Date of Test:	30 September, 4 October, 1999	Manufacturer:	H.E.D. Inc
Location:	L.S. Compliance, Inc. W66 N220 Commerce Court Cedarburg, WI 53012	Model No.:	T900
Specification s:	Title 47CFR, FCC Part 15.249	Serial No.:	Pre-production
Distance:	3 meters, 1 meter**	Configuration:	Continuous FSK transmit
Equipment:	HP 8546A EMI Receiver EMCO 3115 Double Ridged Waveguide EMCO 3146A Log Periodic	Detector(s) Used:	Quasi-peak, below 1 GHz Average, above 1 GHz

The following table depicts the level of significant fundamental and harmonic emissions found:

* Peak signal readings were found to be no more than 3.5 dB above the average readings, and within the peak emission limits.

Frequency (MHz)	Antenna Polarity	Height (meters)	Azimuth (0° - 360°)	Channel	EMI Meter Reading (dB μ V/m)	EMI Meter Reading (dB μ V/m)	15.249 Limit (dB μ V/m)	Margin (dB)
903.39	H	1.0	265	0	90.9		94.0	3.1
903.39	V	1.5	190	0	84.7		94.0	9.3
912.4	H	1.0	265	4	91.7		94.0	2.3
912.4	V	1.3	320	4	83.3		94.0	10.7
921.4	H	1.5	200	7	87.9		94.0	6.1
921.4	V	2.1	70	7	88.7		94.0	5.3
1806.7	H	1.4	170	0		47.4	54.0	6.6
2710.2	V	1.6	260	0		47.1	54.0	6.9
3613.4	H	1.5	70	0		45.0	54.0	9.0
4516.9	V	1.4	220	0		47.4	54.0	6.6
5420.0	V	1.0	135	0		51.7	63.5**	11.8
6324.0	H	1.0	45	0		50.7	63.5**	12.8
1824.8	V	1.1	200	4		52.2	54.0	1.8
2737.2	H	1.3	70	4		47.9	54.0	6.1
3649.6	H	1.5	67	4		44.0	54.0	10.0
4562.0	V	1.3	232	4		48.7	54.0	5.3
5474.0	V	1.0	245	4		51.5	63.5**	12.0
6387.0	V	1.0	225	4		50.9	63.5**	12.6
1842.8	V	1.0	152	7		52.1	54.0	1.9



FCC ID: ORR-T900


2764.2	H	1.0	44	7		50.0	54.0	4.0
3685.6	H	1.5	92	7		47.0	54.0	7.0
4607.0	V	1.6	38	7		50.4	54.0	3.6
5528.0	V	1.0	270	7		52.0	63.5**	11.5
6450.0	V	1.0	225	7		51.1	63.5**	12.4




APPENDIX C:

GRAPHS


Transmitter, emissions below 1 GHz, horizontal polarity, Channel 0

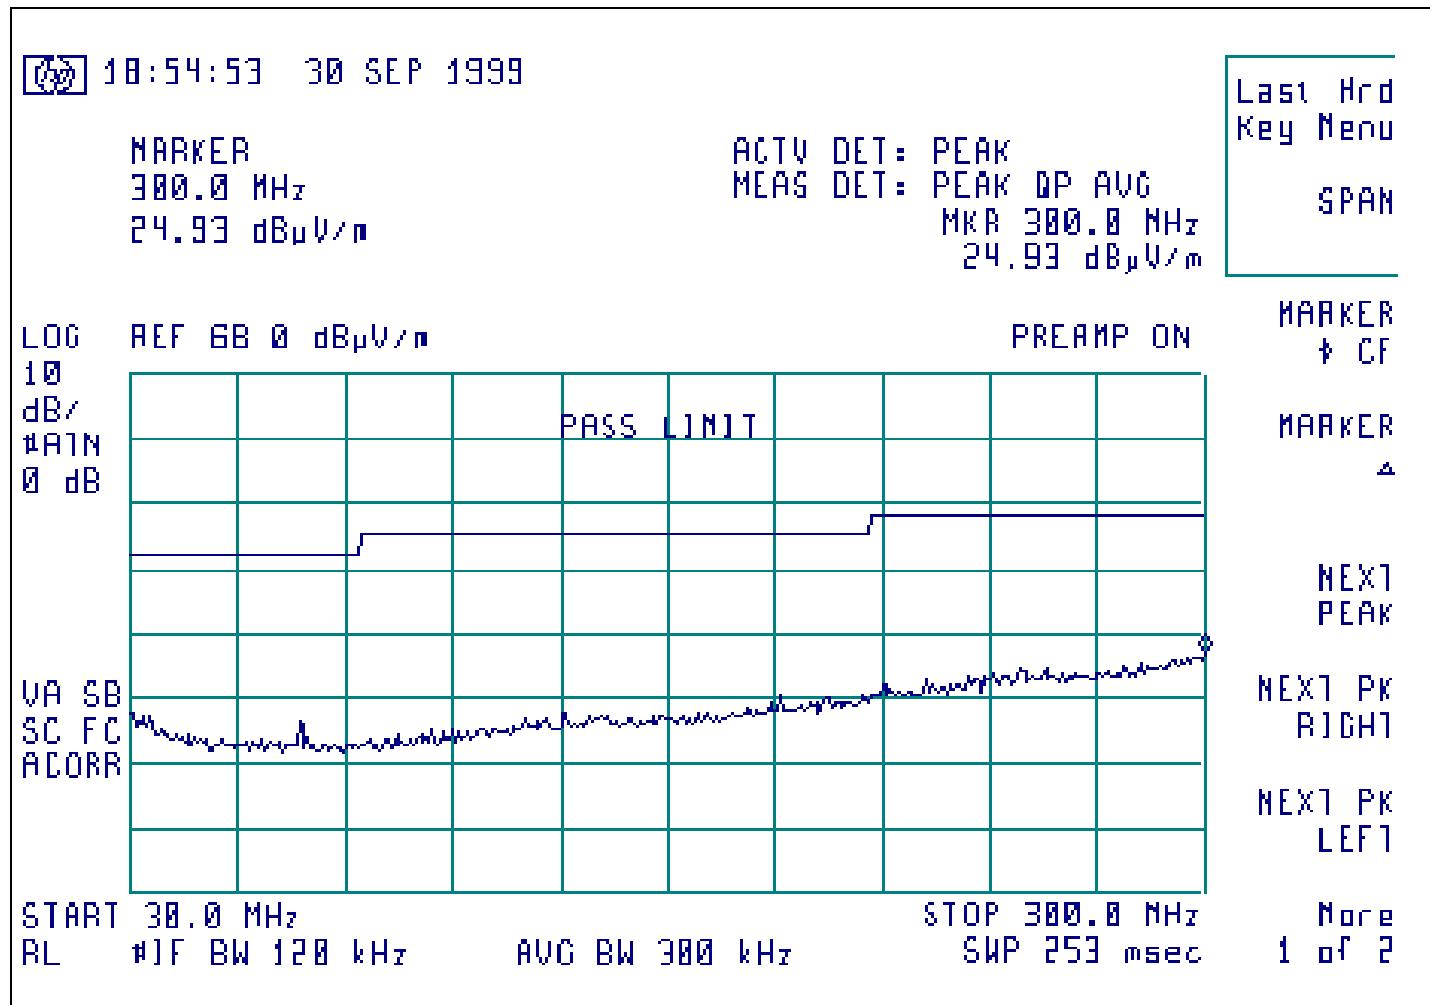


Transmitter, emissions below 1 GHz, horizontal polarity, channel 0

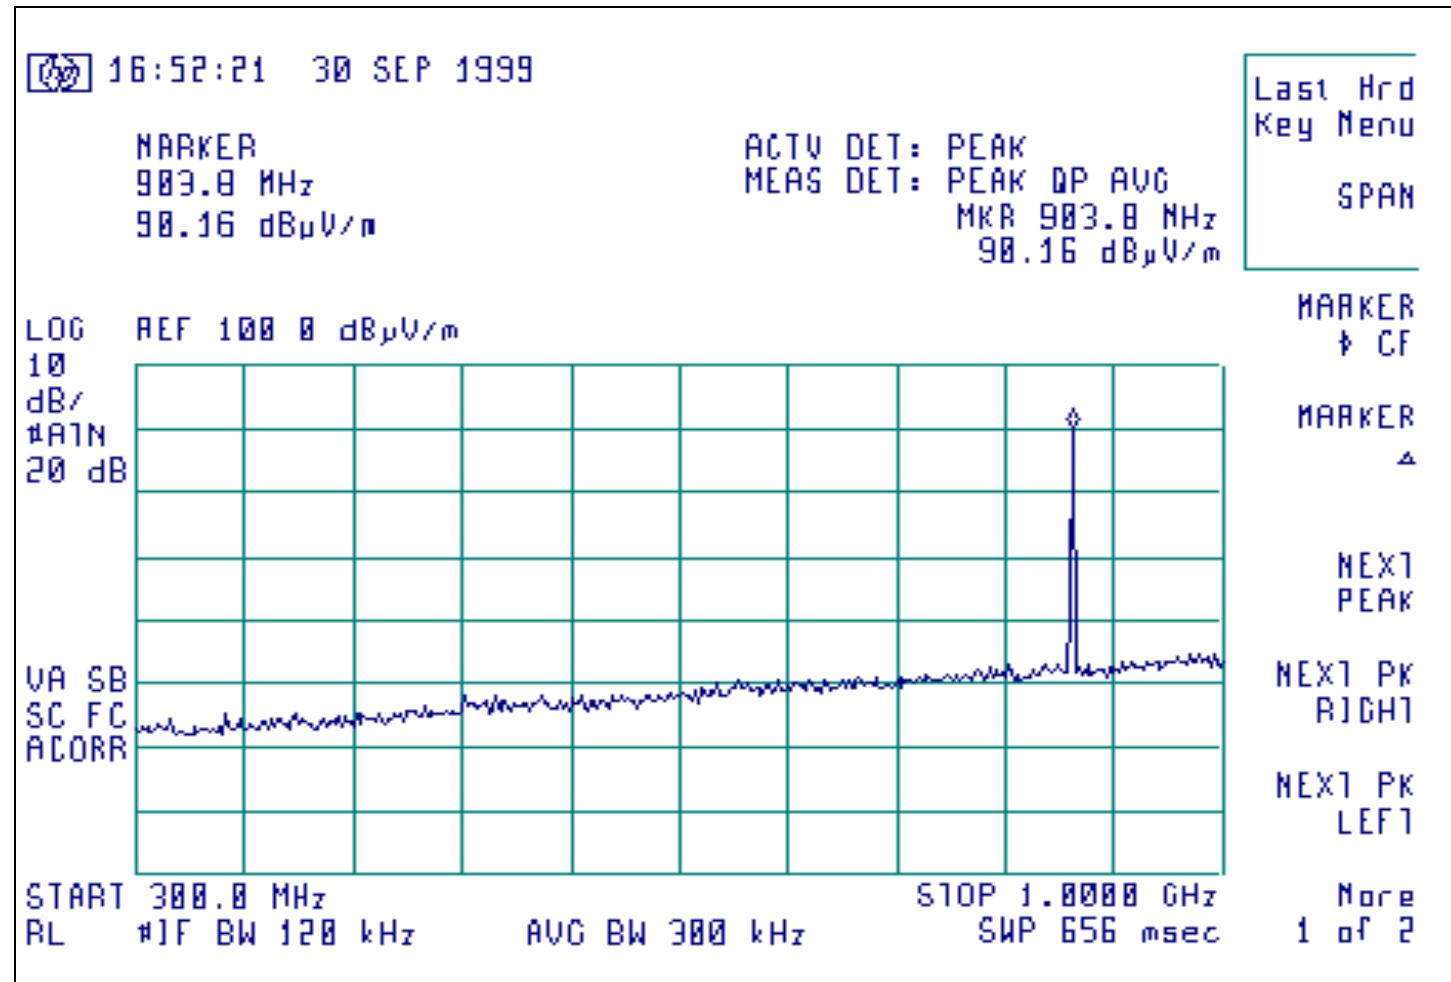


Transmitter, emissions below 1 GHz, horizontal polarity, channel 4

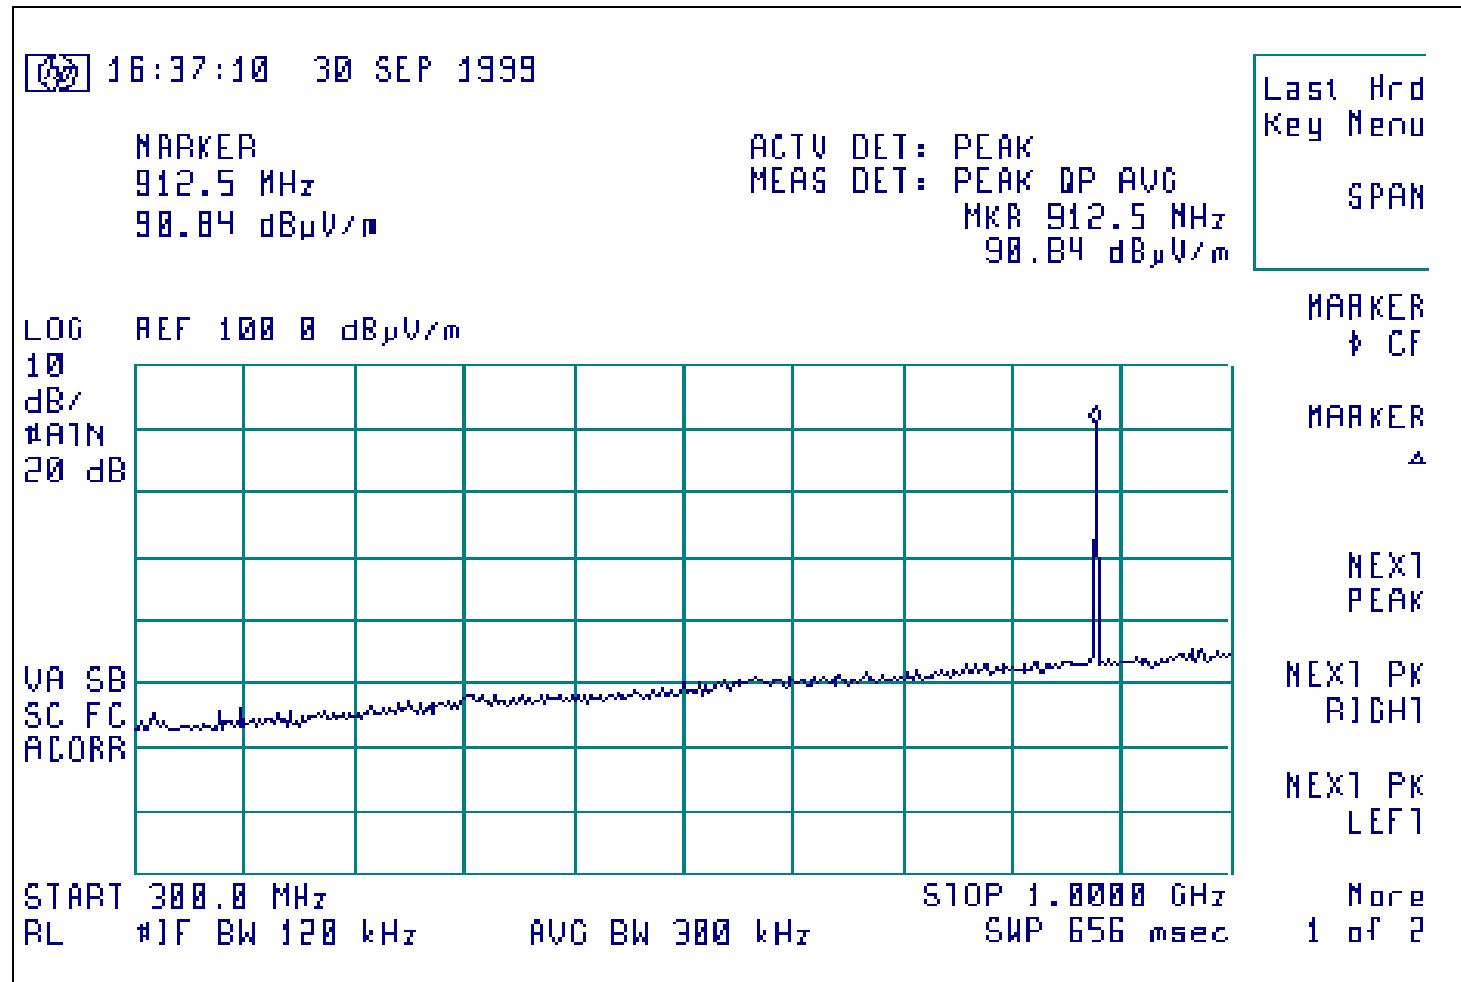


Transmitter, emissions below 1 GHz, horizontal polarity, channel 7

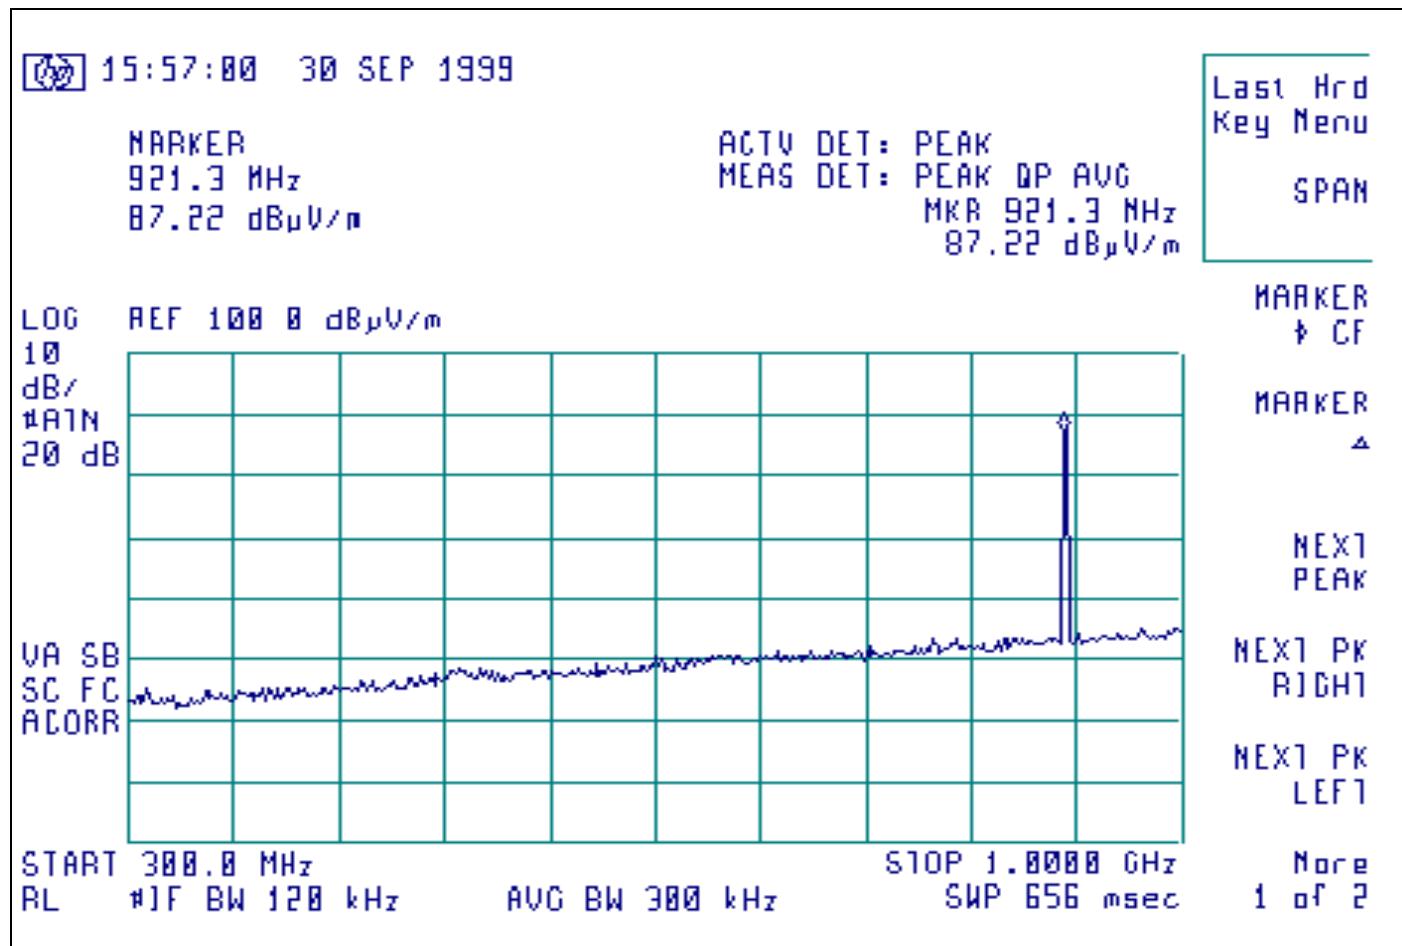


Transmitter, emissions above 1 GHz, vertical polarity, channel 0

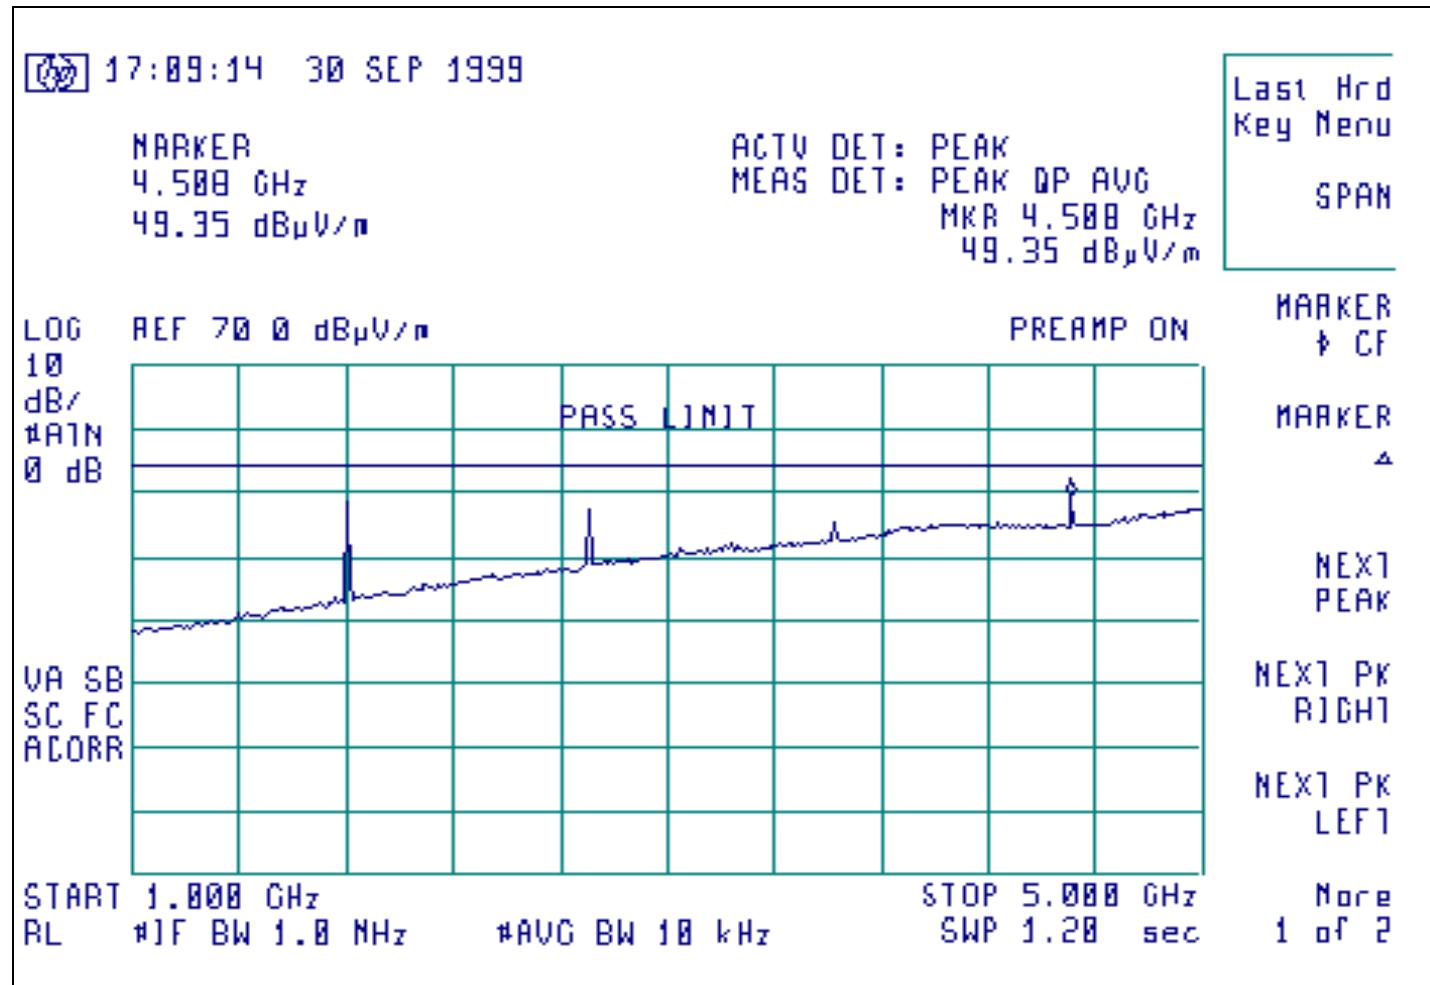


Transmitter, emissions above 1 GHz, channel 4, vertical polarity

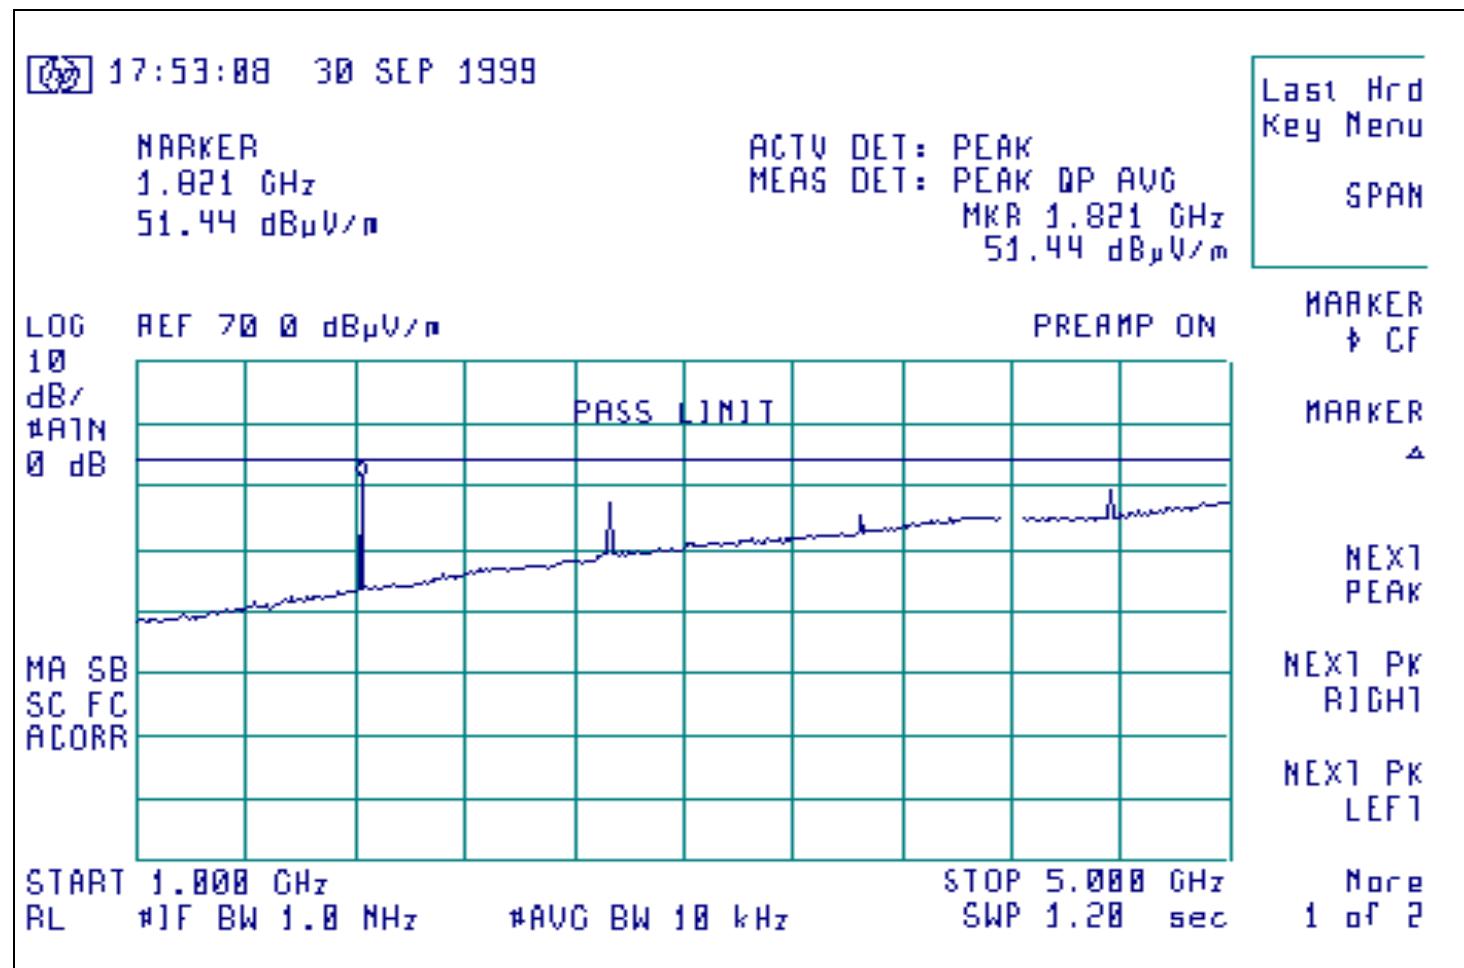


Transmitter, emissions above 1 GHZ, vertical polarity, channel 7

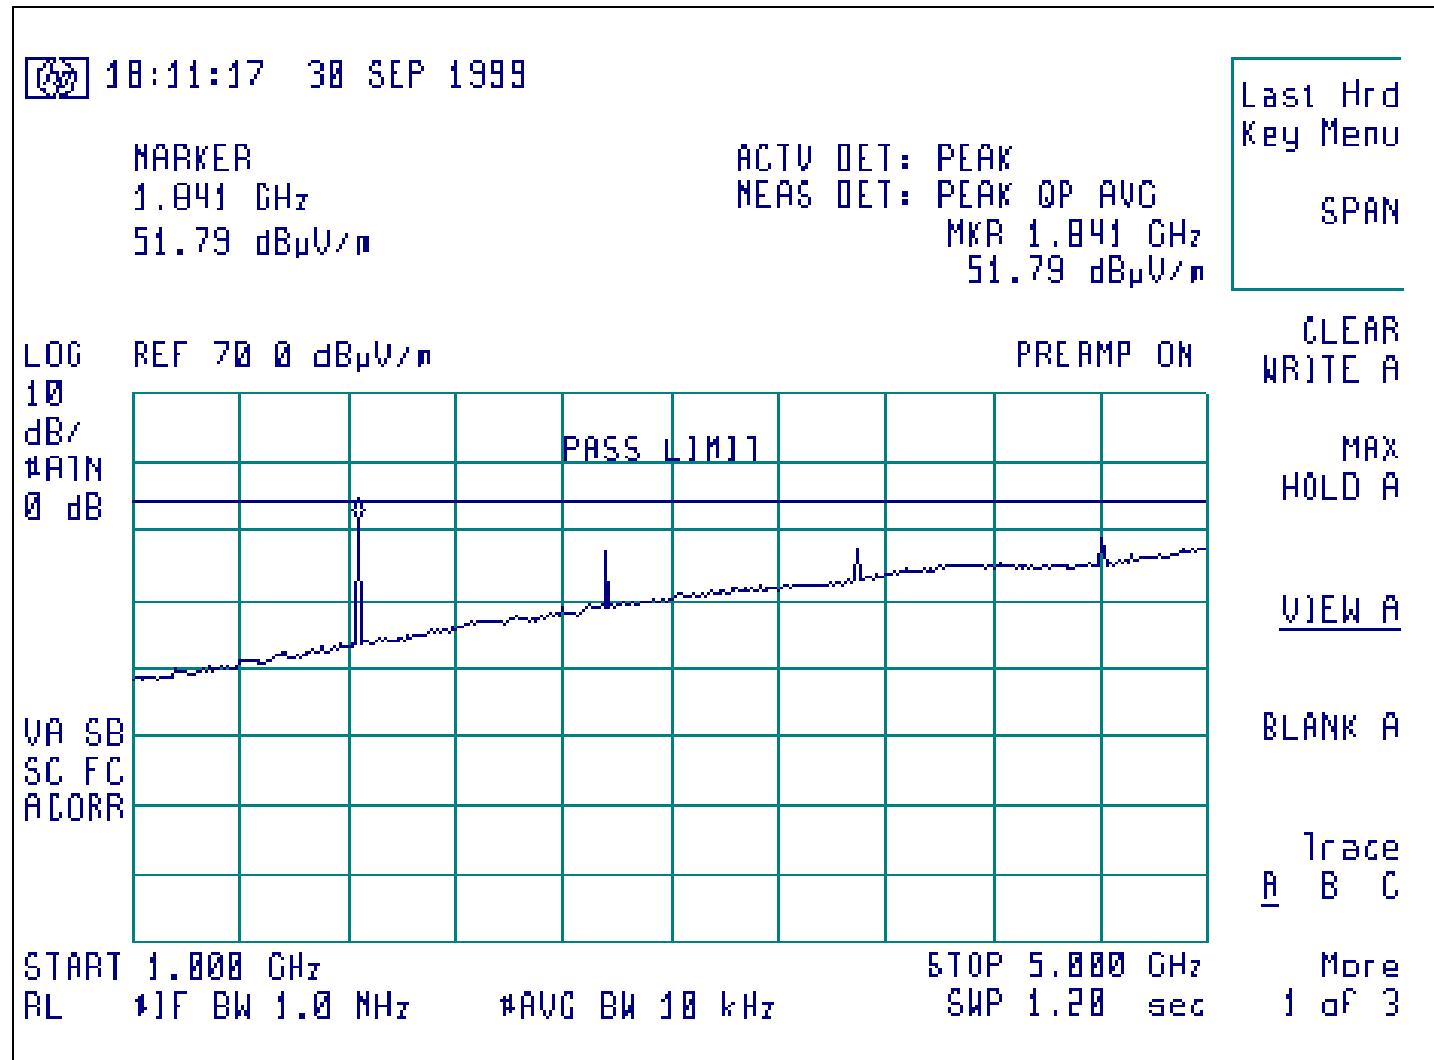

Transmitter, emissions above 5 GHz, vertical polarity, channel 0

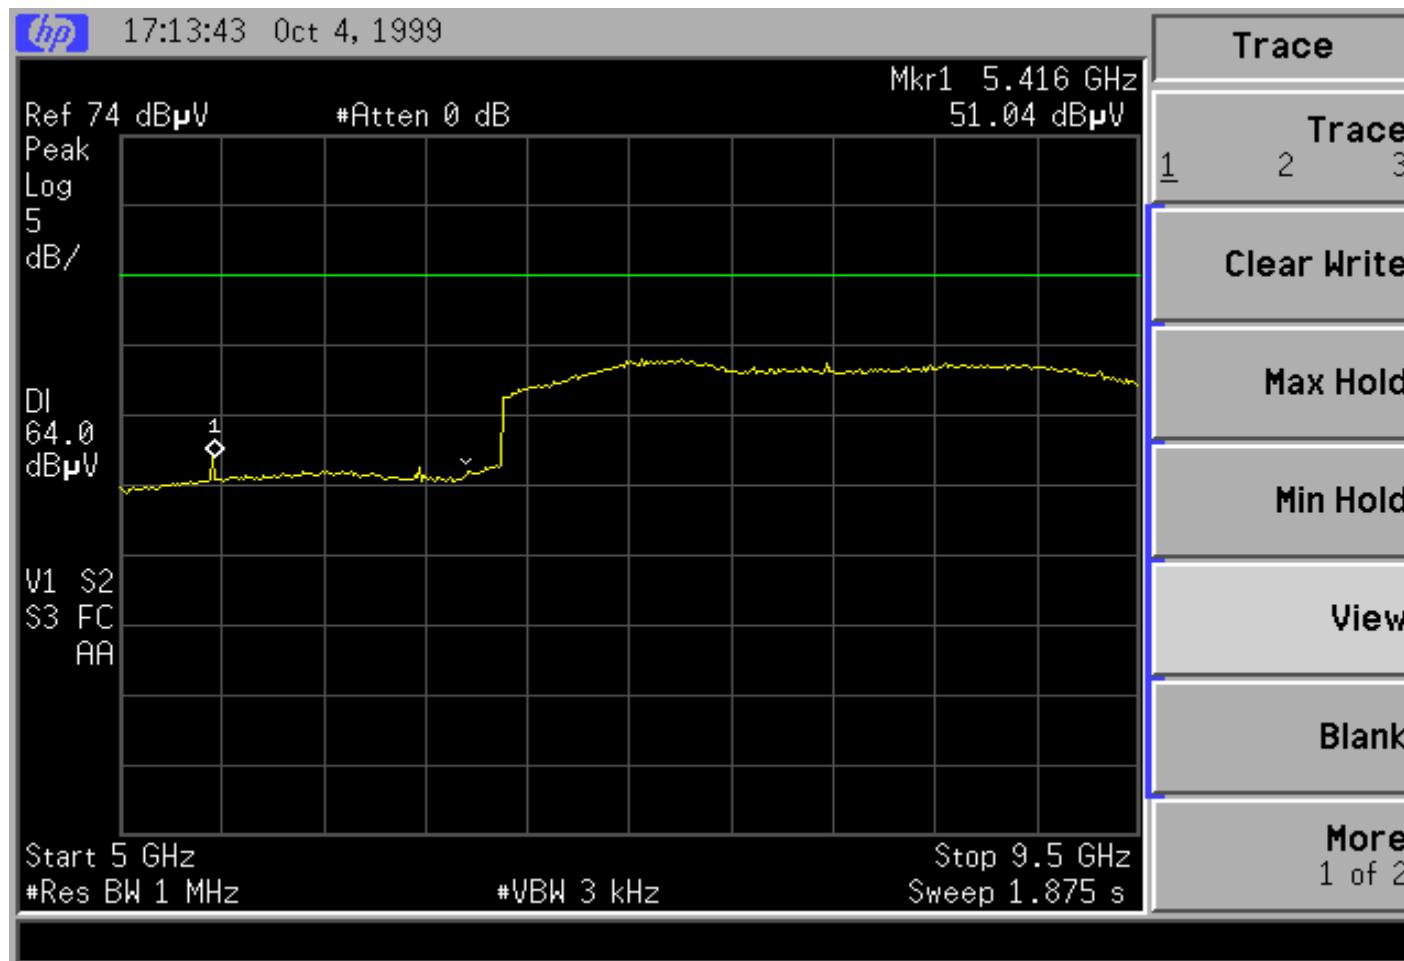

Transmitter, emissions above 5 GHz, vertical polarity, channel 4

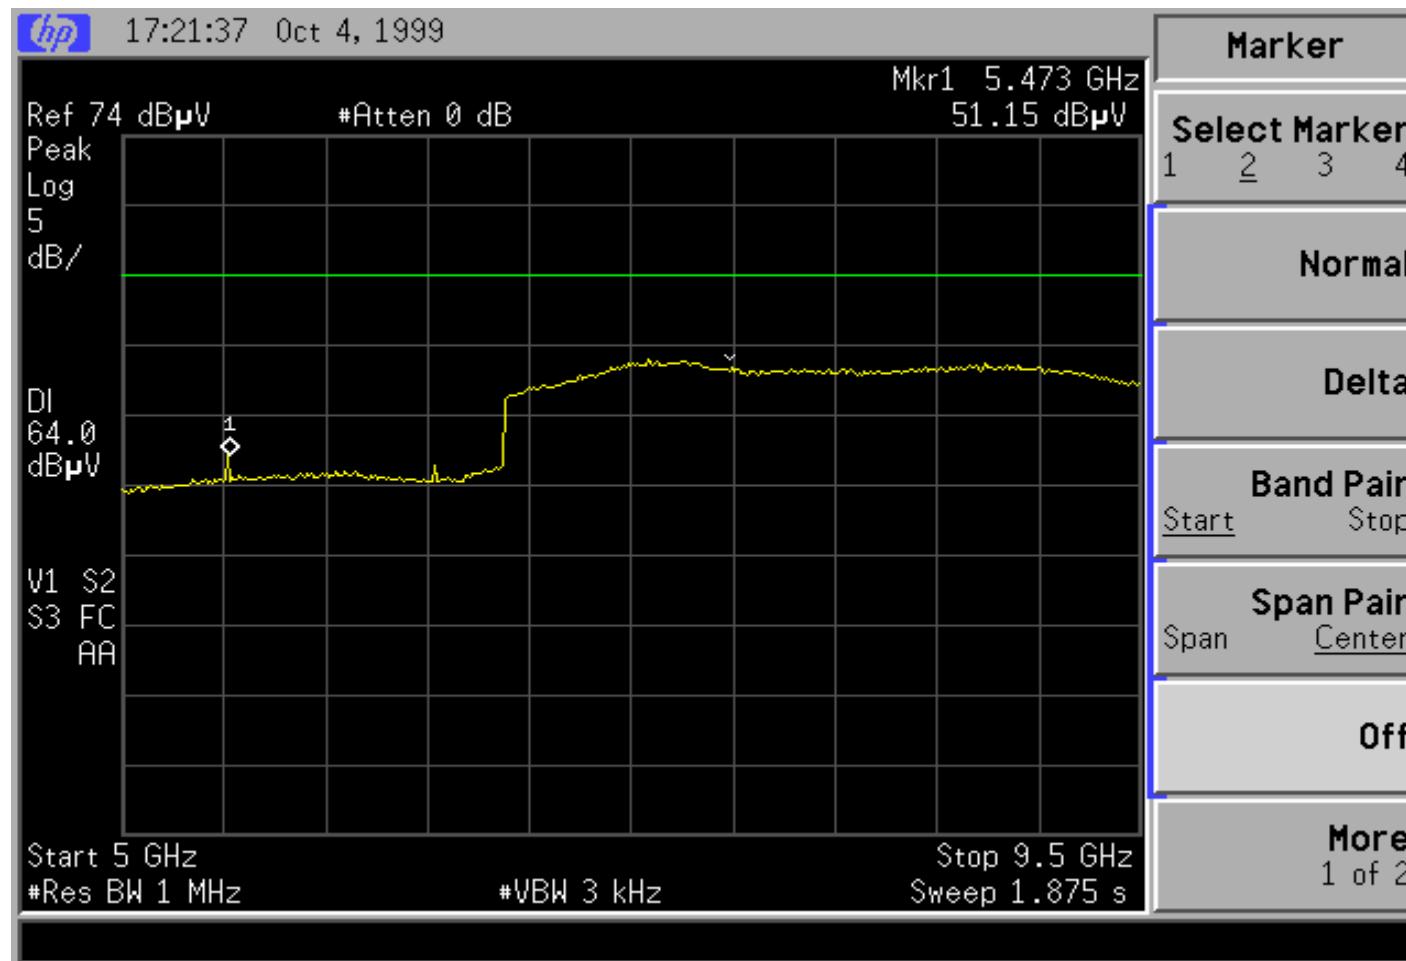

Transmitter, emissions above 5 GHz, vertical polarity, channel 7

