

FCC 47 CFR PART 15 SUBPART C

Product Type : OPU router

Applicant : Zhuhai FTZ Oplink Communications, Inc

Address : #29,#30 Lianfeng Avenue, Free Trade zone, Zhuhai City,
Guangdong province, 519030 China

Trade Name : OPLINK

Model Number : OPU1122

Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4:2009

Receive Date : Jan. 16, 2014

Test Period : Jan. 22~Jan.23, 2014

Issue Date : Feb. 07, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Feb. 07, 2014	Initial Issue	

Verification of Compliance

Issued Date: 02/07/2014

Product Type : OPU router
Applicant : Zhuhai FTZ Oplink Communications, Inc
Address : #29,#30 Lianfeng Avenue, Free Trade zone, Zhuhai City,
Guangdong province,, 519030 China
Trade Name : OPLINK
Model Number : OPU1122
FCC ID : OS3OPU03
EUT Rated Voltage : DC 5.0V, 1.0A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4:2009

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.



Approved By :  Reviewed By : 
(Manager) (Cran Yang) (Testing Engineer) (Fly Lu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Conducted Emission Measurement	10
4.1.	Limit	10
4.2.	Test Instruments	10
4.3.	Test Setup.....	10
4.4.	Test Procedure	11
4.5.	Test Result.....	12
5	Radiated Emission Measurement.....	14
5.1.	Limit	14
5.2.	Test Instruments	14
5.3.	Setup	15
5.4.	Test Procedure	16
5.5.	Test Result.....	18
6	Maximum Conducted Output Power Measurement.....	25
6.1.	Limit	25
6.2.	Test Setup.....	25
6.3.	Test Instruments	25
6.4.	Test Procedure	25
6.5.	Test Result.....	26
7	6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement	28
7.1.	Limit	28
7.2.	Test Setup.....	28
7.3.	Test Instruments	28
7.4.	Test Procedure	28
7.5.	Test Result.....	29
7.6.	Test Graphs	30
8	Maximum Power Density Measurement	34
8.1.	Limit	34
8.2.	Test Setup.....	34
8.3.	Test Instruments	34
8.4.	Test Procedure	34
8.5.	Test Result.....	35
8.6.	Test Graphs	36

9	Out of Band Conducted Emissions Measurement	40
9.1.	Limit	40
9.2.	Test Setup.....	40
9.3.	Test Instruments	40
9.4.	Test Procedure	40
9.5.	Test Graphs	41
10	Band Edges Measurement	53
10.1.	Limit	53
10.2.	Test Setup.....	53
10.3.	Test Instruments	53
10.4.	Test Procedure	54
10.5.	Test Result.....	55
11	Antenna Measurement.....	59
11.1.	Limit	59
11.2.	Antenna Connector Construction	59

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	OPU router
Trade Name	OPLINK
Model No.	OPU1122
Applicant	Zhuhai FTZ Oplink Communications, Inc #29,#30 Lianfeng Avenue, Free Trade zone, Zhuhai City, Guangdong province, 519030 China
Manufacturer	FORMOSA WIRELESS COMMUNICATION INC. 11F., No.3-2, Yuanqu St., Nangang Dist., Taipei City 115, Taiwan (R.O.C.)
FCC ID	OS3OPU03
Frequency Range	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz: 2412 ~ 2462 MHz IEEE 802.11n 2.4GHz 40MHz: 2422 ~ 2452 MHz
Modulation Type	IEEE 802.11b:DSSS IEEE 802.11g:DSSS + OFDM IEEE 802.11n 2.4GHz 20MHz: OFDM IEEE 802.11n 2.4GHz 40MHz: OFDM
Antenna Type	PCB Antenna
Antenna Gain	2.76 dBi
RF Output Power	IEEE 802.11b: 0.152 W / 21.82 dBm IEEE 802.11g: 0.207 W / 23.15 dBm IEEE 802.11n 2.4GHz 20MHz: 0.196 W / 22.92 dBm IEEE 802.11n 2.4GHz 40MHz: 0.104 W / 20.18 dBm
99 % Occupied Bandwidth	IEEE 802.11b: 14.917MHz IEEE 802.11g: 16.398 MHz IEEE 802.11n 2.4GHz 20MHz: 17.624 MHz IEEE 802.11n 2.4GHz 40MHz: 35.777 MHz

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 20MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n 2.4GHz 40MHz mode:


Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

3.2. EUT Exercise Software


1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn on Wi-Fi function link to AP.
4. EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

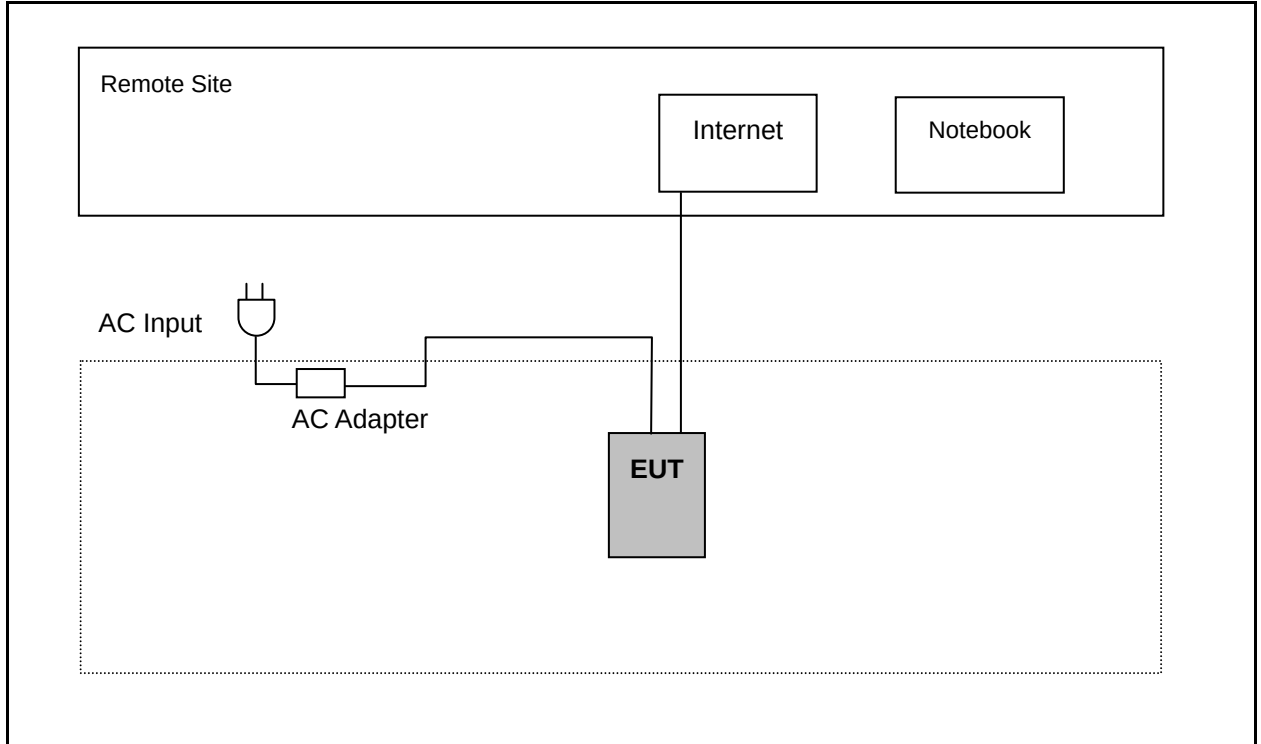

Radiated Emission

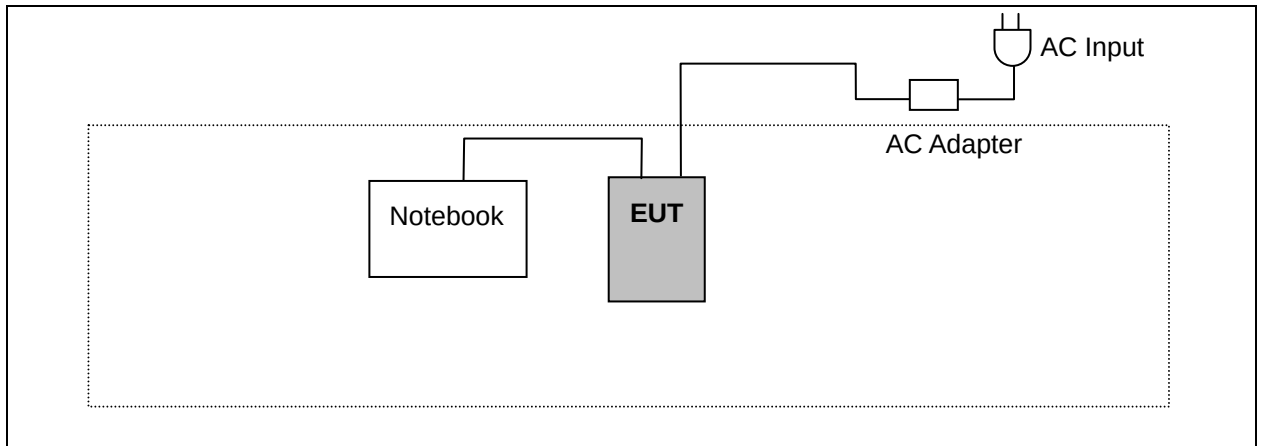

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/06/2013	(1)
LISN	R&S	ENV216	101040	03/04/2013	(1)
LISN	R&S	ENV216	101041	03/04/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

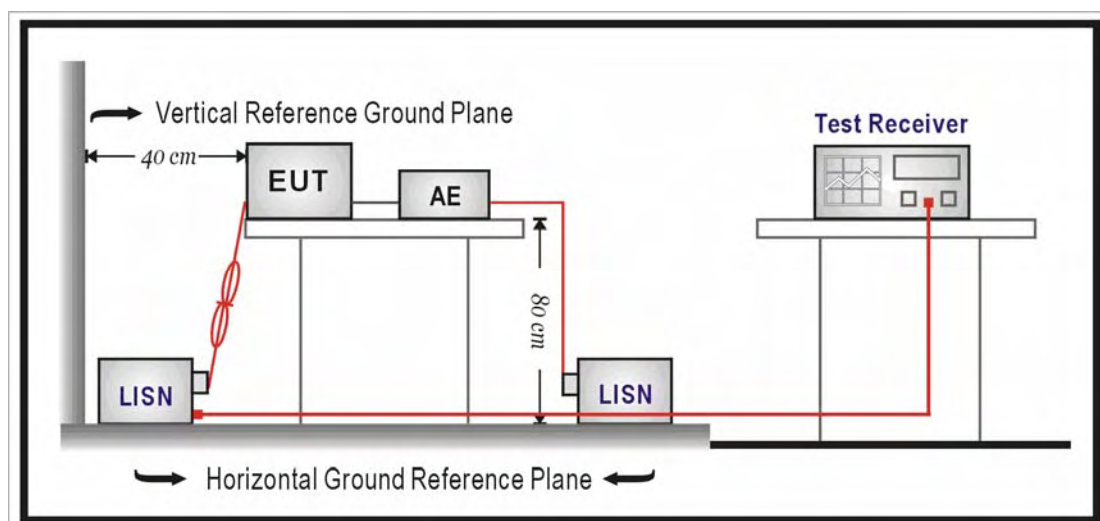

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	OPU1122	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/23/2014
		Test By:	Fly Lu
Description:			

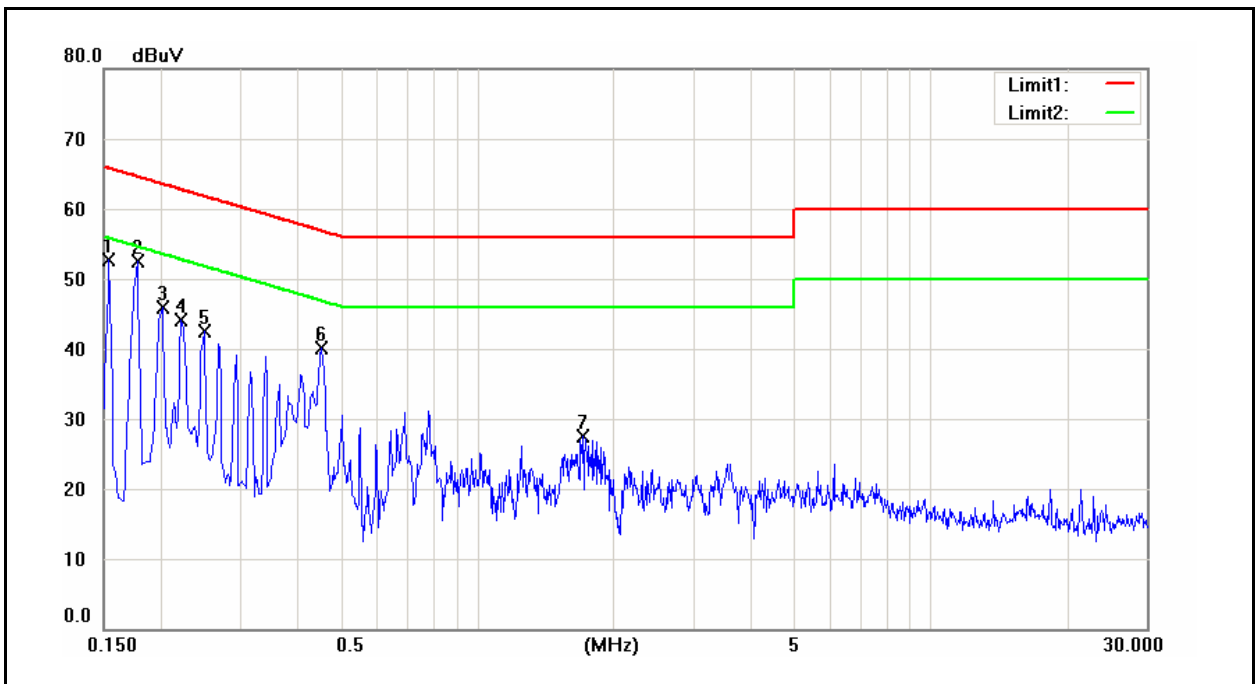


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	37.92	20.16	9.62	47.54	29.78	65.78	55.78	-18.24	-26.00	Pass
2	0.1780	36.22	18.46	9.62	45.84	28.08	64.58	54.58	-18.74	-26.50	Pass
3	0.2020	34.36	18.34	9.62	43.98	27.96	63.53	53.53	-19.55	-25.57	Pass
4	0.2220	31.73	17.89	9.62	41.35	27.51	62.74	52.74	-21.39	-25.23	Pass
5	0.2500	29.32	14.71	9.62	38.94	24.33	61.76	51.76	-22.82	-27.43	Pass
6	0.4540	28.09	22.70	9.62	37.71	32.32	56.80	46.80	-19.09	-14.48	Pass
7	1.7140	10.31	5.63	9.69	20.00	15.32	56.00	46.00	-36.00	-30.68	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	OPU1122	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/23/2014
		Test By:	Fly Lu

Description:

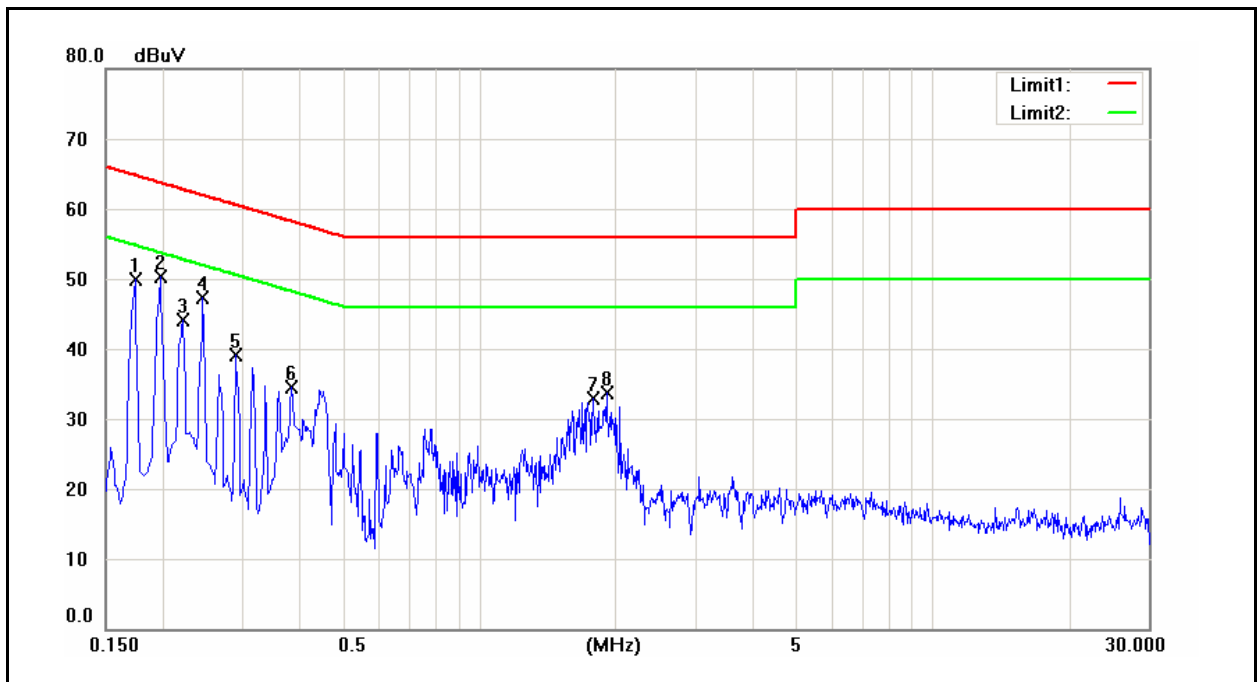

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1740	37.32	17.26	9.63	46.95	26.89	64.77	54.77	-17.82	-27.88	Pass
2	0.1980	32.34	16.62	9.63	41.97	26.25	63.69	53.69	-21.72	-27.44	Pass
3	0.2220	31.21	16.14	9.63	40.84	25.77	62.74	52.74	-21.90	-26.97	Pass
4	0.2460	27.69	13.75	9.63	37.32	23.38	61.89	51.89	-24.57	-28.51	Pass
5	0.2900	24.16	9.03	9.63	33.79	18.66	60.52	50.52	-26.73	-31.86	Pass
6	0.3860	20.08	14.67	9.63	29.71	24.30	58.15	48.15	-28.44	-23.85	Pass
7	1.7900	20.28	10.02	9.69	29.97	19.71	56.00	46.00	-26.03	-26.29	Pass
8	1.9140	16.98	10.28	9.70	26.68	19.98	56.00	46.00	-29.32	-26.02	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/16/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2013	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

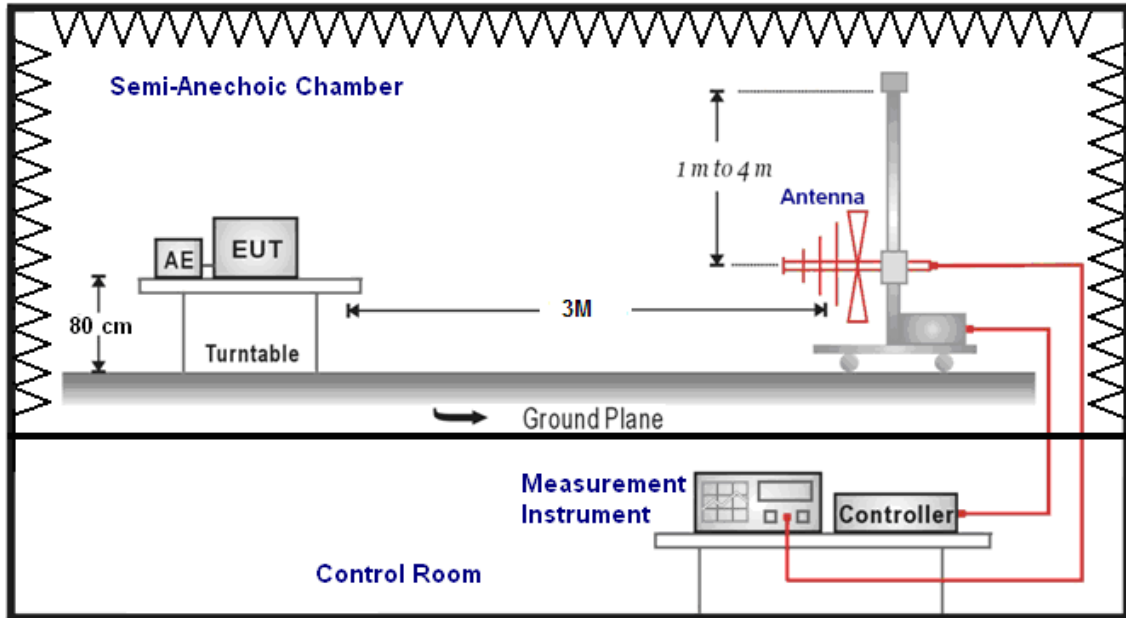

Above 1GHz

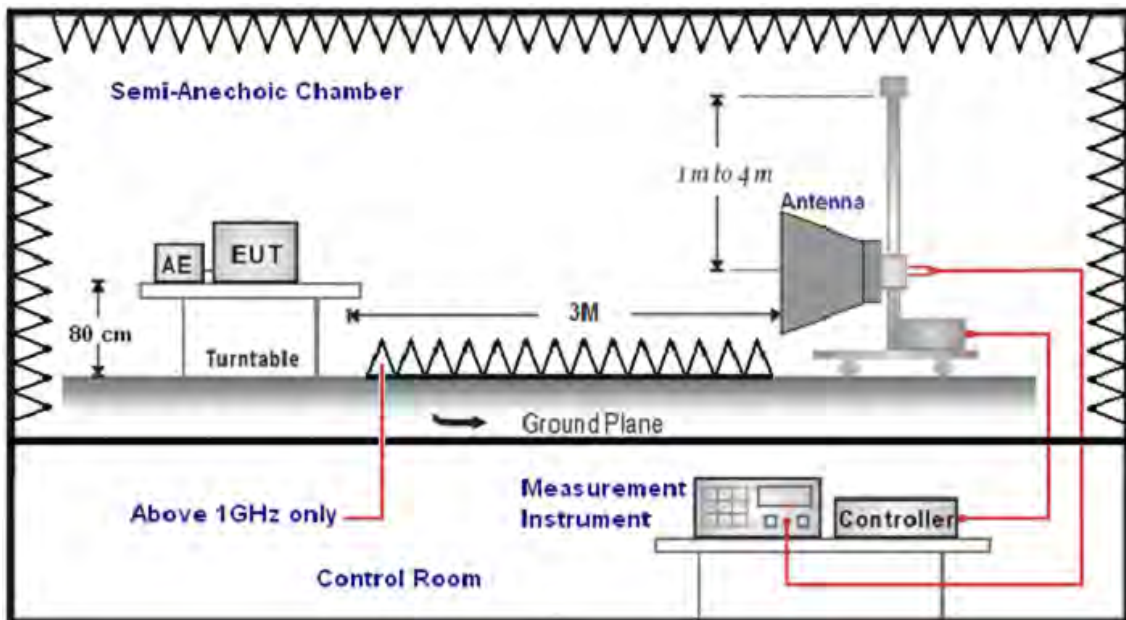

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OPU1122		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		01/22/2014	
				Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
111.5000	49.51	-15.12	34.39	43.50	-9.11	QP	H
191.5000	48.41	-14.15	34.26	43.50	-9.24	QP	H
250.0000	51.52	-12.15	39.37	46.00	-6.63	QP	H
301.5000	43.40	-10.20	33.20	46.00	-12.80	QP	H
666.0000	40.99	-3.00	37.99	46.00	-8.01	QP	H
960.0000	34.83	2.92	37.75	46.00	-8.25	QP	H
111.0000	46.67	-15.17	31.50	43.50	-12.00	QP	V
250.0000	49.06	-12.15	36.91	46.00	-9.09	QP	V
600.0000	42.80	-4.04	38.76	46.00	-7.24	QP	V
666.0000	42.11	-3.00	39.11	46.00	-6.89	QP	V
875.0000	31.52	1.05	32.57	46.00	-13.43	QP	V
960.0000	33.78	2.92	36.70	46.00	-9.30	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/22/2014		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2918.000	36.80	5.94	42.74	74.00	-31.26	peak	H
4605.000	34.68	11.55	46.23	74.00	-27.77	peak	H
6383.000	33.49	17.31	50.80	74.00	-23.20	peak	H
2925.000	36.19	5.95	42.14	74.00	-31.86	peak	V
4822.000	37.70	12.10	49.80	74.00	-24.20	peak	V
6285.000	33.45	16.97	50.42	74.00	-23.58	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/22/2014		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2953.000	37.86	6.00	43.86	74.00	-30.14	peak	H
4605.000	34.86	11.55	46.41	74.00	-27.59	peak	H
6411.000	32.85	17.40	50.25	74.00	-23.75	peak	H
2918.000	37.26	5.94	43.20	74.00	-30.80	peak	V
4570.000	34.47	11.46	45.93	74.00	-28.07	peak	V
6285.000	33.37	16.97	50.34	74.00	-23.66	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/22/2014		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2925.000	37.02	5.95	42.97	74.00	-31.03	peak	H
4591.000	34.31	11.51	45.82	74.00	-28.18	peak	H
6362.000	32.53	17.23	49.76	74.00	-24.24	peak	H
2862.000	37.37	5.81	43.18	74.00	-30.82	peak	V
4598.000	34.81	11.54	46.35	74.00	-27.65	peak	V
6425.000	32.88	17.45	50.33	74.00	-23.67	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/22/2014		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	37.24	6.05	43.29	74.00	-30.71	peak	H
4605.000	34.32	11.55	45.87	74.00	-28.13	peak	H
6411.000	32.66	17.40	50.06	74.00	-23.94	peak	H
2862.000	36.93	5.81	42.74	74.00	-31.26	peak	V
4598.000	34.84	11.54	46.38	74.00	-27.62	peak	V
6418.000	33.36	17.42	50.78	74.00	-23.22	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/22/2014		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2981.000	37.38	6.06	43.44	74.00	-30.56	peak	H
4563.000	34.68	11.45	46.13	74.00	-27.87	peak	H
6390.000	32.94	17.33	50.27	74.00	-23.73	peak	H
2939.000	37.62	5.97	43.59	74.00	-30.41	peak	V
4598.000	35.81	11.54	47.35	74.00	-26.65	peak	V
6411.000	33.43	17.40	50.83	74.00	-23.17	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/22/2014		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2967.000	37.49	6.03	43.52	74.00	-30.48	peak	H
4598.000	35.14	11.54	46.68	74.00	-27.32	peak	H
6418.000	32.71	17.42	50.13	74.00	-23.87	peak	H
2918.000	36.71	5.94	42.65	74.00	-31.35	peak	V
4605.000	34.58	11.55	46.13	74.00	-27.87	peak	V
6369.000	32.75	17.25	50.00	74.00	-24.00	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	4			Date:	01/22/2014		
Frequency:	2412MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2911.000	36.96	5.92	42.88	74.00	-31.12	peak	H
4577.000	35.64	11.47	47.11	74.00	-26.89	peak	H
6383.000	33.33	17.31	50.64	74.00	-23.36	peak	H
2925.000	38.18	5.95	44.13	74.00	-29.87	peak	V
4591.000	35.36	11.51	46.87	74.00	-27.13	peak	V
6243.000	32.67	16.82	49.49	74.00	-24.51	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	01/22/2014		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2918.000	37.47	5.94	43.41	74.00	-30.59	peak	H
4605.000	36.40	11.55	47.95	74.00	-26.05	peak	H
6334.000	33.86	17.13	50.99	74.00	-23.01	peak	H
2939.000	38.26	5.97	44.23	74.00	-29.77	peak	V
4563.000	35.08	11.45	46.53	74.00	-27.47	peak	V
6257.000	33.85	16.87	50.72	74.00	-23.28	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	01/22/2014		
Frequency:	2462MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	36.45	6.13	42.58	74.00	-31.42	peak	H
4591.000	34.89	11.51	46.40	74.00	-27.60	peak	H
6341.000	33.11	17.16	50.27	74.00	-23.73	peak	H
2911.000	38.16	5.92	44.08	74.00	-29.92	peak	V
4549.000	34.88	11.41	46.29	74.00	-27.71	peak	V
6390.000	33.51	17.33	50.84	74.00	-23.16	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	01/22/2014		
Frequency:	2422MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2925.000	37.32	5.95	43.27	74.00	-30.73	peak	H
4577.000	35.11	11.47	46.58	74.00	-27.42	peak	H
6390.000	33.33	17.33	50.66	74.00	-23.34	peak	H
2939.000	38.26	5.97	44.23	74.00	-29.77	peak	V
4605.000	34.28	11.55	45.83	74.00	-28.17	peak	V
6278.000	33.46	16.94	50.40	74.00	-23.60	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	01/22/2014		
Frequency:	2437MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2897.000	36.56	5.89	42.45	74.00	-31.55	peak	H
4577.000	34.43	11.47	45.90	74.00	-28.10	peak	H
6278.000	32.95	16.94	49.89	74.00	-24.11	peak	H
2897.000	36.67	5.89	42.56	74.00	-31.44	peak	V
4598.000	35.71	11.54	47.25	74.00	-26.75	peak	V
6327.000	33.26	17.11	50.37	74.00	-23.63	peak	V


Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	01/22/2014		
Frequency:	2452MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2918.000	37.35	5.94	43.29	74.00	-30.71	peak	H
4591.000	34.39	11.51	45.90	74.00	-28.10	peak	H
6397.000	33.27	17.36	50.63	74.00	-23.37	peak	H
2890.000	36.84	5.88	42.72	74.00	-31.28	peak	V
4633.000	34.01	11.62	45.63	74.00	-28.37	peak	V
6383.000	32.81	17.31	50.12	74.00	-23.88	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

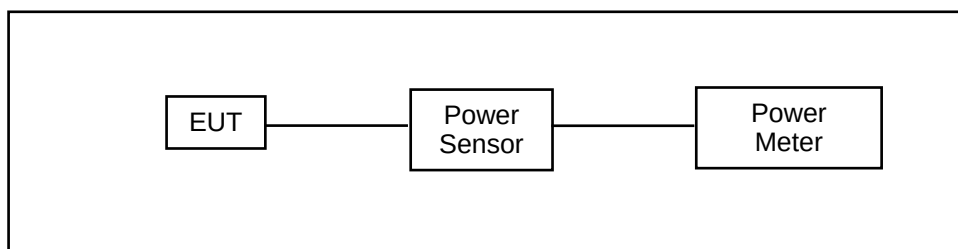

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/21/2013	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/21/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	OPU1122					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: IEEE 802.11b Link Mode					
Date of Test	01/22/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	1M	19.47	0.089	21.82	0.152	< 30
2437		19.16	0.082	21.49	0.141	< 30
2462		18.75	0.075	21.20	0.132	< 30
2437	2M	15.43	0.035	18.45	0.070	< 30
2437	5.5M	15.38	0.035	18.13	0.065	< 30
2437	11M	15.30	0.034	18.06	0.064	< 30

Model Number	OPU1122					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: IEEE 802.11g Link Mode					
Date of Test	01/22/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6M	13.79	0.024	23.15	0.207	< 30
2437		13.51	0.022	22.89	0.195	< 30
2462		13.23	0.021	22.73	0.187	< 30
2437	9M	13.46	0.022	22.51	0.178	< 30
2437	12M	13.44	0.022	22.43	0.175	< 30
2437	18M	13.40	0.022	22.38	0.173	< 30
2437	24M	13.41	0.022	22.26	0.168	< 30
2437	36M	13.34	0.022	22.17	0.165	< 30
2437	48M	13.24	0.021	22.03	0.160	< 30
2437	54M	13.14	0.021	22.01	0.159	< 30

Model Number	OPU1122					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode					
Date of Test	01/22/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2412	6.5M	13.60	0.023	22.92	0.196	< 30
2437		13.56	0.023	22.78	0.190	< 30
2462		12.71	0.019	21.63	0.146	< 30
2437	13M	13.24	0.021	22.52	0.179	< 30
2437	19.5M	13.21	0.021	22.45	0.176	< 30
2437	26M	13.12	0.021	22.37	0.173	< 30
2437	39M	13.08	0.020	22.23	0.167	< 30
2437	52M	13.05	0.020	22.17	0.165	< 30
2437	58.5M	12.99	0.020	22.09	0.162	< 30
2437	65M	12.96	0.020	22.04	0.160	< 30

Model Number	OPU1122					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode					
Date of Test	01/22/2014			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2422	13.5M	10.72	0.012	20.18	0.104	< 30
2437		10.34	0.011	19.84	0.096	< 30
2452		10.04	0.010	19.76	0.095	< 30
2437	27M	10.29	0.011	19.74	0.094	< 30
2437	40.5M	10.14	0.010	19.68	0.093	< 30
2437	54M	10.02	0.010	19.65	0.092	< 30
2437	81M	9.97	0.010	19.59	0.091	< 30
2437	108M	9.95	0.010	19.53	0.090	< 30
2437	121.5M	9.84	0.010	19.46	0.088	< 30
2437	135M	9.87	0.010	19.31	0.085	< 30


7 6dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth: N/A

7.2. Test Setup

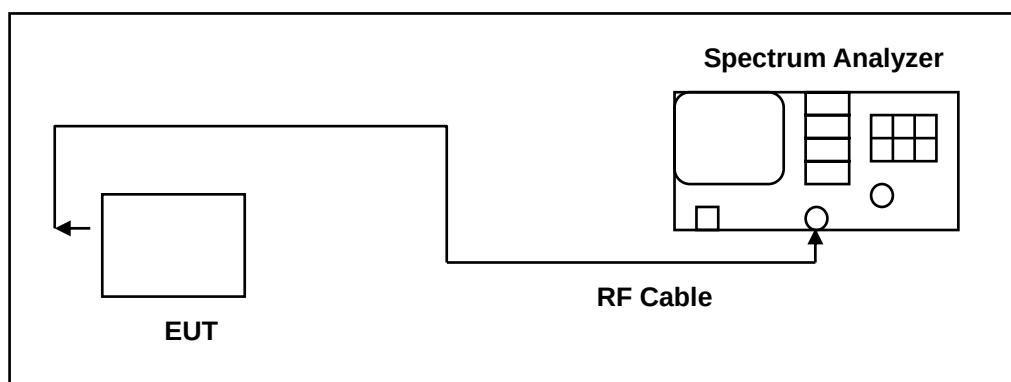

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result




Model Number	OPU1122		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	12.130	14.9172	> 0.500
2437	12.143	14.8029	> 0.500
2462	12.138	14.8476	> 0.500




Model Number	OPU1122		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	16.479	16.3808	> 0.500
2437	16.473	16.3650	> 0.500
2462	16.490	16.3979	> 0.500




Model Number	OPU1122		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2412	17.654	17.6242	> 0.500
2437	17.667	17.5098	> 0.500
2462	17.656	17.5119	> 0.500

Model Number	OPU1122		
Test Item	6dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	6dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6dB RF Bandwidth Limit (MHz)
2422	36.299	35.7596	> 0.500
2437	36.289	35.7057	> 0.500
2452	36.329	35.7769	> 0.500

7.6. Test Graphs

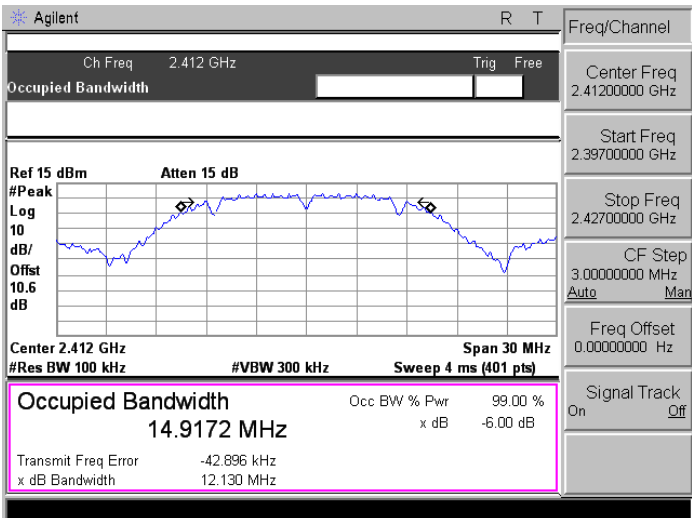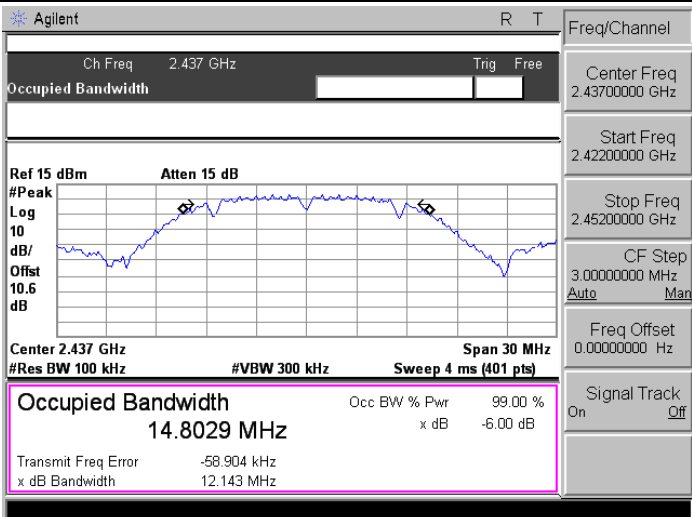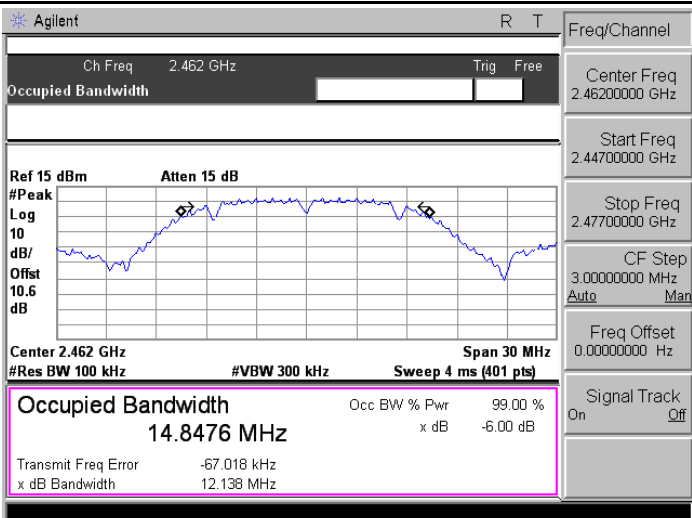
Mode 2: IEEE 802.11b Link Mode	
2412	 Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 14.9172 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -42.896 kHz x dB Bandwidth 12.130 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 14.8029 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -58.904 kHz x dB Bandwidth 12.143 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462	 Agilent R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 14.8476 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -67.018 kHz x dB Bandwidth 12.138 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

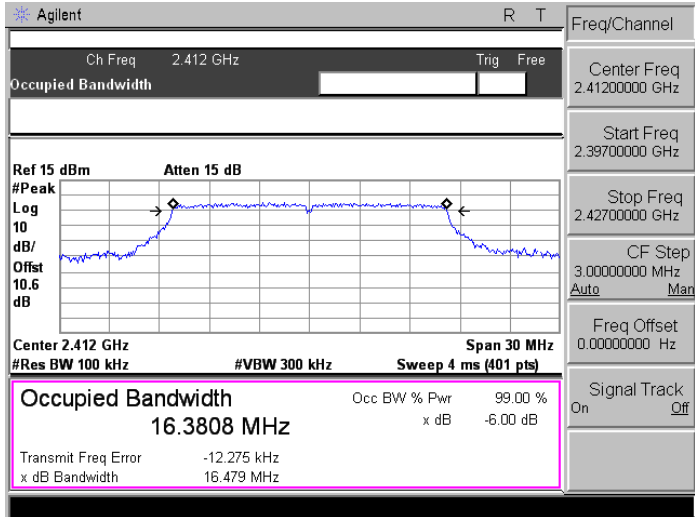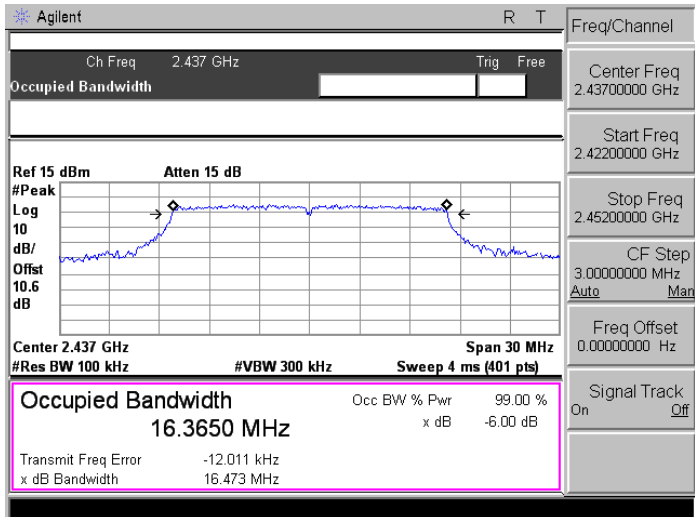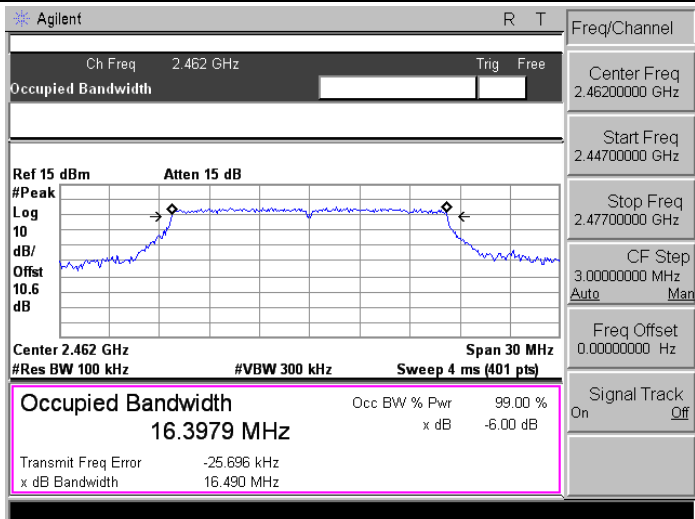Mode 3: IEEE 802.11g Link Mode	
2412	 Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 16.3808 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -12.275 kHz x dB Bandwidth 16.479 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 16.3650 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -12.011 kHz x dB Bandwidth 16.473 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462	 Agilent R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 16.3979 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -25.696 kHz x dB Bandwidth 16.490 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

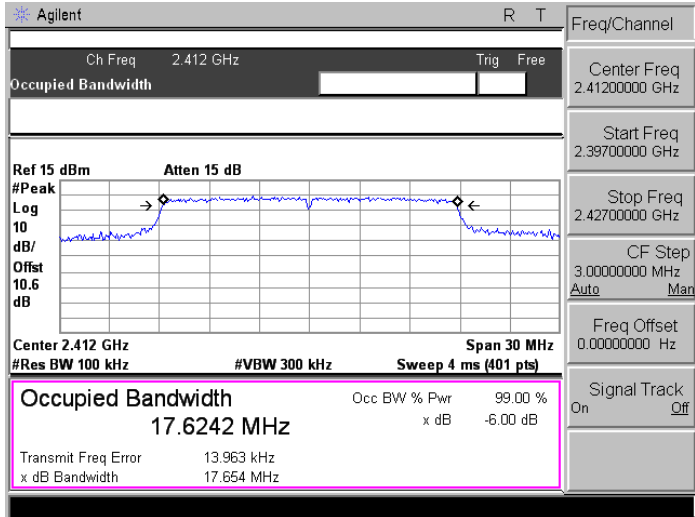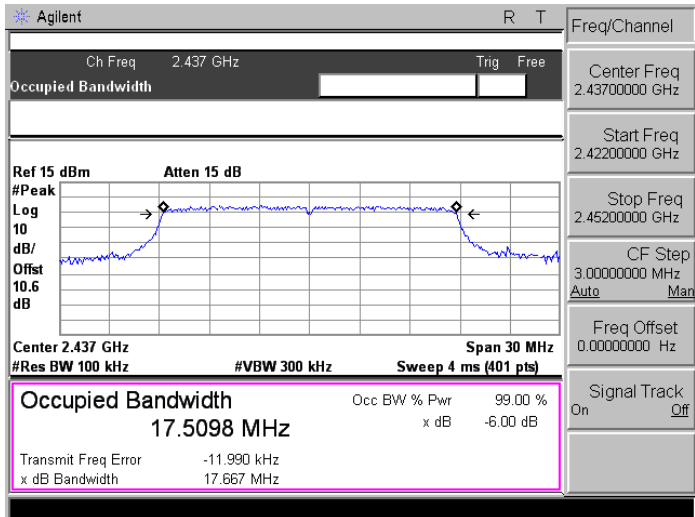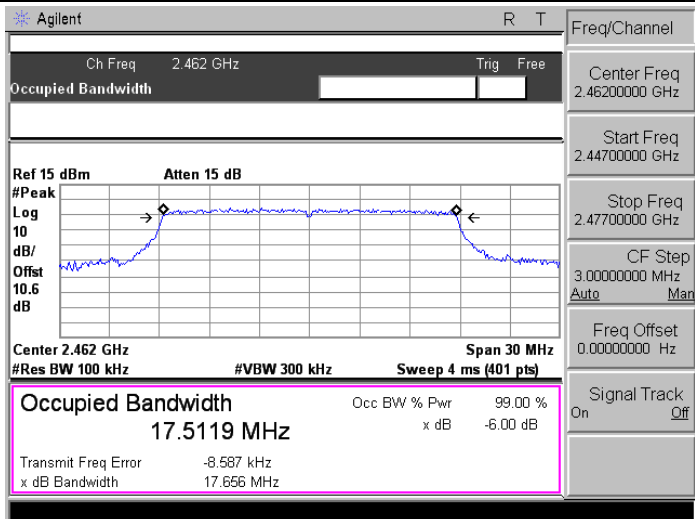
Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
2412	 Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 17.6242 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 13.963 kHz x dB Bandwidth 17.654 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	
2437	 Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 17.5098 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -11.990 kHz x dB Bandwidth 17.667 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	
2462	 Agilent R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 15 dBm Atten 15 dB #Peak Log 10 dB/ Offst 10.6 dB Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 17.5119 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -8.587 kHz x dB Bandwidth 17.656 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

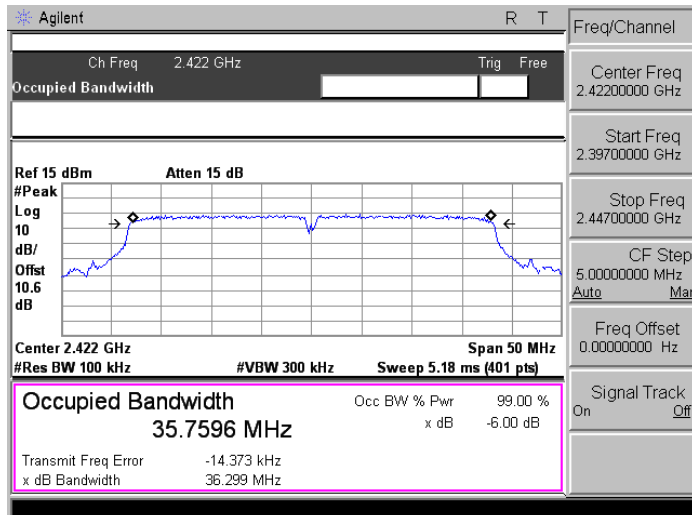

2437

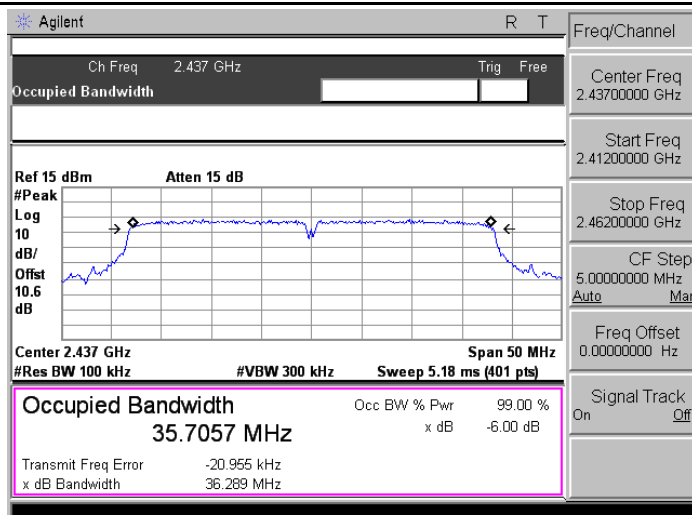

2452

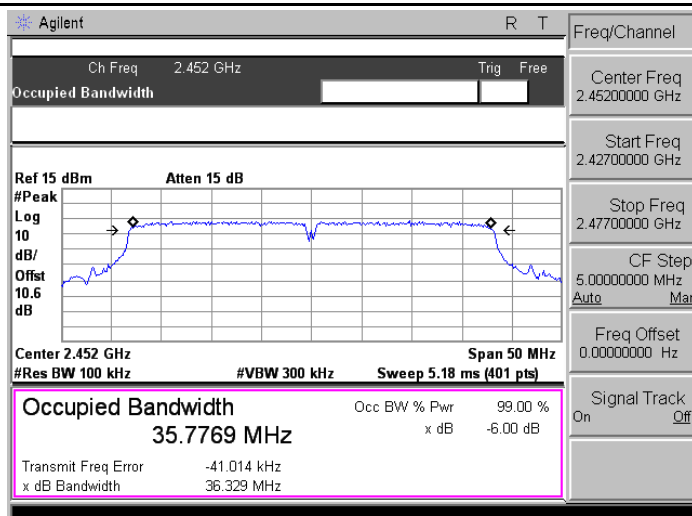


8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

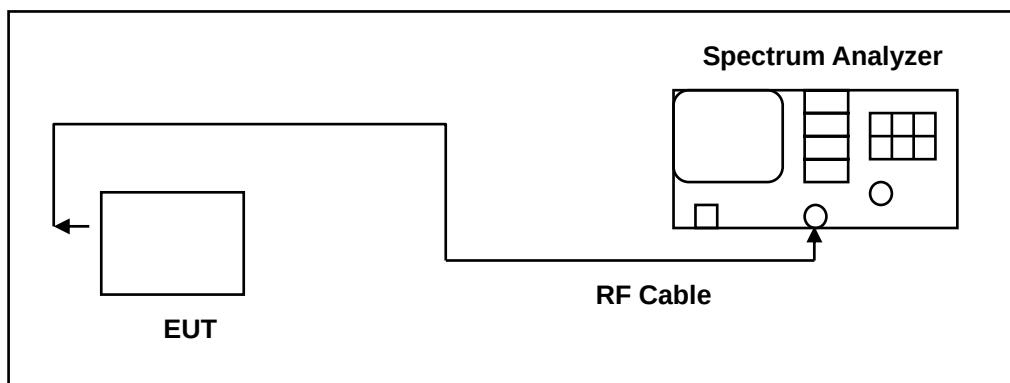

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result




Model Number	OPU1122		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-9.43		< 8
2437	-9.743		< 8
2462	-10.62		< 8

Model Number	OPU1122		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-10.51		< 8
2437	-11.37		< 8
2462	-11.73		< 8

Model Number	OPU1122		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2412	-10.71		< 8
2437	-11.13		< 8
2462	-11.53		< 8


Model Number	OPU1122		
Test Item	Maximum Power Density		
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode		
Date of Test	01/22/2014	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2422	-15.32		< 8
2437	-15.72		< 8
2452	-15.98		< 8

8.6. Test Graphs

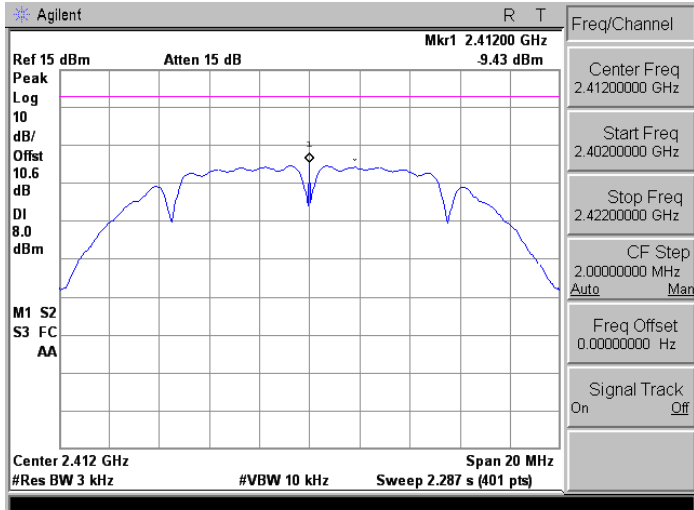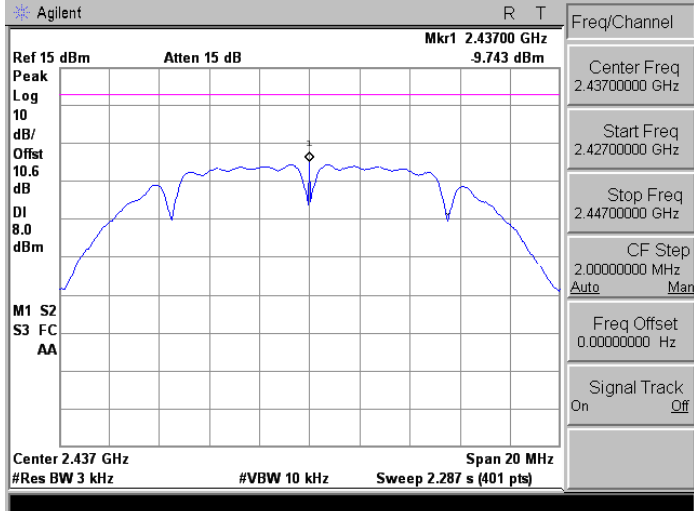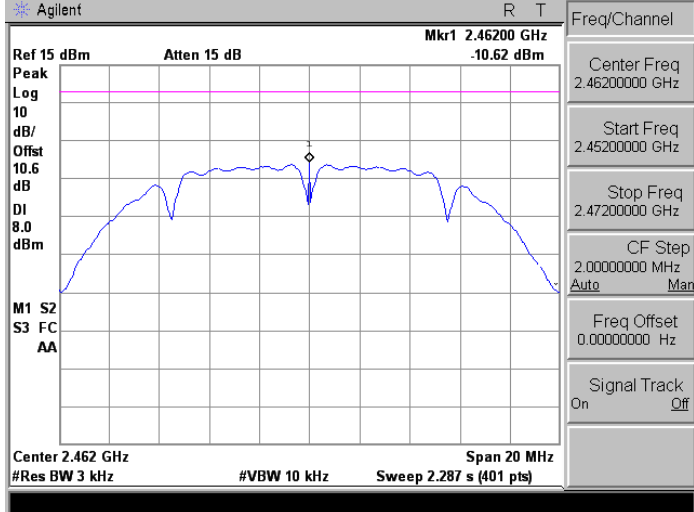
Mode 2: IEEE 802.11b Link Mode	
2412	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.41200 GHz -9.43 dBm Peak Log 10 dB/Offst 10.6 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.287 s (401 pts) Span 20 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.40200000 GHz Stop Freq 2.42200000 GHz CF Step 2.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.43700 GHz -9.743 dBm Peak Log 10 dB/Offst 10.6 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.287 s (401 pts) Span 20 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42700000 GHz Stop Freq 2.44700000 GHz CF Step 2.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.46200 GHz -10.62 dBm Peak Log 10 dB/Offst 10.6 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 2.287 s (401 pts) Span 20 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.45200000 GHz Stop Freq 2.47200000 GHz CF Step 2.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

Mode 3: IEEE 802.11g Link Mode


2412

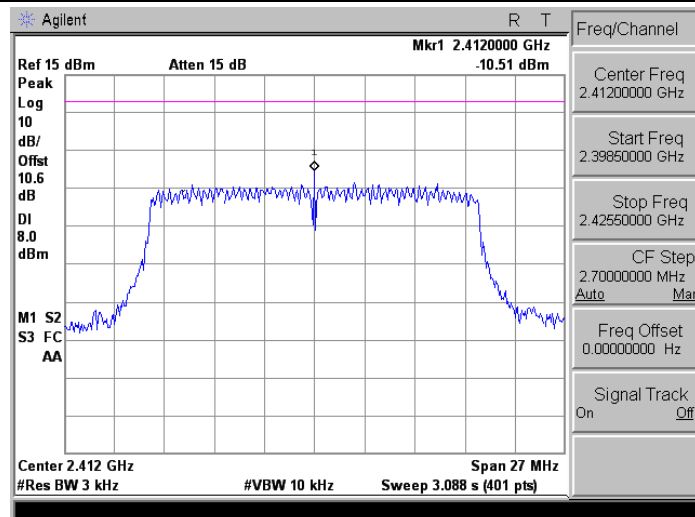

2437

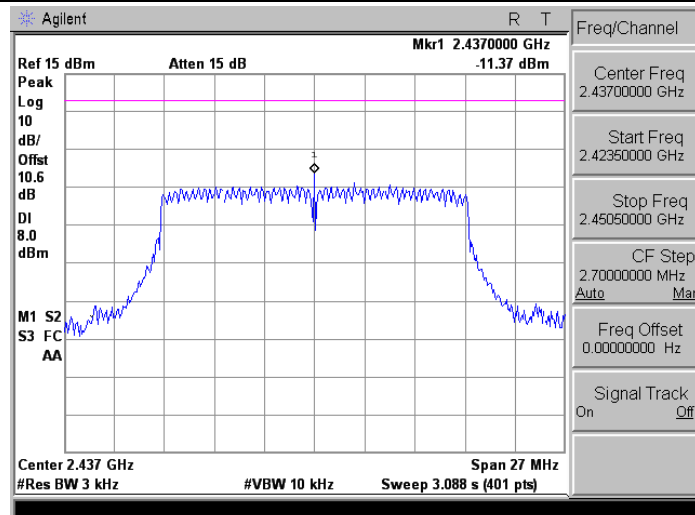


2462

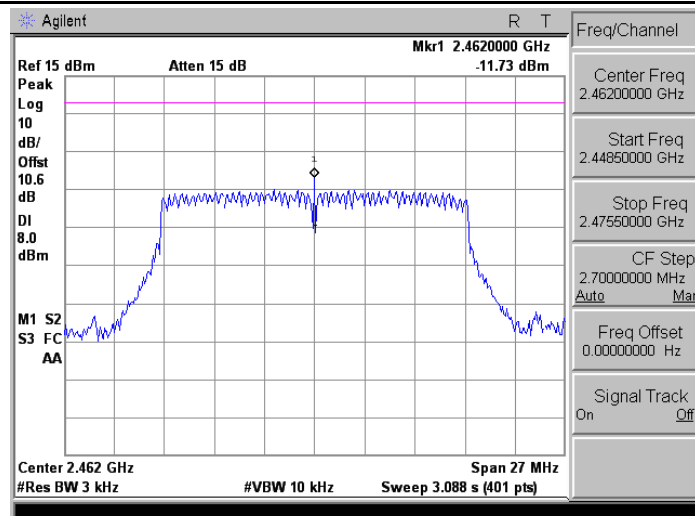


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

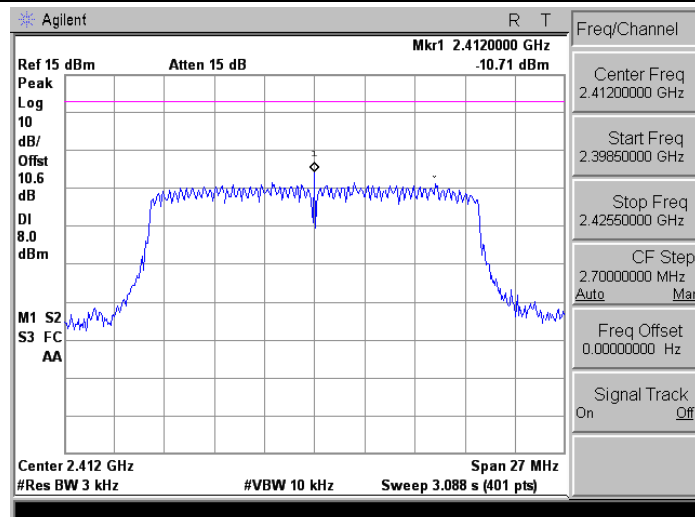




2437

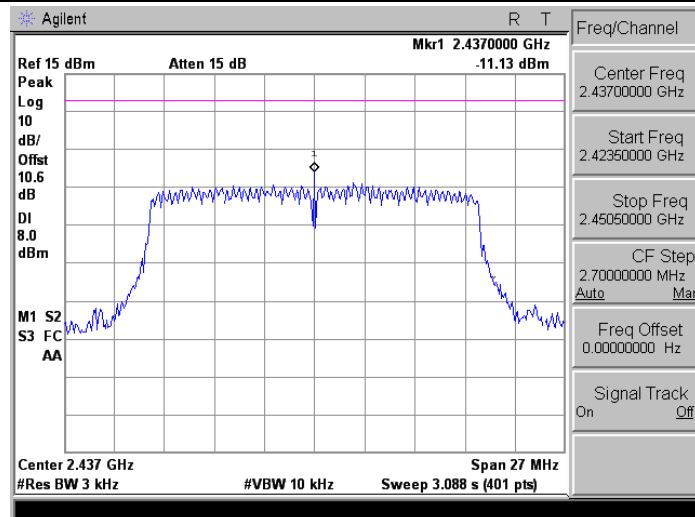

2462

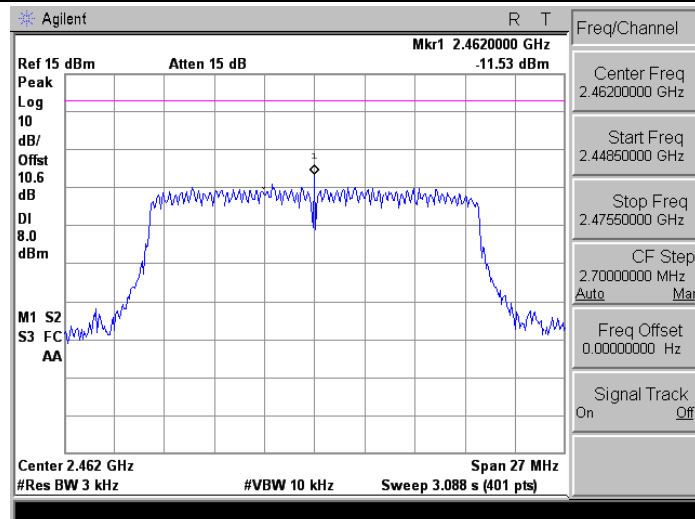

Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

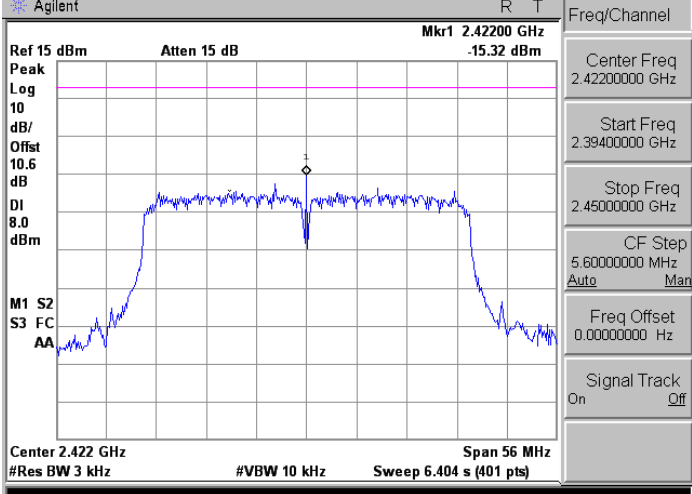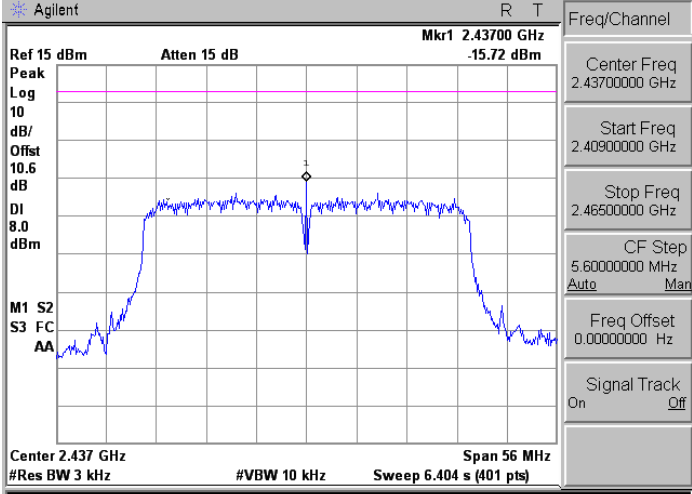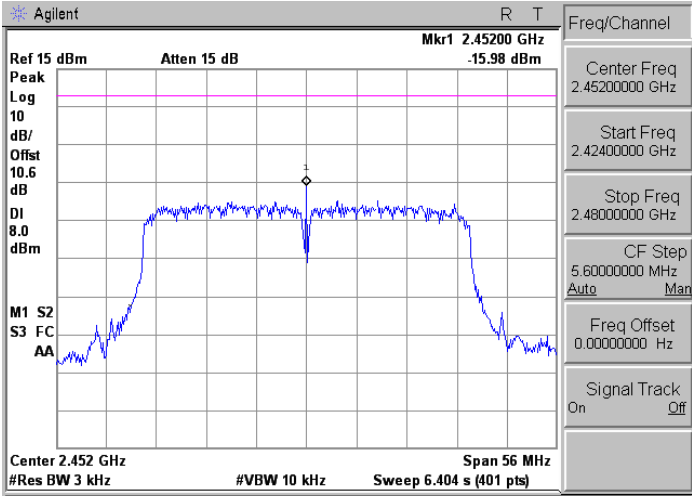
2422	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.42200 GHz -15.32 dBm Peak Log 10 dB/ Offst 10.6 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.422 GHz Span 56 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 6.404 s (401 pts) Freq/Channel Center Freq 2.42200000 GHz Start Freq 2.39400000 GHz Stop Freq 2.45000000 GHz CF Step 5.60000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.43700 GHz -15.72 dBm Peak Log 10 dB/ Offst 10.6 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.437 GHz Span 56 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 6.404 s (401 pts) Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.40900000 GHz Stop Freq 2.46500000 GHz CF Step 5.60000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2452	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.45200 GHz -15.98 dBm Peak Log 10 dB/ Offst 10.6 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.452 GHz Span 56 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 6.404 s (401 pts) Freq/Channel Center Freq 2.45200000 GHz Start Freq 2.42400000 GHz Stop Freq 2.48000000 GHz CF Step 5.60000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

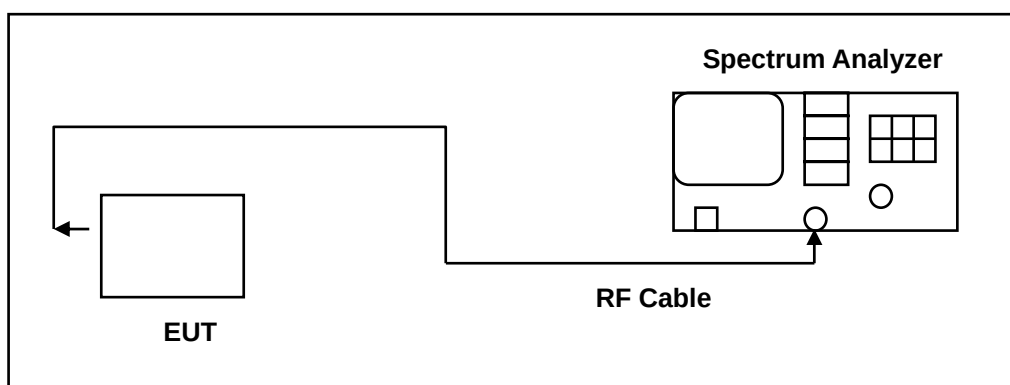

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/11/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure




In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels (Channel 1, 6, 11)


9.5. Test Graphs

Reference level

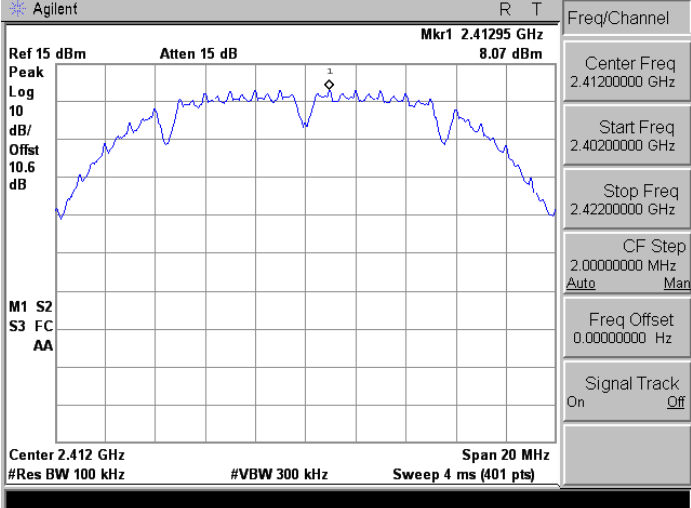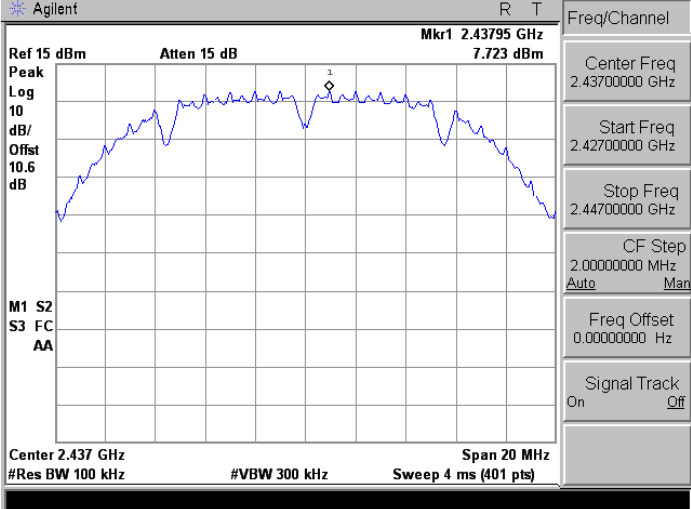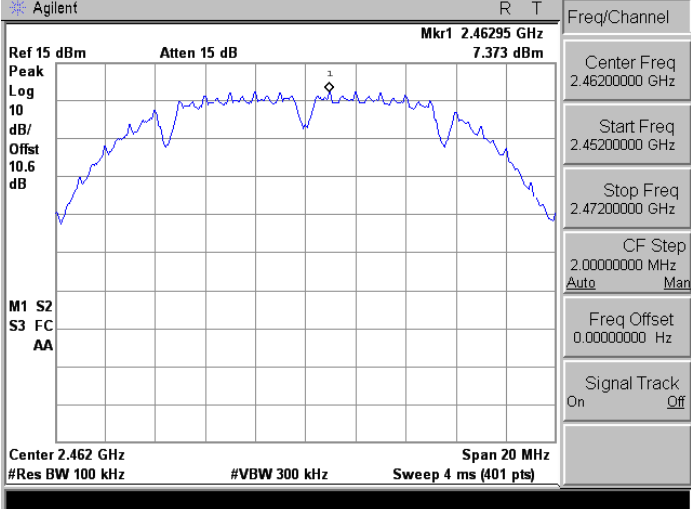
Mode 2: IEEE 802.11b Link Mode 2412	
2437	
2462	

Mode 3: IEEE 802.11g Link Mode


2412

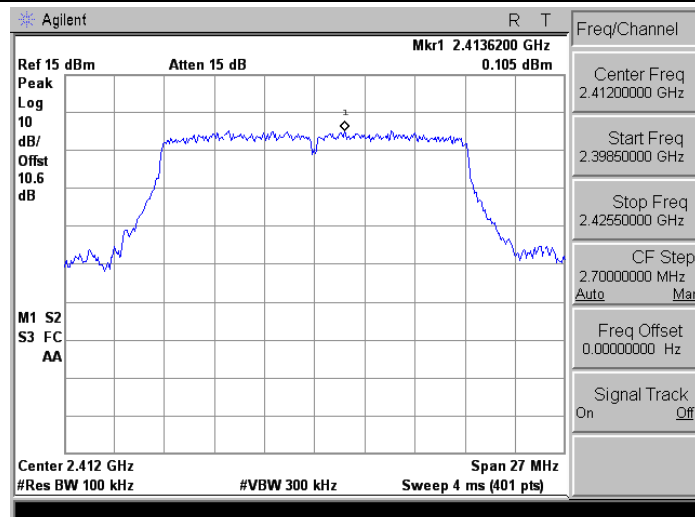




2437

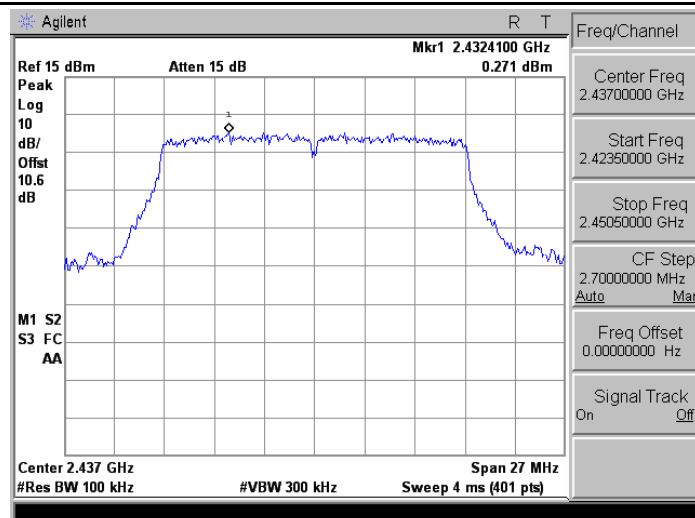




2462

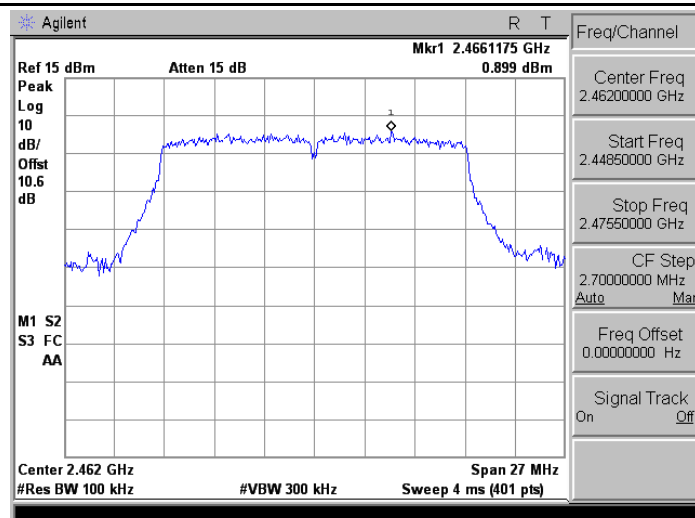

Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode

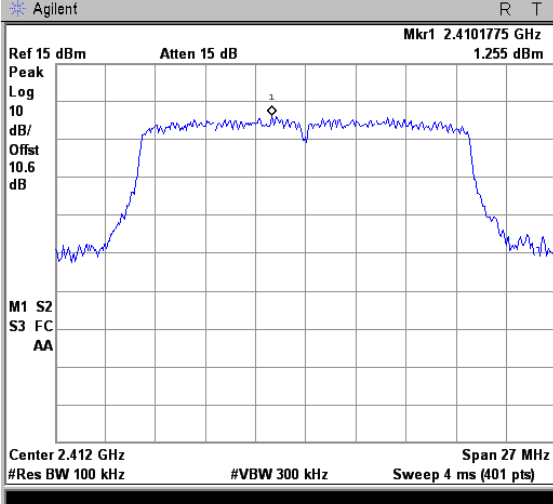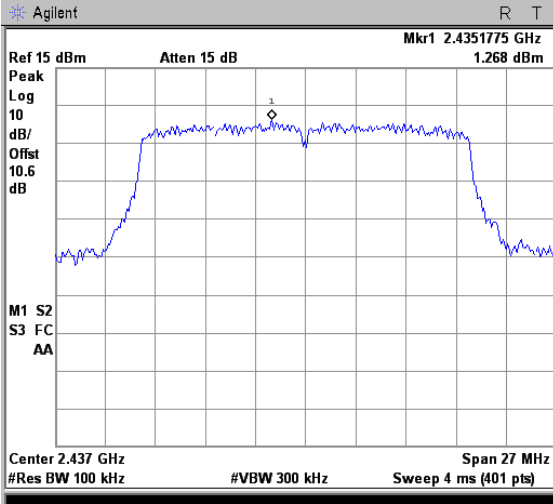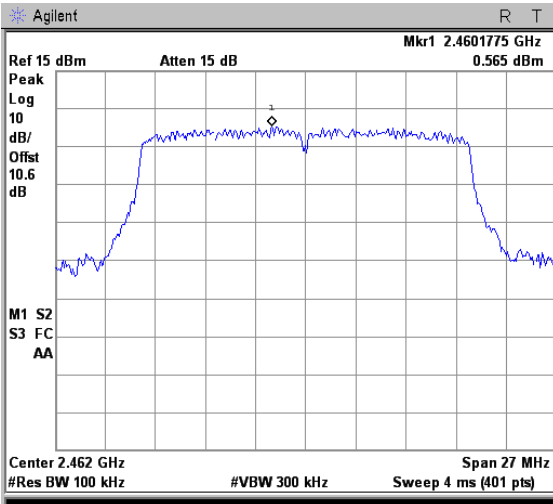2412	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.4101775 GHz 1.255 dBm Center 2.412 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39850000 GHz Stop Freq 2.42550000 GHz CF Step 2.70000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.4351775 GHz 1.268 dBm Center 2.437 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42350000 GHz Stop Freq 2.45050000 GHz CF Step 2.70000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2462	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.4601775 GHz 0.565 dBm Center 2.462 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44850000 GHz Stop Freq 2.47550000 GHz CF Step 2.70000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

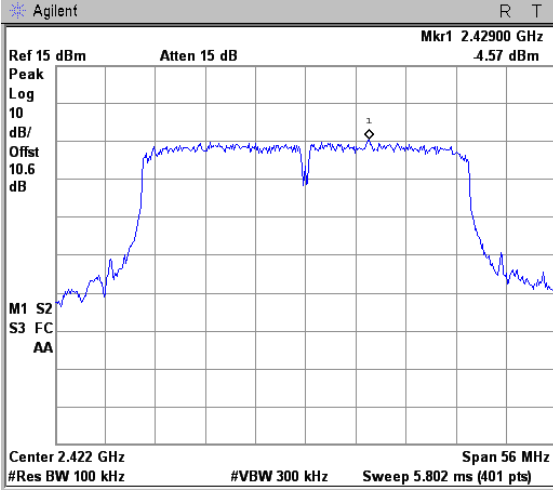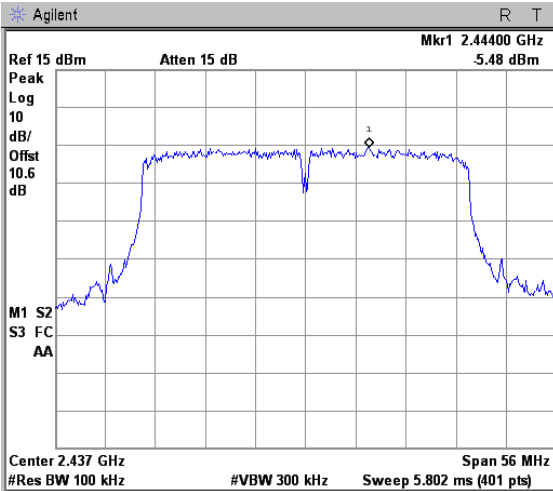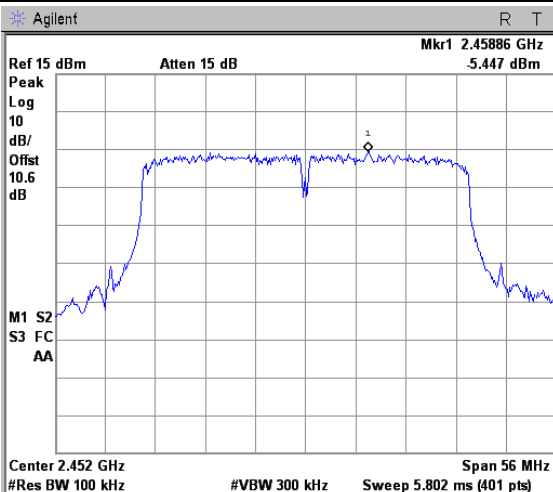2422	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.42900 GHz -4.57 dBm Peak Log 10 dB/ Offst 10.6 dB M1 S2 S3 FC AA Center 2.422 GHz Span 56 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.802 ms (401 pts) Freq/Channel Center Freq 2.42200000 GHz Start Freq 2.39400000 GHz Stop Freq 2.45000000 GHz CF Step 5.60000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2437	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.44400 GHz -5.48 dBm Peak Log 10 dB/ Offst 10.6 dB M1 S2 S3 FC AA Center 2.437 GHz Span 56 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.802 ms (401 pts) Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.40900000 GHz Stop Freq 2.46500000 GHz CF Step 5.60000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2452	 Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.45886 GHz -5.447 dBm Peak Log 10 dB/ Offst 10.6 dB M1 S2 S3 FC AA Center 2.452 GHz Span 56 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.802 ms (401 pts) Freq/Channel Center Freq 2.45200000 GHz Start Freq 2.42400000 GHz Stop Freq 2.48000000 GHz CF Step 5.60000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off


Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Link Mode


2412

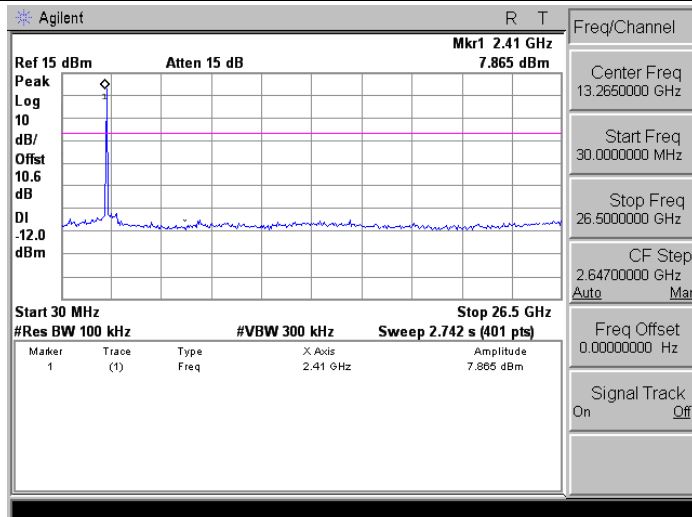

2437

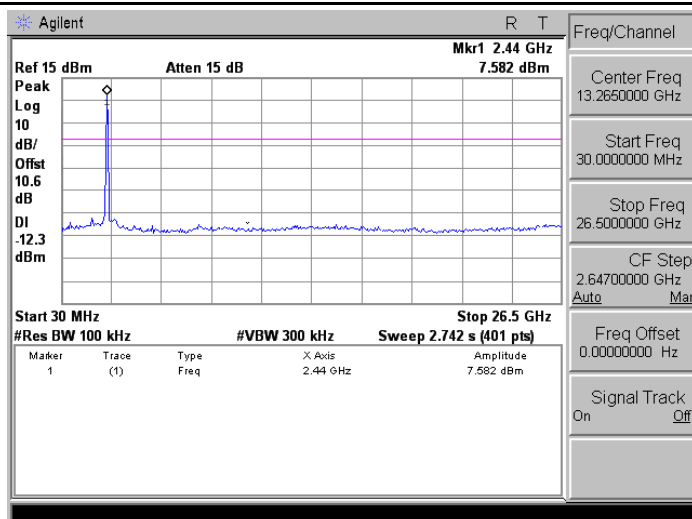


2462

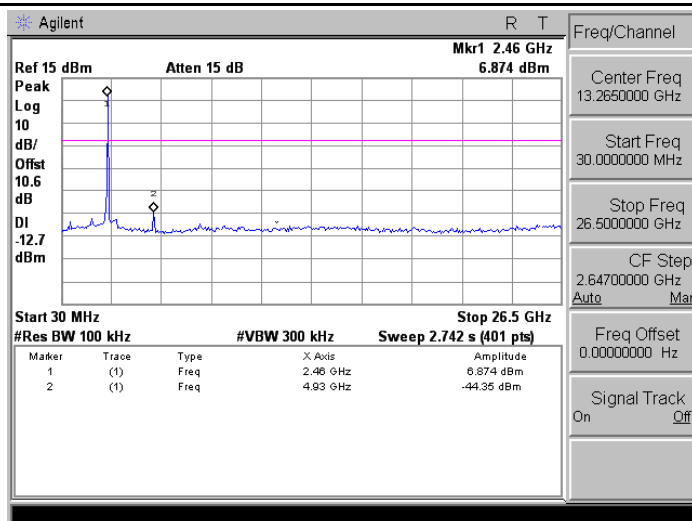


Mode 3: IEEE 802.11g Link Mode


2412

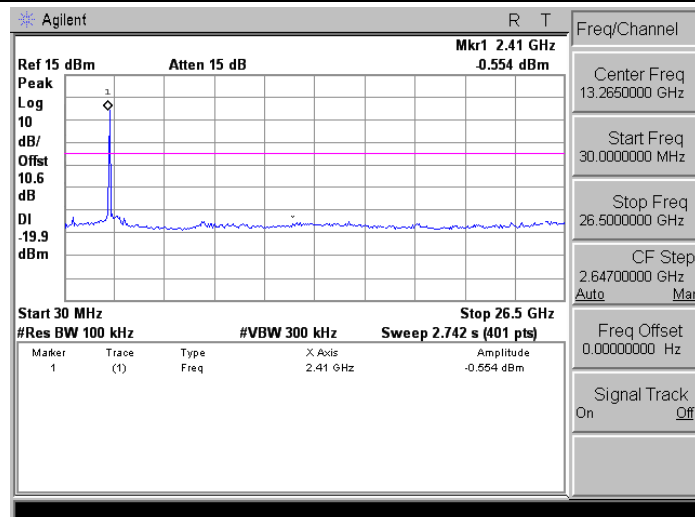

2437

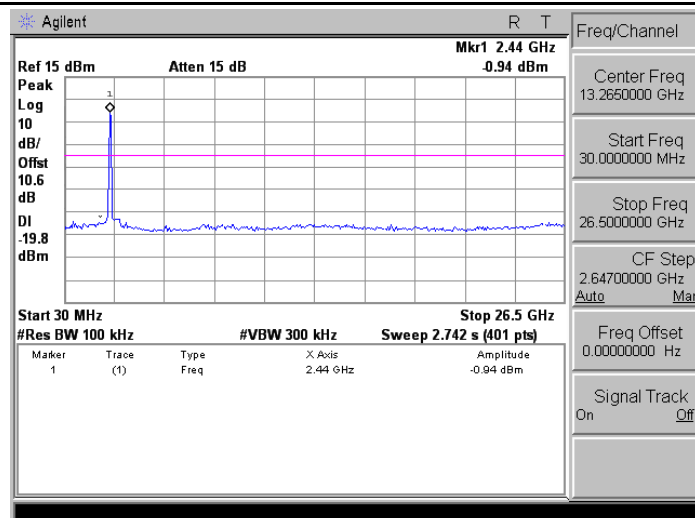


2462

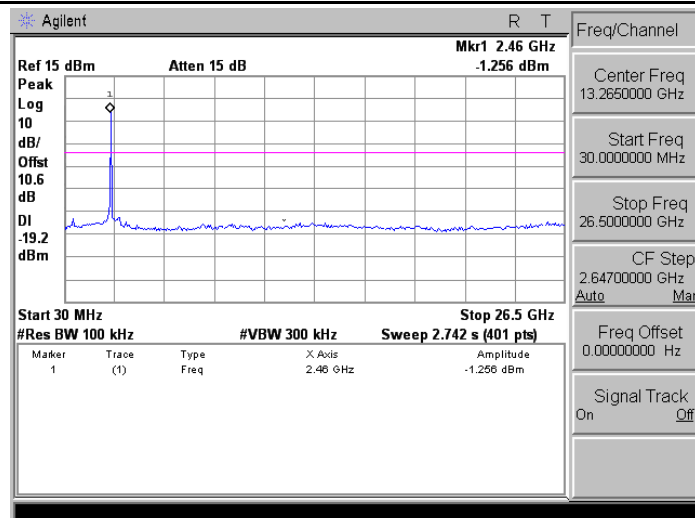


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode


2412

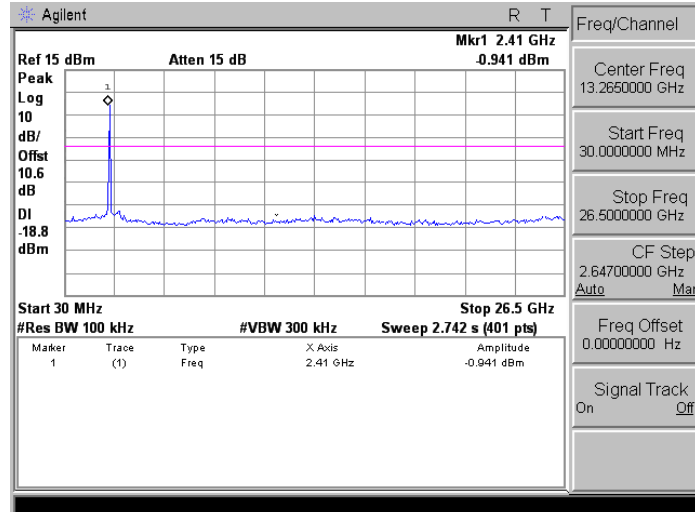

2437

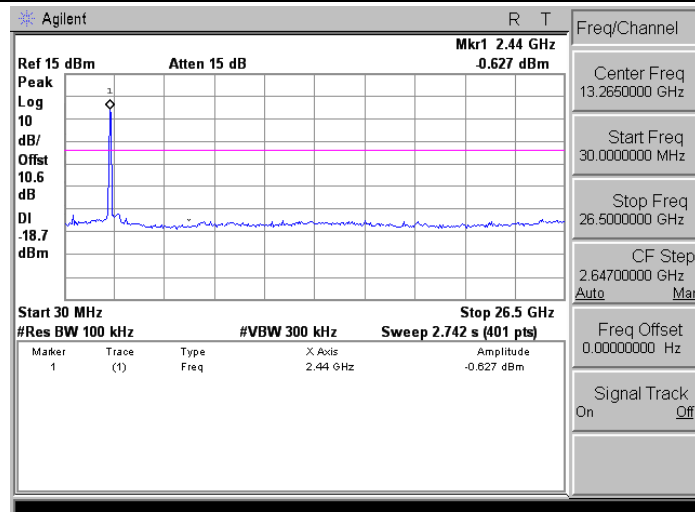


2462

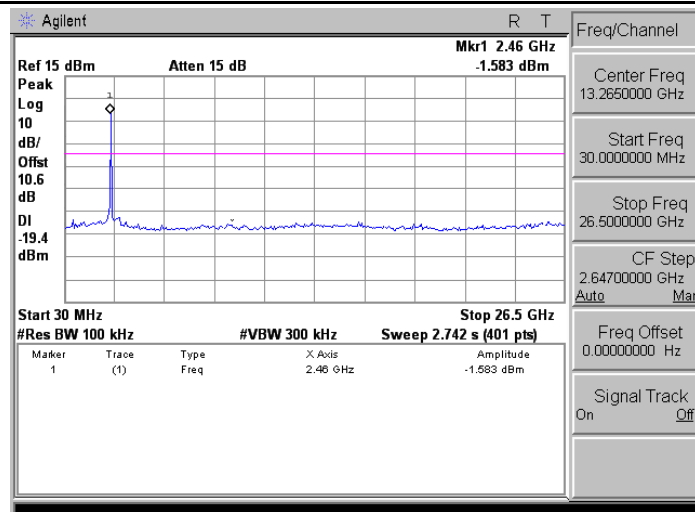


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode


2422

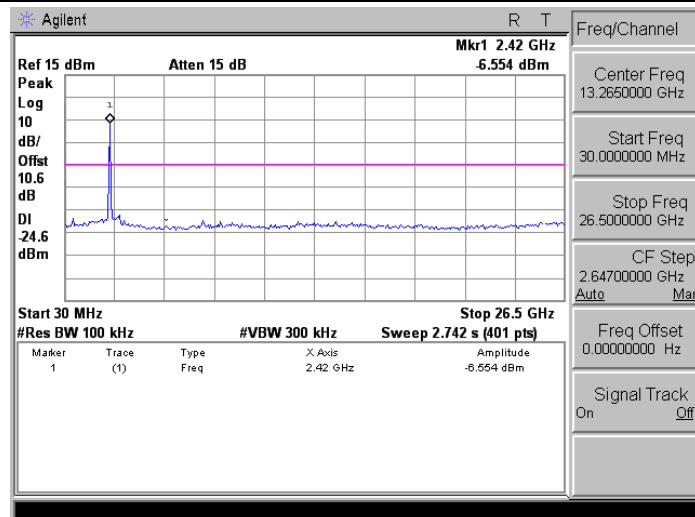

2437

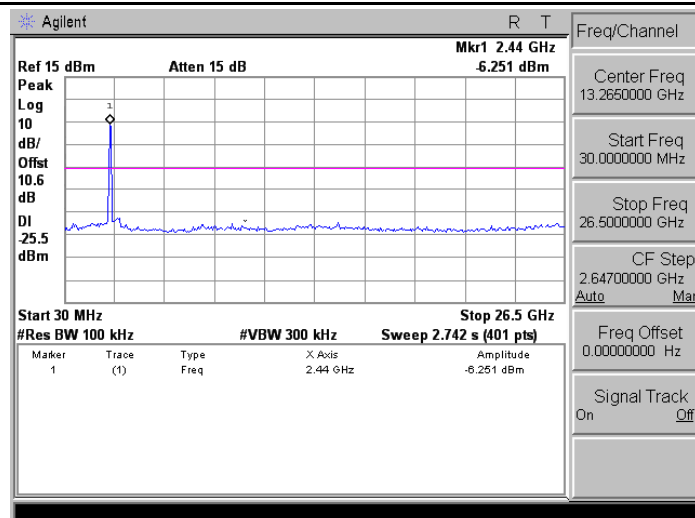


2452

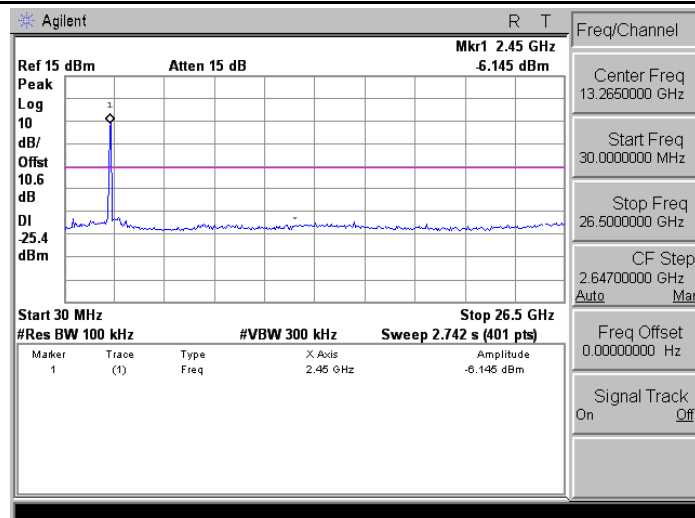


Conducted Band Edge

Mode 2: IEEE 802.11b Link Mode

2412

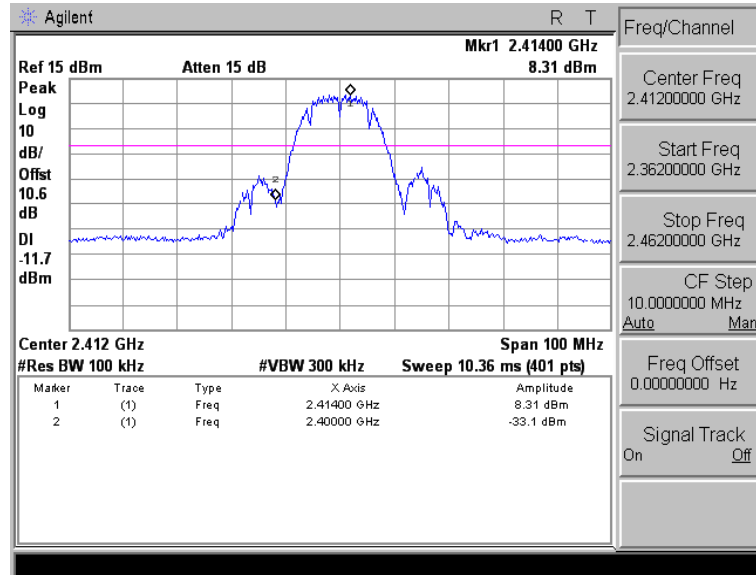


2462

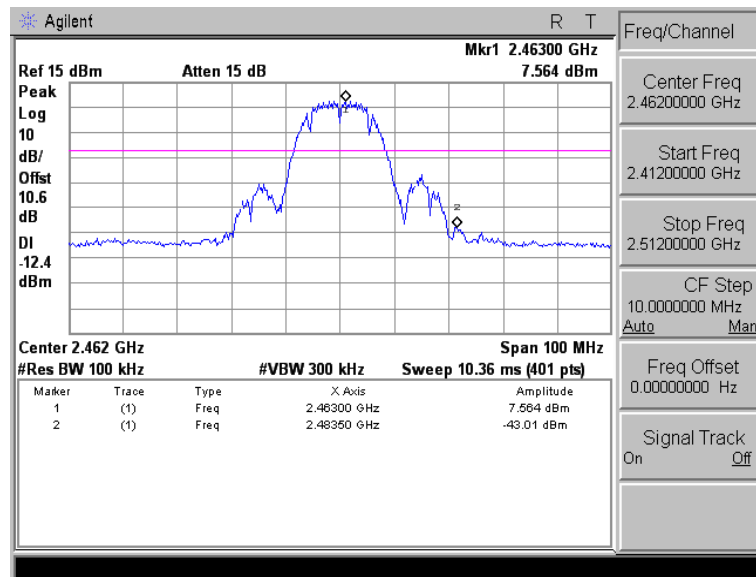


Mode 3: IEEE 802.11g Link Mode

2412

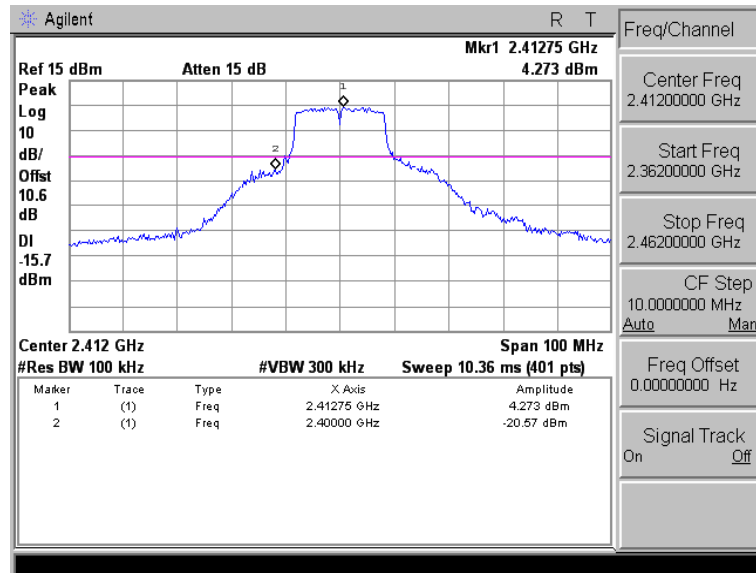


2462

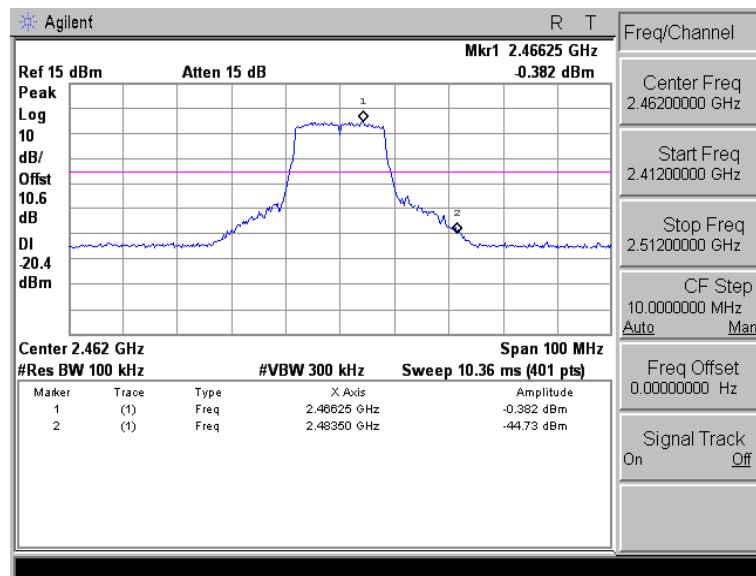


Mode 4: IEEE 802.11n 2.4GHz 20MHz Link Mode

2412

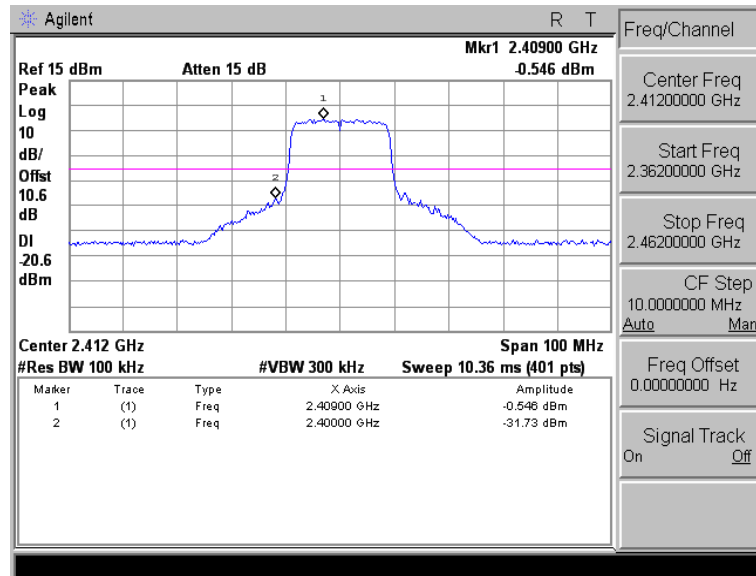


2462

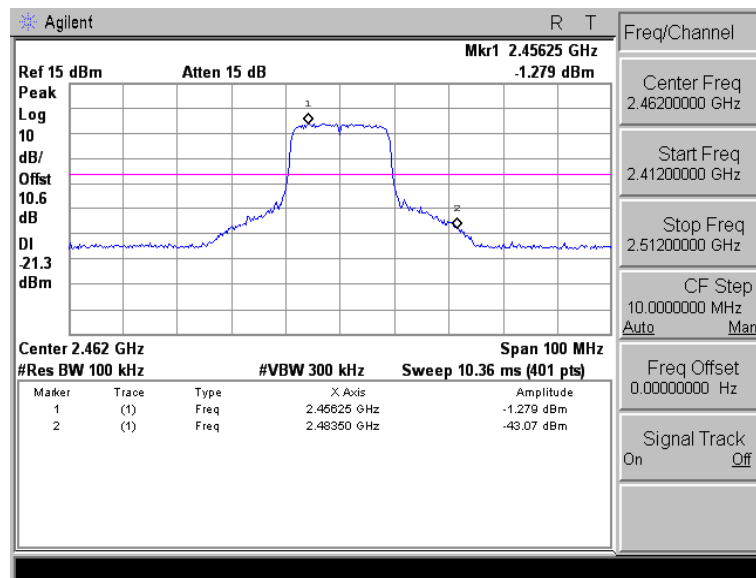


Mode 5: IEEE 802.11n 2.4GHz 40MHz Link Mode

2422

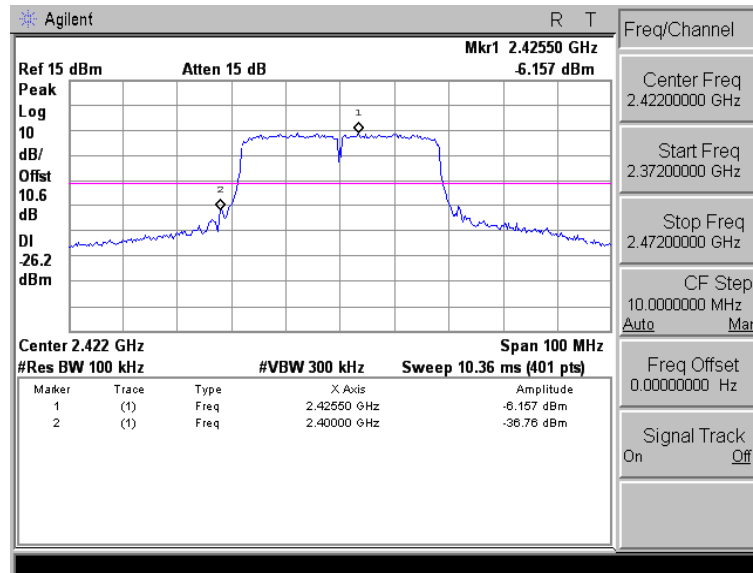

2452

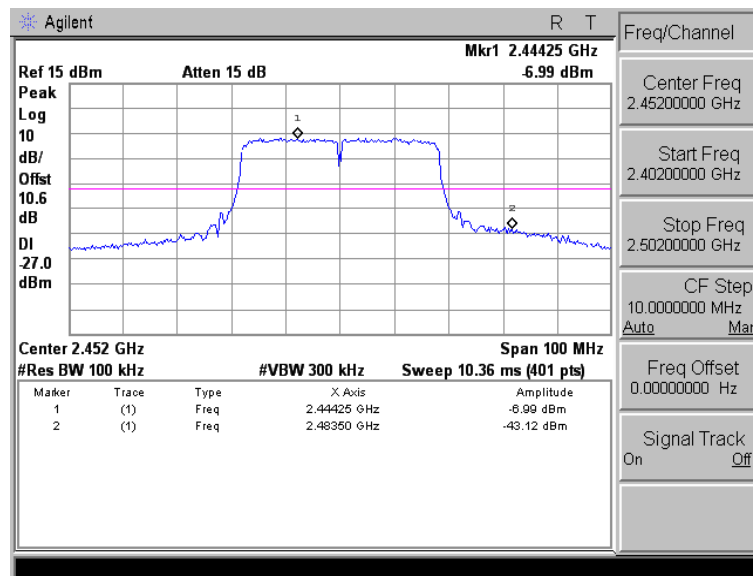


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

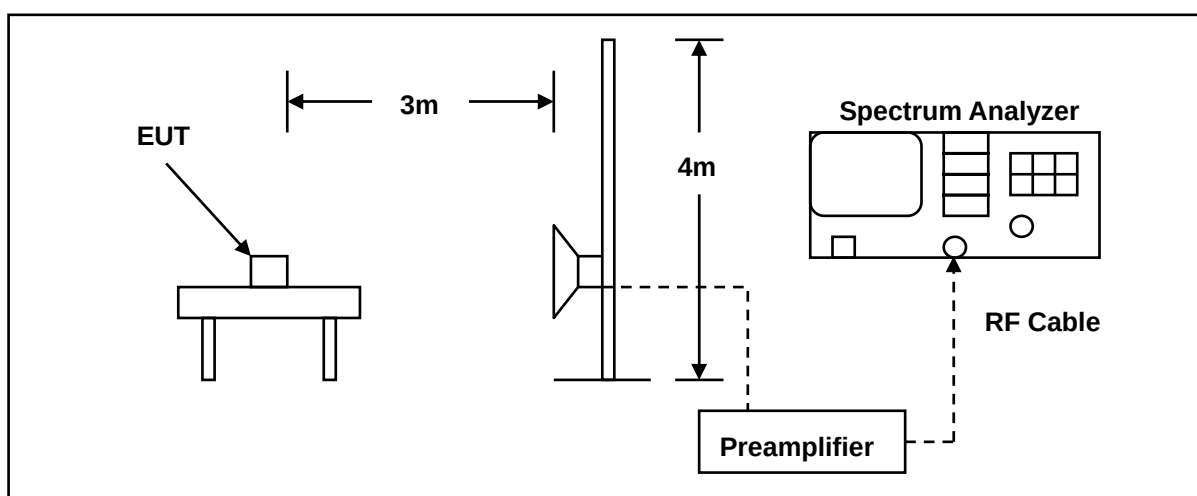

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

10.5. Test Result

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OPU1122		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		01/22/2014	
Frequency:		2412 MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.870	54.96	4.23	59.19	74.00	-14.81	peak	H
2388.870	44.28	4.23	48.51	54.00	-5.49	AVG	H
2390.000	54.21	4.24	58.45	74.00	-15.55	peak	H
2390.000	46.62	4.24	50.86	54.00	-3.14	AVG	H
2372.810	51.13	4.12	55.25	74.00	-18.75	peak	V
2372.810	38.31	4.12	42.43	54.00	-11.57	AVG	V
2390.000	50.04	4.24	54.28	74.00	-19.72	peak	V
2390.000	38.77	4.24	43.01	54.00	-10.99	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OPU1122		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		01/22/2014	
Frequency:		2462 MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	54.69	4.89	59.58	74.00	-14.42	peak	H
2483.500	46.56	4.89	51.45	54.00	-2.55	AVG	H
2484.000	54.89	4.91	59.80	74.00	-14.20	peak	H
2484.000	46.01	4.91	50.92	54.00	-3.08	AVG	H
2483.500	49.26	4.89	54.15	74.00	-19.85	peak	V
2483.500	39.79	4.89	44.68	54.00	-9.32	AVG	V
2488.120	50.26	4.93	55.19	74.00	-18.81	peak	V
2488.120	37.59	4.93	42.52	54.00	-11.48	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	01/22/2014		
Frequency:	2412 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.420	65.79	4.23	70.02	74.00	-3.98	peak	H
2389.420	45.11	4.23	49.34	54.00	-4.66	AVG	H
2390.000	67.19	4.24	71.43	74.00	-2.57	peak	H
2390.000	46.39	4.24	50.63	54.00	-3.37	AVG	H
2389.530	55.02	4.23	59.25	74.00	-14.75	peak	V
2389.530	40.47	4.23	44.70	54.00	-9.30	AVG	V
2390.000	55.15	4.24	59.39	74.00	-14.61	peak	V
2390.000	41.56	4.24	45.80	54.00	-8.20	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OPU1122		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		3		Date:		01/22/2014	
Frequency:		2462 MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	55.94	4.89	60.83	74.00	-13.17	peak	H
2483.500	43.74	4.89	48.63	54.00	-5.37	AVG	H
2483.720	56.93	4.89	61.82	74.00	-12.18	peak	H
2483.720	43.48	4.89	48.37	54.00	-5.63	AVG	H
2483.500	47.84	4.89	52.73	74.00	-21.27	peak	V
2483.500	38.59	4.89	43.48	54.00	-10.52	AVG	V
2486.120	50.14	4.91	55.05	74.00	-18.95	peak	V
2486.120	37.00	4.91	41.91	54.00	-12.09	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	01/22/2014		
Frequency:	2412 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.530	63.12	4.23	67.35	74.00	-6.65	peak	H
2389.530	46.22	4.23	50.45	54.00	-3.55	AVG	H
2390.000	60.08	4.24	64.32	74.00	-9.68	peak	H
2390.000	47.11	4.24	51.35	54.00	-2.65	AVG	H
2389.200	51.82	4.23	56.05	74.00	-17.95	peak	V
2389.200	39.05	4.23	43.28	54.00	-10.72	AVG	V
2390.000	51.06	4.24	55.30	74.00	-18.70	peak	V
2390.000	39.65	4.24	43.89	54.00	-10.11	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	01/22/2014		
Frequency:	2462 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	59.01	4.89	63.90	74.00	-10.10	peak	H
2483.500	44.31	4.89	49.20	54.00	-4.80	AVG	H
2483.720	58.59	4.89	63.48	74.00	-10.52	peak	H
2483.720	44.06	4.89	48.95	54.00	-5.05	AVG	H
2483.500	49.11	4.89	54.00	74.00	-20.00	peak	V
2483.500	38.97	4.89	43.86	54.00	-10.14	AVG	V
2484.360	51.22	4.91	56.13	74.00	-17.87	peak	V
2484.360	38.41	4.91	43.32	54.00	-10.68	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	OPU1122			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	5			Date:	01/22/2014		
Frequency:	2422 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2385.840	66.49	4.20	70.69	74.00	-3.31	peak	H
2385.840	44.25	4.20	48.45	54.00	-5.55	AVG	H
2390.000	63.12	4.24	67.36	74.00	-6.64	peak	H
2390.000	46.37	4.24	50.61	54.00	-3.39	AVG	H
2388.360	56.38	4.22	60.60	74.00	-13.40	peak	V
2388.360	41.88	4.22	46.10	54.00	-7.90	AVG	V
2390.000	51.99	4.24	56.23	74.00	-17.77	peak	V
2390.000	42.41	4.24	46.65	54.00	-7.35	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OPU1122		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		5		Date:		01/22/2014	
Frequency:		2452 MHz		Test By:		Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	55.73	4.89	60.62	74.00	-13.38	peak	H
2483.500	45.82	4.89	50.71	54.00	-3.29	AVG	H
2484.400	57.86	4.91	62.77	74.00	-11.23	peak	H
2484.400	45.19	4.91	50.10	54.00	-3.90	AVG	H
2483.500	50.28	4.89	55.17	74.00	-18.83	peak	V
2483.500	39.70	4.89	44.59	54.00	-9.41	AVG	V
2484.000	51.78	4.91	56.69	74.00	-17.31	peak	V
2484.000	39.62	4.91	44.53	54.00	-9.47	AVG	V

11 Antenna Measurement

11.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Antenna Connector Construction

The antenna used in this product is PCB antenna. And the maximum Gain of this antenna is 2.76 dBi.