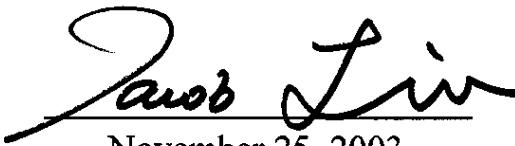


Report No.	T5415114	
FCC ID	OSCMSP250CLBIP	
Specifications	FCC Part 15.109(g), CISPR 22, Class B	
Test Method	ANSI C63.4 1992	
Application	<input checked="" type="checkbox"/> Original <input type="checkbox"/> Class II Changes	
Applicant	TVS Electronics Limited	
Applicant address	34, Developed plots, South Phase, Industrial Estate, Guindy, Chennai – 600 032.	
Items tested	Printer	
Model No.	MSP250-bip (Sample # T5415608)	
EUT Condition	<input checked="" type="checkbox"/> Engineer sample <input type="checkbox"/> Pre-production <input type="checkbox"/> Final production	
Results	Compliance (As detailed within this report)	
Date	10/16/2003 (month / day / year) (Sample received) 10/16/2003 (month / day / year) (Tested)	
Prepared by	 Project Engineer	
Authorized by	 V. General Manager (Jacob Lin)	
Issue date	November 25, 2003 (month / day / year)	
Modifications	None	
Tested by	Training Research Co., Ltd. (<u>Accredited by NVLAP</u>)	
Office at	1F, No. 255, Nan Yang Street, Hsichih, Taipei Hsien 221, Taiwan	
Open site at	No. 15, Lane 530, Pa-Lian RD., Sec. 1, Hsichih City, Taipei Hsien, Taiwan, R.O.C..	

Conditions of issue :

- *This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.*
- *The test data in this test report are following the procedures in accordance with the terms of accreditation.*
- *This test report and measurements made by TRC are traceable to the NIST only Conducted and Radiated Method (TRC is accredited by NVLAP, code No.: 200174-0).*
- *The device has been tested is fully complied with the requirements the Directive FCC Part 15.*

Contents

Chapter 1 Introduction

Description of EUT	3
Configuration of Test Setup	4
List of Support Equipment	5

Chapter 2 Conducted Emission Test

Test Condition and Setup	7
Conducted Test Placement	8

Chapter 3 Radiated Emission Test

Test Condition and Setup	9
Radiated Test Placement	10

Appendix A :

Conducted test result	11
-----------------------------	----

Appendix B :

Radiated test result	12
----------------------------	----

Chapter 1 Introduction

Description of EUT:

The EUT is a Dot Matrix Printer.

Test method:

Pretest was found that the emission of operating mode is worse than standby mode. So, The final test is made at the operating mode.

During the pretest, the EUT was at “operating” mode.


The test voltage is 230Vac/50Hz.

The test placement as the photographs showed is the worst case emission placed. (If the emission is close to the ambient, the resolution BW and view resolution will be reduced and the data will be recorded by detection of maximum hold peak mode.)

The testing configuration of test setup is showing in the next page.

There is no deviation from standard test method.

Configuration of test setup

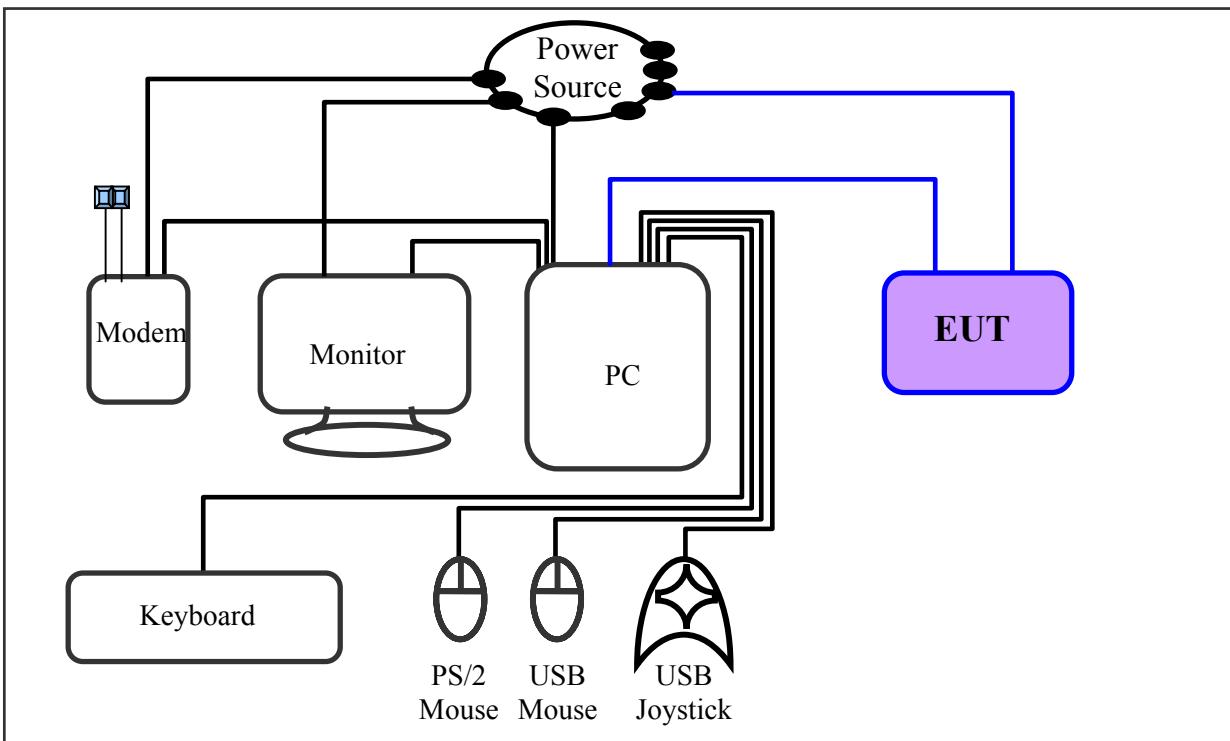

Connections:

PC:

- *Serial Port --- via a 76cm shielded RS-232 cable to an external modem
- *Monitor Port --- a monitor with 1.5m length data cable.
- *Keyboard Port --- a keyboard with 1.7m length data cable.
- *Mouse Port --- a mouse with 1.8m length of data cable.
- *Printer port --- to EUT.
- *USB Port A --- a joystick with 1.5m length shielded and no ferrite bead data cable
- *USB Port B --- a mouse with 1.5m length shielded and no ferrite bead data cable

(Each port on PC is connected with suitable device)

EUT:

*Printer port --- via a 1.18m length braid shielded data cable to the printer port of PC.
*Power port --- via a 2.0m length power cable to the power source.

List of support equipment

Conducted (Radiated) test:

PC : **HP Brio 85xx 6/350**
Model No. : D6928A
Serial No. : SG91801443
FCC ID : Doc Approved
Power type : 100 ~ 230VAC / 50 ~ 60Hz, 5A, Switching
Power cord : Non-shielded, 2.33m long, Plastic, No ferrite core

Keyboard : **Logitech SK-720C**
Model No. : Y-SA2
Serial No. : SCC04514357
FCC ID : GYUR49SK
Power type : By PC
Data cable : Shielded, 1.73m long, with ferrite core

Monitor : **HP 15' Color Monitor**
Model No. : D2827A
Serial No. : KR91161719
FCC ID : C5F7NFCMC1518X
Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching
Power cord : Shielded, 1.83m long, No ferrite core
Data cable : Shielded, 1.46m long, with two ferrite cores

Mouse : **HP**
Model No. : M-S34
Serial No. : LZB90714106 (LZB90714122)
FCC ID : DZL211029
Power type : By PC
Power cord : Non-shielded, 1.88m long, No ferrite core

USB Mouse : **Logitech Wheel Mouse**
Model No. : M-BJ-58
Serial No. : LN20901985
FCC ID : Doc Approved
Power type : By PC
Power cord : Non-shielded, 1.88m long, No ferrite core

Modem : **ACEEX**
Model No. : DM-1414V
FCC ID : IFAXDM1414
Power type : 120VAC, 60Hz/ 9VAC, 1A
Power cord : Non-shielded, 1.9m long, no ferrite cord
Data cable : RS232, Shielded, 1.2m long, no ferrite core
 RJ11C x 2, 7' long non-shielded, no ferrite core

USB Joystick : **Rockfire**
Model No. : QF-337uv
Serial No. : 10600545
FCC ID : CE Approval
Power type : Powered by PC
Power cable : Shielded, 1.8m long, No ferrite bead data cable

Chapter 2 Conducted emission test

Test condition and setup:

All the equipment is placed and setup according to the CISPR 22.

The EUT is assembled on a wooden table that is 80 cm high, is placed 40 cm from the back-wall that is a vertical conducting plane. One LISN is for EUT, the other LISN is for support equipment. They are all placed on the conductive ground. The EUT's LISN connect a line switch box for selecting L1 or L2, then connect to a preamplifier and spectrum for pretest.

The spectrum measured from 150KHz to 30MHz. Conducted emission levels are detected at max. peak mode. But if the max. peak mode failed or over average limit, it will be measured by QP and average detection mode using the Receiver.

Final AC Power line Conducted Emission Measurement set the measurement equipment in Average Detector mode, Re-test all the frequencies that conducted emission level over the limit, if the Quasi-Peak Detector measurement result higher than the Average Detector measurement result 6 dB above at same frequency, than that frequency emission type category as Broad Band Noise. The Quasi-Peak Detector measure result will minus 13dB. As measured result.

While testing, there is the worst-emission plot printed at peak detection mode, and there are more than 6 highest emissions relative to limit recorded. The plot is kept as the original data, not included in test report.

List of test Instrument :

Instrument Name	Model No.	Brand	Serial No.	Calibration Date	Calibration Date
Spectrum analyzer	8591EM	H P	3710A01203	05/21/03	05/20/04
LISN (EUT)	3825/2	EMCO	9411-2284	07/21/03	07/20/04
LISN (Support E.)	3825/2	EMCO	9210-2007	09/03/03	09/02/04
Preamplifier	CB-001	TRC	98-02	05/29/03	05/28/04
Line switch box	CB-01	TRC	98-04	05/29/03	05/28/04
1dB Attenuator	CAT-1	mini-circuits	-----	05/29/03	05/28/04
FTB-1-6 Attenuator	15542	mini-circuits	9620 03	05/29/03	05/28/04
20dB Attenuator	CAT-20	mini-circuits	9620 13	05/29/03	05/28/04
3dB Attenuator	CAT-3	mini-circuits	9620 14	05/29/03	05/28/04
Coixal Cable	BNC3200B-0058	Jyebao	CL-05	05/29/03	05/28/04
Coixal Cable	BNC31VB-0316	Jyebao	IF-01ca0069-036	05/29/03	05/28/04
50ohm terminator	370BNM	NARDA	PWR5W	07/21/03	07/20/04
50ohm terminator	370BNM	NARDA	PWR5W	07/21/03	07/20/04
50ohm terminator	370BNM	NARDA	PWR5W	09/03/03	09/02/04
50ohm terminator	370BNM	NARDA	PWR5W	09/03/03	09/02/04

The level of confidence of 95% , the uncertainty of measurement of conducted emission is +3.1/-4.84 dB .

Test Result: Pass (Appendix A)

Conducted Test Placement: (Photographs)



Chapter 3 Radiated emission test

Test condition and setup:

Pretest : Prior to the final test (OATS test) ,the EUT is placed in a shielded enclosure, and scan from 30MHz to 1GHz. This is done to ensure the radiation exactly emits from the EUT.

Final test: Final radiation measurement is made on a **10 - meter**, open-field test site. The EUT is placed on a nonconductive table that is 0.8m height, the top surface is 1.0 x 1.5 meter. The placement is according to CISPR 22.

The M. E. whole range Antenna is used to measure frequency from 30 MHz to 1GHz. The final test is used the Receiver.

Measure more than six top marked frequencies generated from pretest by computer step by step at each frequency. The EUT is rotated 360 degrees, and antenna is raised and lowered from 1 to 4 meters to find the maximum emission levels. The antenna is used with both horizontal and vertical polarization.

Appropriated preamplifier that is made by TRC is used for improving sensitivity and precaution is taken to avoid overloading. The spectrum analyzer's 6dB bandwidth is set to 120 KHz, and the EUT is measured at quasi-peak mode.

If the emission is close to the frequency band of ambient, the tester will recheck the data and the corrected data will be written in the test data sheet. If the emission is just within the ambient, the data from shield room will be taken as the final data.


List of test Instrument :

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>
Receiver	SCR3102	SCHAFFNER	012	04/22/03 04/21/04
Control Box	TWR95-4	TRC	C9001-2	N/A N/A
Antenna	CBL6141A	SCHAFFNER	4206	05/27/03 05/26/04
Open test side (Antenna, Amplify, cable calibrated together)				05/29/03 05/28/04
Pre-amplifier	TRC-CB-2	TRC	CB-002	05/29/03 05/28/04
Coixal Cable(20meter)	RG-214/U	Jyebao	CL-002	05/29/03 05/28/04
Coixal Cable(50cm)	BNC31VB-0316	Jyebao	CL-002	05/29/03 05/28/04
Coixal Cable(20cm)	BNC31VB-0318	Jyebao	CL-007	05/29/03 05/28/04
Coixal Cable(55cm)	BNC31VB-0316	Jyebao	CL-006	05/29/03 05/28/04
Coixal Cable(55cm)	BNC31VB-0316	Jyebao	CL-005	05/29/03 05/28/04

The level of confidence of 95%, the uncertainty of measurement of radiated emission is +2.85/-2.77 dB.

Test Result : Pass (Appendix B)

Radiated Test Placement: (Photographs)

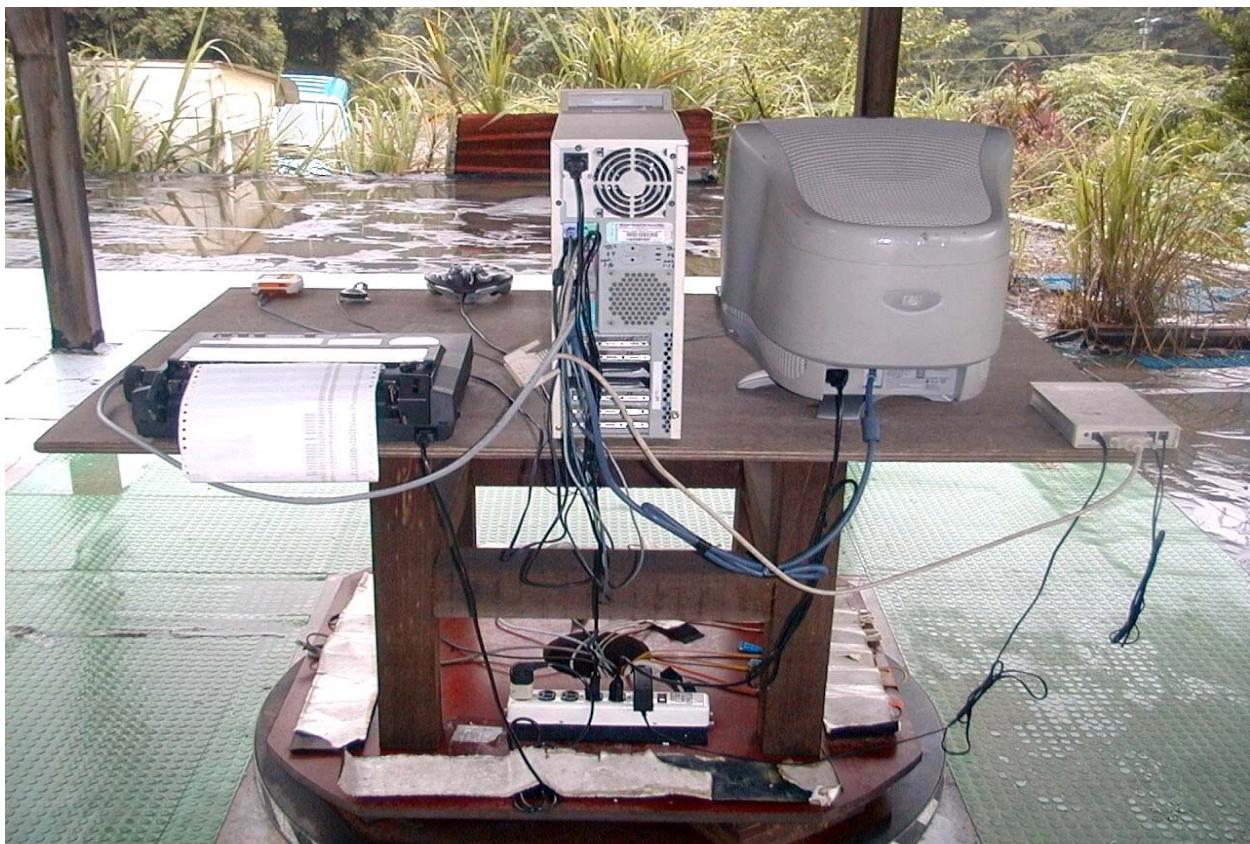

Appendix A**Conducted Emission Test Result:**

Testing room: Temperature : 22 ° C Humidity : 72 % RH

Line 1

Frequency (KHz)	READING AMPLITUDE			LIMIT		Margin (dB)
	Peak (dB μ V)	Quasi-Peak (dB μ V)	Average (dB μ V)	Quasi-Peak (dB μ V)	Average (dB μ V)	
4950.00	31.64	***.**	***.**	56.00	46.00	-14.36
5320.00	36.42	***.**	***.**	60.00	50.00	-13.58
5860.00	36.59	***.**	***.**	60.00	50.00	-13.41
6100.00	36.52	***.**	***.**	60.00	50.00	-13.48
8690.00	41.91	***.**	***.**	60.00	50.00	-8.09
9130.00	41.59	***.**	***.**	60.00	50.00	-8.41
9640.00	38.73	***.**	***.**	60.00	50.00	-11.27
10020.00	39.09	***.**	***.**	60.00	50.00	-10.91
1560.00	35.66	***.**	***.**	60.00	50.00	-14.34
2570.00	35.32	***.**	***.**	60.00	50.00	-14.68

Line 2

Frequency (KHz)	READING AMPLITUDE			LIMIT		Margin (dB)
	Peak (dB μ V)	Quasi-Peak (dB μ V)	Average (dB μ V)	Quasi-Peak (dB μ V)	Average (dB μ V)	
151.00	43.81	***.**	***.**	65.97	55.97	-12.16
1987.00	34.48	***.**	***.**	56.00	46.00	-11.52
2060.00	33.59	***.**	***.**	56.00	46.00	-12.41
6980.00	38.79	***.**	***.**	60.00	50.00	-11.21
8690.00	44.21	***.**	***.**	60.00	50.00	-5.79
8940.00	45.46	***.**	***.**	60.00	50.00	-4.54
9130.00	43.76	***.**	***.**	60.00	50.00	-6.24
9640.00	41.96	***.**	***.**	60.00	50.00	-8.04
10090.00	43.74	***.**	***.**	60.00	50.00	-6.26
11040.00	38.71	***.**	***.**	60.00	50.00	-11.29

*The reading amplitudes are all under limit.

Appendix B

Radiated Emission Test Result:

Test Conditions:

Testing site : Temperature : 25 ° C Humidity : 78 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dB μ V/m	m	degree	dB	dB μ V/m	dB μ V/m	dB

Horizontal

212.9065	31.73	2.49	219	-3.31	28.42	30.00	-1.58
221.2565	26.88	2.49	218	-2.19	24.69	30.00	-5.31
225.4325	30.47	3.99	247	-2.48	27.99	30.00	-2.01
229.6063	25.86	2.49	264	-2.77	23.09	30.00	-6.91
237.9686	33.49	2.49	304	-2.56	30.93	37.00	-6.07

Vertical

53.9313	31.02	1.01	304	-6.15	24.87	30.00	-5.13
75.1495	33.81	1.01	257	-10.19	23.62	30.00	-6.38
88.3000	33.89	1.01	178	-9.25	24.64	30.00	-5.36
200.4015	32.48	1.01	211	-3.90	28.58	30.00	-1.42
203.7503	30.71	2.49	359	-3.86	26.85	30.00	-3.15
225.4475	26.30	1.01	327	-2.48	23.82	30.00	-6.18

Note:

1. Margin = Amplitude - limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss - Amplitude gain)
(For example : 30MHz correction factor = 15.5 + (-15.26) = 0.24 dB/m)