

# TEST RESULT SUMMARY

## FCC PART 15 SUBPART C Section 15.231(e)

MANUFACTURER'S NAME

SIMS Deltec, Incorporated

NAME OF EQUIPMENT

Wireless Remote Monitoring System (WRMS)  
Transmitter

MODEL NUMBER

**21-6330-51**

MANUFACTURER'S ADDRESS

1265 Grey Fox Road  
St. Paul MN 55112

TEST REPORT NUMBER

W0277

TEST DATE


22 May 2000

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15.

Date: 11 September 2000

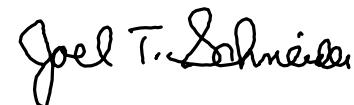

Location: Taylors Falls MN  
USA

---

J. C. Sausen  
Test Engineer

---

J. T. Schneider  
Lead Engineer

Not Transferable

# EMC EMISSION - TEST REPORT

Test Report File No. : **WC1G027701** Date of issue: 11 September 2000

Model / Serial No. : **21-6330-51 / Prototype**

Product Type : **Wireless Remote Monitoring System (WRMS) Transmitter**

Applicant : **SIMS Deltec, Incorporated**

Manufacturer : **SIMS Deltec, Incorporated**

License holder : **SIMS Deltec, Incorporated**

Address : **1265 Grey Fox Road**  
**St. Paul MN 55112**

Test Result :  **Positive  Negative**

Test Project Number Reference(s) : **W0277**

Total pages including Appendices : **29**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of  
AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

File No. WC1G027701, Page 1 of 12

## D I R E C T O R Y - E M I S S I O N S

	<b>Page(s)</b>
<b>A) Documentation</b>	
Test report	1 – 10
Directory	2
Test Regulations	3
Deviation from standard / Summary	10
Test-setups (Photos)	11 – 12
Test-setup (drawing)	Appendix A
<b>B) Test data</b>	
Conducted emissions	10/150 kHz - 30 MHz
Radiated emissions	10 kHz - 30 MHz
Radiated emissions	30 MHz - 1000 MHz
Interference power	30 MHz - 300 MHz
Equivalent Radiated emissions	1 GHz - 18 GHz
<b>C) Appendix A</b>	
Test Data Sheets and Test Setup Drawing(s)	A2 – A7
<b>D) Appendix B</b>	
Constructional Data Form	B2 – B8
Product Information Form(s)	N/A
<b>E) Appendix C</b>	
Measurement Protocol	C1 - C2

## EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

<input type="checkbox"/> - EN 50081-1 / 1991	<input type="checkbox"/> - Group 1	<input type="checkbox"/> - Group 2
<input type="checkbox"/> - EN 55011 / 1991	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
<input type="checkbox"/> - EN 55013 / 1990	□ - Household appliances and similar	
<input type="checkbox"/> - EN 55014 / 1987	□ - Portable tools	
	□ - Semiconductor devices	
<input type="checkbox"/> - EN 55014 / A2:1990	□ - Household appliances and similar	
<input type="checkbox"/> - EN 55014 / 1993	□ - Portable tools	
	□ - Semiconductor devices	
<input type="checkbox"/> - EN 55015 / 1987	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
<input type="checkbox"/> - EN 55015 / A1:1990	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
<input type="checkbox"/> - EN 55015 / 1993	□ - Household appliances and similar	
<input type="checkbox"/> - EN 55022 / 1987	□ - Portable tools	
<input type="checkbox"/> - EN 55022 / 1994	□ - Semiconductor devices	
<input type="checkbox"/> - BS	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
<input type="checkbox"/> - VCCI	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
<input checked="" type="checkbox"/> - FCC Part 15 Subpart C Section 15.231(e)	□ - Household appliances and similar	
<input type="checkbox"/> - AS 3548 (1992)	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
<input type="checkbox"/> - CISPR 11 (1990)	<input type="checkbox"/> - Group 1	<input type="checkbox"/> - Group 2
<input type="checkbox"/> - CISPR 22 (1993)	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B
	<input type="checkbox"/> - Class A	<input type="checkbox"/> - Class B

**Environmental conditions in the lab:**

	<u>Actual</u>
Temperature	: 24 °C
Relative Humidity	: 54 %
Atmospheric pressure	: 97.9 kPa
Power supply system	: 3.3 VDC

**Sign Explanations:**

- not applicable
- applicable



## Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

## Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The **RADIATED EMISSIONS (MAGNETIC FIELD)** measurements were performed at the following test location:

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- 3 meters
- 30 meters

- Test not applicable

## Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The **RADIATED EMISSIONS (ELECTRIC FIELD)** measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site) – NSA measurements made 6-99, due 6-00
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2430A00930	5-01
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A08134	5-01
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2521A01006	5-01
■ - ZHL-1042J	Mini-Circuits	Preamplifier	H081296-16	3-01
■ - EM-6917B	Electro-Metrics	Biconicalog Periodic	106	12-00

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

## Emissions Test Conditions: INTERFERENCE POWER

The **INTERFERENCE POWER** measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

## Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The **EQUIVALENT RADIATED EMISSIONS** measurements in the frequency range 1 GHz – 4.2 GHz were performed in a horizontal and vertical polarization at the following test location :

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room

at a test distance of:

- 1 meters
- 3 meters
- 10 meters

- Test not applicable

### Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2430A00930	5-01
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A08134	5-01
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2521A01006	5-01
■ - ZHL-1042J	Mini-Circuits	Preamplifier	H081296-16	3-01
■ - EM-6917B	Electro-Metrics	Biconicalog Periodic	106	12-00
■ - 3115	Electro-Mechanics (EMCO)	Ridge Guide Antenna	2483	12-00

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

## Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- Transmitter on.

---

### Configuration of the device under test:

- See Constructional Data Form in Appendix B - Page B2
- See Product Information Form in Appendix B - beginning on Page B3

### The following peripheral devices and interface cables were connected during the measurement:

<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - _____	Type : _____
<input type="checkbox"/> - unshielded power cable	
<input checked="" type="checkbox"/> - unshielded cables	
<input type="checkbox"/> - shielded cables	MPS.No.: _____
<input type="checkbox"/> - customer specific cables	
<input type="checkbox"/> - _____	
<input type="checkbox"/> - _____	

## Emission Test Results:

### Conducted emissions 10/150 kHz - 30 MHz

The requirements are	<input type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin	_____ dB	at _____ MHz
Maximum limit exceeding	_____ dB	at _____ MHz
Remarks: _____		

### Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are	<input type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin	_____ dB	at _____ MHz
Maximum limit exceeding	_____ dB	at _____ MHz
Remarks: _____		

### Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are	<input checked="" type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin for fundamental	0.5 dB	at 418.0 MHz
Minimum limit margin for spurious	27 dB	at 836.0 MHz
Remarks: The fundamental was measured to be 77.5 dBuV/m in peak mode, minus 5.75 dB (based on 51.6% duty cycle) to get average measurement, or 71.75 dBuV/m (3868 uV/m) compared to a limit of 72.3 dBuV/m (4133 uV/m). The second harmonic was measured to be 30.8 dBuV/m in peak mode, minus 5.75 dB (based on 51.6% duty cycle) to get average measurement, or 25.05 dBuV/m (17.9 uV/m) compared to an average limit of 52.3 dBuV/m (413 uV/m).		

### Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are	<input type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin	_____ dB	at _____ MHz
Maximum limit exceeding	_____ dB	at _____ MHz
Remarks: _____		

### Equivalent Radiated emissions 1 GHz – 4.2 GHz

The requirements are	<input checked="" type="checkbox"/> - MET	<input type="checkbox"/> - NOT MET
Minimum limit margin	8 dB	at 3762.16 MHz
Maximum limit exceeding	_____ dB	at _____ MHz
Remarks: The noise level at the ninth harmonic was measured to be 51.8 dBuV/m in peak mode, minus 5.75 dB (based on 51.6% duty cycle) to get average measurement, or 46.05 dBuV/m (200 uV/m) compared to an average limit of 54 dBuV/m (501 uV/m).		

## DEVIATIONS FROM STANDARD:

None.

## GENERAL REMARKS:

The bandwidth of the fundamental must be less than 0.25% of the center frequency, or 1.045 MHz. Page A6 of A7 shows the bandwidth to be less than 200 kHz. The transmitter is on for 10.32 msec/20 msec, so a duty cycle relaxation factor of  $20 \log 51.6/100$ , or 5.75 dB is used to convert peak readings to average readings. Page A7 of A7 shows the on/off times.

## SUMMARY:

The requirements according to the technical regulations are

- met

- **not** met.

The device under test does

- fulfill the general approval requirements mentioned on page 3.

- **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 22 May 2000

Testing End Date: 22 May 2000

- TÜV PRODUCT SERVICE INC -



J. T. Schneider  
Lead Engineer




Tested By:  
J. C. Sausen

File No. WC1G027701, Page 10 of 12

Test-setup photo(s):  
Conducted emission 10/150 kHz - 30 MHz

Not Applicable

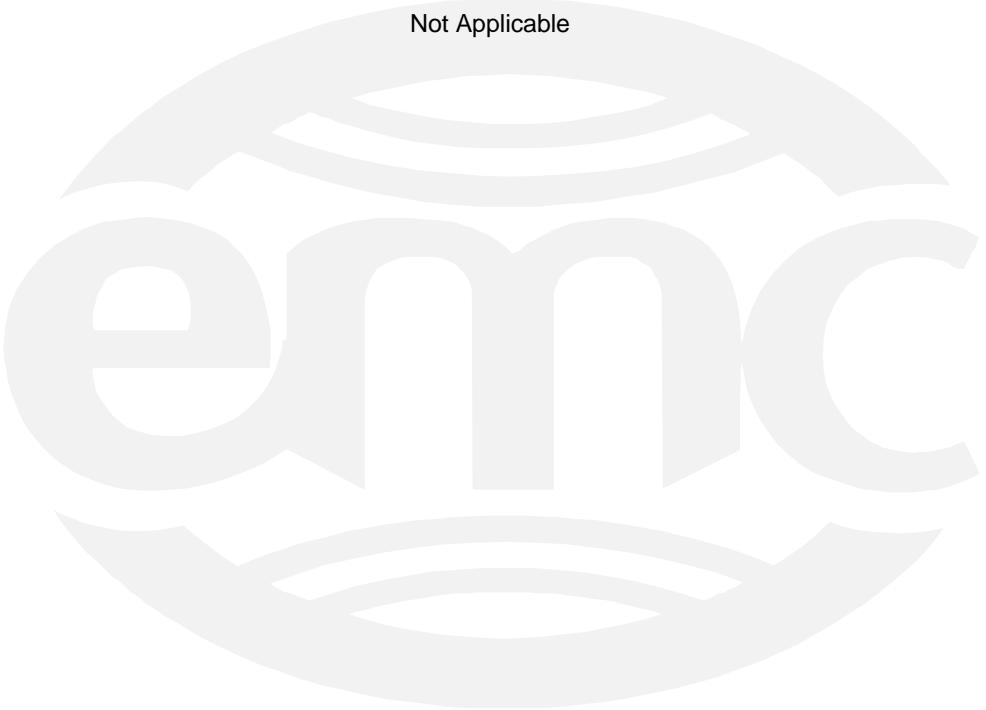

File No. WC1G027701, Page 11 of 12

Test-setup photo(s):  
Radiated emission 30 MHz – 4.2 GHz

**See Test-Setup Exhibit**



File No. WC1G027701, Page 12 of 12

## Appendix A

Test Data Sheets

and

Test Setup Drawing(s)



File No. WC1G027701, Page A1 of A7

**TEST SETUP FOR EMISSIONS TESTING**

WILD RIVER LAB  
Small Test Site (STS)

**See Test-Setup Exhibit**



File No. WC1G027701, Page A2 of A7

# Radiated Electromagnetic Emissions

Test Report #:	W0277 Run 02	Test Area:	STS 3m
Test Method:	N/A	Test Date:	22-May-2000
EUT Model #:	21-6330-51	EUT Power:	
EUT Serial #:	prototype #'s 1 & 2	Temperature:	24 °C
Manufacturer:	Sims Deltec	Relative Humidity:	54 %
EUT Description:	CADD-Lynxs Transmitter	Air Pressure:	97.9 kPa
Notes:	PWA #: 71-0323		

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB).....(dB/m).....(dB)	FINAL PEAK (dBuV/m)	POL / HGT / AZ (m) (DEG)	FINAL AVERAGE (dBuV/m)	15.231 LIMIT (dBuV/m)
Note: Res BW & Video BW = 100 kHz:						
418.00	85.1 Pk	4.6 / 16.0 / 28.2	77.5	H / 1.0 / 252.0	71.75	72.3
418.00	79.9 Pk	4.6 / 16.0 / 28.2	72.3	V / 2.4 / 196.0	66.55	72.3
noise floor only:						
836.01	24.4 Pk	6.6 / 21.4 / 27.5	24.9	V / 2.4 / 196.0	19.15	52.3
eut harmonic:						
836.07	30.2 Pk	6.6 / 21.4 / 27.5	30.8	H / 1.0 / 0.0	26.05	52.3
Note Res BW and Video BW = 1 MHz						
noise floor:						
1254.07	25.9 Pk	8.6 / 22.4 / 27.3	29.7	H / 1.0 / 0.0	23.95	54
1254.07	29.9 Pk	8.6 / 22.4 / 27.3	33.7	V / 1.0 / 0.0	27.95	54
1672.07	33.0 Pk	10.6 / 25.6 / 27.5	41.7	V / 1.0 / 0.0	35.95	54
1672.07	31.5 Pk	10.6 / 25.6 / 27.5	40.2	H / 1.0 / 0.0	34.45	54
2090.16	30.0 Pk	11.5 / 27.6 / 27.5	41.5	H / 1.0 / 0.0	35.75	54
2090.16	31.7 Pk	11.5 / 27.6 / 27.5	43.2	V / 1.0 / 0.0	37.45	54
2508.16	31.9 Pk	12.6 / 28.4 / 28.2	44.7	V / 1.0 / 0.0	38.95	54
2508.16	31.4 Pk	12.6 / 28.4 / 28.2	44.3	V / 1.0 / 0.0	38.55	54
2926.16	31.6 Pk	13.8 / 30.4 / 28.2	47.6	V / 1.0 / 0.0	41.85	54
2926.16	28.9 Pk	13.8 / 30.4 / 28.2	45.0	H / 1.0 / 0.0	39.25	54
3344.16	28.0 Pk	15.1 / 31.3 / 28.1	46.3	H / 1.0 / 0.0	40.55	54
3344.16	28.4 Pk	15.1 / 31.3 / 28.1	46.7	H / 1.0 / 0.0	40.95	54
3762.16	31.4 Pk	16.8 / 32.1 / 28.5	51.8	V / 1.0 / 0.0	46.05	54
3762.16	27.9 Pk	16.8 / 32.1 / 28.5	48.2	H / 1.0 / 0.0	42.45	54


Tested by: J. C. Sausen



Printed

Signature

Reviewed by: T. K. Swanson



Printed

Signature

File No. WC1G027701, Page A3 of A7

# Radiated Electromagnetic Emissions



Test Report #:	W0277 Run 02	Test Area:	STS 3m
Test Method:	N/A	Test Date:	22-May-2000
EUT Model #:	21-6330-51	EUT Power:	
EUT Serial #:	prototype #'s 1 & 2	Temperature:	24 °C
Manufacturer:	Sims Deltec	Relative Humidity:	54 %
EUT Description:	CADD-Lynxs Transmitter	Air Pressure:	97.9 kPa
Notes:	PWA #: 71-0323		

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB).....(dB/m).....(dB)	FINAL PEAK (dBuV/m)	POL / HGT / AZ (m) (DEG)	FINAL AVERAGE (dBuV/m)	15.231 LIMIT (dBuV/m)
4180.16	20.2 Pk	17.6 / 32.5 / 28.8	41.4	H / 1.0 / 0.0	35.65	54
4180.16	19.9 Pk	17.6 / 32.5 / 28.8	41.1	V / 1.0 / 0.0	35.35	54
No spurious emissions detected.						

Tested by: J. C. Sausen

Printed

Signature

Reviewed by: T. K. Swanson

Printed

Signature

File No. WC1G027701, Page A4 of A7

# Radiated Electromagnetic Emissions



Test Report #:	W0277 Run 02	Test Area:	STS 3m
Test Method:	N/A	Test Date:	22-May-2000
EUT Model #:	21-6330-51	EUT Power:	
EUT Serial #:	prototype #'s 1 & 2	Temperature:	24 °C
Manufacturer:	Sims Deltec	Relative Humidity:	54 %
EUT Description:	CADD-Lynxs Transmitter	Air Pressure:	97.9 kPa
Notes:	PWA #: 71-0323		

FREQ (MHz)	LEVEL (dBuV)	CABLE / ANT / PREAMP (dB).....(dB/m).....(dB)	FINAL PEAK (dBuV/m)	POL / HGT / AZ (m) (DEG)	FINAL AVERAGE (dBuV/m)	15.231 LIMIT (dBuV/m)
---------------	-----------------	--	---------------------------	-----------------------------	---------------------------	--------------------------

***** MEASUREMENT SUMMARY *****						
418.00	90.7 Pk	4.6 / 16.0 / 28.2	77.5	H / 1.0 / 0.0	71.75	72.3
836.07	30.2 Pk	6.6 / 21.4 / 27.5	30.8	H / 1.0 / 0.0	26.05	52.3
1254.07	29.9 Pk	8.6 / 22.4 / 27.3	33.7	V / 1.0 / 0.0	27.95	54
1672.07	33.0 Pk	10.6 / 25.6 / 27.5	41.7	V / 1.0 / 0.0	35.95	54
2090.16	31.7 Pk	11.5 / 27.6 / 27.5	43.2	V / 1.0 / 0.0	37.45	54
2508.16	31.9 Pk	12.6 / 28.4 / 28.2	44.7	V / 1.0 / 0.0	38.95	54
2926.16	31.6 Pk	13.8 / 30.4 / 28.2	47.6	V / 1.0 / 0.0	41.85	54
3344.16	28.4 Pk	15.1 / 31.3 / 28.1	46.7	H / 1.0 / 0.0	40.95	54
3762.16	31.4 Pk	16.8 / 32.1 / 28.5	51.8	V / 1.0 / 0.0	46.05	54
4180.16	20.2 Pk	17.6 / 32.5 / 28.8	41.4	H / 1.0 / 0.0	35.65	54

Tested by: J. C. Sausen

Printed

Signature


Reviewed by: T. K. Swanson

Printed

Signature


File No. WC1G027701, Page A5 of A7

0.25% of 418.05 = 1.045 MHz allowed BW

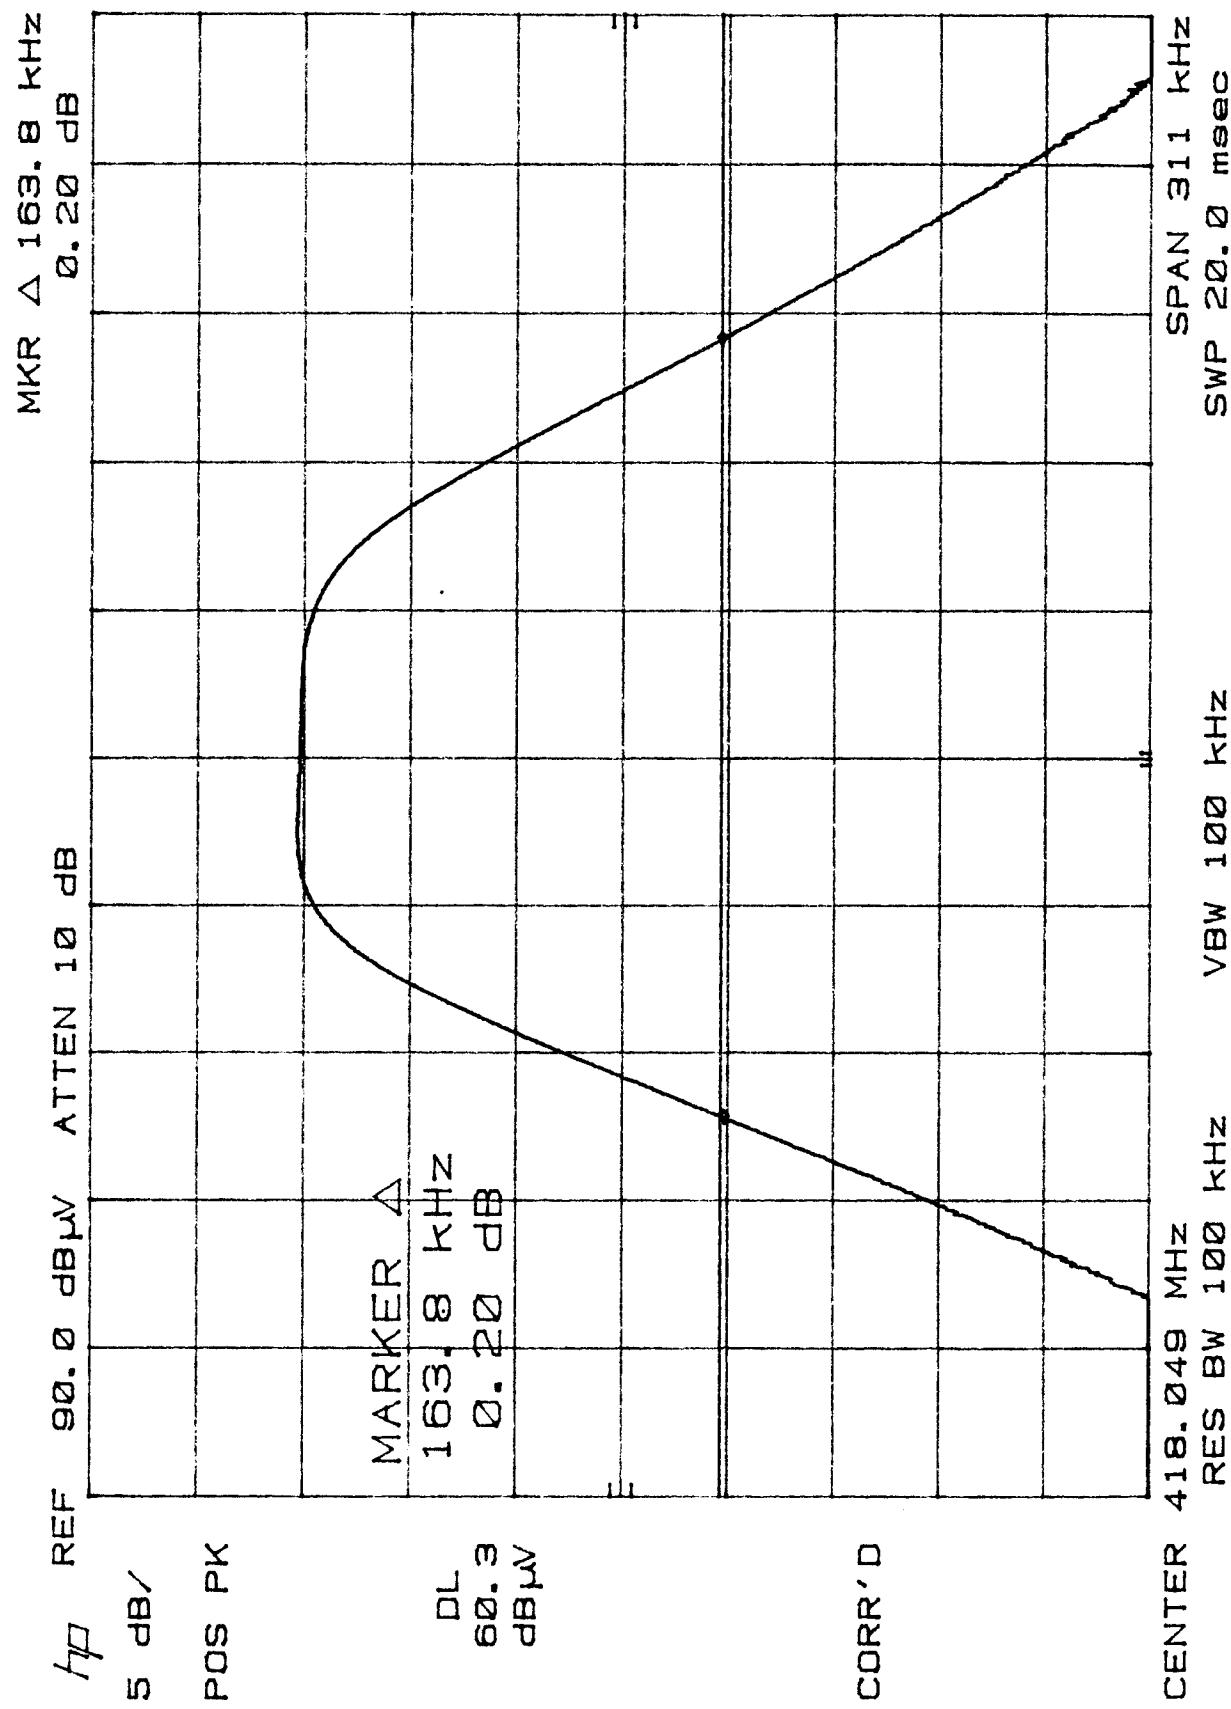

$$1.72(6) = 10.32 \text{ msec ontime}$$

$$20 \log \frac{10.32}{20} = -5.75 \text{ dB duty cycle correction}$$

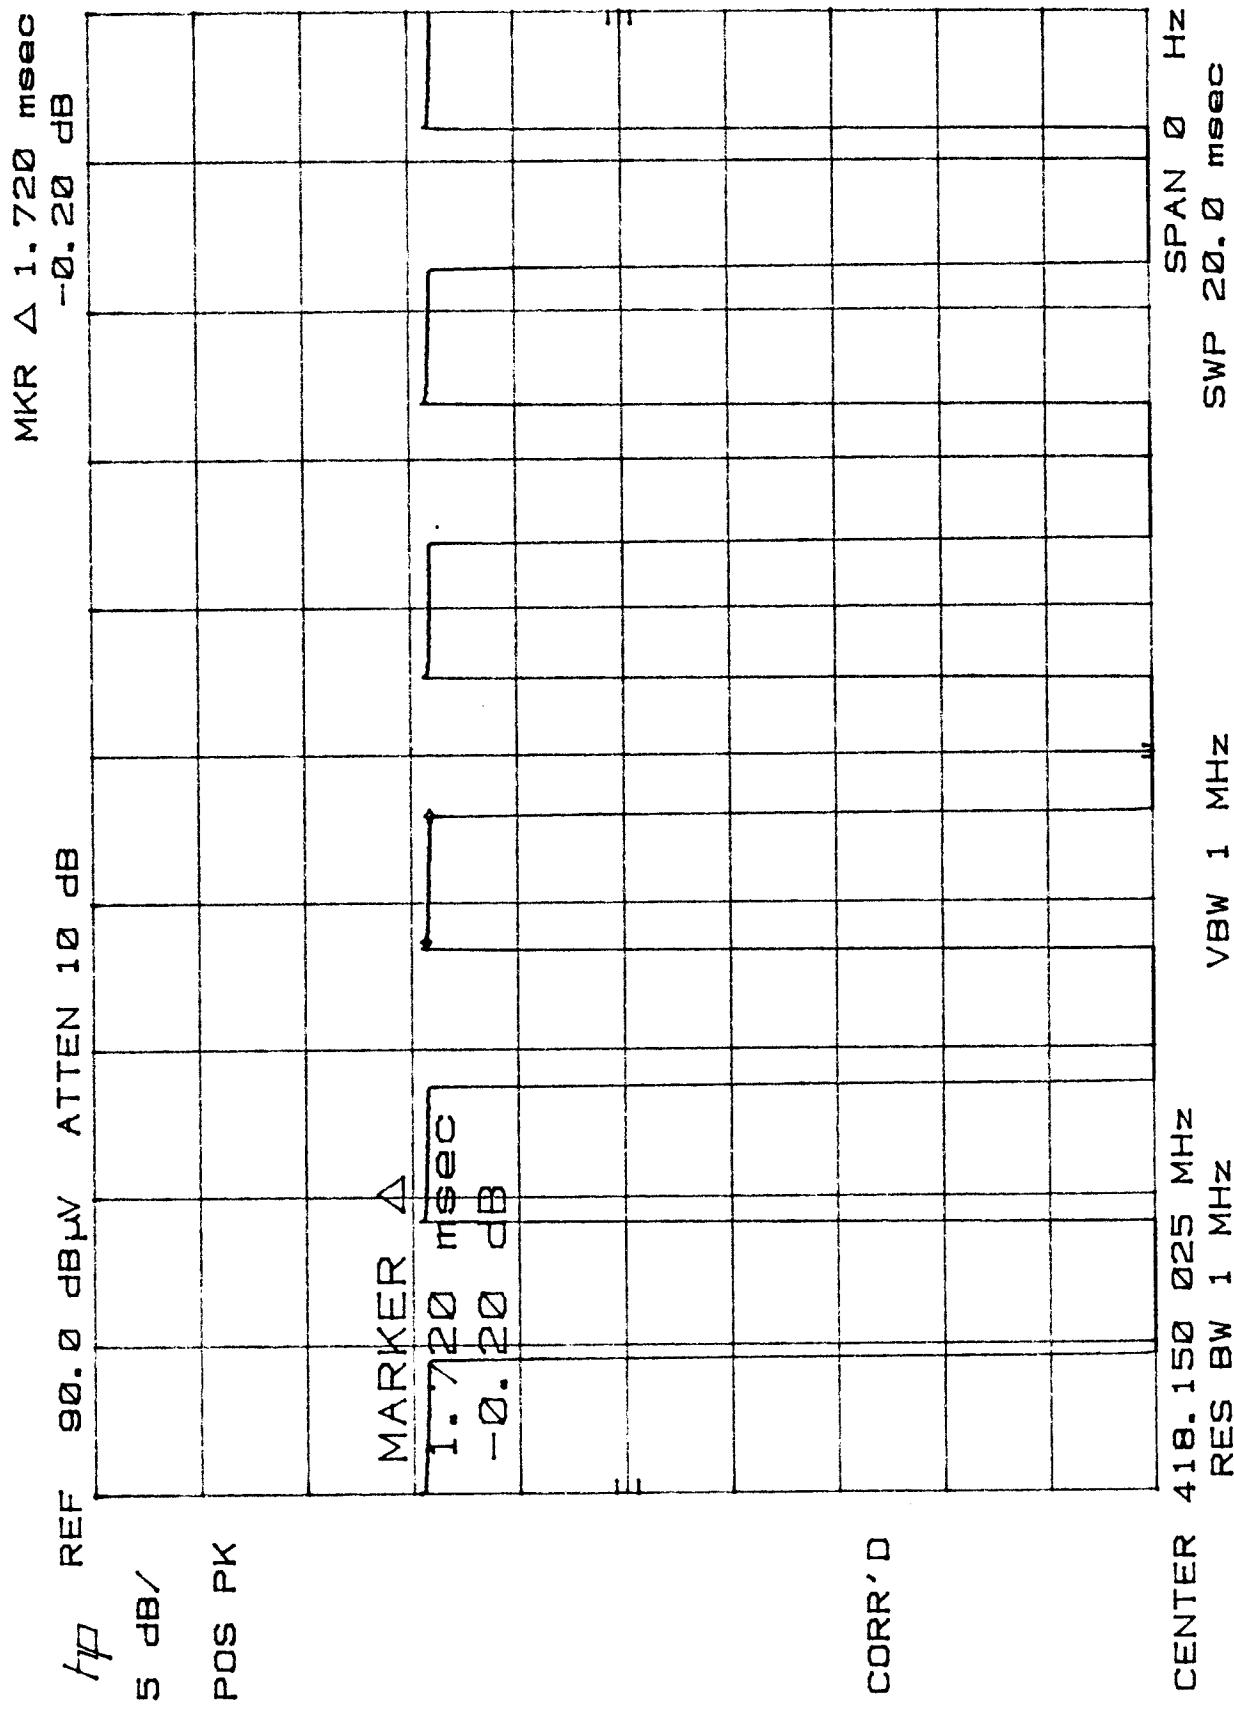

## Appendix B

Constructional Data Form



File No. WC1G027701, Page B1 of B8

## Form



### EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

**Applicant -- NOTE: This information will be input into your test report as shown below.**  
*Press the F1 key at any time to get HELP for the current field selected.*

Company: SIMS Deltec, Inc.  
Address: 1265 Grey Fox Rd  
St Paul  
MN 55112  
Contact: Ron Dohmen Position: Engineer  
Phone: 651 628-7064 Fax: 651 628-7406  
E-mail Address: ron.dohmen@deltec.com

**General Equipment Description -- NOTE: This information will be input into your test report as shown below.**

EUT Description Wireless Remote Monitoring System (WRMS) Transmitter  
EUT Name CADD-Lynx Transmitter  
Model No.: 21-6330-51 Serial No.: ptototype #s 1 and 2  
Product Options: n/a  
Configurations to be tested: \_\_\_\_\_

#### Test Objective

<input type="checkbox"/> EMC Directive 89/336/EEC (EMC) Std: _____	<input checked="" type="checkbox"/> FCC: Class <input type="checkbox"/> A <input type="checkbox"/> B Part <u>15</u>
<input type="checkbox"/> Machinery Directive 89/392/EEC (EMC) Std: _____	<input type="checkbox"/> VCCI: Class <input type="checkbox"/> A <input type="checkbox"/> B
<input type="checkbox"/> Medical Device Directive 93/42/EEC (EMC) Std: _____	<input type="checkbox"/> BCIQ: Class <input type="checkbox"/> A <input type="checkbox"/> B
<input type="checkbox"/> Vehicle Directive 72/245/EEC (EMC) Std: _____	<input type="checkbox"/> Canada: Class <input type="checkbox"/> A <input type="checkbox"/> B
<input type="checkbox"/> FDA Reviewers Guidance for Premarket Notification Submissions (EMC)	<input type="checkbox"/> Australia: Class <input type="checkbox"/> A <input type="checkbox"/> B
	<input type="checkbox"/> Other: _____

#### TÜV Product Service Certification Requested

<input type="checkbox"/> Attestation of Conformity (AoC)	<input type="checkbox"/> International EMC Mark (IEM)
<input type="checkbox"/> Certificate of Conformity (CoC)	<input type="checkbox"/> Compliance Document
Protection Class (N/A for vehicles)	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III

(Press **F1** when field is selected to show additional information on Protection Class.)

#### Attendance

Test will be:  Attended by the customer  Unattended by the customer

## EMC Test Plan and Constructional Data Form

### Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TUV Product Service should:

- Call contact listed above, if not available then stop testing. (After hrs phone): \_\_\_\_\_
- Continue testing to complete test series.
- Continue testing to define corrective action.
- Stop testing.

### EUT Specifications and Requirements

Length 93 mm      Width: 59 mm      Height: 27mm      Weight: less than 75g  
 : \_\_\_\_\_      \_\_\_\_\_      \_\_\_\_\_      \_\_\_\_\_

### Power Requirements

*Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)*

Voltage: 3.3 Volts (If battery powered, make sure battery life is sufficient to complete testing.)

# of Phases: na/

Current  
 (Amps/phase(max)): 66 milliwatts      Current  
 (Amps/phase(nominal)): na/

Other n/a

### Other Special Requirements

### Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)  
 Laboratory

### EUT Power Cable

<input checked="" type="checkbox"/> Permanent	OR	<input type="checkbox"/> Removable	Length (in meters): 120 mm
<input checked="" type="checkbox"/> Shielded	OR	<input type="checkbox"/> Unshielded	
<input type="checkbox"/> Not Applicable			

## EMC Test Plan and Constructional Data Form

### EUT Interface Ports and Cables

Type	Interface				Shielding				Length (in meters)	Removable	Permanent	
	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination			
<b>EXAMPLE:</b> RS232	<input type="checkbox"/>	<input checked="" type="checkbox"/>	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3.3 Volt Unipolar	<input type="checkbox"/>	<input checked="" type="checkbox"/>	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Braid	Pins	1/8" Stereo	na/	0	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	

## EMC Test Plan and Constructional Data Form

### EUT Software.

Revision Level: 97-0328 rev B.

Description: WRMS transmitter software

**EUT Operating Modes to be Tested** -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. Continuous Carrier

2. Normal Operation

3.

**EUT System Components** -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
Legacy Pump	CADD-Legacy	n/a	

## EMC Test Plan and Constructional Data Form

**Support Equipment --** List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)

Description	Model #	Serial #	FCC ID #
n/a			

**Oscillator Frequencies**

Frequency	Derived Frequency	Component # / Location	Description of Use
3.579545 MHz	n/a	crystal on PWA	clock

**Power Supply**

Manufacturer	Model #	Serial #	Type
n/a			<input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____
			<input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____

**Power Line Filters**

Manufacturer	Model #	Location in EUT
n/a		

**EMC Test Plan and Constructional Data Form****Critical EMI Components (Capacitors, ferrites, etc.)**

Description	Manufacturer	Part # or Value	Qty	Component #/Location
TVS	AVX	VC08LC18A500	2	PWA

**EMC Critical Detail --** Describe other EMC Design details used to reduce high frequency noise.

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

**Authorization Signatures**

Ron Dohmen

8-22-00

Customer authorization to perform tests  
according to this test plan.

Date

Test Plan/CDF Prepared By (please print)


Date

Reviewed by TÜV Product Service Associate

Date

## EMC Block Diagram Form

**System Configuration Block Diagram** -- Provide a line drawing identifying the EUT, simulators, support equipment, I/O cables, power cables, and any other pertinent components to be used during testing. Use a dashed line to separate the equipment in the testing field versus equipment outside testing field.

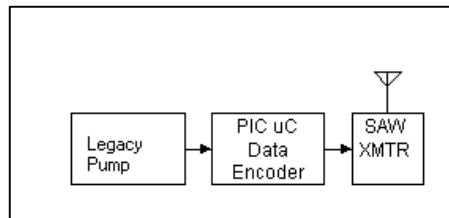

### Authorization Signatures

Ron Dohmen

8-22-00

Customer authorization to perform tests  
according to this test plan.

Date

Test Plan/CDF Prepared By (please print)

Date

Reviewed by TÜV Product Service Associate

Date

## Appendix C

# MEASUREMENT PROTOCOL

## GENERAL INFORMATION

### Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of  $\pm 4.5$  dB. The equipment comprising the test systems are calibrated on an annual basis.

### Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

## CONDUCTED EMISSIONS

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

## RADIATED EMISSIONS

The final level, expressed in dB $\mu$ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB $\mu$ V) and adding the antenna correction factor and cable loss factor and subtracting the preamplifier gain. The average reading is obtained by subtracting the duty cycle correction factor.

Example:

FREQ (MHz)	LEVEL (dB $\mu$ V)	CABLE/ANT/PREAMP (dB)	FINAL(Pk) (dB $\mu$ V/m)	POL/HGT/AZ (m) (deg)	FINAL(Av)
418.0	85.1Pk +	4.6 + 16.0 - 28.2 = 77.5		V 1.0 0.0	71.75

## DETAILS OF TEST PROCEDURES

### General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

### Conducted Emissions

Conducted emissions on the 60 Hz power interface of the EUT are measured in the frequency range of 450 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω/50 μH (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

### Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 4200 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. Intentional radiators are rotated through three orthogonal axes to determine the attitude that maximizes the emissions.