

Exhibit K – Test Data


FCC ID: OT8RFMR

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: Handheld RF Module	Serial Number: None	Job Number: SEIT0047	Date: 02/28/01
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power:	
Comments:	Transmit fundamental		
<i>Rod Peloquin</i>		Temperature (°C): 21	% Humidity: 26


FCC 15.249 (3 Meter Limit)

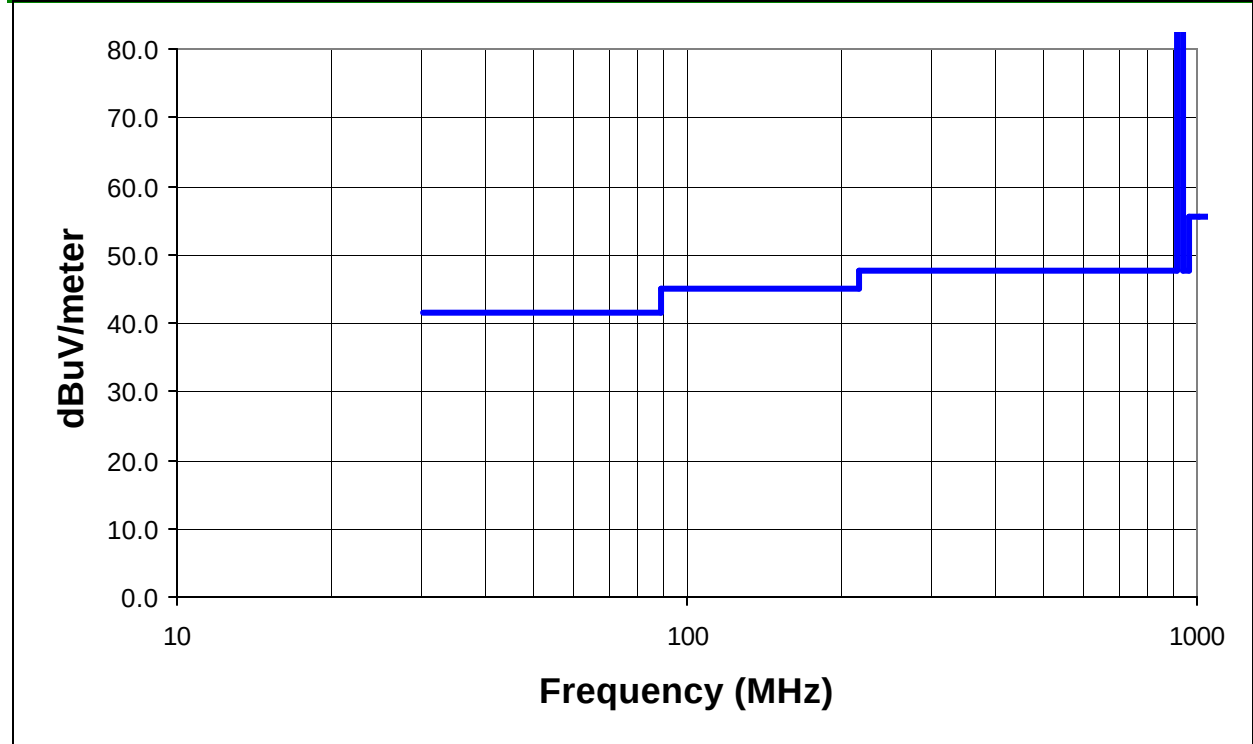


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
916.498	66.3	PK	23.4	HBLG	0.0	1.7	301.0	1.0	91.4	94.0	-2.6
916.502	64.6	PK	23.4	VBLG	0.0	1.7	259.0	1.7	89.7	94.0	-4.3

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets


Rev 3.4
10/11/00

EUT: Handheld RF Module	Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power: Battery Powered	
Comments: Receive Mode, Battery powered			
		Temperature (°C): 21	% Humidity: 26


FCC Class B (3 Meter Limit)

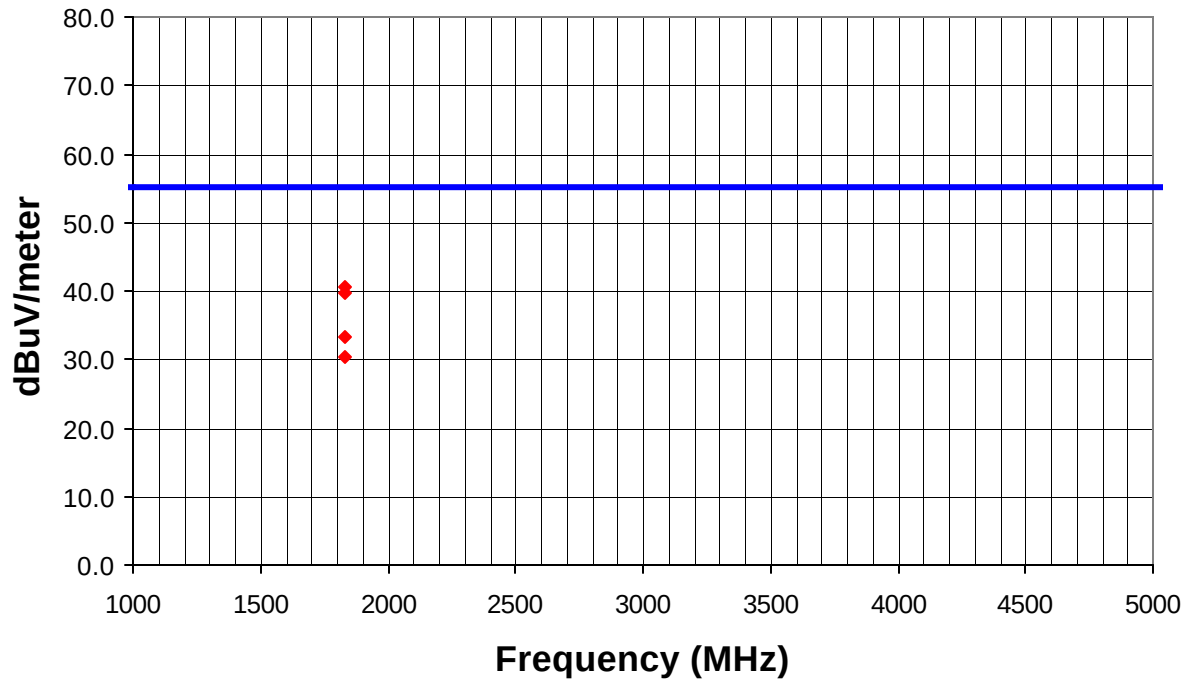


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
1833.000	43.7	PK	28.5	VHRN	34.1	2.4	80.0	1.3	40.5	54.0	-13.5
1833.000	43.0	PK	28.5	HHRN	34.1	2.4	53.0	1.0	39.8	54.0	-14.2
1833.000	36.5	AV	28.5	VHRN	34.1	2.4	80.0	1.3	33.3	54.0	-20.8
1833.000	33.7	AV	28.5	HHRN	34.1	2.4	53.0	1.0	30.5	54.0	-23.5

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: Handheld RF Module	Serial Number: None	Job Number: SEIT0047	Date: 03/02/01	
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01		
Customer Reference Number:	Software:	Power: Battery Powered		
Comments:	Transmit frequency, 916.5MHz, Battery powered			
		Temperature (°C): 21	% Humidity: 26	


FCC 15.249 (3 Meter Limit)

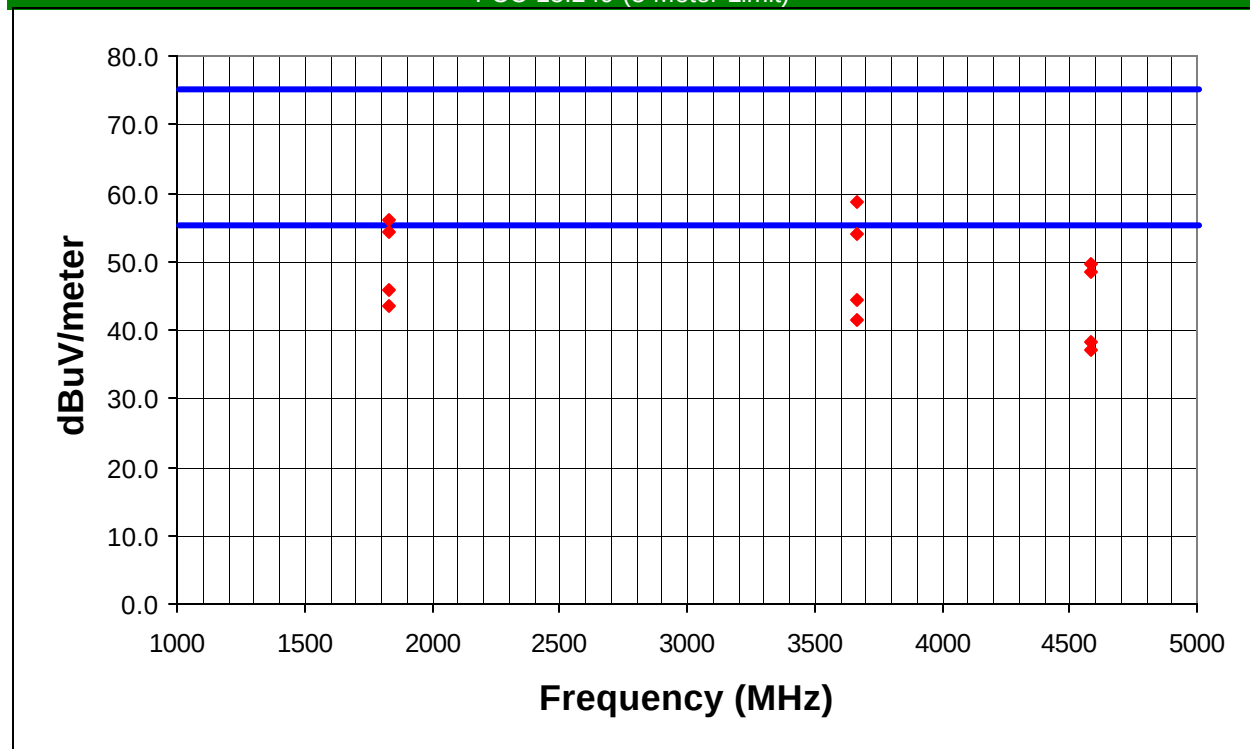


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
1833.000	46.8	AV	28.5	HHRN	34.1	2.4	174.0	1.3	43.6	54.0	-10.5
1833.000	49.2	AV	28.5	VHRN	34.1	2.4	260.0	1.3	46.0	54.0	-8.1
3666.000	41.6	AV	33.4	HHRN	34.2	3.6	67.0	1.9	44.4	54.0	-9.7
3666.000	38.6	AV	33.4	VHRN	34.2	3.6	108.0	1.5	41.4	54.0	-12.7
4582.500	33.2	AV	33.9	HHRN	34.3	4.3	337.0	2.2	37.1	54.0	-17.0
4582.500	34.3	AV	33.9	VHRN	34.3	4.3	70.0	3.1	38.2	54.0	-15.8
1833.000	57.5	PK	28.5	HHRN	34.1	2.4	174.0	1.3	54.3	74.0	-19.8
1833.000	59.2	PK	28.5	VHRN	34.1	2.4	260.0	1.3	56.0	74.0	-18.1
3666.000	55.8	PK	33.4	HHRN	34.2	3.6	67.0	1.9	58.6	74.0	-15.5
3666.000	51.2	PK	33.4	VHRN	34.2	3.6	108.0	1.5	54.0	74.0	-20.1
4582.500	44.7	PK	33.9	HHRN	34.3	4.3	337.0	2.2	48.6	74.0	-25.4
4582.500	45.9	PK	33.9	VHRN	34.3	4.3	70.0	3.1	49.8	74.0	-24.3

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: Handheld RF Module		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Receive Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #14	


FCC Part 15 Class B Conducted Emissions Limits - High Line

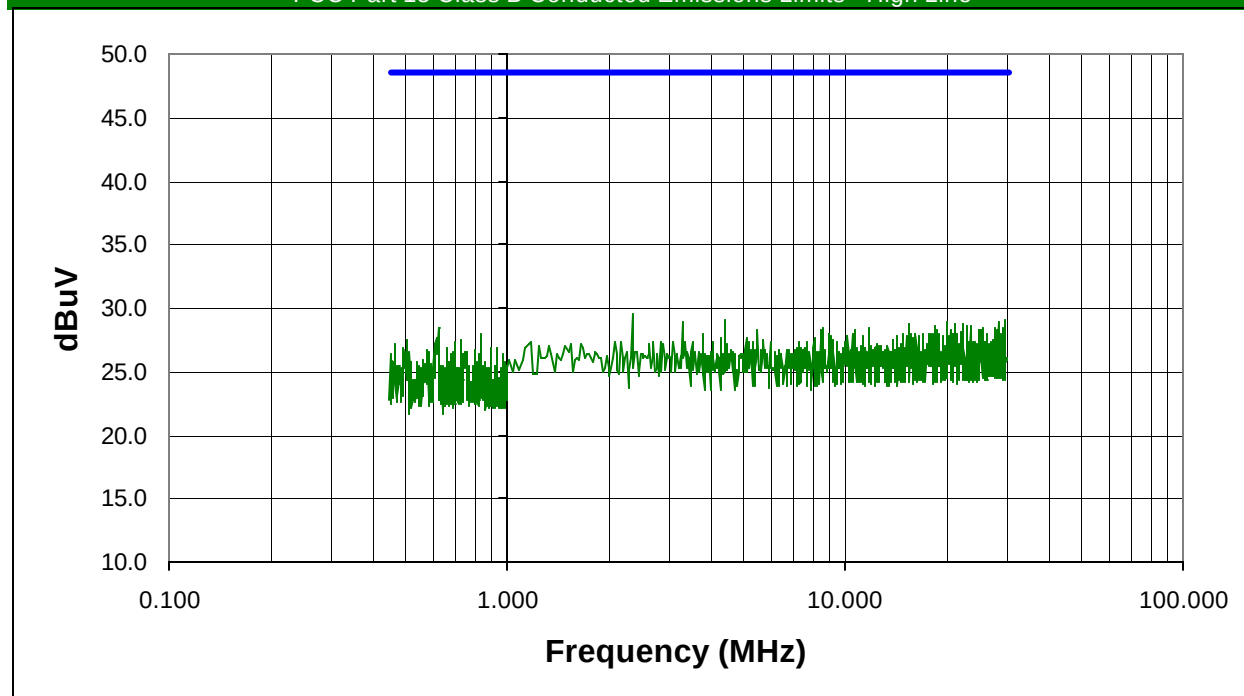


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
2.353	8.9	Peak	20.7	29.6	48.0	-18.4
4.412	8.3	Peak	20.8	29.1	48.0	-18.9
29.796	7.7	Peak	21.3	29.0	48.0	-19.0
20.026	7.7	Peak	21.2	28.9	48.0	-19.1
28.375	7.6	Peak	21.3	28.9	48.0	-19.1
3.303	8.1	Peak	20.8	28.9	48.0	-19.1
22.462	7.6	Peak	21.2	28.8	48.0	-19.2
21.219	7.6	Peak	21.2	28.8	48.0	-19.2
15.477	7.7	Peak	21.1	28.8	48.0	-19.2
23.680	7.4	Peak	21.2	28.6	48.0	-19.4
22.970	7.4	Peak	21.2	28.6	48.0	-19.4
18.492	7.4	Peak	21.2	28.6	48.0	-19.4
11.734	7.4	Peak	21.1	28.5	48.0	-19.5
8.597	7.5	Peak	21.0	28.5	48.0	-19.5
0.626	8.5	Peak	20.0	28.5	48.0	-19.5
25.482	7.1	Peak	21.3	28.4	48.0	-19.6
29.390	7.1	Peak	21.3	28.4	48.0	-19.6
27.842	7.1	Peak	21.3	28.4	48.0	-19.6
23.452	7.1	Peak	21.2	28.3	48.0	-19.7
18.668	7.1	Peak	21.2	28.3	48.0	-19.7

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: Handheld RF Module		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Receive Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #15	


FCC Part 15 Class B Conducted Emissions Limits - Low Line

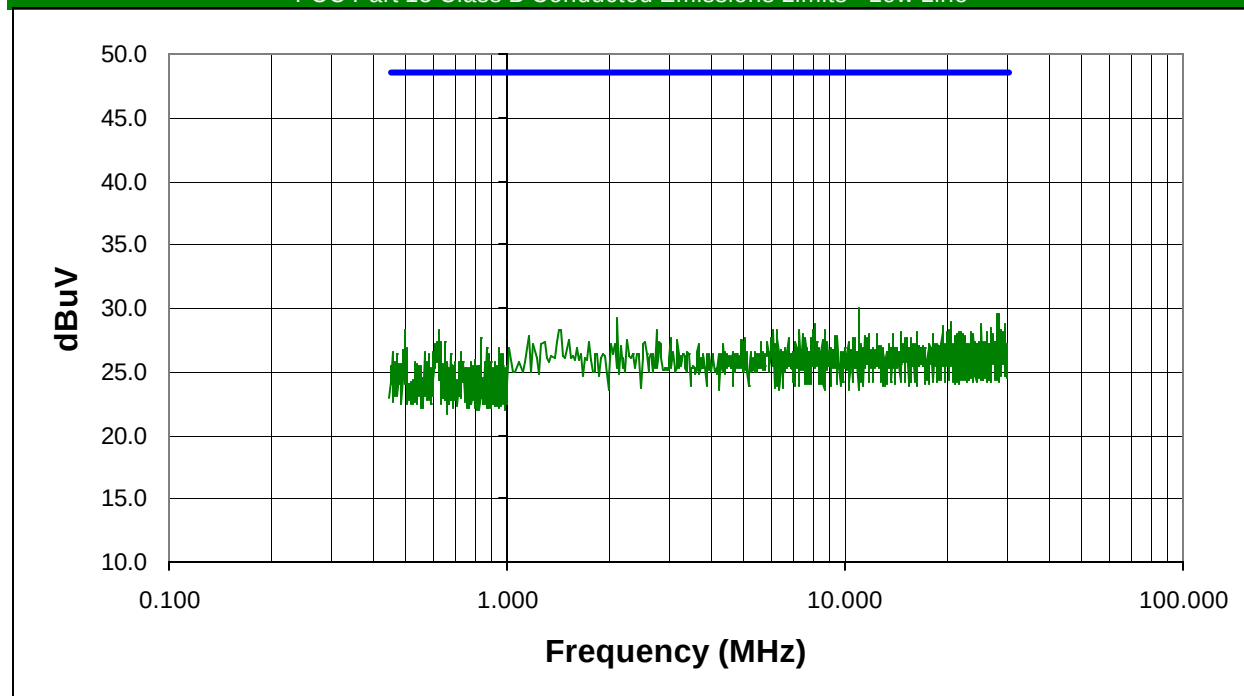


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
11.030	8.9	Peak	21.1	30.0	48.0	-18.0
28.349	8.3	Peak	21.3	29.6	48.0	-18.4
2.126	8.5	Peak	20.7	29.2	48.0	-18.8
20.534	7.7	Peak	21.2	28.9	48.0	-19.1
29.593	7.5	Peak	21.3	28.8	48.0	-19.2
8.122	7.7	Peak	21.0	28.7	48.0	-19.3
25.406	7.4	Peak	21.3	28.7	48.0	-19.3
19.472	7.4	Peak	21.2	28.6	48.0	-19.4
28.095	7.1	Peak	21.3	28.4	48.0	-19.6
27.030	7.1	Peak	21.3	28.4	48.0	-19.6
20.178	7.1	Peak	21.2	28.3	48.0	-19.7
8.756	7.3	Peak	21.0	28.3	48.0	-19.7
7.353	7.3	Peak	21.0	28.3	48.0	-19.7
28.476	7.0	Peak	21.3	28.3	48.0	-19.7
1.425	7.7	Peak	20.6	28.3	48.0	-19.7
28.958	7.0	Peak	21.3	28.3	48.0	-19.7
8.054	7.3	Peak	21.0	28.3	48.0	-19.7
2.760	7.5	Peak	20.7	28.2	48.0	-19.8
0.498	8.2	Peak	20.0	28.2	48.0	-19.8
6.154	7.3	Peak	20.9	28.2	48.0	-19.8


Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: Handheld RF Module		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Transmit Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #16	

FCC Part 15 Class B Conducted Emissions Limits - High Line

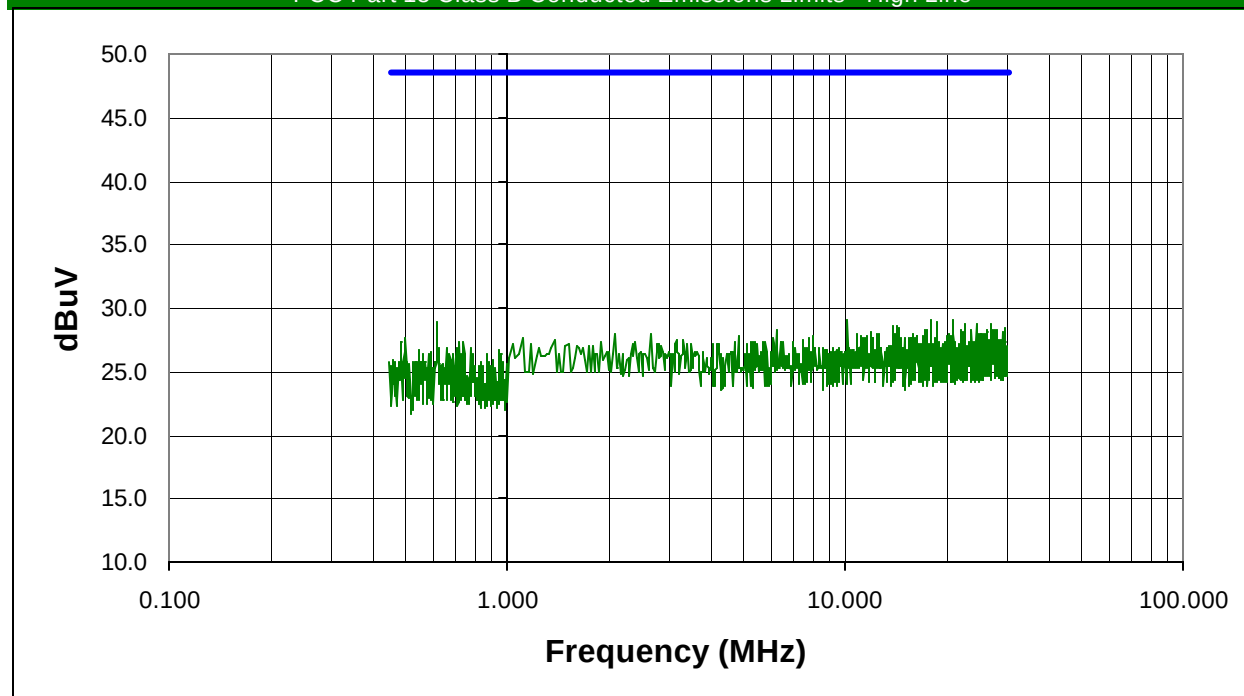

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
10.201	8.1	Peak	21.0	29.1	48.0	-18.9
20.838	7.9	Peak	21.2	29.1	48.0	-18.9
17.915	7.8	Peak	21.2	29.0	48.0	-19.0
18.693	7.7	Peak	21.2	28.9	48.0	-19.1
0.621	8.9	Peak	20.0	28.9	48.0	-19.1
27.004	7.5	Peak	21.3	28.8	48.0	-19.2
22.564	7.5	Peak	21.2	28.7	48.0	-19.3
24.416	7.4	Peak	21.3	28.7	48.0	-19.3
13.819	7.5	Peak	21.1	28.6	48.0	-19.4
14.297	7.5	Peak	21.1	28.6	48.0	-19.4
14.372	7.3	Peak	21.1	28.4	48.0	-19.6
29.770	7.1	Peak	21.3	28.4	48.0	-19.6
22.031	7.1	Peak	21.2	28.3	48.0	-19.7
27.486	7.0	Peak	21.3	28.3	48.0	-19.7
27.766	7.0	Peak	21.3	28.3	48.0	-19.7
26.446	7.0	Peak	21.3	28.3	48.0	-19.7
17.387	7.0	Peak	21.2	28.2	48.0	-19.8
6.267	7.3	Peak	20.9	28.2	48.0	-19.8
17.161	7.0	Peak	21.2	28.2	48.0	-19.8
23.731	7.0	Peak	21.2	28.2	48.0	-19.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00	
EUT: Handheld RF Module		Serial Number: None		Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin		Job Site: EV01	
Customer Reference Number:		Software:		Power: 120 VAC/60 Hz	
Comments: Transmit Mode, 120VAC/60Hz mains					
				Temperature (°C): 21	% Humidity: 30
				Run #17	

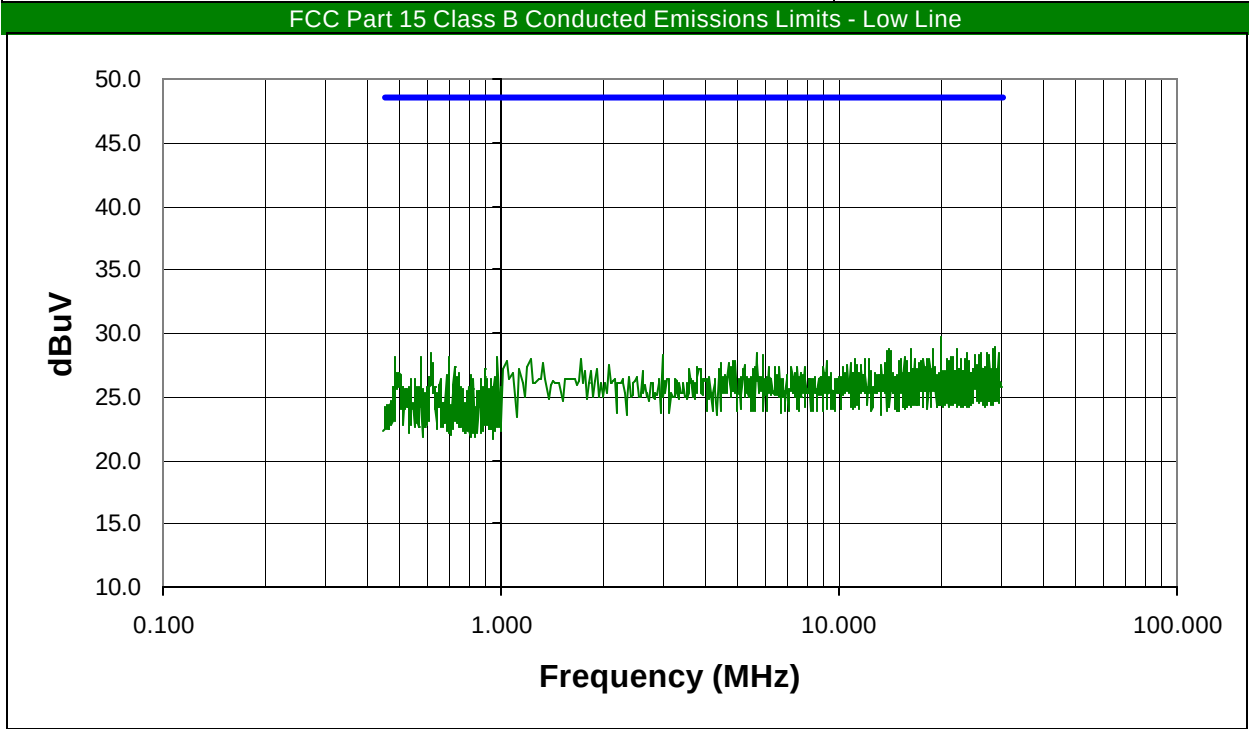

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
20.128	8.5	Peak	21.2	29.7	48.0	-18.3
28.984	7.6	Peak	21.3	28.9	48.0	-19.1
18.945	7.6	Peak	21.2	28.8	48.0	-19.2
14.020	7.7	Peak	21.1	28.8	48.0	-19.2
16.382	7.5	Peak	21.2	28.7	48.0	-19.3
22.285	7.5	Peak	21.2	28.7	48.0	-19.3
28.628	7.4	Peak	21.3	28.7	48.0	-19.3
13.844	7.5	Peak	21.1	28.6	48.0	-19.4
14.271	7.5	Peak	21.1	28.6	48.0	-19.4
5.701	7.6	Peak	20.9	28.5	48.0	-19.5
29.542	7.2	Peak	21.3	28.5	48.0	-19.5
27.486	7.2	Peak	21.3	28.5	48.0	-19.5
23.832	7.2	Peak	21.2	28.4	48.0	-19.6
26.268	7.1	Peak	21.3	28.4	48.0	-19.6
0.622	8.4	Peak	20.0	28.4	48.0	-19.6
5.950	7.4	Peak	20.9	28.3	48.0	-19.7
27.613	7.0	Peak	21.3	28.3	48.0	-19.7
26.040	6.9	Peak	21.3	28.2	48.0	-19.8
25.279	6.9	Peak	21.3	28.2	48.0	-19.8
3.009	7.4	Peak	20.8	28.2	48.0	-19.8