

Exhibit K – Test Data


FCC ID: OT8RFMT

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: RF Module for base unit	Serial Number: None	Job Number: SEIT0047	Date: 02/28/01
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power: 120 VAC/60 Hz	
Comments: Transmit frequency			
<i>Rod Peloquin</i>		Temperature (°C): 21	% Humidity: 26

FCC 15.249 (3 Meter Limit)

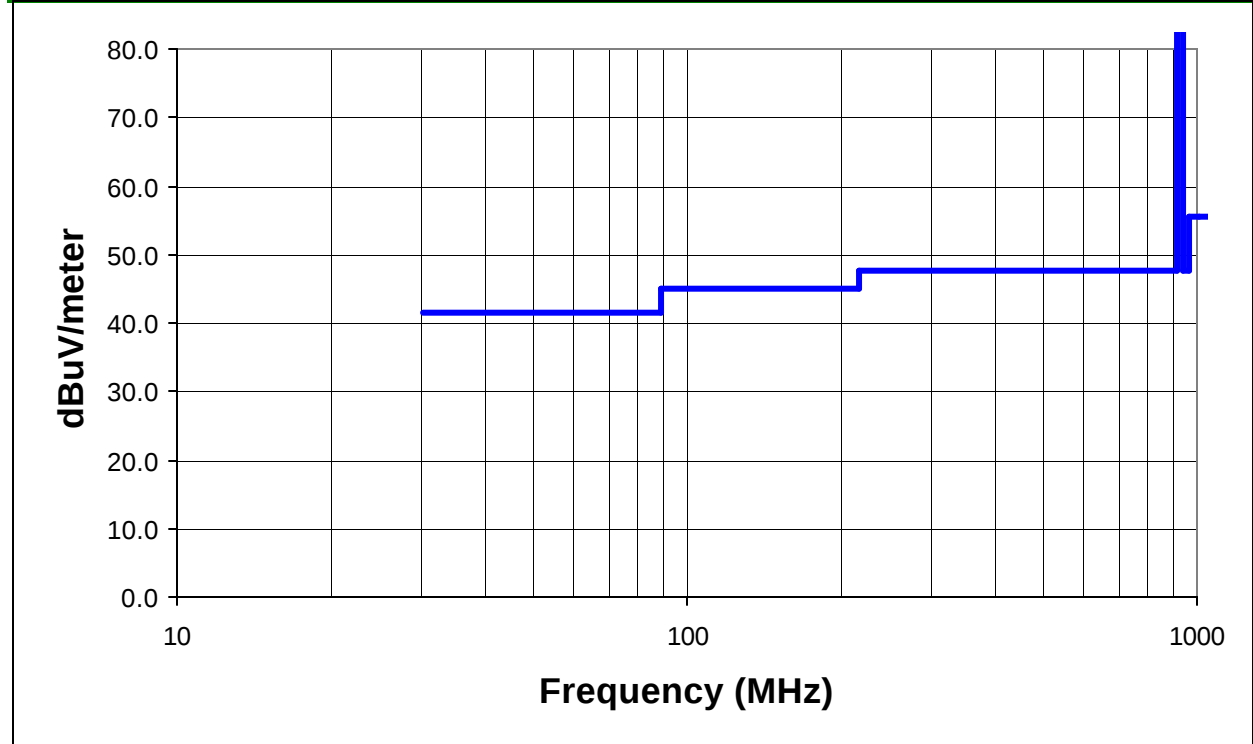


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
905.800	67.5	PK	23.3	HBLG	0.0	1.7	220.0	1.0	92.5	94.0	-1.6
905.807	67.4	PK	23.3	VBLG	0.0	1.7	265.0	1.3	92.4	94.0	-1.6

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: RF Module for base unit	Serial Number: None	Job Number: SEIT0047	Date: 02/28/01
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power: 120 VAC/60 Hz	
Comments: Transmit frequency, 905.8MHz, AC powered			
<i>Rod Peloquin</i>		Temperature (°C): 21	% Humidity: 26

FCC 15.209 (3 Meter Limit)

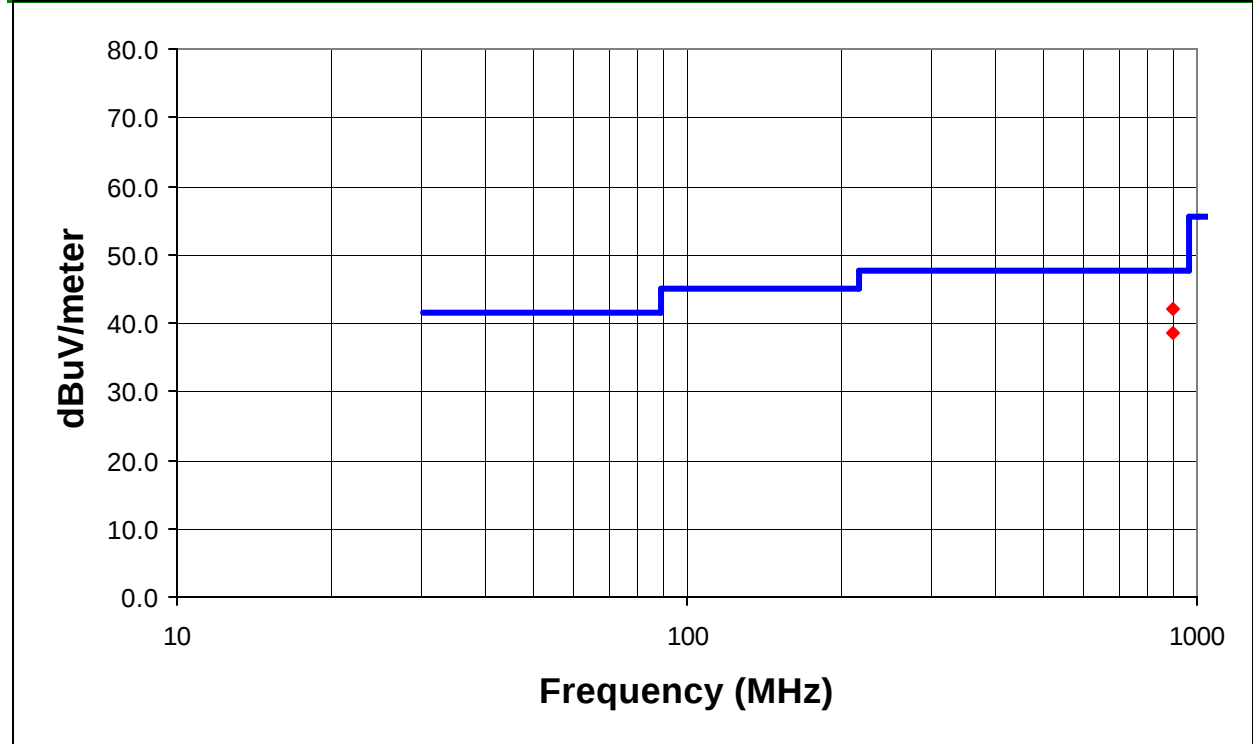


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
898.734	47.7	QP	23.3	HBLG	30.6	1.7	242.0	1.0	42.1	46.0	-3.9
898.727	44.2	QP	23.3	VLBG	30.6	1.7	55.0	1.9	38.6	46.0	-7.5

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: RF Module for base unit	Serial Number: None	Job Number: SEIT0047	Date: 02/28/01
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power: 120 VAC/60 Hz	
Comments: Transmit frequency, 905.8MHz, AC powered			
		Temperature (°C): 21	% Humidity: 26

FCC 15.209 (3 Meter Limit)

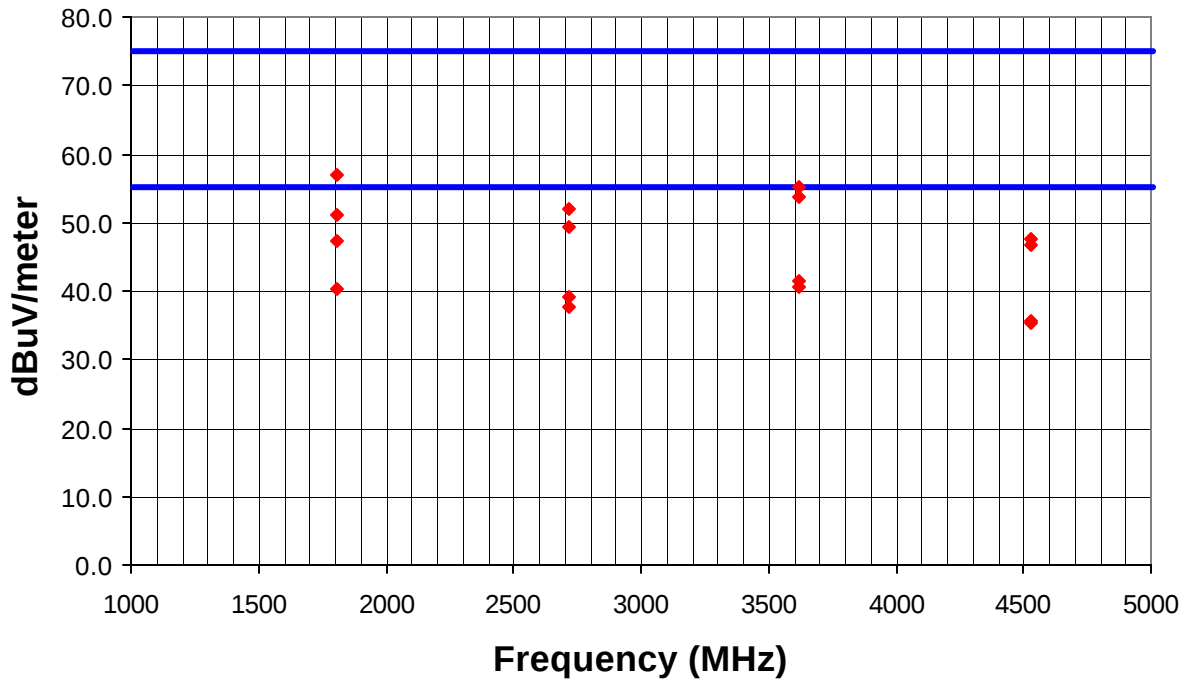


Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamp Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
1811.600	43.5	AV	28.4	HHRN	34.1	2.4	243.0	1.0	40.2	54.0	-13.9
1811.600	50.7	AV	28.4	VHRN	34.1	2.4	264.0	1.3	47.4	54.0	-6.6
2717.414	39.2	AV	30.9	HHRN	33.9	3.0	264.0	2.2	39.2	54.0	-14.8
2717.414	37.6	AV	30.9	VHRN	33.9	3.0	285.0	2.0	37.6	54.0	-16.4
3623.219	38.8	AV	33.2	HHRN	34.2	3.6	300.0	1.8	41.4	54.0	-12.6
3623.219	38.1	AV	33.2	VHRN	34.2	3.6	249.0	1.2	40.7	54.0	-13.4
4529.000	31.9	AV	33.8	HHRN	34.3	4.2	63.0	2.3	35.6	54.0	-18.5
4529.000	31.6	AV	33.8	VHRN	34.3	4.2	93.0	1.5	35.3	54.0	-18.8
1811.600	54.4	PK	28.4	HHRN	34.1	2.4	243.0	1.0	51.1	74.0	-23.0
1811.600	60.4	PK	28.4	VHRN	34.1	2.4	264.0	1.3	57.1	74.0	-17.0
2717.414	52.1	PK	30.9	HHRN	33.9	3.0	264.0	2.2	52.1	74.0	-21.9
2717.414	49.4	PK	30.9	VHRN	33.9	3.0	285.0	2.0	49.4	74.0	-24.7
3623.219	52.6	PK	33.2	HHRN	34.2	3.6	300.0	1.8	55.2	74.0	-18.8
3623.219	51.3	PK	33.2	VHRN	34.2	3.6	249.0	1.2	53.9	74.0	-20.2
4529.000	43.8	PK	33.8	HHRN	34.3	4.2	63.0	2.3	47.5	74.0	-26.6
4529.000	43.2	PK	33.8	VHRN	34.3	4.2	93.0	1.5	46.9	74.0	-27.2

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.4
10/11/00

EUT: RF Module for base unit	Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates	Test Engineer: Rod Peloquin	Job Site: EV01	
Customer Reference Number:	Software:	Power: 120 VAC/60 Hz	
Comments: Receive mode, AC powered			
<i>Rod Peloquin</i>		Temperature (°C): 21	% Humidity: 26


FCC Class B (3 Meter Limit)

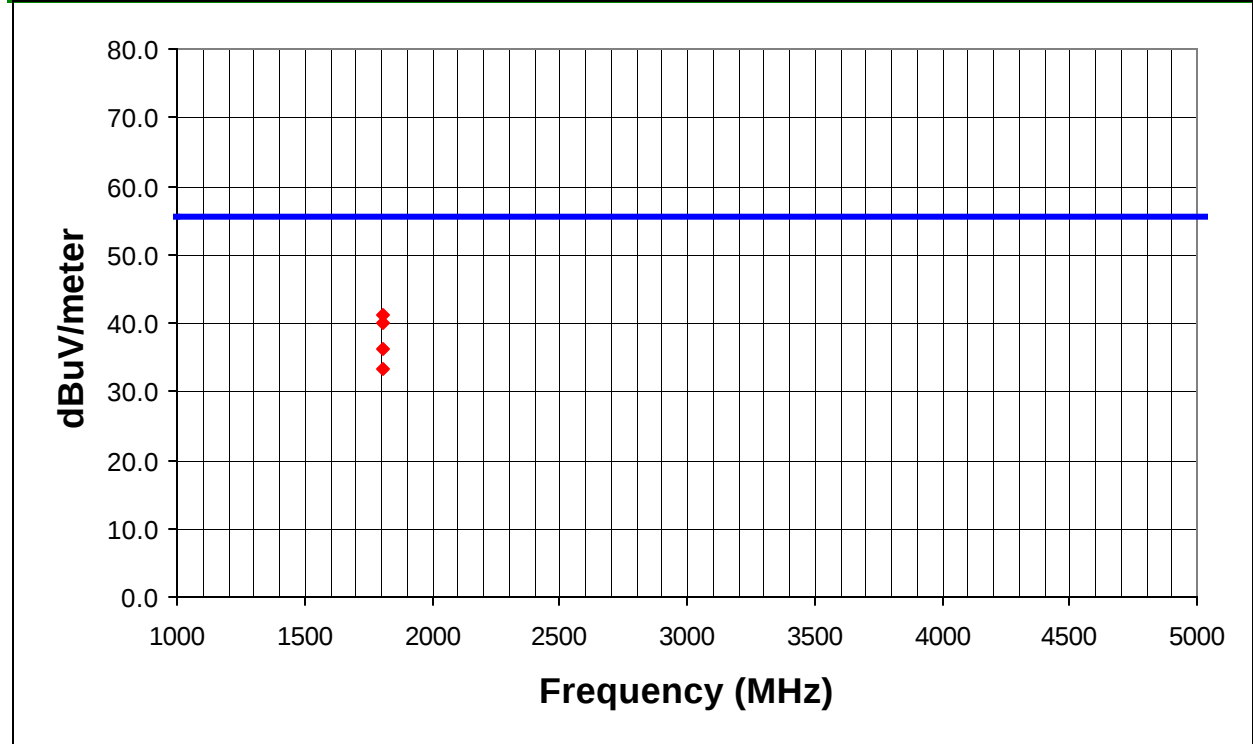

Frequency (MHz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB/m)	Antenna Polarity	Preamplifier Gain (dB)	Cable Loss (dB)	Table Azimuth (degrees)	Antenna Height (meters)	Adjusted Level (dBuV/m)	Spec. Limit (dBuV/m)	Margin (dB)
1811.600	44.5	PK	28.4	VHRN	34.1	2.4	243.0	1.3	41.2	54.0	-12.8
1811.600	43.2	PK	28.4	HHRN	34.1	2.4	10.0	1.4	39.9	54.0	-14.1
1811.600	39.6	AV	28.4	VHRN	34.1	2.4	243.0	1.3	36.3	54.0	-17.8
1811.600	36.5	AV	28.4	HHRN	34.1	2.4	10.0	1.4	33.2	54.0	-20.9

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: RF Module for base unit		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin EV01	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Transmit Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #18	


FCC Part 15 Class B Conducted Emissions Limits - High Line

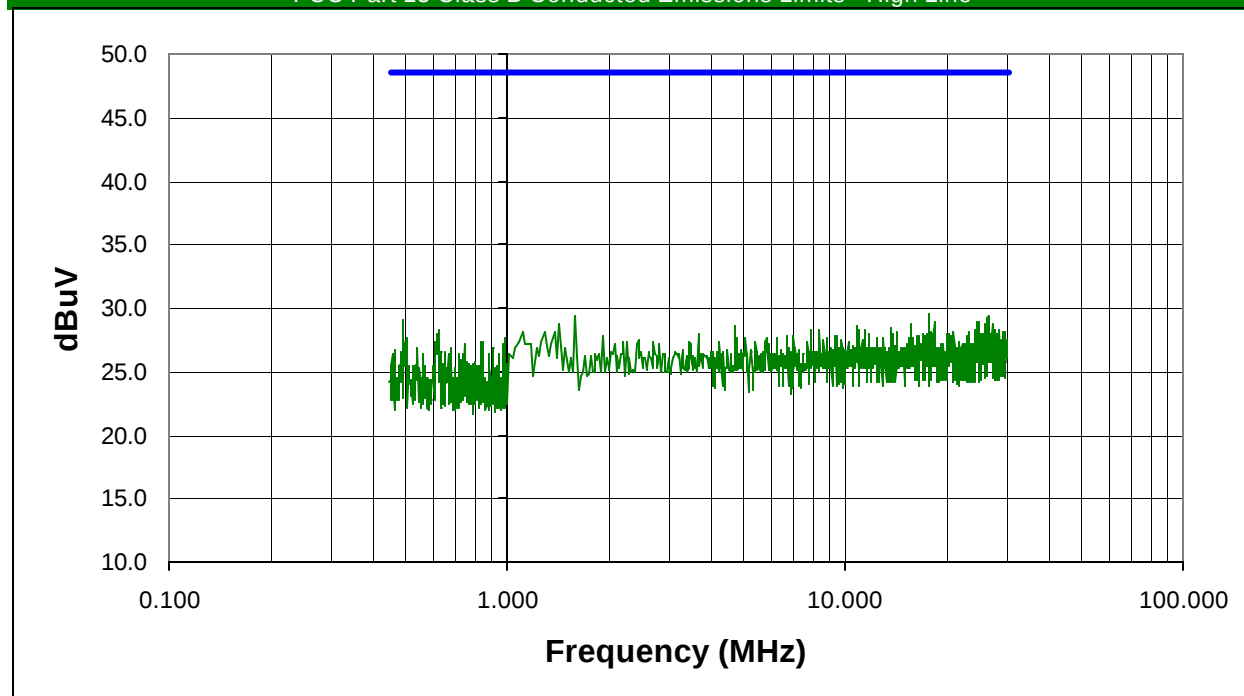

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
17.814	8.4	Peak	21.2	29.6	48.0	-18.4
1.583	8.8	Peak	20.6	29.4	48.0	-18.6
26.497	8.0	Peak	21.3	29.3	48.0	-18.7
0.493	9.0	Peak	20.0	29.0	48.0	-19.0
18.342	7.7	Peak	21.2	28.9	48.0	-19.1
24.644	7.6	Peak	21.3	28.9	48.0	-19.1
24.898	7.6	Peak	21.3	28.9	48.0	-19.1
15.704	7.7	Peak	21.1	28.8	48.0	-19.2
27.233	7.5	Peak	21.3	28.8	48.0	-19.2
1.425	8.1	Peak	20.6	28.7	48.0	-19.3
25.888	7.4	Peak	21.3	28.7	48.0	-19.3
10.854	7.5	Peak	21.1	28.6	48.0	-19.4
4.728	7.7	Peak	20.9	28.6	48.0	-19.4
13.694	7.4	Peak	21.1	28.5	48.0	-19.5
24.797	7.1	Peak	21.3	28.4	48.0	-19.6
24.238	7.1	Peak	21.2	28.3	48.0	-19.7
27.969	7.0	Peak	21.3	28.3	48.0	-19.7
11.483	7.2	Peak	21.1	28.3	48.0	-19.7
10.980	7.2	Peak	21.1	28.3	48.0	-19.7
27.918	7.0	Peak	21.3	28.3	48.0	-19.7

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: RF Module for base unit		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin EV01	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Transmit Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #19	


FCC Part 15 Class B Conducted Emissions Limits - Low Line

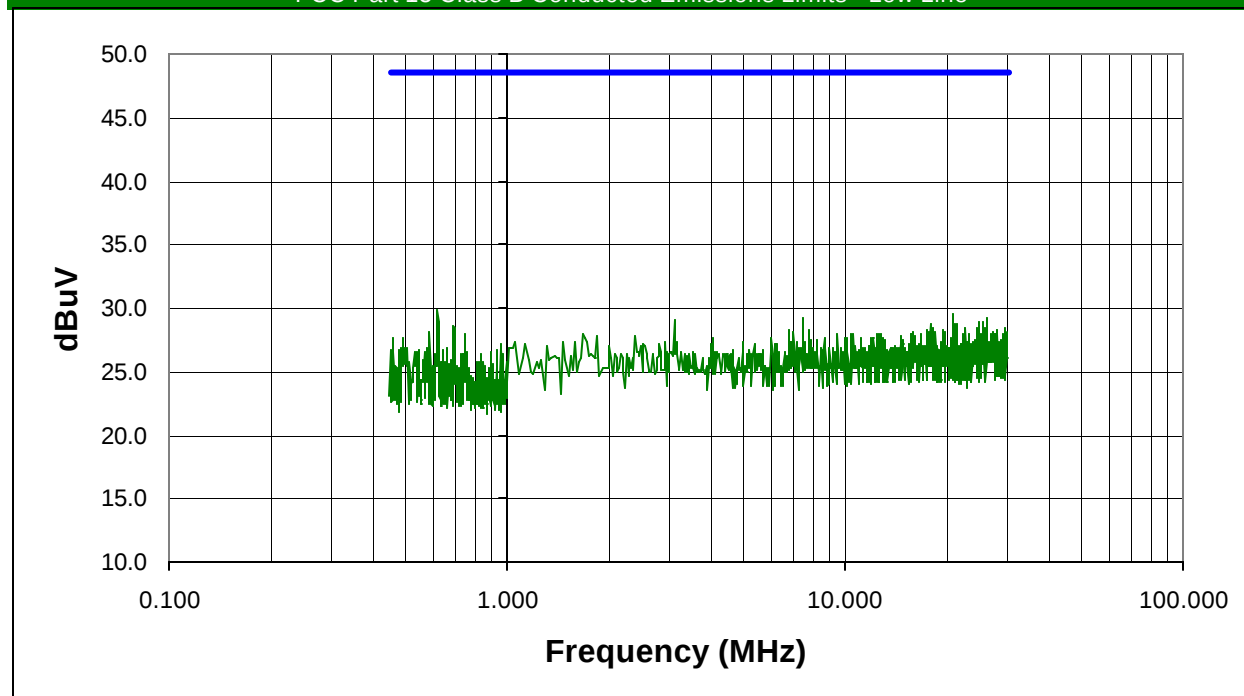

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.623	9.9	Peak	20.0	29.9	48.0	-18.1
20.914	8.4	Peak	21.2	29.6	48.0	-18.4
7.511	8.2	Peak	21.0	29.2	48.0	-18.8
26.421	7.9	Peak	21.3	29.2	48.0	-18.8
3.122	8.2	Peak	20.8	29.0	48.0	-19.0
25.000	7.6	Peak	21.3	28.9	48.0	-19.1
25.533	7.6	Peak	21.3	28.9	48.0	-19.1
21.143	7.6	Peak	21.2	28.8	48.0	-19.2
17.864	7.6	Peak	21.2	28.8	48.0	-19.2
21.447	7.5	Peak	21.2	28.7	48.0	-19.3
0.696	8.6	Peak	20.0	28.6	48.0	-19.4
24.873	7.2	Peak	21.3	28.5	48.0	-19.5
18.291	7.3	Peak	21.2	28.5	48.0	-19.5
25.812	7.2	Peak	21.3	28.5	48.0	-19.5
22.792	7.2	Peak	21.2	28.4	48.0	-19.6
24.543	7.1	Peak	21.3	28.4	48.0	-19.6
29.821	7.1	Peak	21.3	28.4	48.0	-19.6
24.746	7.1	Peak	21.3	28.4	48.0	-19.6
7.805	7.3	Peak	21.0	28.3	48.0	-19.7
6.810	7.2	Peak	21.0	28.2	48.0	-19.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: RF Module for base unit		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin EV01	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Receive Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #20	


FCC Part 15 Class B Conducted Emissions Limits - High Line

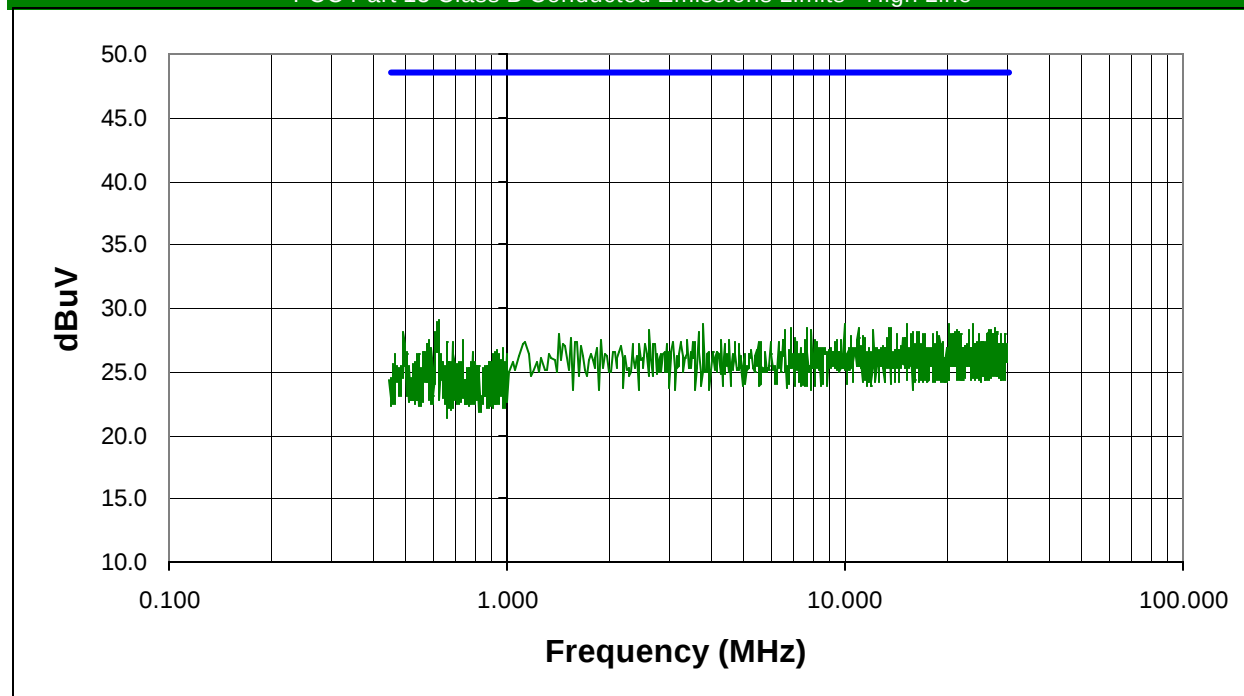

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.627	9.0	Peak	20.0	29.0	48.0	-19.0
23.909	7.6	Peak	21.2	28.8	48.0	-19.2
15.226	7.6	Peak	21.1	28.7	48.0	-19.3
20.305	7.5	Peak	21.2	28.7	48.0	-19.3
9.955	7.7	Peak	21.0	28.7	48.0	-19.3
3.823	7.9	Peak	20.8	28.7	48.0	-19.3
27.689	7.2	Peak	21.3	28.5	48.0	-19.5
6.900	7.5	Peak	21.0	28.5	48.0	-19.5
7.715	7.5	Peak	21.0	28.5	48.0	-19.5
13.719	7.3	Peak	21.1	28.4	48.0	-19.6
13.568	7.3	Peak	21.1	28.4	48.0	-19.6
10.930	7.3	Peak	21.1	28.4	48.0	-19.6
23.401	7.1	Peak	21.2	28.3	48.0	-19.7
2.647	7.6	Peak	20.7	28.3	48.0	-19.7
7.986	7.3	Peak	21.0	28.3	48.0	-19.7
26.928	7.0	Peak	21.3	28.3	48.0	-19.7
12.161	7.2	Peak	21.1	28.3	48.0	-19.7
6.651	7.4	Peak	20.9	28.3	48.0	-19.7
21.523	7.0	Peak	21.2	28.2	48.0	-19.8
26.624	6.9	Peak	21.3	28.2	48.0	-19.8

Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets				Rev 3.4 10/11/00
EUT: RF Module for base unit		Serial Number: None	Job Number: SEIT0047	Date: 03/02/01
Manufacturer: Seitz & Associates		Test Engineer: Rod Peloquin EV01	Job Site: EV01	
Customer Reference Number:		Software:	Power: 120 VAC/60 Hz	
Comments:	Receive Mode, 120VAC/60Hz mains			
			Temperature (°C): 21	% Humidity: 30
			Run #21	

FCC Part 15 Class B Conducted Emissions Limits - Low Line

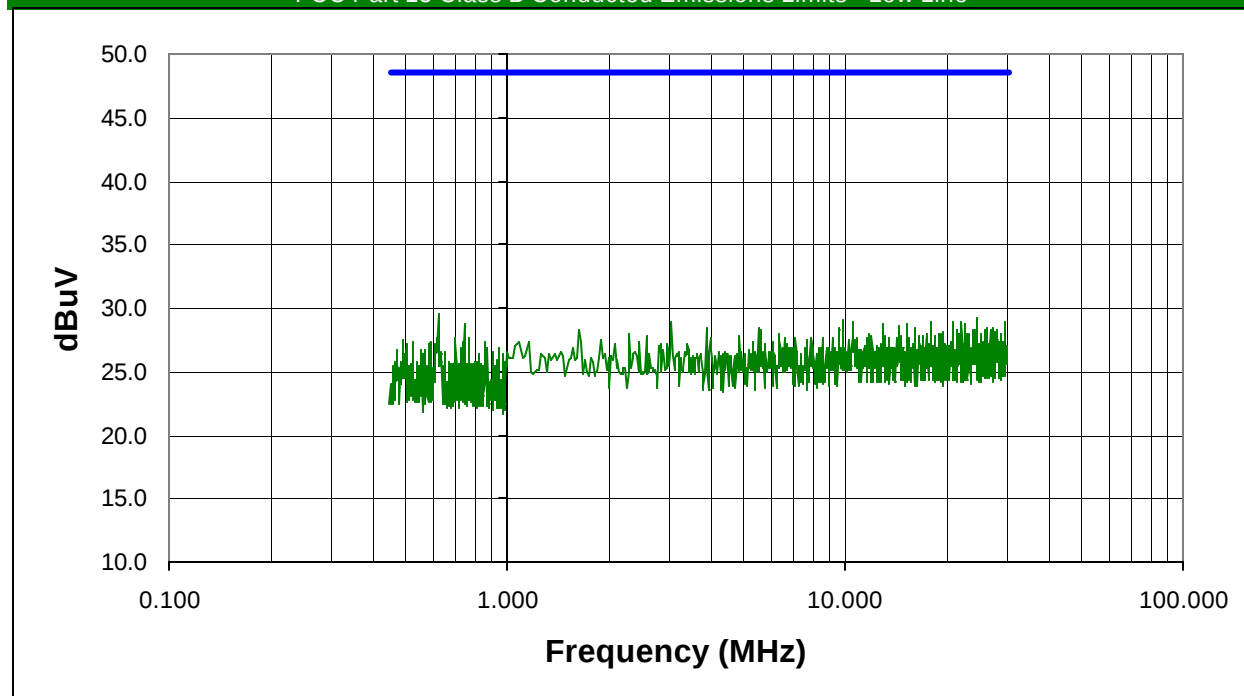

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.625	9.6	Peak	20.0	29.6	48.0	-18.4
24.467	7.9	Peak	21.3	29.2	48.0	-18.8
9.842	8.1	Peak	21.0	29.1	48.0	-18.9
10.578	7.8	Peak	21.1	28.9	48.0	-19.1
18.040	7.7	Peak	21.2	28.9	48.0	-19.1
22.183	7.7	Peak	21.2	28.9	48.0	-19.1
20.813	7.7	Peak	21.2	28.9	48.0	-19.1
3.077	8.1	Peak	20.8	28.9	48.0	-19.1
29.669	7.6	Peak	21.3	28.9	48.0	-19.1
22.640	7.6	Peak	21.2	28.8	48.0	-19.2
0.747	8.8	Peak	20.0	28.8	48.0	-19.2
12.965	7.7	Peak	21.1	28.8	48.0	-19.2
15.201	7.6	Peak	21.1	28.7	48.0	-19.3
14.397	7.5	Peak	21.1	28.6	48.0	-19.4
16.030	7.3	Peak	21.2	28.5	48.0	-19.5
5.543	7.5	Peak	20.9	28.4	48.0	-19.6
26.268	7.1	Peak	21.3	28.4	48.0	-19.6
27.588	7.1	Peak	21.3	28.4	48.0	-19.6
3.891	7.6	Peak	20.8	28.4	48.0	-19.6
9.593	7.4	Peak	21.0	28.4	48.0	-19.6