

CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3) Date : Aug 07, 2019

Application No. : LY014803(5)

Applicant : Kidztech Toys Manufacturing Limited
Room 1201, 12/F., Inter-Continental Plaza,
94 Granville Road, Tsim Sha Tsui East,
Kowloon, Hong Kong

Sample Description : One(1) item of submitted sample stated to be:

Sample Description	Model No.
R/C Max Drive	84552 / 84551

Radio Frequency : 2410 – 2475MHz

Rating : 2 x 1.5V AAA batteries

No. of submitted sample : One (1) set (s)

Sample registration No. : RY008983-001

Date Received : Jul 23, 2019

Test Period : 23 Jul 2019 to 02 Aug 2019

Test Requested : FCC 47CFR Part 15 Certification

Test Method : 47 CFR Part 15 (10-1-18 Edition)
ANSI C63.10 – 2013
ANSI C63.4 – 2014

Test Result : See attached sheet(s) from page 2 to 18.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part 15 Subpart C, section 15.249.

For and on behalf of
CMA Industrial Development Foundation Limited

Mr. WONG Lap-pong, Andrew
Manager

Authorized Signature : _____

Page 1 of 18

FCC ID: OTM-8455219-24GTX

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatesting.org.
This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel : (852) 2698 8198 Fax : (852) 2695 4177 E-mail : info@cmatesting.org Web Site : <http://www.cmatesting.org>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty	6
1.5	Test Summary	6
2	Description of the radiated emission test	7
2.1	Test Procedure	7
2.2	Test Setup	8
2.3	Test Result	10
3.1	Test Procedure	14
3.2	Test Result	14
3.3	Test Setup	14
3.4	Graph and Table of Conducted Emission Measurement Data	14
4	Supplementary document.....	15
4.1	Bandwidth	15
5	Appendices	16



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

1 General Information

1.1 General Description

The 12MHz crystal oscillator drives the base of IC final amplifier. The modulation provided by IC u1. The output of U1 has the matching network consisting C2, L1 that limit the harmonic content and effect the proper coupling of the antenna to the output stage.

Antenna, Ground and Power Source:

The antenna consists of an Internal wired integral antenna with 0.0dBi. There is no external ground connection. The ground is only that of the printed circuit board. Electric current is supplied by 2 x 1.5V AAA size batteries.

Operation Descriptions:

The Equipment Under Test (EUT) is a portable 2.4GHz Pure Transmitter, The transmitter is a remote control system. The transmission signal is frequency hopping with channel frequency range 2410.0.-2475.0MHz during normal use. Channel spacing 1MHz, total 66 channels. The EUT was set to fixed frequency test mode by application. The EUT is powered by 2 x 1.5V AAA size batteries, After switching on the EUT, the car can be controlled to move forward, backward, turning left/right direction.

The transmitter has two control levers to control the left and right turn and forward and backward movement respectively. The EUT continues to transmit while Power on. Modulation by IC with GFSK (FHSS - Frequency Hopping Spread Spectrum) modulation.

Manufacturer declare that all **Two** models are the same cosmetics, materials, PCB layout, electrical, mechanical, physical design, including software/firmware; therefore model **84552** was provided to be the representative of the test sample.

The difference between the tested sample and declared model(s) are non-conductive outer casing only.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)
Conformity Assessment Body Identifier (CABID: HK0002)

Page 4 of 18

FCC ID: OTM-8455219-24GTX



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCS30	100001	29 Mar 2020	1 Year
Spectrum Analyzer	R&S	FSV40	100964	11 Sep 2019	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSP30	100628	26 Mar 2020	1 Year
Broadband Antenna	Schaffner	CBL6112B	2692	27 Mar 2021	2 Years
Loop Antenna	EMCO	6502	00056620	25 Jan 2020	2 Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	21 Dec 2020	2 Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2020	2 Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	01 Aug 2020	2 Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	01 Aug 2020	2 Years
Coaxial Cable	Schaffner	RG 213/U	N/A	16 May 2020	1 Year
Coaxial Cable	Suhner	RG 214/U	N/A	16 May 2020	1 Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	21 Dec 2019	1 Year
LISN	Rohde & Schwarz	ENV216	101323	22 Jan 2020	1 Year
Coaxial Cable	Tyco Electronics	RG 58C/U	N/A	23 Oct 2019	1 Year



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~1000MHz (Horizontal)	4.94dB
200MHz ~1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB
6GHz – 18GHz	4.58dB
18GHz – 40GHz	4.80dB

1.5 Test Summary

TEST ITEM	FCC REFERANCE	RESULT
Fundamental and harmonic emission	15.249(a)	Comply
Out-band emission	15.249(d)	Comply
Peak Limit	15.249(e)	Comply
Bandwidth	15.215(c)	Comply

FCC ID: OTM-8455219-24GTX

Page 6 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

A non-conductive turntable with dimensions of 1.5m x 0.4m x 0.8m (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AY0041360(3)

Date : Aug 07, 2019

2.2 Test Setup

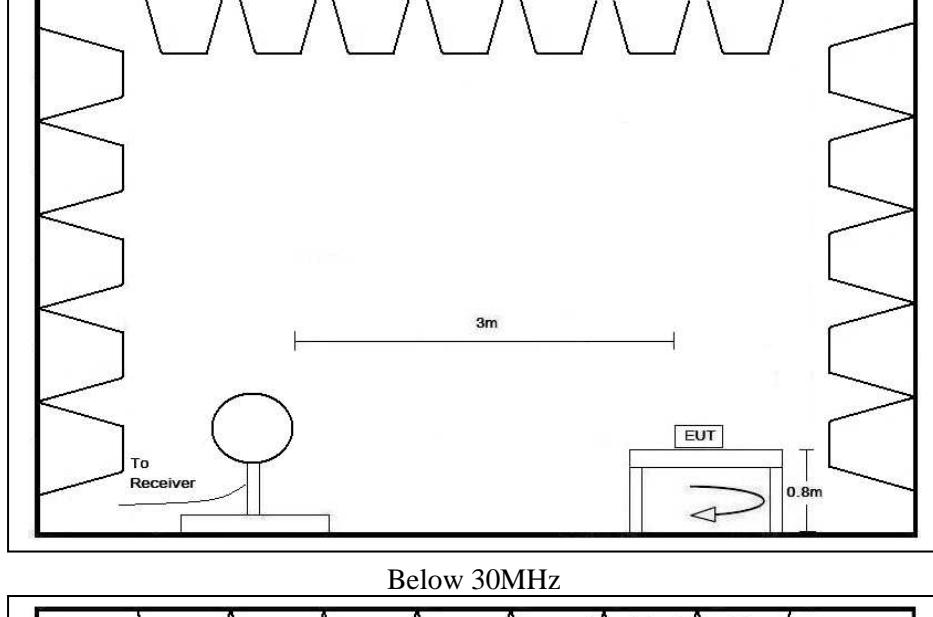

Below 30MHz

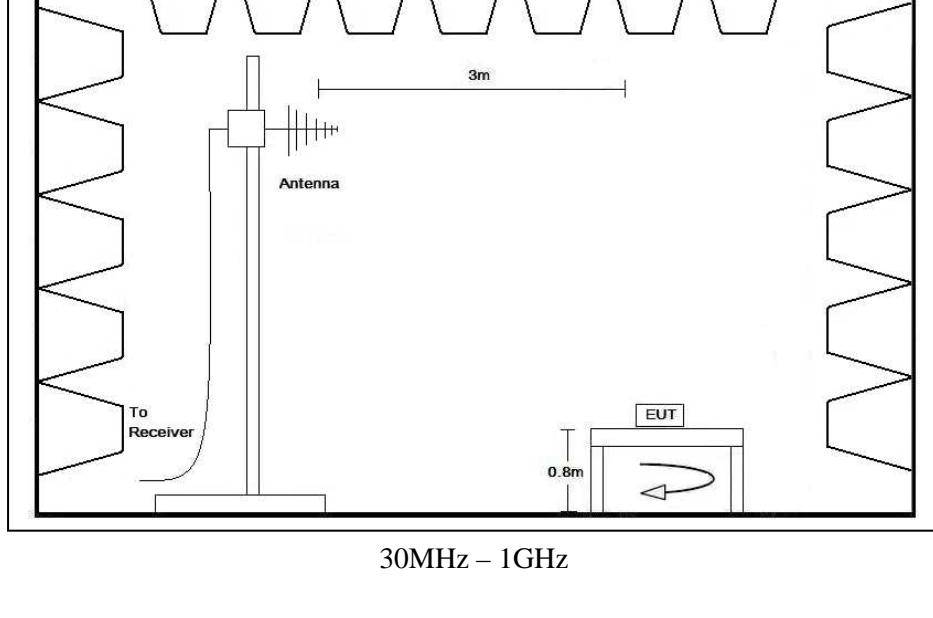

30MHz - 1GHz

Page 8 of 18

FCC ID: OTM-8455219-24GTX

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatesting.org. This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel : (852) 2698 8198 Fax : (852) 2695 4177 E-mail : info@cmatesting.org Web Site : <http://www.cmatesting.org>



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

2.2 Test Setup

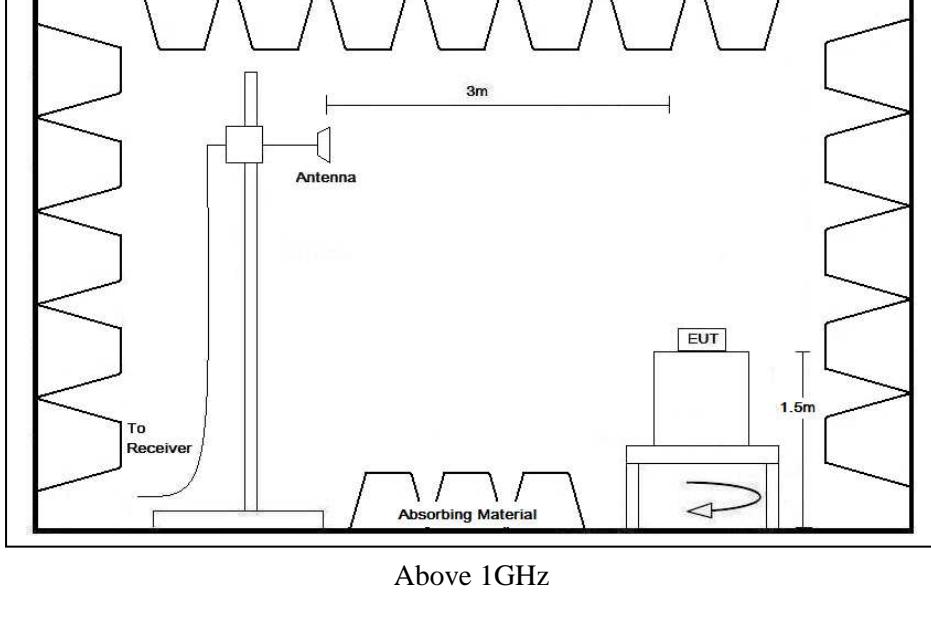

Above 1GHz

FCC ID: OTM-8455219-24GTX

Page 9 of 18

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatesting.org. This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel : (852) 2698 8198 Fax : (852) 2695 4177 E-mail : info@cmatesting.org Web Site : <http://www.cmatesting.org>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 26GHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode.

It was found that the EUT meet the FCC requirement.

FCC ID: OTM-8455219-24GTX

Page 10 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

2.4 Radiated Emission Measurement Data

Radiated emission

Environmental conditions:

Parameter	Recorded value
Ambient temperature:	27.8 °C
Relative humidity:	49.5 %

Channel: 2410MHz

Polarization	Frequency (MHz)	Reading at 3m (dB μ V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)	Detector Type
H	2410.957	106.6	-4.7	101.9	114.0	-12.1	Peak
H	2409.974	88.2	-4.7	83.5	94.0	-10.5	Average
V	2410.973	102.6	-4.7	97.9	114.0	-16.1	Peak
V	2409.914	84.0	-4.7	79.3	94.0	-14.7	Average
H	2400.000	64.3	-4.7	59.6	74.0	-14.4	Peak
H	2400.000	30.9	-4.7	26.2	54.0	-27.8	Average
H	4819.358	52.7	2.3	55.0	74.0	-19.0	Peak
H	4819.538	33.8	2.3	36.1	54.0	-17.9	Average
H	7229.120	48.1	9.6	57.7	74.0	-16.3	Peak
H	7229.325	29.7	9.6	39.3	54.0	-14.7	Average
H	9632.550 ¹	34.6	12.7	47.3	54.0	-6.7	Peak

Remark: 1) The peak value of emission 9632.550MHz are below the average limit, so no average measurement is performed.

FCC ID: OTM-8455219-24GTX

Page 11 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

Channel: 2440 MHz

Polarization	Frequency (MHz)	Reading at 3m (dB μ V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)	Detector Type
H	2440.273	106.9	-4.7	102.2	114.0	-11.8	Peak
H	2440.045	88.4	-4.7	83.7	94.0	-10.3	Average
V	2440.353	104.6	-4.7	99.9	114.0	-14.1	Peak
V	2439.995	86.1	-4.7	81.4	94.0	-12.6	Average
H	2368.698 ¹	57.8	-6.7	51.1	54.0	-2.9	Peak
V	2487.352 ¹	55.5	-4.7	50.8	54.0	-3.2	Peak
H	4879.294	53.6	2.3	55.9	74.0	-18.1	Peak
H	4879.524	34.5	2.3	36.8	54.0	-17.2	Average
V	7320.619	49.9	9.6	59.5	74.0	-14.5	Peak
V	7319.290	31.0	9.6	40.6	54.0	-13.4	Average
V	9759.011 ¹	38.1	12.7	50.8	54.0	-3.2	Peak

Remark: 1) The peak value of emission 2368.698MHz, 2487.352MHz and 9759.011MHz are below the average limit, so no average measurement is performed.

FCC ID: OTM-8455219-24GTX

Page 12 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

Channel: 2475MHz

Polarization	Frequency (MHz)	Reading at 3m (dB μ V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)	Detector Type
H	2475.227	106.5	-4.7	101.8	114.0	-12.2	Peak
H	2475.010	88.1	-4.7	83.4	94.0	-10.6	Average
V	2475.295	105.3	-4.7	100.6	114.0	-13.4	Peak
V	2475.008	86.9	-4.7	82.2	94.0	-11.8	Average
H	2483.500 ¹	58.2	-4.7	53.5	54.0	-0.5	Peak
H	4950.503	54.7	2.3	57.0	74.0	-17.0	Peak
H	4949.534	35.3	2.3	37.6	54.0	-16.4	Average
V	7424.165	49.7	9.6	59.3	74.0	-14.7	Peak
V	7424.520	37.9	2.3	40.2	54.0	-13.8	Average
V	9901.496 ¹	39.9	12.7	52.6	54.0	-1.4	Peak

Remark: 1) The peak value of emission 2483.5MHz and 9901.496MHz are below the average limit, so no average measurement is performed.

FCC ID: OTM-8455219-24GTX

Page 13 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

3 Description of the Line-conducted Test


3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Test Setup

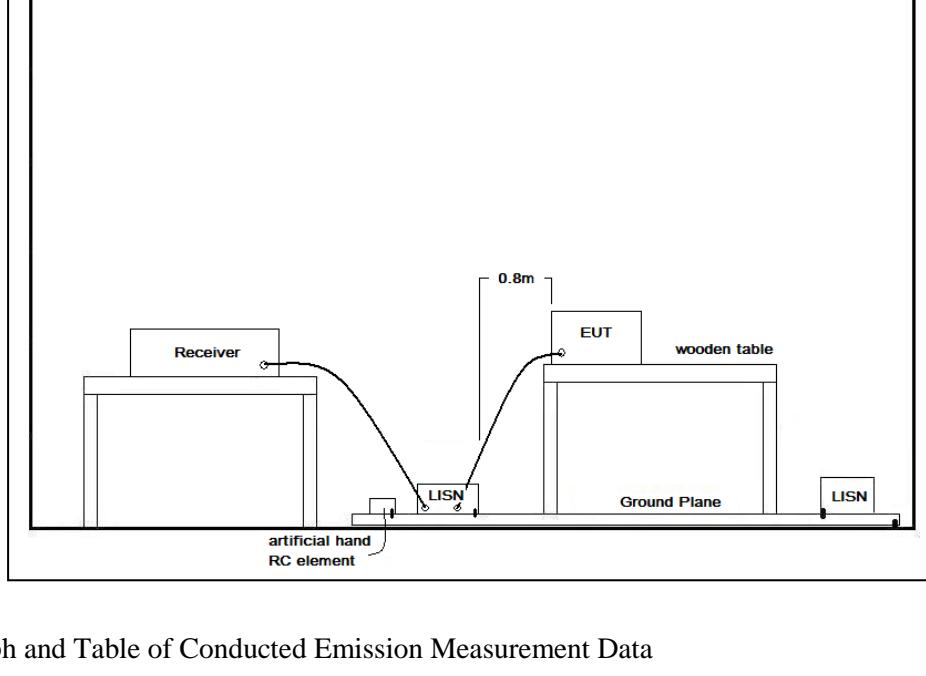

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable

FCC ID: OTM-8455219-24GTX

Page 14 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	Label Artwork and Location.pdf
Block Diagram	Block Diagram.pdf
Schematic Diagram	Schematic.pdf
Users Manual	User Manual.pdf
Operational Description	Operation Description.pdf

4.1 Bandwidth

Appendix A1 show the fundamental emission is confined in the specified band. 20dB bandwidth is 5.155MHz. 20dB bandwidth falls in the band of 2400 – 2483.5MHz. It also shows that the EUT met the requirement of FCC Part 15.215(c).

FCC ID: OTM-8455219-24GTX

Page 15 of 18



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

5 Appendices

A1. 20dB Bandwidth Plot 2 page(s)

FCC ID: OTM-8455219-24GTX

Page 16 of 18



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AY0041360(3)

Date : Aug 07, 2019

A1. 20dB Bandwidth Plot

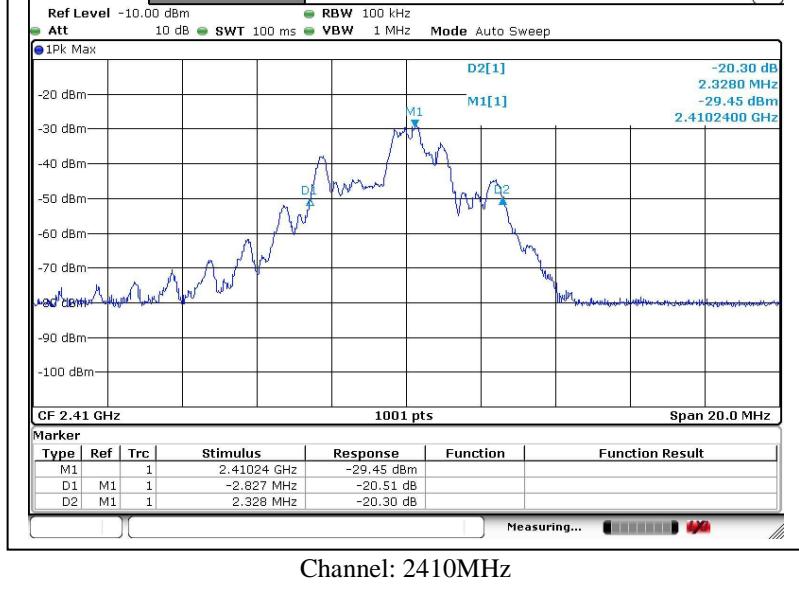

Channel: 2410MHz

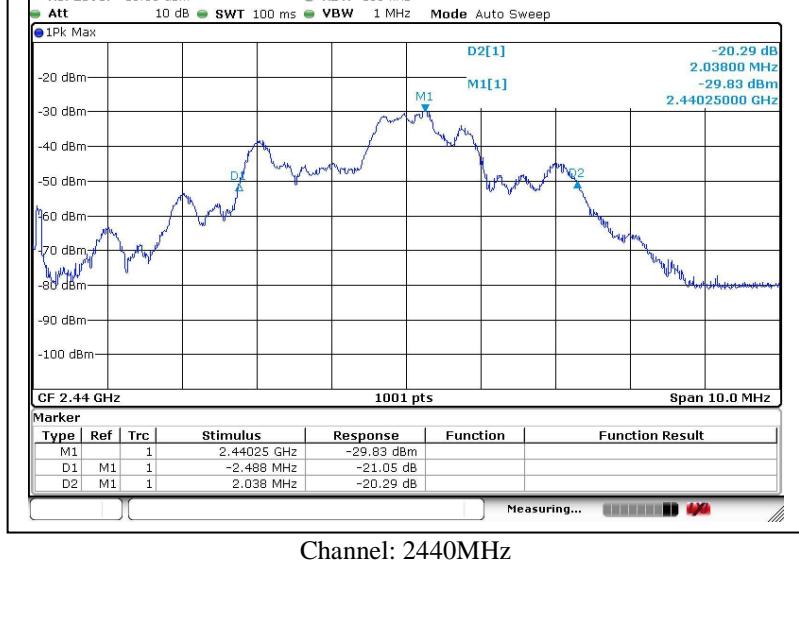

Channel: 2440MHz

FCC ID: OTM-8455219-24GTX

Page 17 of 18

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatesting.org. This document shall not be reproduced except in full or with written approval by CMA Testing.

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel : (852) 2698 8198 Fax : (852) 2695 4177 E-mail : info@cmatesting.org Web Site : <http://www.cmatesting.org>




CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AY0041360(3)

Date : Aug 07, 2019

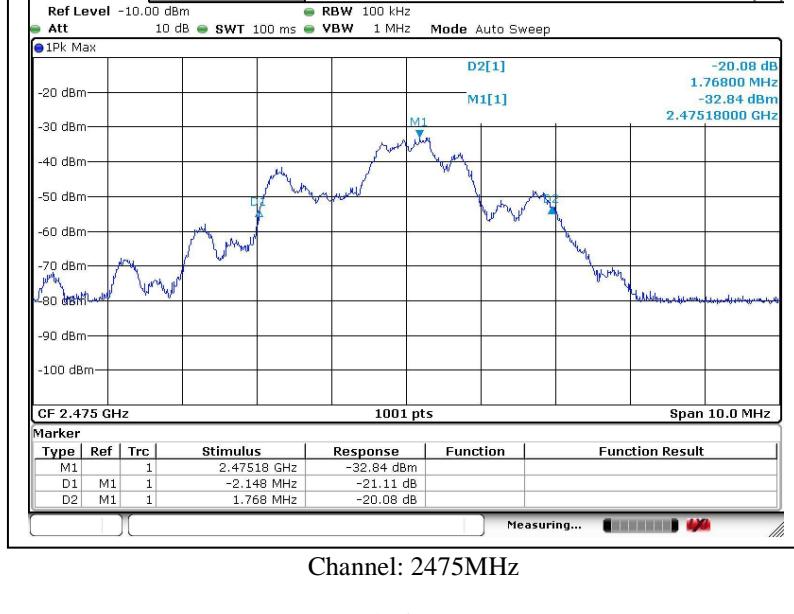

Channel: 2475MHz

***** End of Report *****

FCC ID: OTM-8455219-24GTX

Page 18 of 18