

**TEST REPORT****Report No.: 17061581HKG-003**

Kidztech Toys Manufacturing Limited

Application For Certification  
(Original Grant)**FCC ID: OTM-8537617-49MRX**

Superregenerative Receiver

**PREPARED AND CHECKED BY:****APPROVED BY:**

Signed On File  
Xu Lap Ho, Leo  
Assistant Engineer

---

Koo Wai Ip  
Technical Supervisor  
Date: July 12, 2017

**TEST REPORT****GENERAL INFORMATION**

|                                  |  |
|----------------------------------|--|
| <b>Grantee:</b>                  | Kidztech Toys Manufacturing Limited  |
| <b>Grantee Address:</b>          | Room 1201, 12/F., Inter-Continental Plaza,<br>94 Granville Road, Tsim Sha Tsui East,<br>Kowloon, Hong Kong.  |
| <b>Contact Person:</b>           | Lonson Cheung  |
| <b>Tel:</b>                      | (852) 2721 8868  |
| <b>Fax:</b>                      | (852) 2721 8838  |
| <b>e-mail:</b>                   | N/A  |
| <b>Manufacturer:</b>             | Kidztech Toys Manufacturing Ltd.   |
| <b>Manufacturer Address:</b>     | Room 1201, Inter-Continental Plaza,<br>94 Granville Road, Tsim Sha Tsui,<br>Hong Kong.   |
| <b>Brand Name:</b>               | FASTLANE   |
| <b>Model:</b>                    | 5F633FA  |
| <b>Additional Model:</b>         | 85376, 85476, 85576, 84554, 84553, 140892, 898716, 117064,<br>742478, 84557, 84558   |
| <b>Type of EUT:</b>              | Superheterodyne Receiver   |
| <b>Description of EUT:</b>       | FL 1/16 TRUCK ASST. (5F633FA),<br>FL RC 1/16 TRUCKS (2 ASST), RC 1/16 OFF-ROAD TRUCK (85376,<br>85476, 85576, 84554, 84553, 140892, 898716, 117064, 742478,<br>84557, 84558) |
| <b>Serial Number:</b>            | N/A  |
| <b>FCC ID:</b>                   | OTM-8537617-49MRX  |
| <b>Date of Sample Submitted:</b> | June 22, 2017  |
| <b>Date of Test:</b>             | June 22, 2017 to July 08, 2017   |
| <b>Report No.:</b>               | 17061581HKG-003  |
| <b>Report Date:</b>              | July 12, 2017  |
| <b>Environmental Conditions:</b> | Temperature: +10 to 40°C<br>Humidity: 10 to 90%  |

**TEST REPORT****SUMMARY OF TEST RESULT**

| TEST SPECIFICATION                           | REFERENCE | RESULTS |
|--|-----------|---------|
| Receiver / Digital Device Radiated Emissions | 15.109    | Pass    |

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2015 Edition

**TEST REPORT****TABLE OF CONTENTS**

|  |           |
|--|-----------|
| <b>1.0 GENERAL DESCRIPTION .....</b>                 | <b>5</b>  |
| 1.1 Product Description .....                        | 5         |
| 1.2 Related Submittal(s) Grants .....                | 5         |
| 1.3 Test Methodology .....                           | 5         |
| 1.4 Test Facility .....                              | 5         |
| <b>2.0 SYSTEM TEST CONFIGURATION.....</b>            | <b>6</b>  |
| 2.1 Justification.....                               | 6         |
| 2.2 EUT Exercising Software .....                    | 6         |
| 2.3 Special Accessories .....                        | 6         |
| 2.4 Measurement Uncertainty.....                     | 6         |
| 2.5 Support Equipment List and Description.....      | 6         |
| <b>3.0 EMISSION RESULTS .....</b>                    | <b>7</b>  |
| 3.1 Field Strength Calculation .....                 | 7         |
| 3.2 Radiated Emission Configuration Photograph ..... | 8         |
| 3.3 Radiated Emission Data .....                     | 8         |
| <b>4.0 EQUIPMENT PHOTOGRAPHS .....</b>               | <b>10</b> |
| <b>5.0 PRODUCT LABELLING .....</b>                   | <b>10</b> |
| <b>6.0 TECHNICAL SPECIFICATIONS .....</b>            | <b>10</b> |
| <b>7.0 INSTRUCTION MANUAL.....</b>                   | <b>10</b> |
| <b>8.0 MISCELLANEOUS INFORMATION.....</b>            | <b>11</b> |
| 8.1 Stabilization Waveform .....                     | 11        |
| 8.2 Discussion of Pulse Desensitization .....        | 12        |
| 8.3 Calculation of Average Factor.....               | 12        |
| 8.4 Emissions Test Procedures .....                  | 13        |
| <b>9.0 EQUIPMENT LIST .....</b>                      | <b>16</b> |

**TEST REPORT****1.0 GENERAL DESCRIPTION****1.1 Product Description**

The Equipment Under Test (EUT) is a receiver (Car Unit) for a portable 49.86MHz Transmitter (controller).

The EUT is powered by 5\*1.5V AA battery. After switch on the EUT, the car can be controlled to move forward/backward/leftward/rightward by the controller.

The Model: 85376, 85476, 85576, 84554, 84553, 140892, 898716, 117064, 742478, 84557, 84558 are the same as the Model: 5F633FA in hardware aspect. The difference in model number serves as marketing strategy. The models are different in model number only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

**1.2 Related Submittal(s) Grants**

This is a single application for certification of a receiver.

**1.3 Test Methodology**

Radiated emission measurement was performed according to the procedures in ANSI C63.4 (2014). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

**1.4 Test Facility**

The 3m Chamber facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

**TEST REPORT****2.0 SYSTEM TEST CONFIGURATION****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2014).

The device was powered by new 5 x 1.5V AA batteries.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

**2.2 EUT Exercising Software**

There was no special software to exercise the device. Once the unit is powered up, it receives the RF signal continuously.

**2.3 Special Accessories**

There are no special accessories necessary for compliance of this product.

**2.4 Measurement Uncertainty**

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

**Uncertainty and Compliance** - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

**2.5 Support Equipment List and Description**

N/A.

**TEST REPORT****3.0 EMISSION RESULTS**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

**3.1 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RR = RA - AG - AV in  $\text{dB}\mu\text{V}$

LF = CF + AF in dB

Assume a receiver reading of 52.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

**TEST REPORT****3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 49.85 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

**3.3 Radiated Emission Data**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 3.0 dB

**TEST REPORT**
**RADIATED EMISSIONS**

Model: 5F633FA

Date of Test: July 08, 2017

Worst-Case Operating Mode: Receiving

**Table 1**  
**Pursuant to FCC Part 15 Section 15.109 Requirement**

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|-------------|
| H            | 49.848          | 39.2                 | 16           | 11.0                | 34.2                     | 40.0                       | -5.8        |
| V            | 49.848          | 42.0                 | 16           | 11.0                | 37.0                     | 40.0                       | -3.0        |
| H            | 97.118          | 35.1                 | 16           | 12.0                | 31.1                     | 43.5                       | -12.4       |
| V            | 97.118          | 28.6                 | 16           | 12.0                | 24.6                     | 43.5                       | -18.9       |
| H            | 145.906         | 22.8                 | 16           | 14.0                | 20.8                     | 43.5                       | -22.7       |
| V            | 145.906         | 14.8                 | 16           | 14.0                | 12.8                     | 43.5                       | -30.7       |
| H            | 193.918         | 17.1                 | 16           | 16.0                | 17.1                     | 43.5                       | -26.4       |
| V            | 193.918         | 11.9                 | 16           | 16.0                | 11.9                     | 43.5                       | -31.6       |
| V            | 249.296         | 4.9                  | 16           | 20.0                | 8.9                      | 46.0                       | -37.1       |
| H            | 249.296         | 5.0                  | 16           | 20.0                | 9.0                      | 46.0                       | -37.0       |
| V            | 299.155         | 5.1                  | 16           | 22.0                | 11.1                     | 46.0                       | -34.9       |
| H            | 299.155         | 5.5                  | 16           | 22.0                | 11.5                     | 46.0                       | -34.5       |
| V            | 349.014         | 4.8                  | 16           | 24.0                | 12.8                     | 46.0                       | -33.2       |
| H            | 349.014         | 5.9                  | 16           | 24.0                | 13.9                     | 46.0                       | -32.1       |
| V            | 398.873         | 5.6                  | 16           | 25.0                | 14.6                     | 46.0                       | -31.4       |
| H            | 398.873         | 5.7                  | 16           | 25.0                | 14.7                     | 46.0                       | -31.3       |
| V            | 448.733         | 5.8                  | 16           | 26.0                | 15.8                     | 46.0                       | -30.2       |
| H            | 448.733         | 5.8                  | 16           | 26.0                | 15.8                     | 46.0                       | -30.2       |
| V            | 498.592         | 6.5                  | 16           | 26.0                | 16.5                     | 46.0                       | -29.5       |
| H            | 498.592         | 6.4                  | 16           | 26.0                | 16.4                     | 46.0                       | -29.6       |

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 .
5. Measurement Uncertainty is  $\pm 5.3\text{dB}$  at a level of confidence of 95%.

**TEST REPORT****4.0 EQUIPMENT PHOTOGRAPHS**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

**5.0 PRODUCT LABELLING**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**6.0 TECHNICAL SPECIFICATIONS**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**7.0 INSTRUCTION MANUAL**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.


This manual will be provided to the end-user with each unit sold/leased in the United States.

**TEST REPORT****8.0 MISCELLANEOUS INFORMATION**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

**8.1 Stabilization Waveform**

Previous to the testing, the superregenerative receiver was stabilized as outlined in the test procedure. For the electronic filing, the plot saved with filename: superreg.pdf show the fundamental emission when a signal generator was used to stabilize the receiver. Please note that the antenna was placed as close as possible to the EUT for clear demonstration of the waveform and that accurate readings are not possible from this plot.

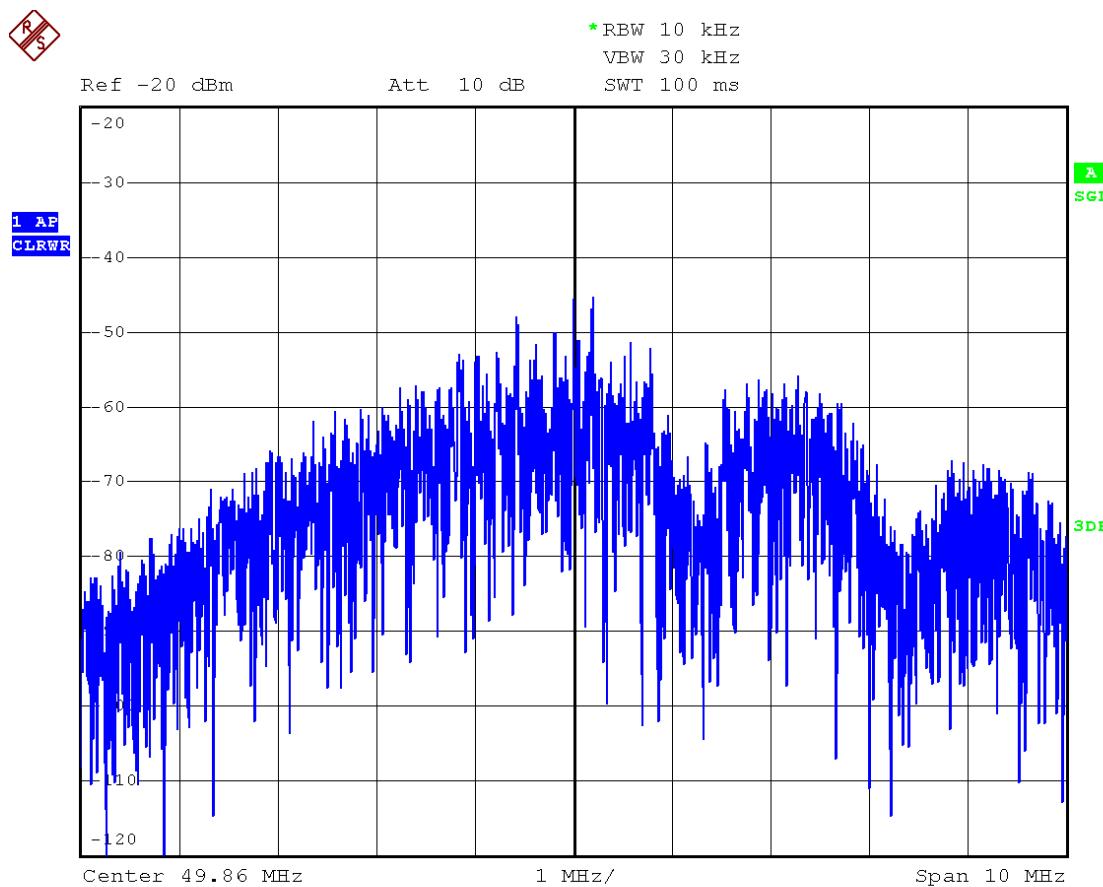

**TEST REPORT****8.2 Discussion of Pulse Desensitization**

This device is a Superregenerative receiver. No desensitization of the measurement equipment is required as the received signals are continuously.

**8.3 Calculation of Average Factor**

This device is a Superregenerative receiver. It is not necessary to apply average factor to the measurement result.

**TEST REPORT****8.4 Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of Superregenerative receivers operating under the Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 (2014). A typical or an unmodulated CW signal at the operating frequency of the EUT has been supplied to the EUT for all measurements. Such a signal is supplied by a signal generator and an antenna in close proximity to the EUT. The signal level is sufficient to stabilize the local oscillator of the EUT.

The equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from 30 MHz to 1000 MHz.

**TEST REPORT****8.4 Emissions Test Procedures (cont'd)**

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.


Conducted measurements were made as described in ANSI C63.4 (2014).

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Measurements are normally conducted at a measurement distance of three meters. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

**TEST REPORT****8.4.1 Radiated Emission Test Setup**

The figure below shows the test setup, which is utilized to make these measurements.

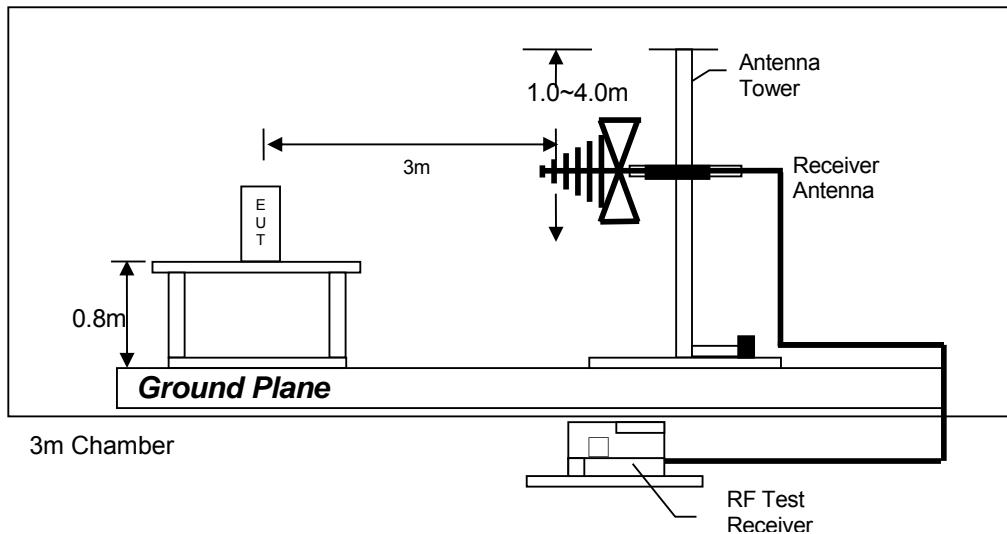

Test setup of radiated emissions up to 1GHz

**TEST REPORT****9.0 EQUIPMENT LIST**

## 1) Radiated Emissions Test

| EQUIPMENT USED                                   | CAL. NO. | MANUFACTURER | CAL DATE  | DUe DATE  |
|--|----------|--------------|-----------|-----------|
| Semi-anechoic Chamber                            | EMC209   | Frankonia    | 25-Apr-17 | 25-Apr-18 |
| Test Receiver                                    | EMC597   | R & S        | 26-Jul-16 | 26-Jul-17 |
| Bi-conical Antenna                               | EMC576   | R & S        | 1-Sep-15  | 1-Sep-17  |
| Log Periodic Antenna                             | EMC039   | R & S        | 1-Sep-15  | 1-Sep-17  |
| Coaxial cable                                    | EMC624   | Harbour      | 10-Jun-16 | 10-Jun-18 |
| Microwave amplifier<br>0.5-26.5GHz, 25dB<br>gain | EMC557   | HP           | 18-Jul-16 | 18-Jul-18 |
| High Pass Filter (cutoff<br>freq. =1000MHz)      | EMC572   | Trilithic    | 28-Oct-15 | 28-Oct-17 |

## 2) Waveform Measurement

| EQUIPMENT            | SPECTRUM ANALYZER |
|----------------------|-------------------|
| Registration No.     | EW-2329           |
| Manufacturer         | R&S               |
| Model No.            | FSP3              |
| Calibration Date     | Aug. 26, 2016     |
| Calibration Due Date | Aug. 26, 2017     |

END OF TEST REPORT