

TABLE OF CONTENTS LIST

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCRIPTIVE  
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED  
PAGE 3.....RF POWER OUTPUT  
PAGE 4.....MODULATION CHARACTERISTICS  
PAGE 5.....AUDIO FREQUENCY RESPONSE GRAPH  
PAGE 6.....MODULATION LIMITING GRAPH - 300Hz  
PAGE 7.....MODULATION LIMITING GRAPH - 1000Hz  
PAGE 8.....MODULATION LIMITING GRAPH - 3000Hz  
PAGE 9.....AUDIO LOW PASS FILTER GRAPH  
PAGE 10.....OCCUPIED BANDWIDTH  
PAGE 11.....OCCUPIED BANDWIDTH PLOT  
PAGE 12.....OCCUPIED BANDWIDTH PLOT - CW  
PAGE 13.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
PAGE 14.....UNWANTED RADIATION  
PAGE 15.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 16.....FREQUENCY STABILITY  
PAGE 17.....LIST OF TEST EQUIPMENT

EXHIBITS CONTAINING:

EXHIBIT 1.....FCC ID LABEL SAMPLE & SKETCH OF LOCATION  
EXHIBIT 2A.....EXTERNAL PHOTO - FRONT VIEW  
EXHIBIT 2B.....EXTERNAL PHOTO - REAR VIEW - WITH CLIP  
EXHIBIT 2C.....EXTERNAL PHOTO - REAR VIEW - W/OUT CLIP  
EXHIBIT 2D.....EXTERNAL PHOTO - SIDE VIEW  
EXHIBIT 2E.....EXTERNAL PHOTO - TOP VIEW  
EXHIBIT 3A.....INTERNAL PHOTO - COMPONENT VIEW  
EXHIBIT 3B.....INTERNAL PHOTO - COPPER VIEW  
EXHIBIT 4.....BLOCK DIAGRAM  
EXHIBIT 5.....SCHEMATICS  
EXHIBIT 6.....USER'S MANUAL  
EXHIBIT 7.....CIRCUIT DESCRIPTION  
EXHIBIT 8.....TUNING PROCEDURE  
EXHIBIT 9.....TEST SET UP PHOTO

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED  
FOR CERTIFICATION

2.1033(c)(1)(2) SB TELCOM CO., LTD. will manufacture the  
FCCID: OTVGMRS1100 GMRS CHANNELS  
TRANSCEIVER in quantity, for use under FCC RULES  
PART 95.

SB TELCOM CO., LTD.  
#25-49, JUAN5-DONG, NAM-KU  
INCHEON KOREA

2.1033 (c) TECHNICAL DESCRIPTION

2.1033(c)(3) Instruction book. A draft copy of the instruction  
manual is included as EXHIBIT 6.

2.1033(c) (4) Type of Emission: 10K5F3E  
95.631

Bn = 2M + 2DK  
M = 3000  
D = 1.75K  
K = 1  
Bn = 2(3000)+2(2250) = 10.5 k

GMRS Authorized Bandwidth 20.0 kHz  
2.1033(c)(5) GMRS Frequency Range: 462.5500 - 462.7250 MHz  
95.621

2.10311c)(6)(7) The Maximum Output Power Rating:  
GMRS - .62 Watts  
FRS - .23 Watts

FRS Authorized Bandwidth 12.5 kHz

2.1033(c)(5) FRS Frequency Range: 1. 462.5625 8. 467.5625  
95.627 2. 462.5875 9. 467.5875  
3. 462.6125 10. 467.6125  
4. 462.6375 11. 467.6375  
5. 462.6625 12. 467.6625  
6. 462.6875 13. 467.6875  
7. 462.7125 14. 467.7125 MHz

2.1033(c)(6)(7) Power Output shall not exceed 0.50 Watts effective  
95.639 radiated power. There can be no provisions for  
95.649 increasing the power or varying the power.

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\\$|SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

2.1033(c)(8) DC Voltages and Current into Final Amplifier:  
FINAL AMPLIFIER ONLY

FOR LOW POWER SETTING INPUT POWER: (6.0V)(.210A) = 1.26 Watts  
FOR HIGH POWER SETTING INPUT POWER:(6.0V)(.550A) = 3.30 Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included as EXHIBIT # 8.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 5 of this report. The block diagrams are included as EXHIBIT 4 of this report.

2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 2-3.

2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100


REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

95.639 Power Output shall not exceed 50.0 Watts effective radiated power. There can be no provisions for increasing the power or varying the power. RF power output.

2.1046(a) RF power is measured by radiated field strength using the substitution method. With a nominal battery voltage of 6.0 V, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER: GMRS: .62 Watts ERP  
FRS: .23 Watts ERP

2.1046(a) RF power output. The test procedure used was TIA/EIA-603 S2.2.1.

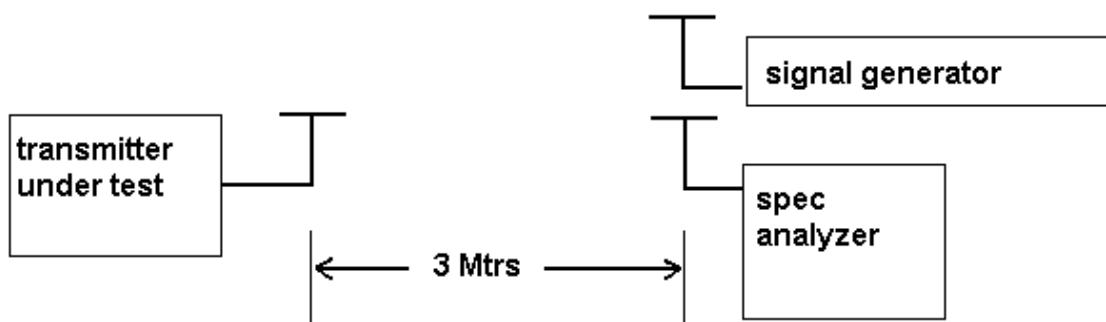

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

2.1047(a)(b)

Modulation characteristics:

AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone circuit and into the microphone connector. The input required to produce 30 percent modulation level was measured. See Page 5 of report.

2.1047(b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz. See Pages 6,7 & 8 of report.


95.637

Post Limiter Filter Each GMRS transmitter, except a mobile station transmitter with a power of 2.5 Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1 kHz. See Page 9 of report.

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100


REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

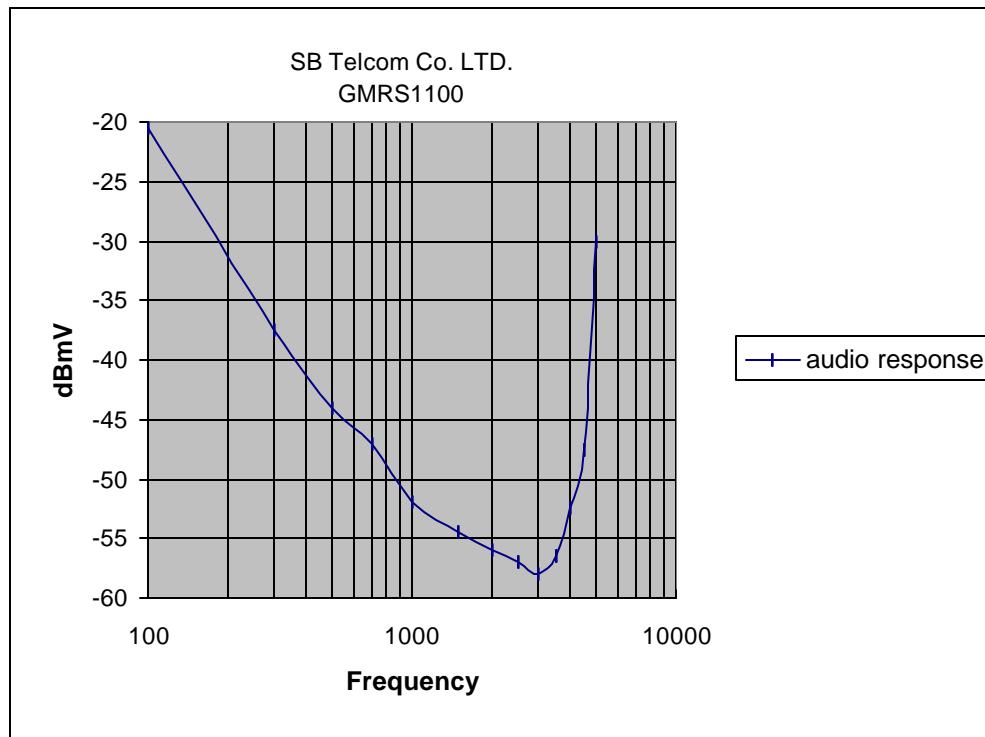

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100


REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

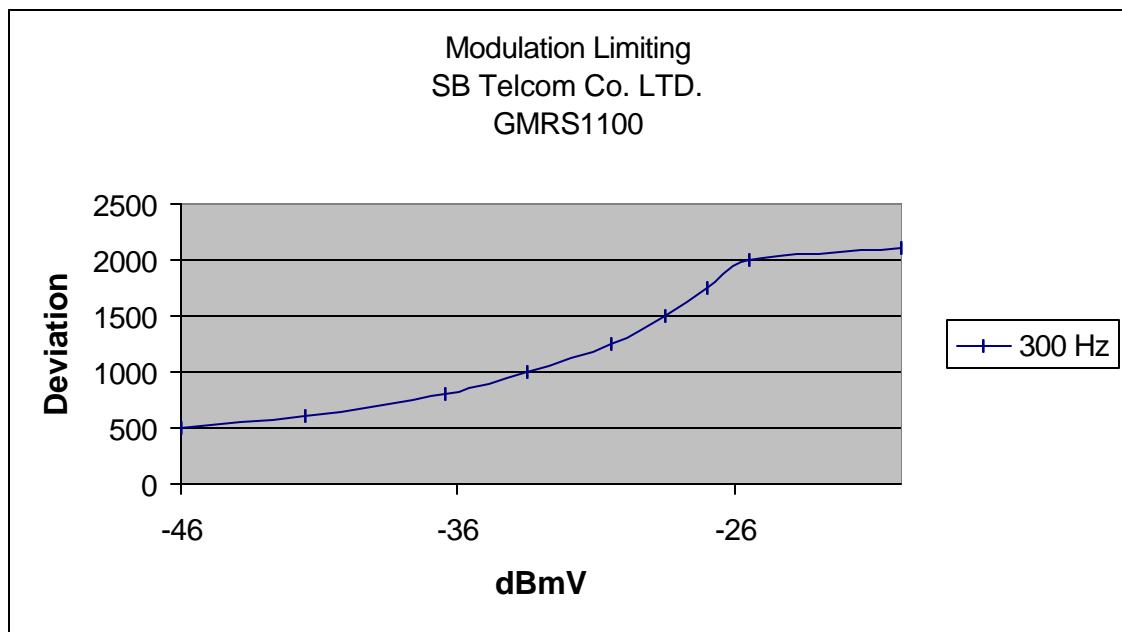

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100


REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

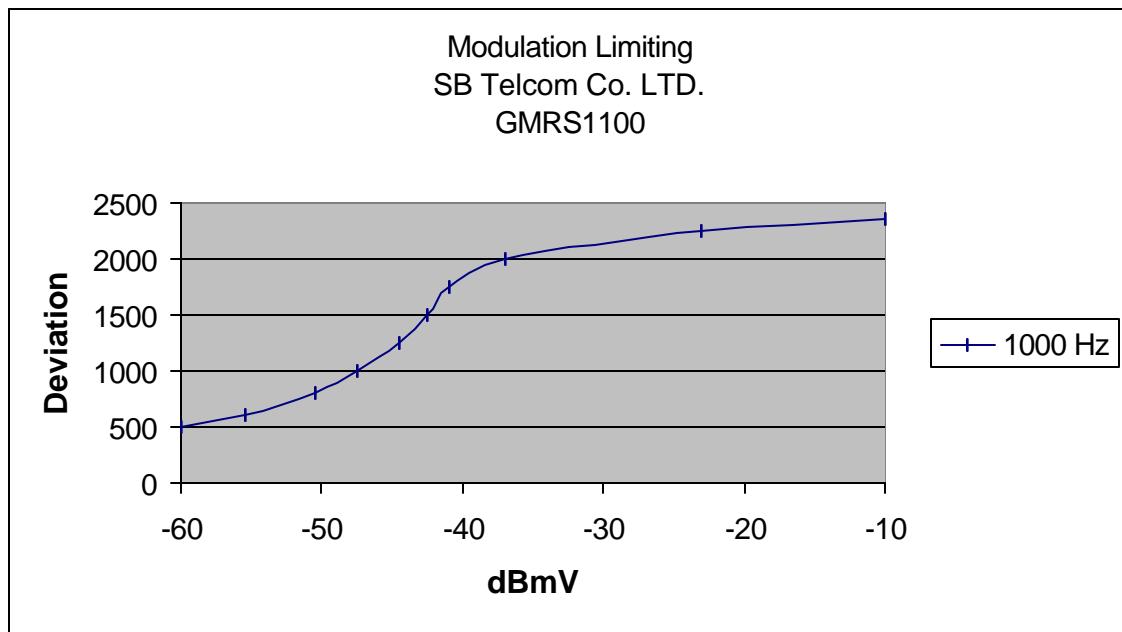

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

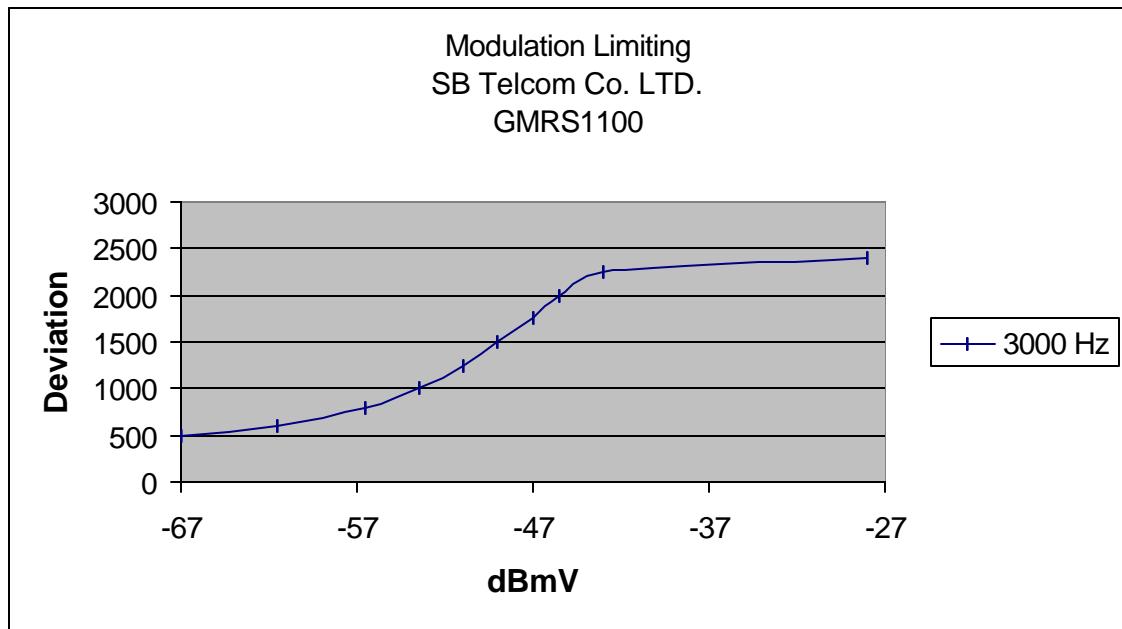

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100


REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

## 10. Audio Low Pass Filter

Audio Low Pass Filter Response (FCC Part 90)

TEST BY : J.H.SONG

TEST DATE : Dec . 27 . 2001 .

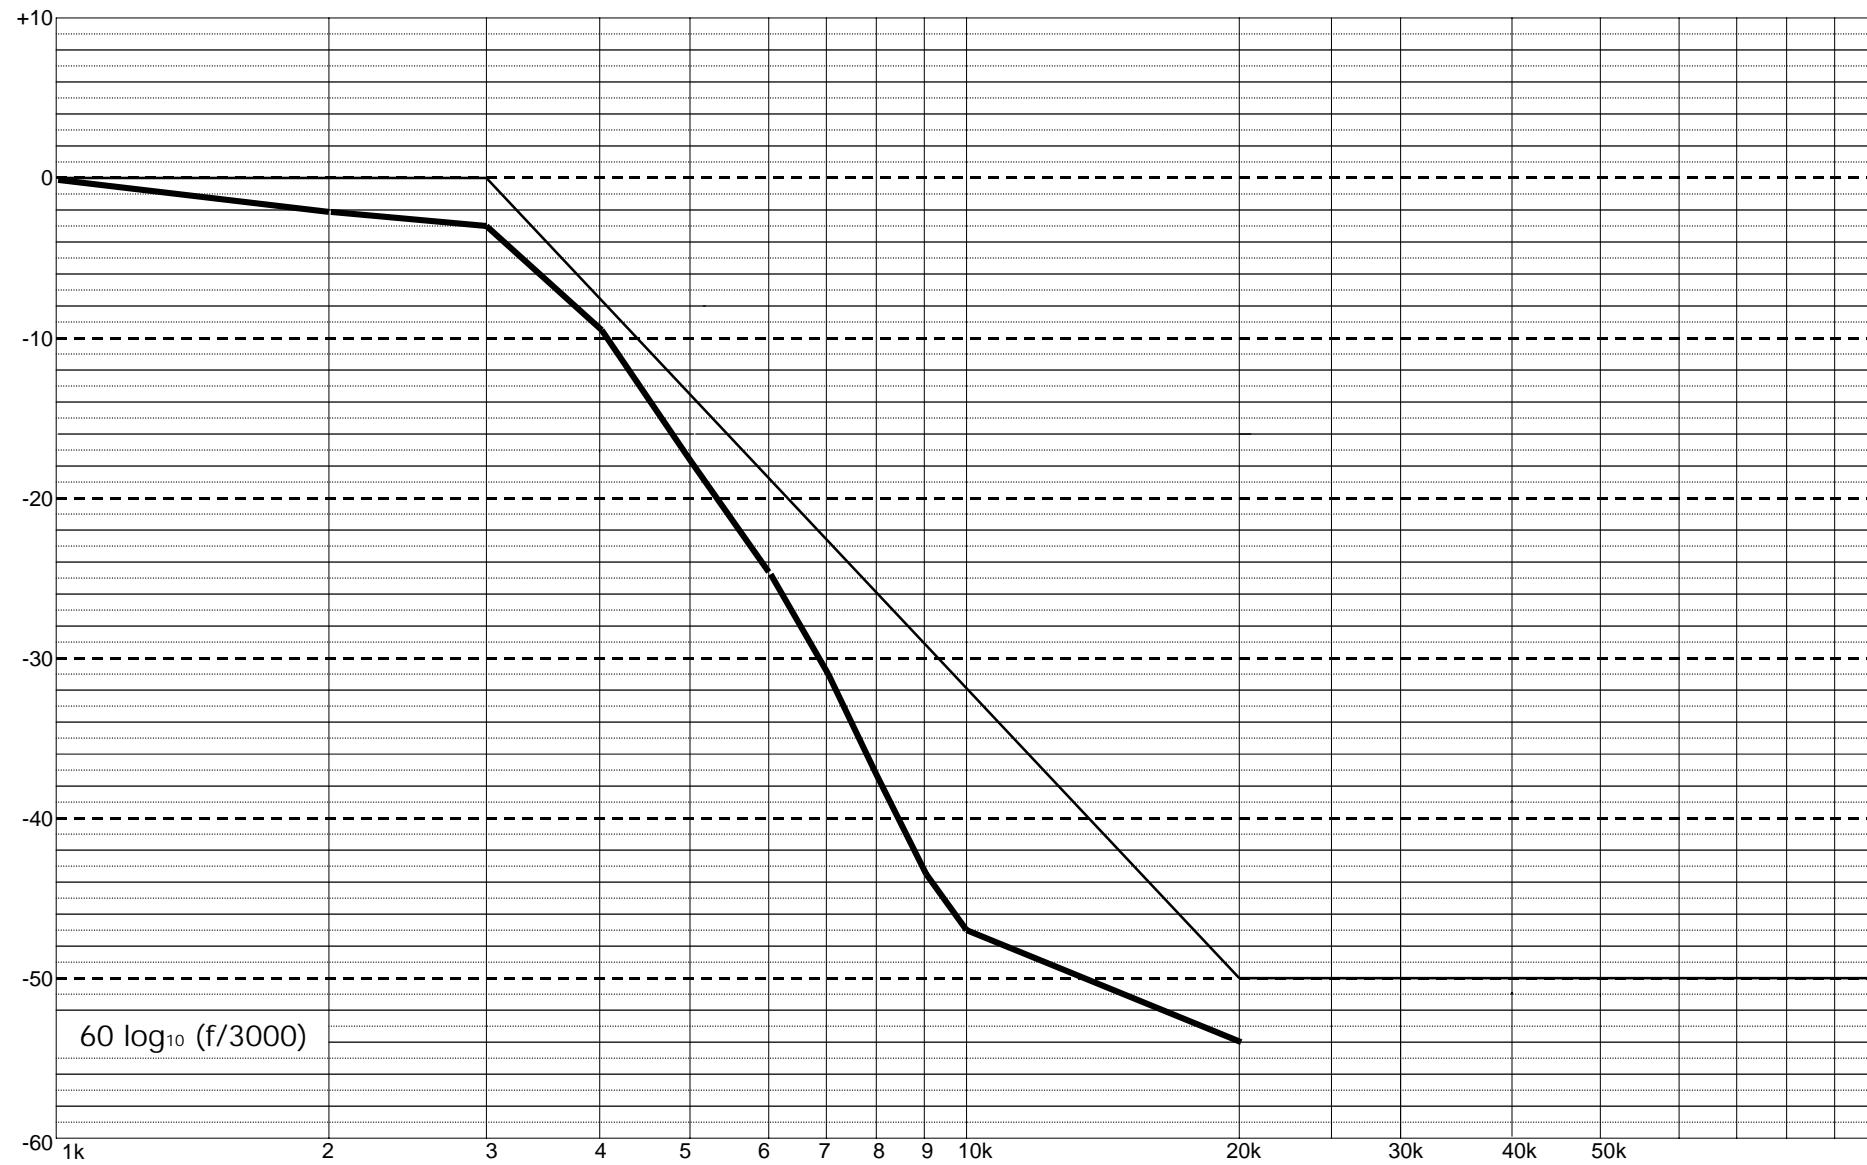

MODEL NAME : GMRS1100-2CH


SB TELCOM CO., LTD

2.1049 Occupied bandwidth:

95.635(b)(1)(3)(7)

At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least  $43 + \log_{10}(TP)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See plots on pages 11 and 12.

Occupied BW Test Equipment Setup

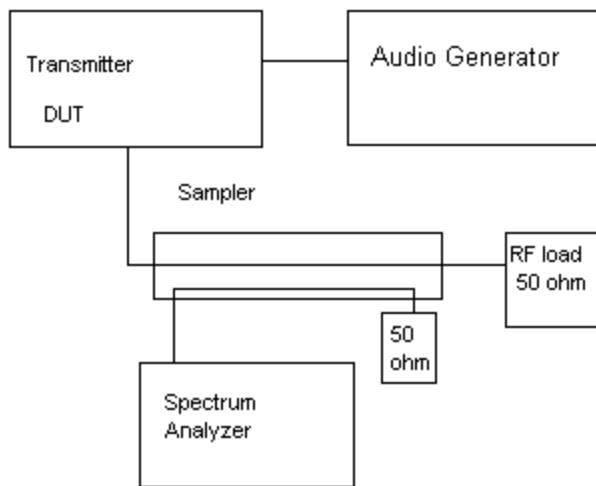

APPLICANT: SB TELCOM CO., LTD.


FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

SB TELCOM CO., LTD

OCCUPIED BANDWIDTH PLOT

PAGE : 9

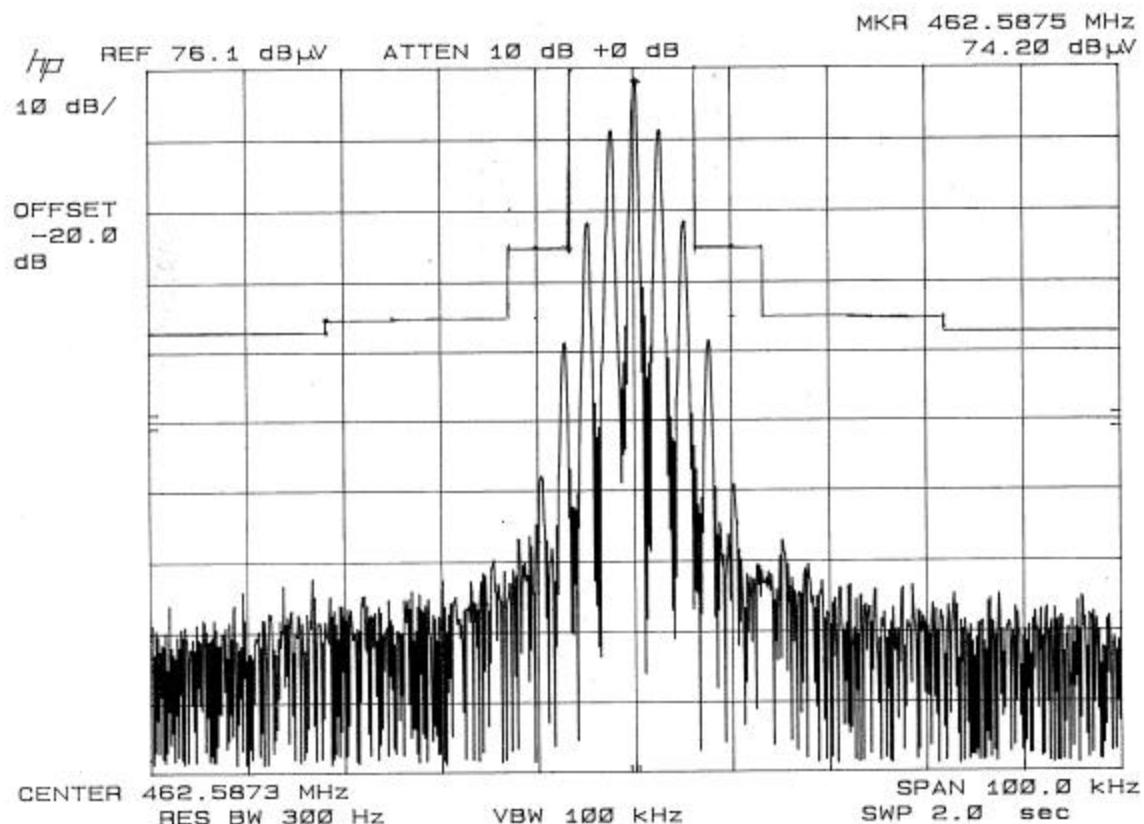


APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

Page 11 of 17

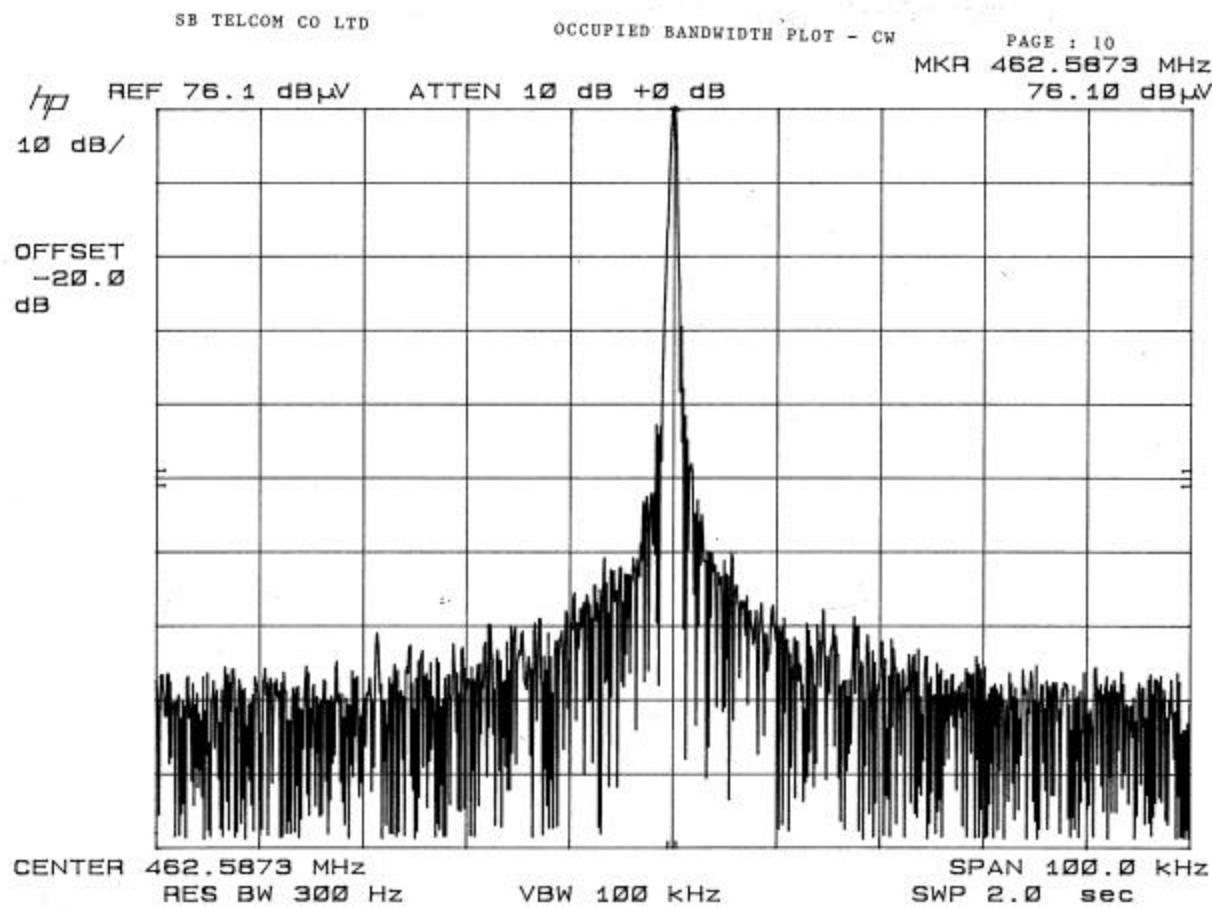

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100


REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

Page 12 of 17

2.1051

Spurious emissions at antenna terminals (conducted):  
The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

Spurious Emissions at  
Antenna Terminals

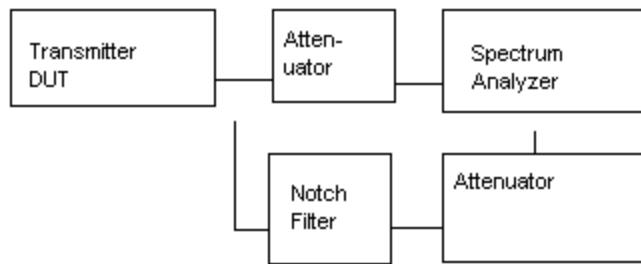

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

2.1051 Not Applicable, no antenna terminal allowed.

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

2.1053  
95.635(b)(7)

UNWANTED RADIATION:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the 10th harmonic of the fundamental. This test was conducted per ANSI C63.4-1992.

REQUIREMENTS: GMRS:  $43 + 10\log(.62) = 41$  dB  
FRS:  $43 + 10\log(.23) = 37$  dB

TEST DATA:

Emission Frequency MHz	ATTN dBc	Margin dB
<b>GMRS</b>		
462.60	0.0	0.0
925.40	47	6
1,388.10	55	14
1,850.80	65	24
2,313.50	65	24
2,776.20	**	
3,238.90	60	19
3,701.60	70	29
4,164.30	60	19
4,627.10	66	25
<b>FRS</b>		
467.50	0.0	0.0
935.10	51	14
1,402.60	61	24
1,870.20	68	31
2,337.80	68	31
2,805.30	67	30
3,272.90	64	27
3,740.40	67	30
4,208.00	64	27
4,675.60	63	26

Note: \*\* Below the measurement capabilities. Measurement is >20 dB below FCC limit.

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: SB TELCOM CO., LTD.


FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

APPLICANT : SB TELCOM CO., LTD.

FCC ID : OTVGMRS1100

Method of Measuring Radiated Spurious Emissions

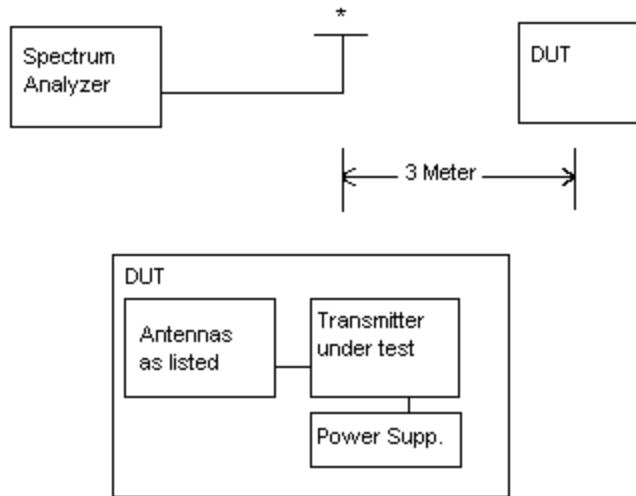

Equipment placed 80 cm above ground  
on a rotatable platform.

\* Appropriate antenna raised from 1 to 4 meters.

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

Page 15 of 17

2.1055  
95.621(b)

Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus and minus 15% of the battery voltage of 6.0 VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 467.563 034

<u>TEMPERATURE_C</u>	<u>FREQUENCY_MHz</u>	<u>PPM</u>
REFERENCE_____	467.563 034	00.00
-30C_____	467.561 140	-4.05
-20C_____	467.562 666	-0.79
-10C_____	467.463 571	1.15
0C_____	467.563 945	1.95
10C_____	467.563 705	1.44
20C_____	467.563 183	0.32
30C_____	467.562 585	-0.96
40C_____	467.562 146	-1.90
50C_____	467.562 130	-1.93

BATT. %	BATT. DATA	VOLTS	BATT. PPM
-15%	467.563 016	5.1	-0.04
+15%	467.563 072	6.9	0.08

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -4.05 to +1.95 ppm. The maximum frequency variation with voltage was -0.04 to +0.08 ppm.

Note: This EUT meets the frequency stability requirement for a FRS: +/- 2.5ppm over temp range of -20 degrees C to +50 degrees C. It also meets the GMRS frequency stability requirements: +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc

APPLICANT: SB TELCOM CO., LTD.  
FCC ID: OTVGMRS1100

TEST EQUIPMENT LIST

1.  Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/ preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02, S/N 3008A00372 Cal. 8/31/01 Due 8/31/02
2.  Biconnical Antenna: Eaton Model 94455-1, S/N 1057, Cal. 10/1/01 Due 10/1/02
3.  Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171 Cal. 4/26/01 Due 4/26/03
4.  Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632 Char. 10/15/01 Due 10/15/02
5.  Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409 Char. 10/16/01 Due 10/16/02
6.  Log-Periodic Antenna: Electro-Metrics Model LPA-25, S/N 1122 Char. 2/10/01 Due 3/10/02
7.  Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180, 1-18 GHz, S/N 2319 Cal. 12/19/01 Due 12/19/02
8.  18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20 No Cal Required
9.  Horn 40-60GHz: ATM Part #19-443-6R No Cal Required
10.  Line Impedance Stabilization Network: Electro-Metrics Model EM-7820, w/NEMA Adapter S/N 2682 Cal. 3/16/01 Due 3/16/02
11.  Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7 Char. 1/27/01 Due 1/27/02
12.  Frequency Counter: HP Model 5385A, S/N 3242A07460 Char. 12/11/01 Due 12/11/02
13.  Peak Power Meter: HP Model 8900C, S/N 2131A00545 Char. 1/26/01 Due 1/26/02
14.  Open Area Test Site #1-3meters Cal. 12/22/99
15.  Signal Generator: HP 8640B, S/N 2308A21464 Char. 11/15/01 Due 11/15/02
16.  Passive Loop Antenna: EMC Model 6512, 9KHz to 30MHz, S/N 9706-1211 Char. 7/10/01 Due 7/10/02
17.  Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 152 Char. 3/21/01 Due 3/21/02
18.  AC Voltmeter: HP Model 400FL, S/N 2213A14499 Char. 10/9/01 Due 10/09/02
19.  Digital Multimeter: Fluke Model 77, S/N 35053830 Char. 1/11/01 Due 1/11/02
20.  Oscilloscope: Tektronix Model 2230, S/N 300572 Char. 2/1/01 Due 2/1/02

APPLICANT: SB TELCOM CO., LTD.

FCC ID: OTVGMRS1100

REPORT #: T:\S\SBTELE\24akt2a\Corres-22785\MODIFmodifiedTESTREPORT.doc