



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250300053504

Page: 1 of 113

TEST REPORT

Application No.: SHCR2503000535ME
FCC ID: OU5MULW01
Applicant: GE Medical Systems Information Technologies, Inc.
Address of Applicant: 3114 N Grandview Blvd Waukesha, WI 53188, USA
Manufacturer: GE Medical Systems Information Technologies, Inc.
Address of Manufacturer: 3114 N Grandview Blvd Waukesha, WI 53188, USA
Equipment Under Test (EUT):
EUT Name: WLAN Module
Model No.: WLANCSMOD
Trade Mark: GE HealthCare
Standard(s) : 47 CFR Part 15, Subpart E 15.407
RSS-247 Issue 3, August 2023
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2025-03-12
Date of Test: 2025-03-13 to 2025-04-14
Date of Issue: 2025-04-15

Test Result:	Pass*
---------------------	-------

* In the configuration tested, the EUT complied with the standards specified above.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)

Revision Record			
Version	Description	Date	Remark
00	Original	2025-04-15	/

Authorized for issue by:			
Tested By		 Wade Zhang	
		Wade Zhang/Project Engineer	
Approved By		 Parlam Zhan	
		Parlam Zhan / Reviewer	

2 Test Summary

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions Below 1GHz	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5	Pass
Radiated Spurious Emissions Above 1GHz	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.6	Pass

Remark: New optional BT&WIFI antenna(s) changed to the original module, Radiated Spurious Emission tests were performed to verify RF compliance, other test data reference to original module report KSCR241000206804.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty	5
4.4 Test Location.....	6
4.5 Test Facility	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions	6
5 Equipment List	7
6 Radio Spectrum Matter Test Results	8
6.1 Radiated Emissions (Below 1GHz).....	8
6.1.1 E.U.T. Operation.....	8
6.1.2 Test Mode Description	8
6.1.3 Test Setup Diagram.....	9
6.1.4 Measurement Procedure and Data.....	9
6.2 Radiated Emissions (Above 1GHz).....	12
6.2.1 E.U.T. Operation	12
6.2.2 Test Mode Description	12
6.2.3 Test Setup Diagram.....	12
6.2.4 Measurement Procedure and Data.....	13
6.3 Radiated Emissions which fall in the restricted bands	80
6.3.1 E.U.T. Operation	80
6.3.2 Test Mode Description	80
6.3.3 Test Setup Diagram	81
6.3.4 Measurement Procedure and Data.....	82
7 Test Setup Photo	113
8 EUT Constructional Details (EUT Photos)	113

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.3V
Test voltage:	DC 3.3V
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Modulation Type:	OFDM (64QAM, 16QAM, QPSK, BPSK); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing:	802.11a/n20: 20MHz; 802.11n40: 40MHz
DFS Function:	Slave without Radar detection
TPC Function:	Without TPC function
Antenna Type:	FPC Antenna
Antenna Gain:	Ant 1: 5.79dBi; Ant 2: 4.73dBi (Provided by manufacturer)
Antenna Number:	2

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
PC	GE	-	-

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-6GHz) 5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2024/12/18	2025-12-17
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2024/12/18	2025-12-17
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2024-07-31	2025-07-30
Signal Generator	R&S	SMR20	SHEM006-1	2024-07-31	2025-07-30
Signal Generator	Agilent	N5182A	SHEM182-1	2024-07-31	2025-07-30
Communication Tester	R&S	CMW270	SHEM183-1	2024-05-23	2025-05-22
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Power Sensor	Keysight	U2021XA * 4	SHEM293-1	2024-07-31	2025-07-30
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2024-11-05	2026-11-04
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2024/12/18	2025-12-17
DC Power Supply	HP	6010A	SHEM222-1	2024/12/18	2025-12-17
Conducted test Cable	/	RF01-RF04	/	2024/12/18	2025-12-17
Switcher	Tonscend	JS0806	SHEM293-1	2024-07-31	2025-07-30
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2024-07-31	2025-07-30
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2024/12/18	2025-12-17
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2024/12/18	2025-12-17
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2024/12/18	2025-12-17
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2023-04-17	2025-04-16
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024-08-05	2026-08-04
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Pre-Amplifier	HP	8447D	SHEM236-1	2024/12/18	2025-12-17
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2024/12/18	2025-12-17
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMNM-10M	SHEM217-2	2024/12/18	2025-12-17
Test software	ESE	E3	Version: 6.111221a	/	/

6 Radio Spectrum Matter Test Results

6.1 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.

6.1.3 Test Setup Diagram

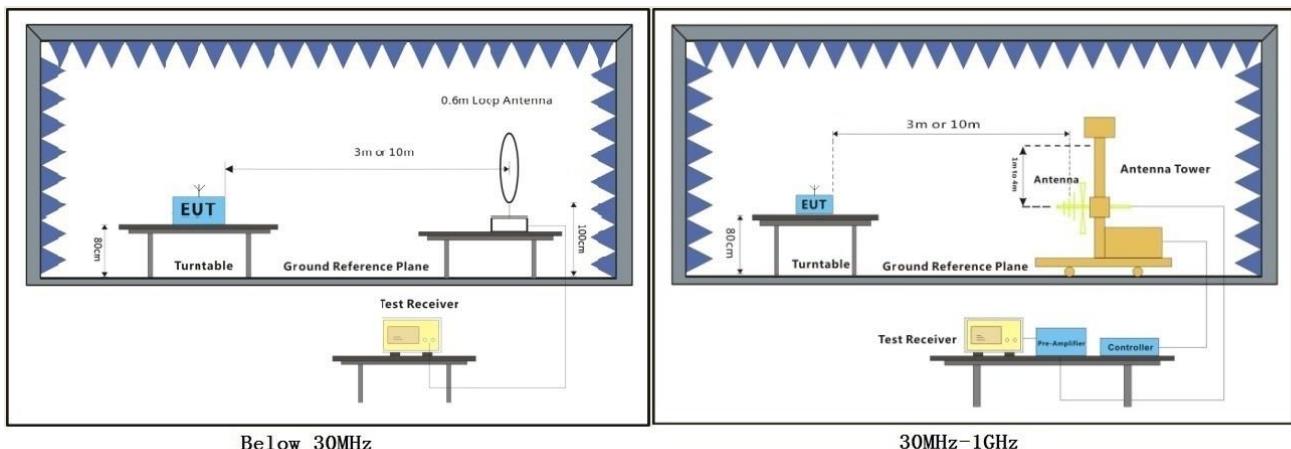


6.1.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Test Mode: 03; Polarity: Horizontal

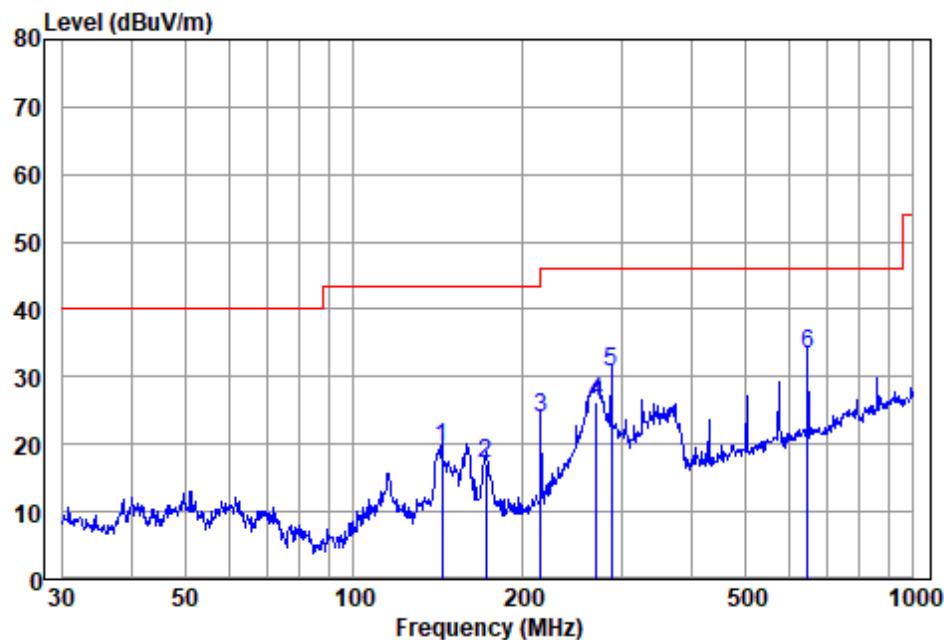

Antenna Polarity :HORIZONTAL


EUT/Project :0535ME

Test mode :03

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	143.830	36.44	13.50	2.55	33.02	19.47	43.50	-24.03	QP
2	171.995	34.76	12.41	2.82	33.00	16.99	43.50	-26.51	QP
3	216.024	43.80	9.86	3.11	32.93	23.84	46.00	-22.16	QP
4	271.325	42.86	12.35	3.87	32.84	26.24	46.00	-19.76	QP
5	287.990	46.90	13.04	3.55	32.88	30.61	46.00	-15.39	QP
6	647.386	39.48	20.65	5.72	32.61	33.24	46.00	-12.76	QP

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Vertical

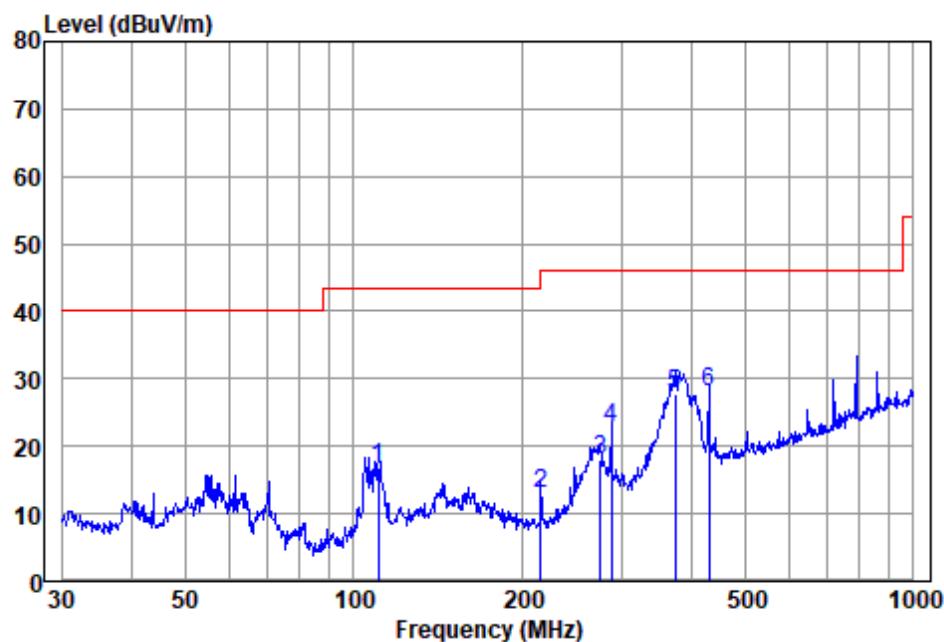

Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Test mode : 03

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	110.569	37.06	10.55	2.27	33.15	16.73	43.50	-26.77	QP
2	216.024	32.84	9.86	3.11	32.93	12.88	46.00	-33.12	QP
3	276.124	34.74	12.60	3.67	32.86	18.15	46.00	-27.85	QP
4	287.990	38.90	13.04	3.55	32.88	22.61	46.00	-23.39	QP
5	374.623	41.26	15.10	4.28	32.75	27.89	46.00	-18.11	QP
6	431.032	39.36	16.74	4.57	32.74	27.93	46.00	-18.07	QP

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

6.2 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.

6.2.3 Test Setup Diagram

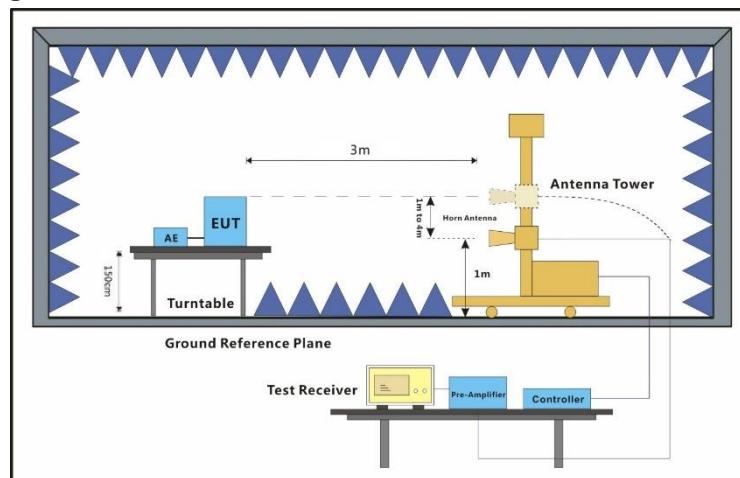


6.2.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

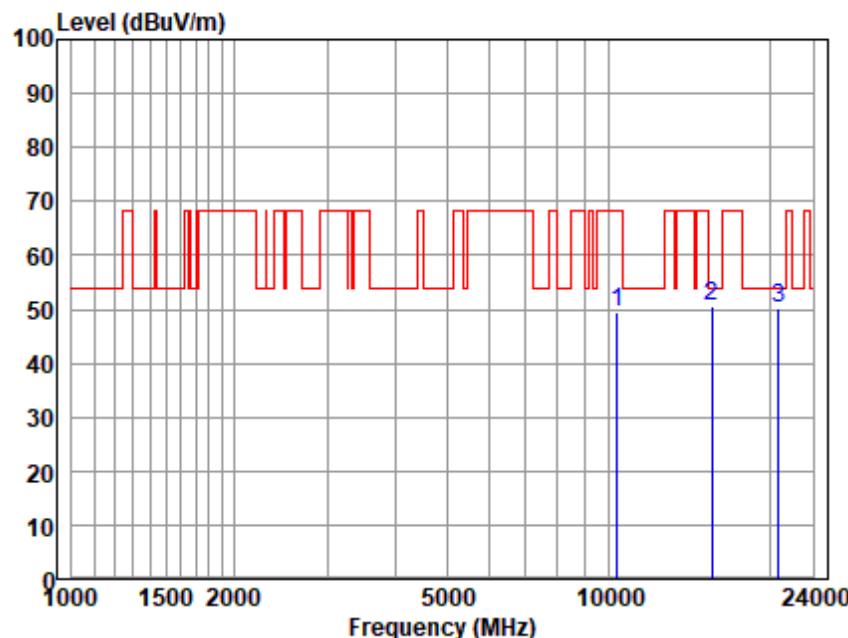


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.350	35.96	37.85	9.02	33.56	49.27	68.20	-18.93	Peak
15528.240	31.45	43.36	12.59	36.82	50.58	54.00	-3.42	Peak
20735.830	30.43	43.94	14.46	38.82	50.01	54.00	-3.99	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

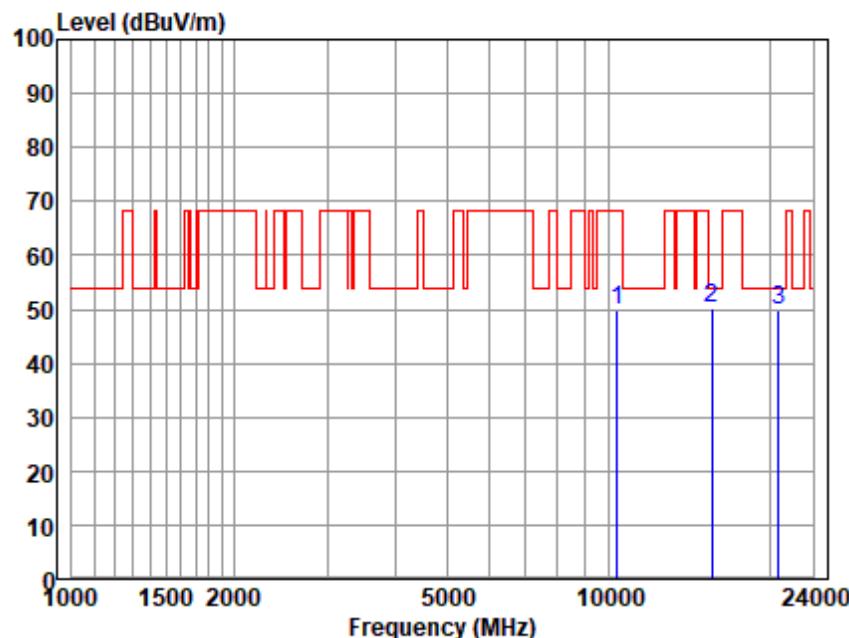


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.350	36.66	37.85	9.02	33.56	49.97	68.20	-18.23	Peak
15528.240	30.89	43.36	12.59	36.82	50.02	54.00	-3.98	Peak
20735.830	30.13	43.94	14.46	38.82	49.71	54.00	-4.29	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

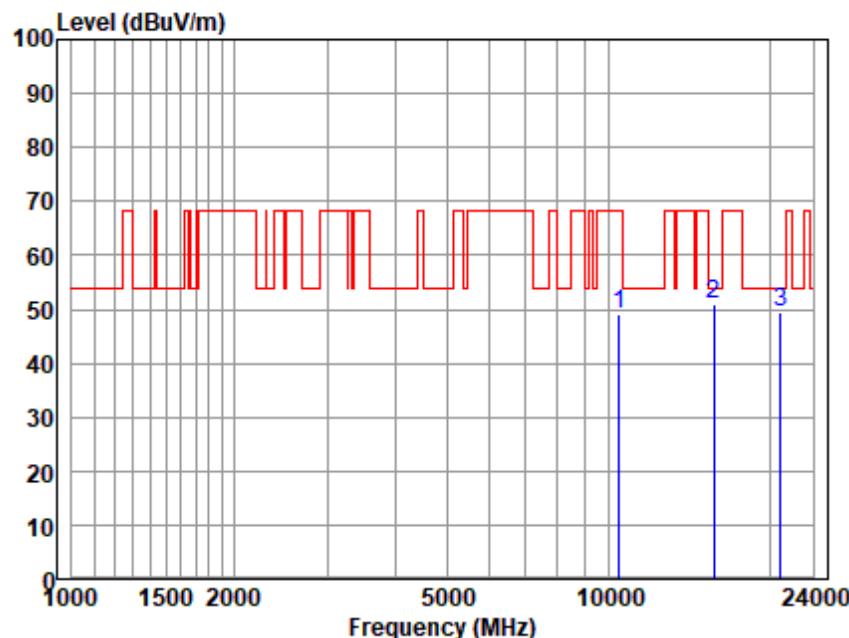


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10440.490	35.95	37.88	9.03	33.60	49.26	68.20	-18.94	Peak
15677.000	31.98	43.04	12.63	36.81	50.84	54.00	-3.16	Peak
20868.050	29.84	43.98	14.50	39.02	49.30	54.00	-4.70	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

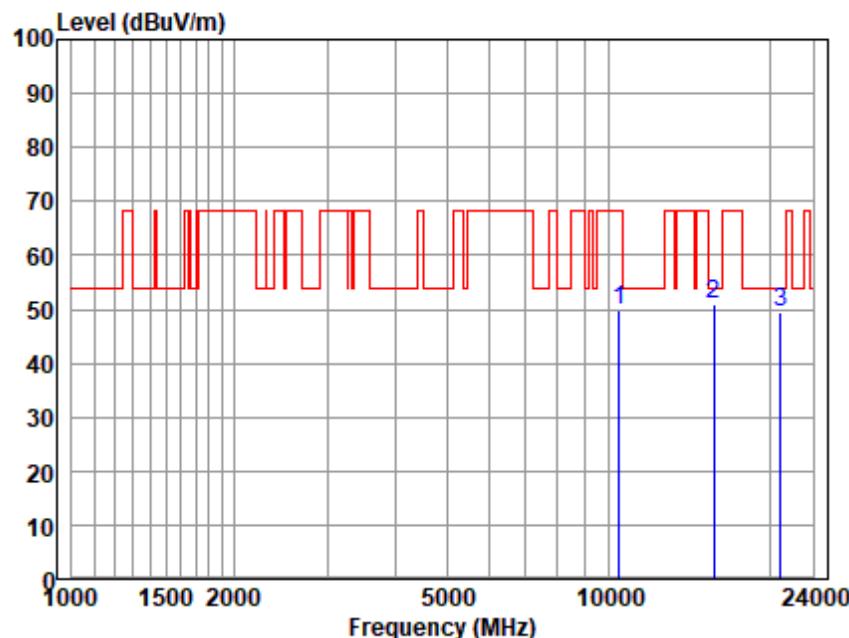


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10440.490	36.38	37.88	9.03	33.60	49.69	68.20	-18.51	Peak
15677.000	31.90	43.04	12.63	36.81	50.76	54.00	-3.24	Peak
20868.050	30.07	43.98	14.50	39.02	49.53	54.00	-4.47	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

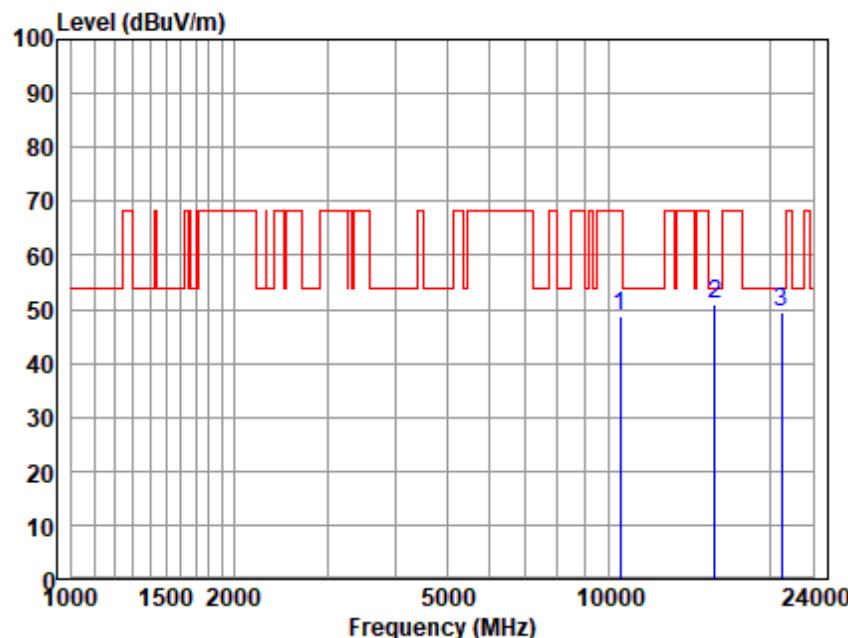


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.710	35.54	37.90	9.04	33.62	48.86	68.20	-19.34	Peak
15726.900	32.21	42.93	12.54	36.81	50.87	54.00	-3.13	Peak
20934.480	29.92	44.00	14.53	39.12	49.33	54.00	-4.67	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

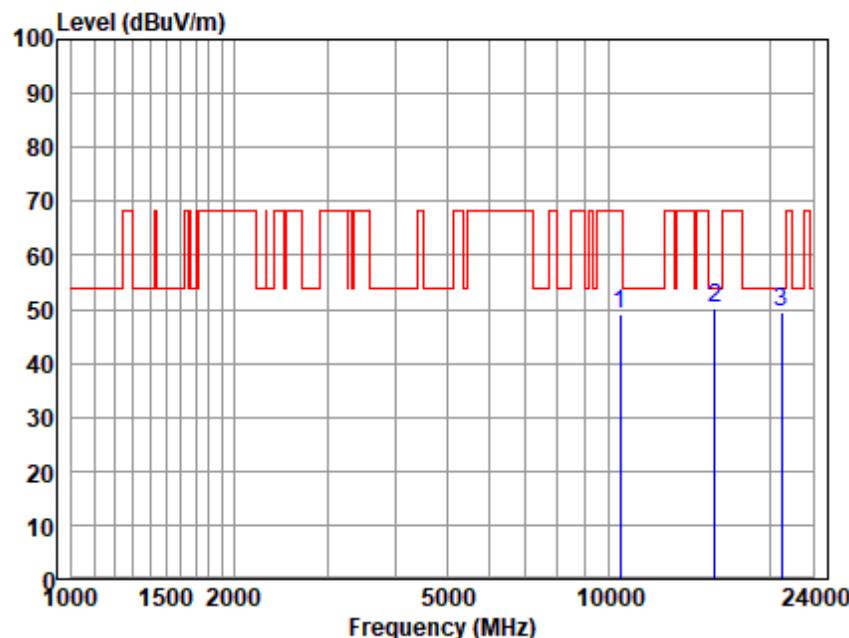


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.710	35.82	37.90	9.04	33.62	49.14	68.20	-19.06	Peak
15726.900	31.47	42.93	12.54	36.81	50.13	54.00	-3.87	Peak
20934.480	29.94	44.00	14.53	39.12	49.35	54.00	-4.65	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

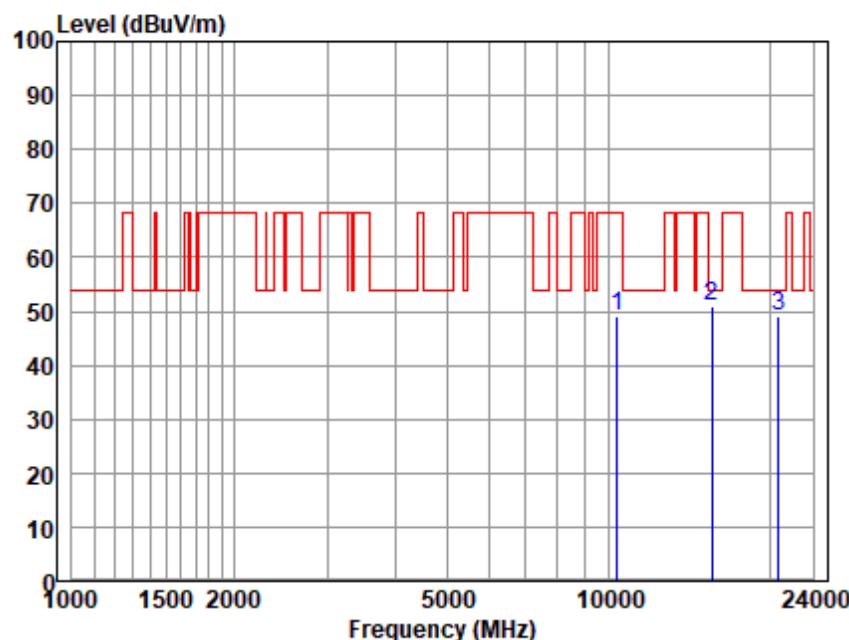


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.350	35.94	37.85	9.02	33.56	49.25	68.20	-18.95	Peak
15528.240	31.70	43.36	12.59	36.82	50.83	54.00	-3.17	Peak
20735.830	29.56	43.94	14.46	38.82	49.14	54.00	-4.86	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

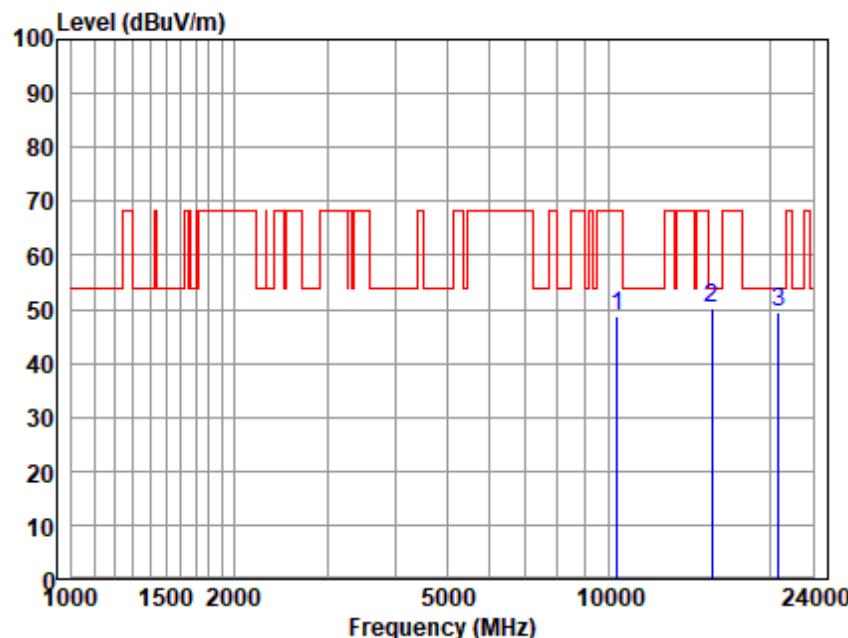


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10360.350	35.40	37.85	9.02	33.56	48.71	68.20	-19.49	Peak
15528.240	31.15	43.36	12.59	36.82	50.28	54.00	-3.72	Peak
20735.830	29.73	43.94	14.46	38.82	49.31	54.00	-4.69	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

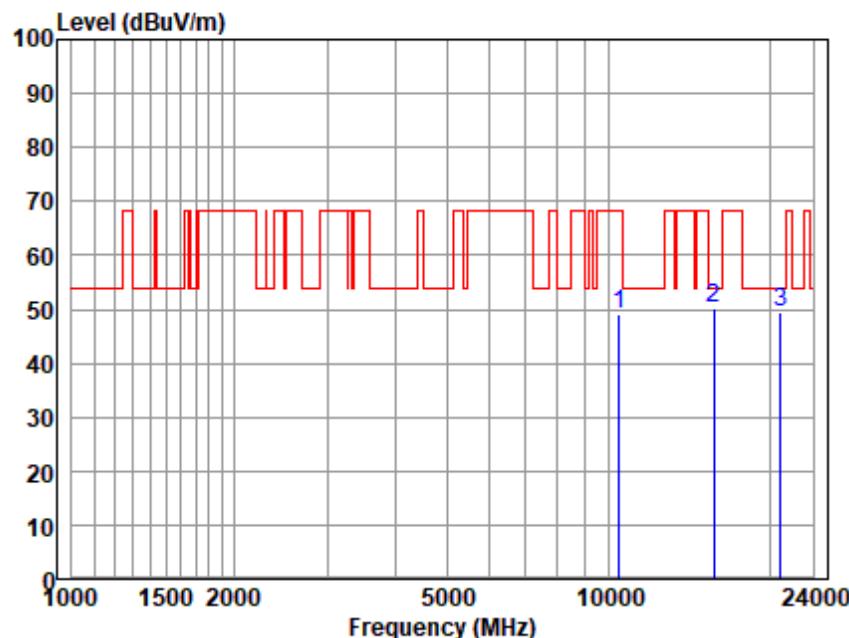


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10440.490	35.75	37.88	9.03	33.60	49.06	68.20	-19.14	Peak
15677.000	31.50	43.04	12.63	36.81	50.36	54.00	-3.64	Peak
20868.050	29.90	43.98	14.50	39.02	49.36	54.00	-4.64	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

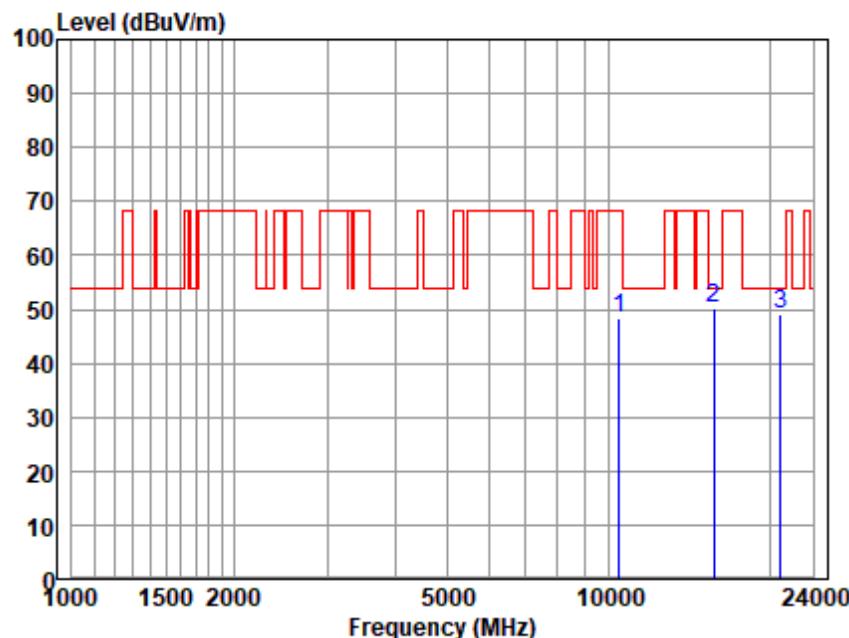


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
10440.490	34.95	37.88	9.03	33.60	48.26	68.20	-19.94	Peak
15677.000	31.47	43.04	12.63	36.81	50.33	54.00	-3.67	Peak
20868.050	29.67	43.98	14.50	39.02	49.13	54.00	-4.87	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

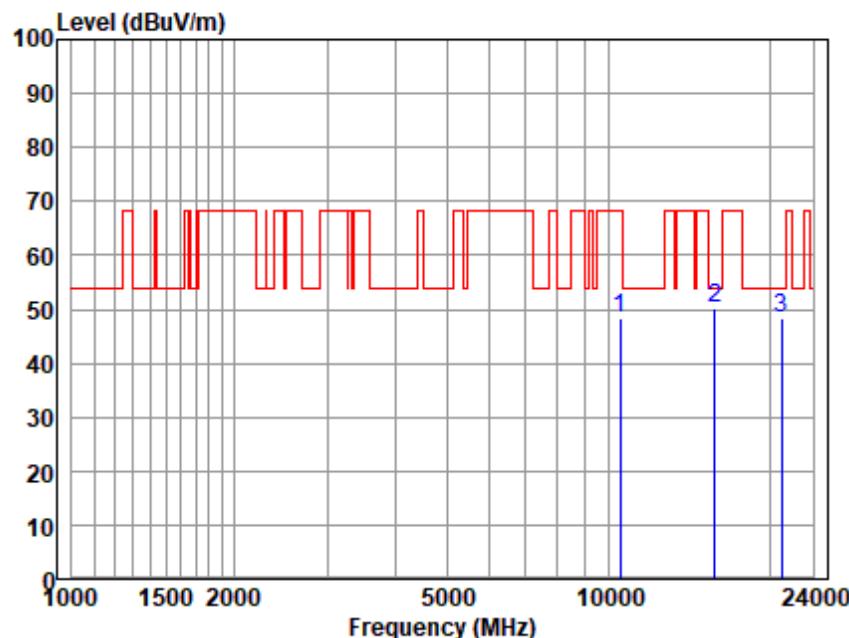


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.710	35.14	37.90	9.04	33.62	48.46	68.20	-19.74	Peak
15726.900	31.60	42.93	12.54	36.81	50.26	54.00	-3.74	Peak
20934.480	29.02	44.00	14.53	39.12	48.43	54.00	-5.57	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

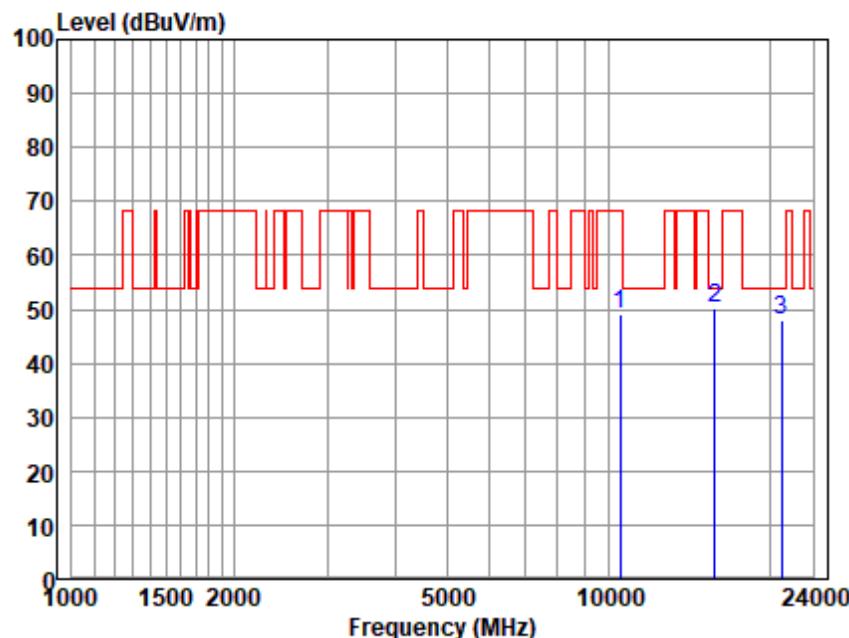


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10480.710	35.76	37.90	9.04	33.62	49.08	68.20	-19.12	Peak
15726.900	31.52	42.93	12.54	36.81	50.18	54.00	-3.82	Peak
20934.480	28.59	44.00	14.53	39.12	48.00	54.00	-6.00	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

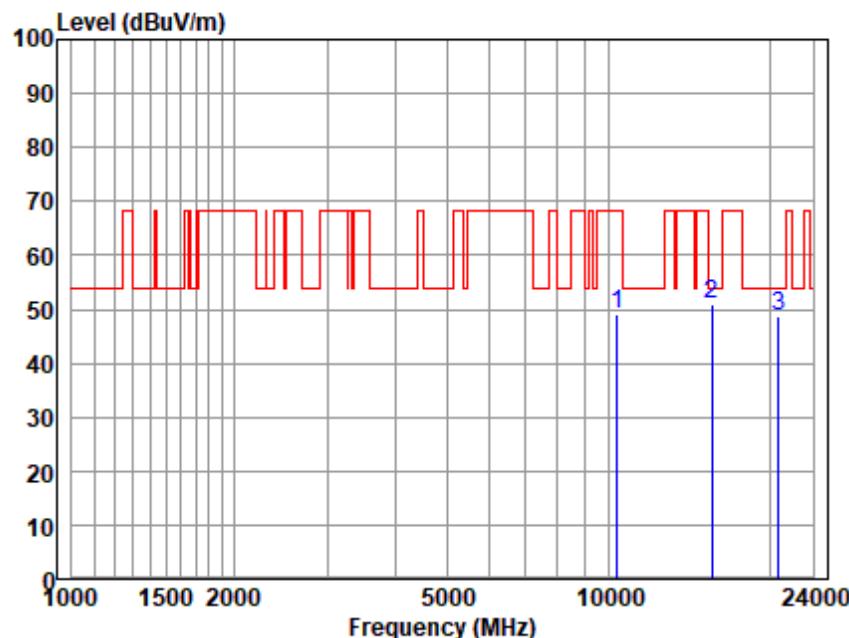


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10380.350	35.84	37.85	9.02	33.56	49.15	68.20	-19.05	Peak
15577.670	31.67	43.25	12.64	36.81	50.75	54.00	-3.25	Peak
20735.830	29.28	43.94	14.46	38.82	48.86	54.00	-5.14	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

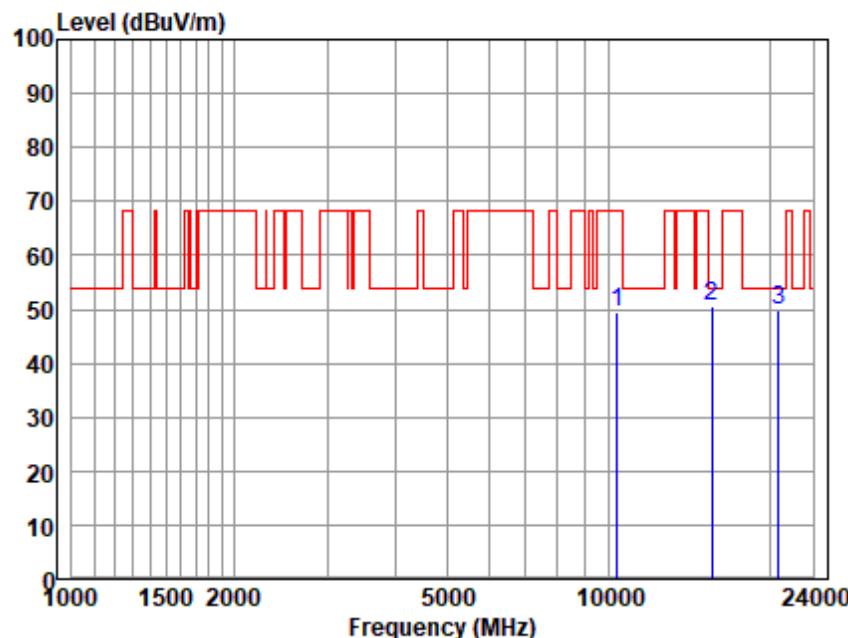


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10380.350	36.02	37.85	9.02	33.56	49.33	68.20	-18.87	Peak
15577.670	31.52	43.25	12.64	36.81	50.60	54.00	-3.40	Peak
20735.830	30.17	43.94	14.46	38.82	49.75	54.00	-4.25	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

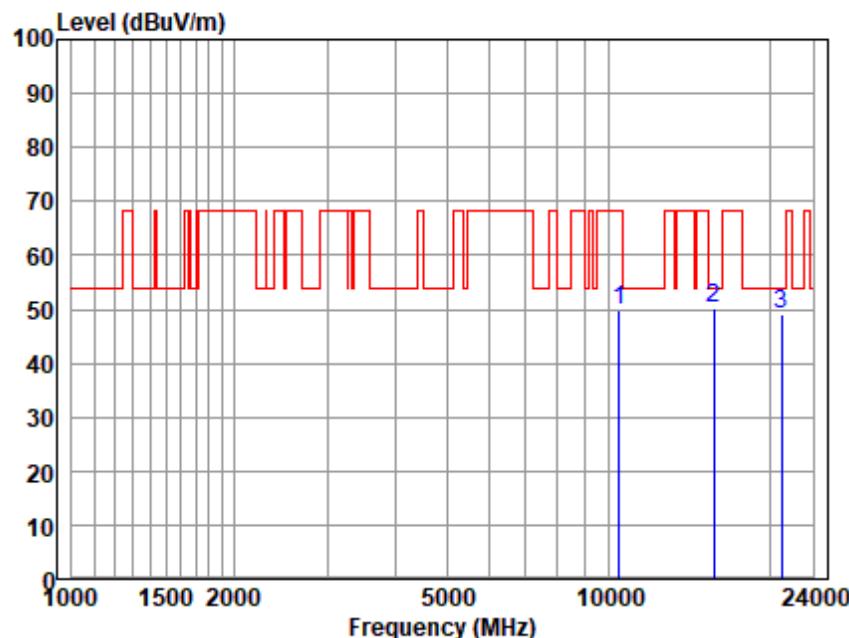


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10460.710	36.56	37.90	9.04	33.62	49.88	68.20	-18.32	Peak
15677.000	31.50	43.04	12.63	36.81	50.36	54.00	-3.64	Peak
20934.480	29.85	44.00	14.53	39.12	49.26	54.00	-4.74	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

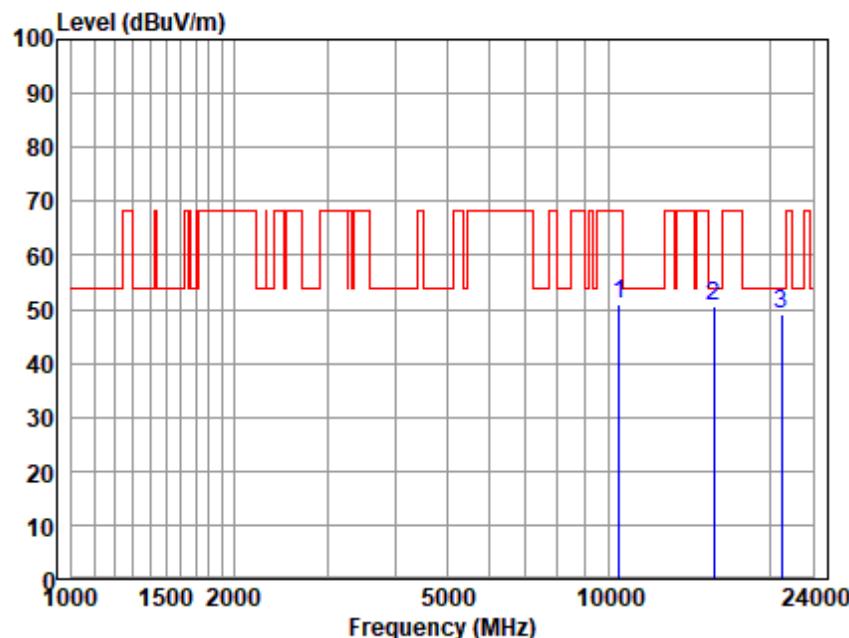


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10460.710	37.56	37.90	9.04	33.62	50.88	68.20	-17.32	Peak
15677.000	31.84	43.04	12.63	36.81	50.70	54.00	-3.30	Peak
20934.480	29.85	44.00	14.53	39.12	49.26	54.00	-4.74	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

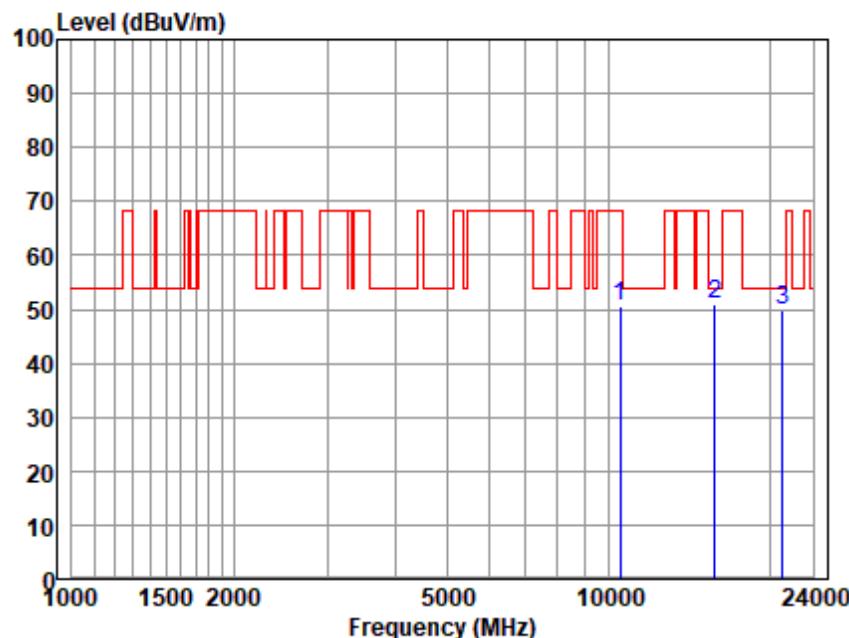


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.040	37.17	37.91	9.05	33.63	50.50	68.20	-17.70	Peak
15776.960	32.45	42.79	12.50	36.80	50.94	54.00	-3.06	Peak
21067.960	30.39	44.05	14.57	39.31	49.70	54.00	-4.30	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

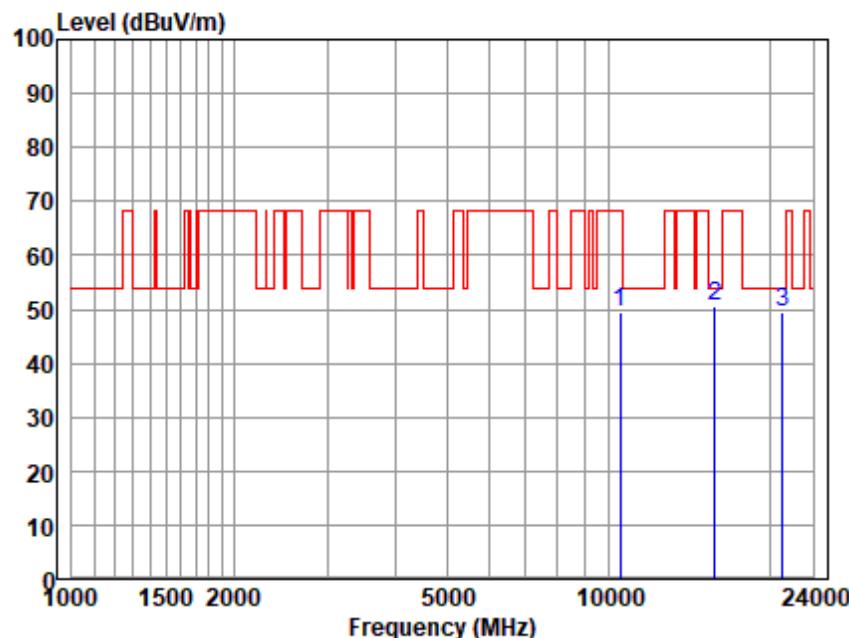


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.040	35.99	37.91	9.05	33.63	49.32	68.20	-18.88	Peak
15776.960	31.94	42.79	12.50	36.80	50.43	54.00	-3.57	Peak
21067.960	29.98	44.05	14.57	39.31	49.29	54.00	-4.71	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

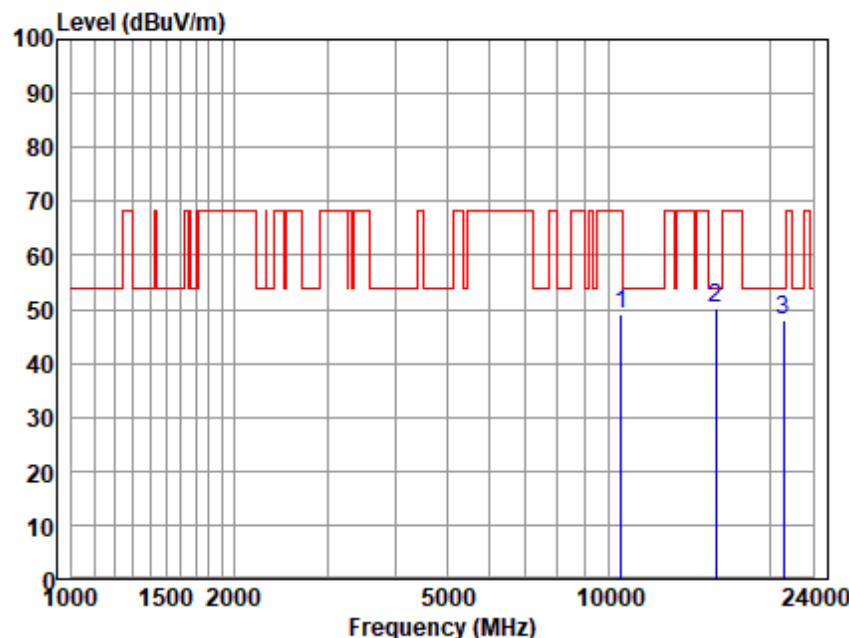


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10560.020	35.75	37.96	9.07	33.67	49.11	68.20	-19.09	Peak
15827.180	31.96	42.65	12.48	36.76	50.33	54.00	-3.67	Peak
21135.030	28.70	44.07	14.59	39.41	47.95	54.00	-6.05	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

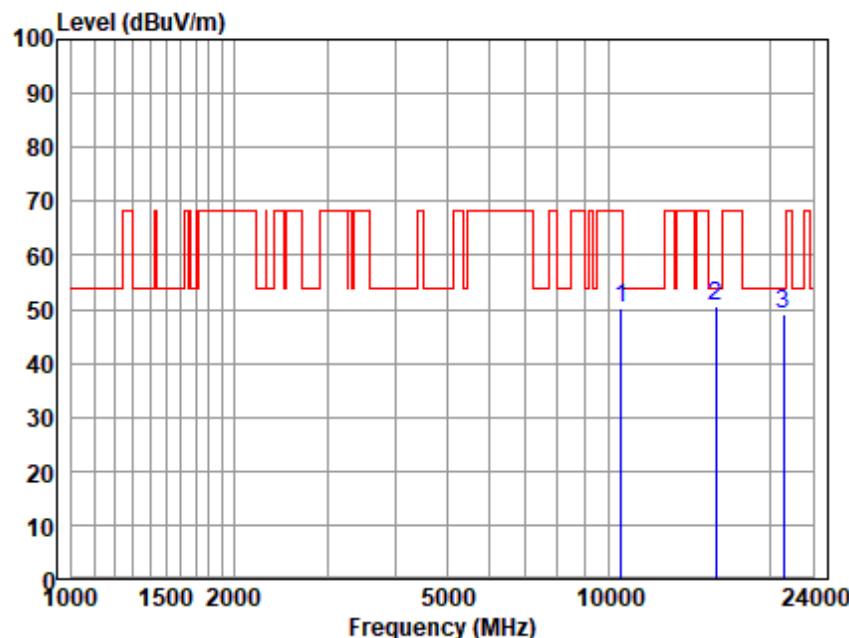


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
10560.020	36.78	37.96	9.07	33.67	50.14	68.20	-18.06	Peak
15827.180	32.14	42.65	12.48	36.76	50.51	54.00	-3.49	Peak
21135.030	29.84	44.07	14.59	39.41	49.09	54.00	-4.91	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

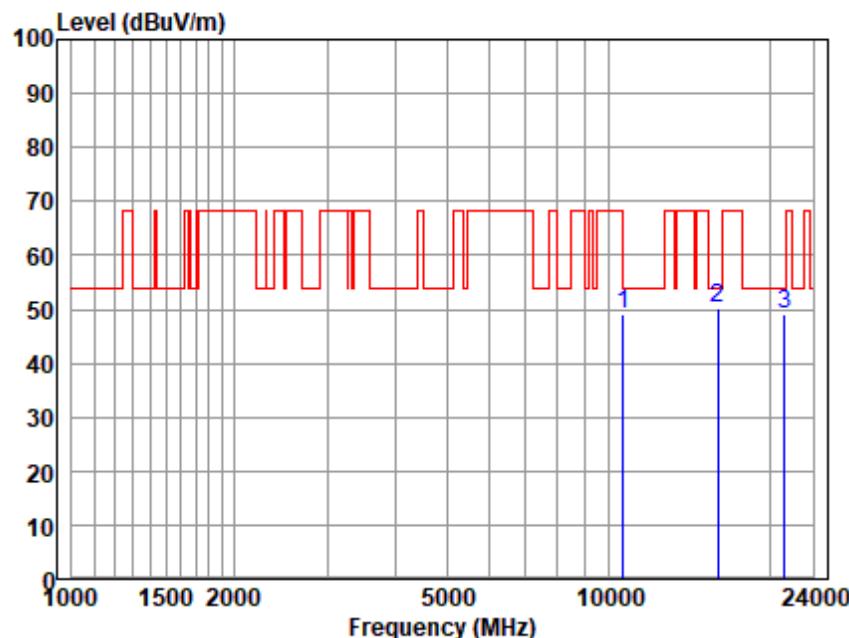


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.420	35.73	38.02	9.09	33.71	49.13	54.00	-4.87	Peak
15978.800	32.14	42.32	12.44	36.63	50.27	54.00	-3.73	Peak
21269.790	30.10	44.11	14.64	39.61	49.24	54.00	-4.76	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

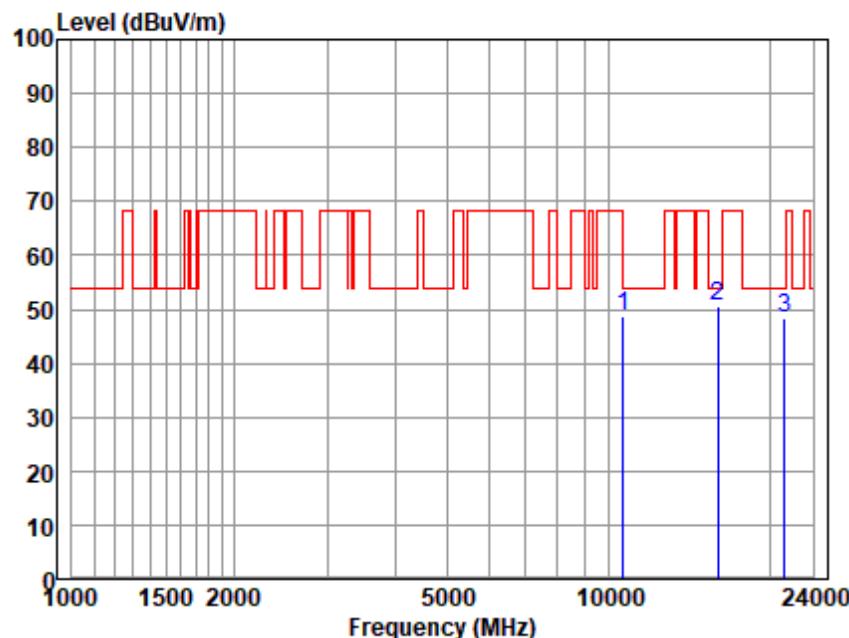


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.420	35.24	38.02	9.09	33.71	48.64	54.00	-5.36	Peak
15978.800	32.46	42.32	12.44	36.63	50.59	54.00	-3.41	Peak
21269.790	29.34	44.11	14.64	39.61	48.48	54.00	-5.52	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

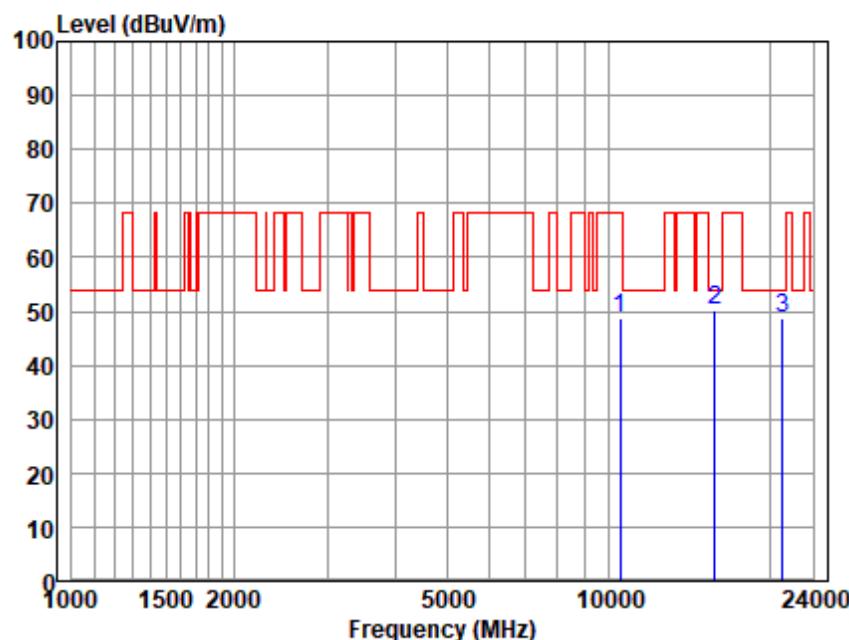


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.040	35.49	37.91	9.05	33.63	48.82	68.20	-19.38	Peak
15776.960	31.70	42.79	12.50	36.80	50.19	54.00	-3.81	Peak
21067.960	29.36	44.05	14.57	39.31	48.67	54.00	-5.33	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

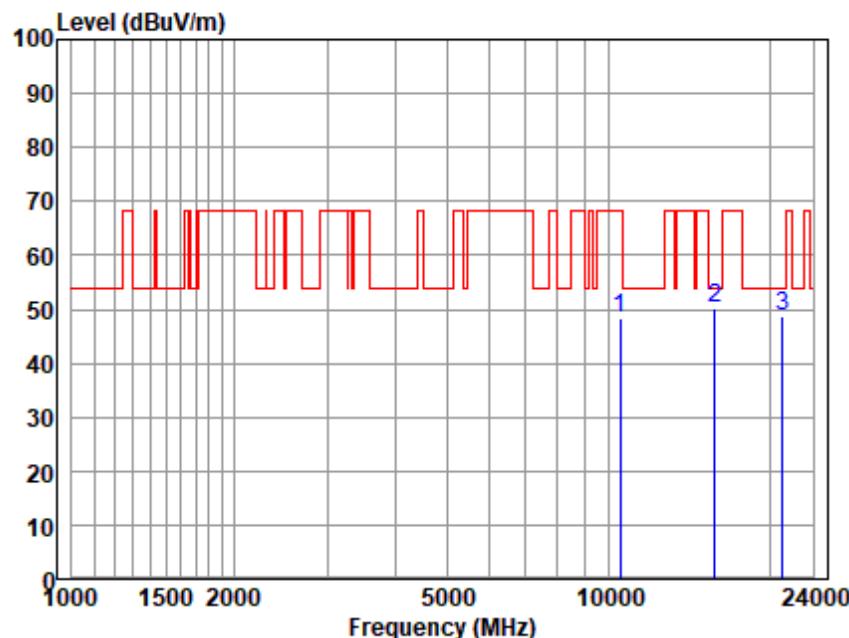


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10520.040	35.05	37.91	9.05	33.63	48.38	68.20	-19.82	Peak
15776.960	31.82	42.79	12.50	36.80	50.31	54.00	-3.69	Peak
21067.960	29.50	44.05	14.57	39.31	48.81	54.00	-5.19	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

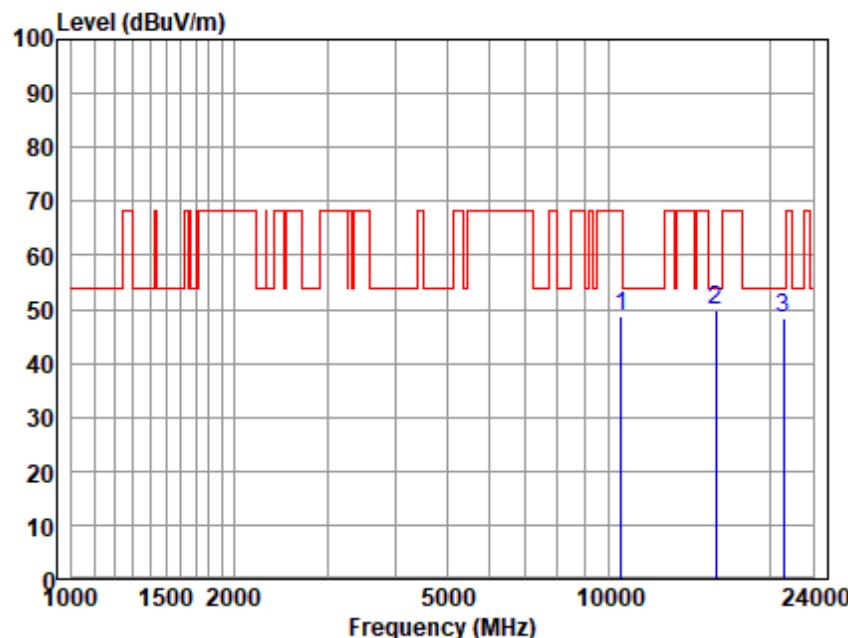


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10560.020	35.48	37.96	9.07	33.67	48.84	68.20	-19.36	Peak
15827.180	31.47	42.65	12.48	36.76	49.84	54.00	-4.16	Peak
21135.030	29.19	44.07	14.59	39.41	48.44	54.00	-5.56	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

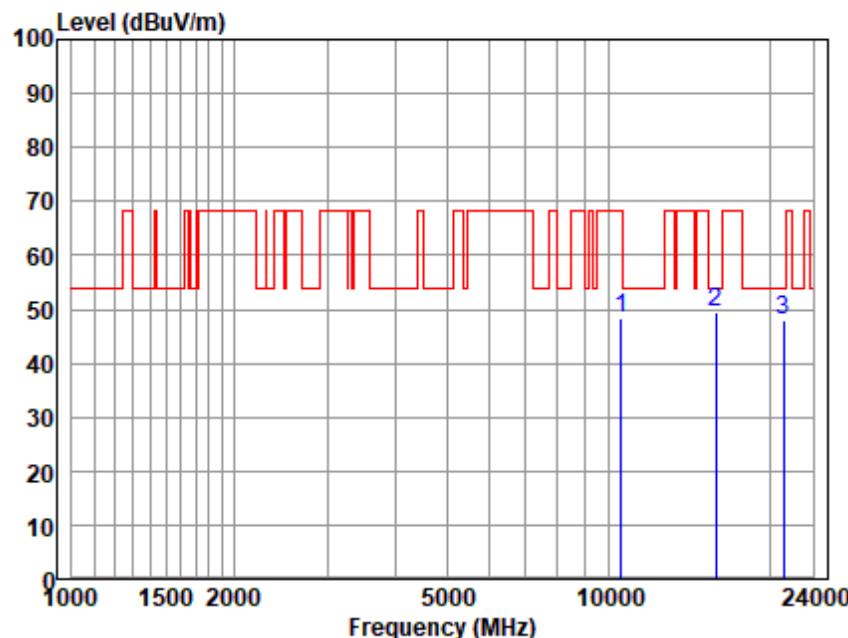


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10560.020	35.12	37.96	9.07	33.67	48.48	68.20	-19.72	Peak
15827.180	31.17	42.65	12.48	36.76	49.54	54.00	-4.46	Peak
21135.030	28.58	44.07	14.59	39.41	47.83	54.00	-6.17	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

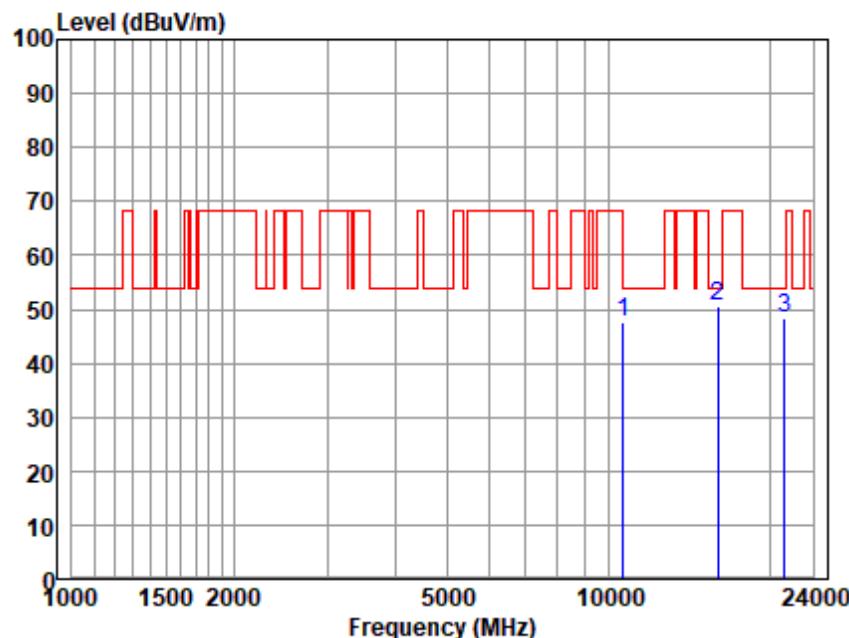


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.420	34.28	38.02	9.09	33.71	47.68	54.00	-6.32	Peak
15978.800	32.29	42.32	12.44	36.63	50.42	54.00	-3.58	Peak
21269.790	29.18	44.11	14.64	39.61	48.32	54.00	-5.68	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

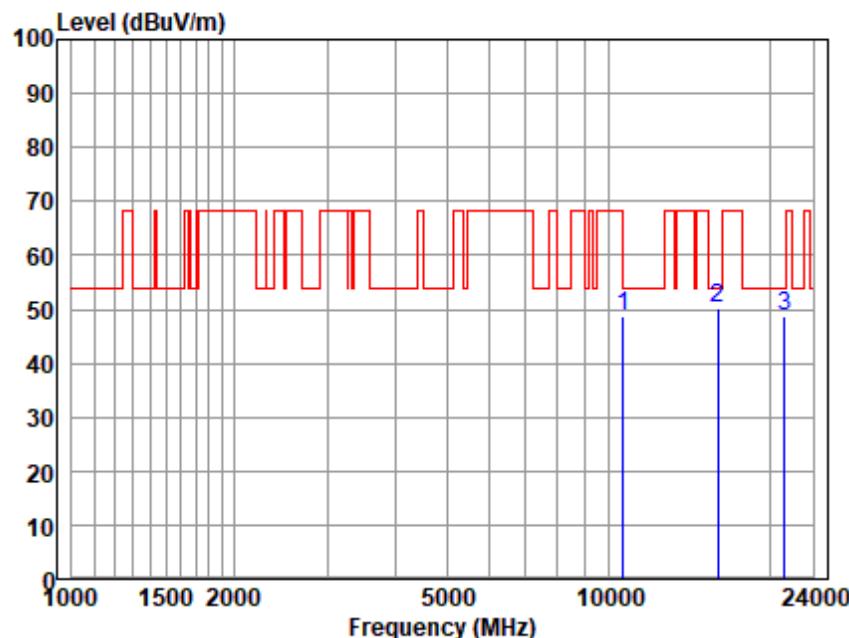


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10640.420	35.45	38.02	9.09	33.71	48.85	54.00	-5.15	Peak
15978.800	32.06	42.32	12.44	36.63	50.19	54.00	-3.81	Peak
21269.790	29.61	44.11	14.64	39.61	48.75	54.00	-5.25	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

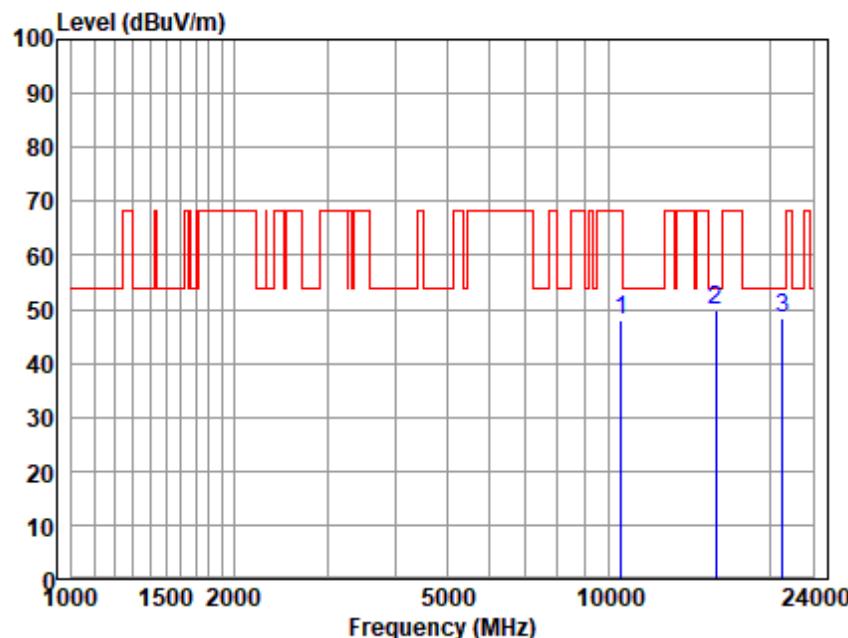


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10540.470	34.59	37.94	9.05	33.65	47.93	68.20	-20.27	Peak
15827.180	31.46	42.65	12.48	36.76	49.83	54.00	-4.17	Peak
21067.960	29.02	44.05	14.57	39.31	48.33	54.00	-5.67	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

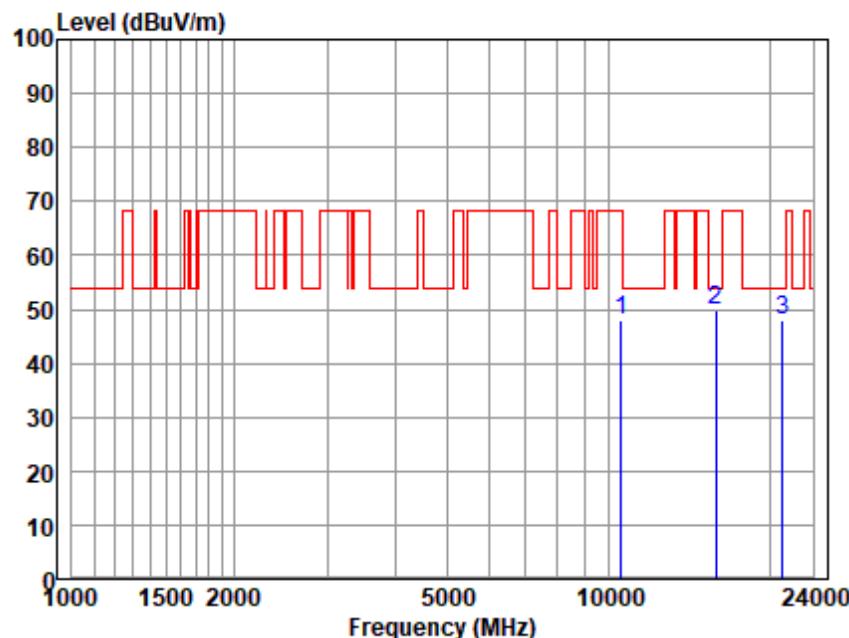


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10540.470	34.67	37.94	9.05	33.65	48.01	68.20	-20.19	Peak
15827.180	31.50	42.65	12.48	36.76	49.87	54.00	-4.13	Peak
21067.960	28.55	44.05	14.57	39.31	47.86	54.00	-6.14	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

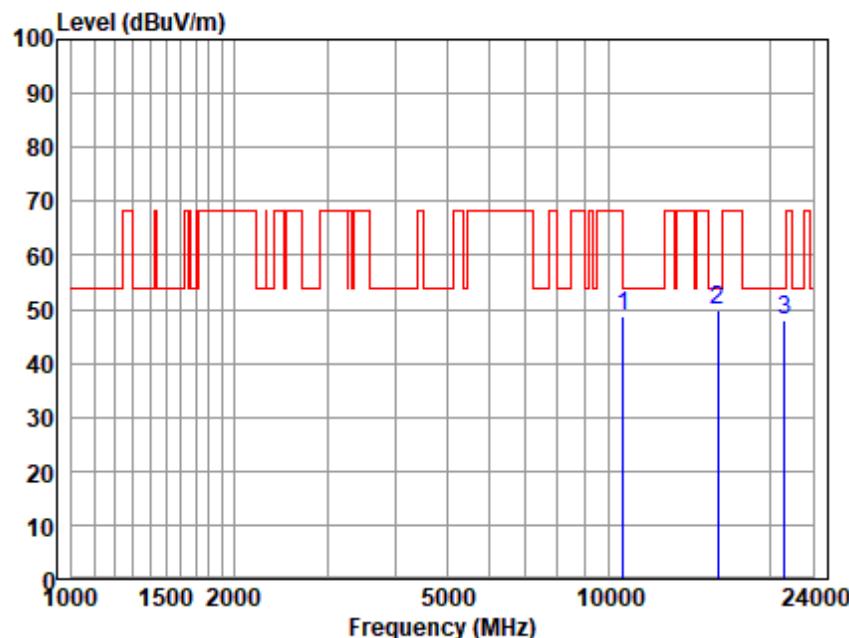


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10620.670	35.27	37.99	9.08	33.69	48.65	54.00	-5.35	Peak
15928.100	31.65	42.37	12.46	36.67	49.81	54.00	-4.19	Peak
21269.790	28.88	44.11	14.64	39.61	48.02	54.00	-5.98	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

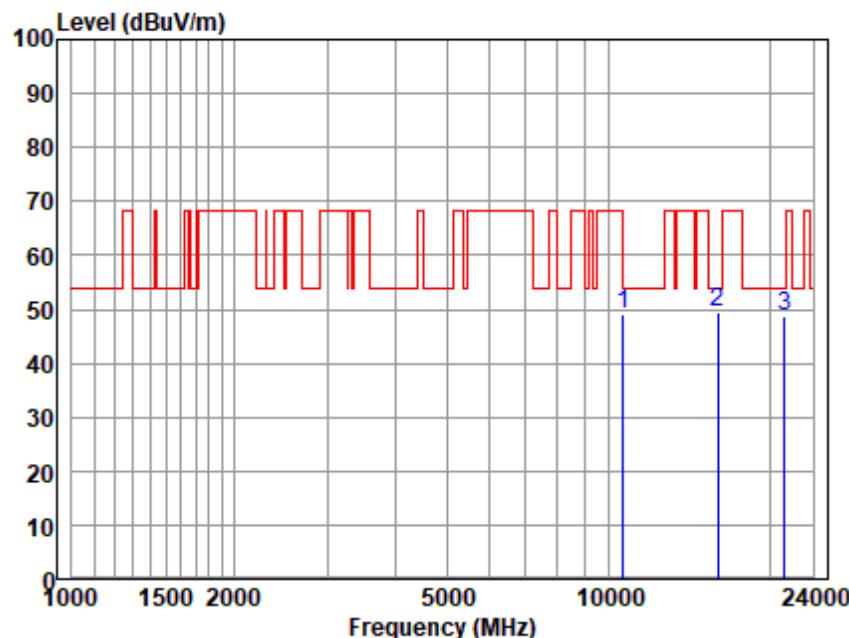


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
10620.670	35.73	37.99	9.08	33.69	49.11	54.00	-4.89	Peak
15928.100	31.33	42.37	12.46	36.67	49.49	54.00	-4.51	Peak
21269.790	29.40	44.11	14.64	39.61	48.54	54.00	-5.46	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

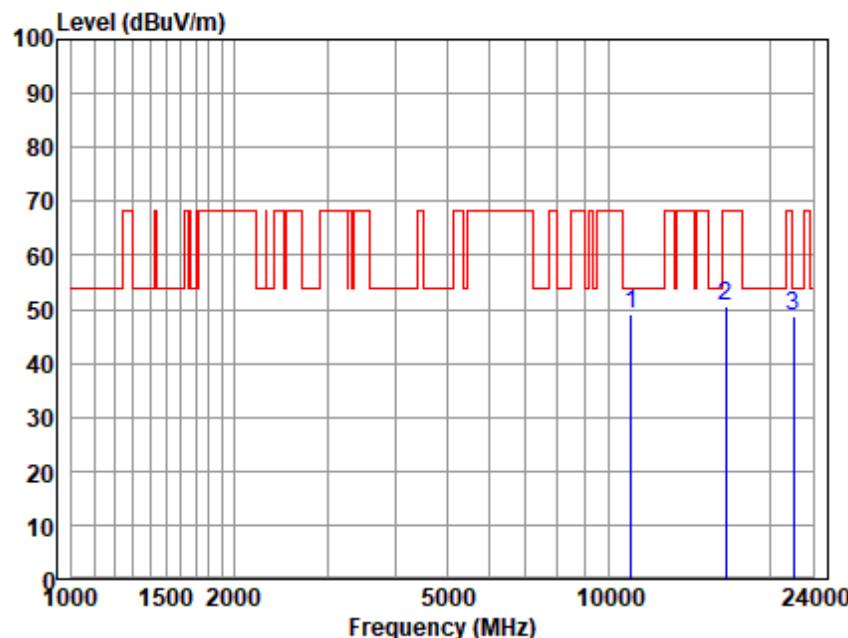


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11000.900	35.41	38.28	9.37	34.15	48.91	54.00	-5.09	Peak
16494.770	32.34	41.74	12.79	36.20	50.67	68.20	-17.53	Peak
22026.500	29.99	44.36	14.88	40.70	48.53	54.00	-5.47	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

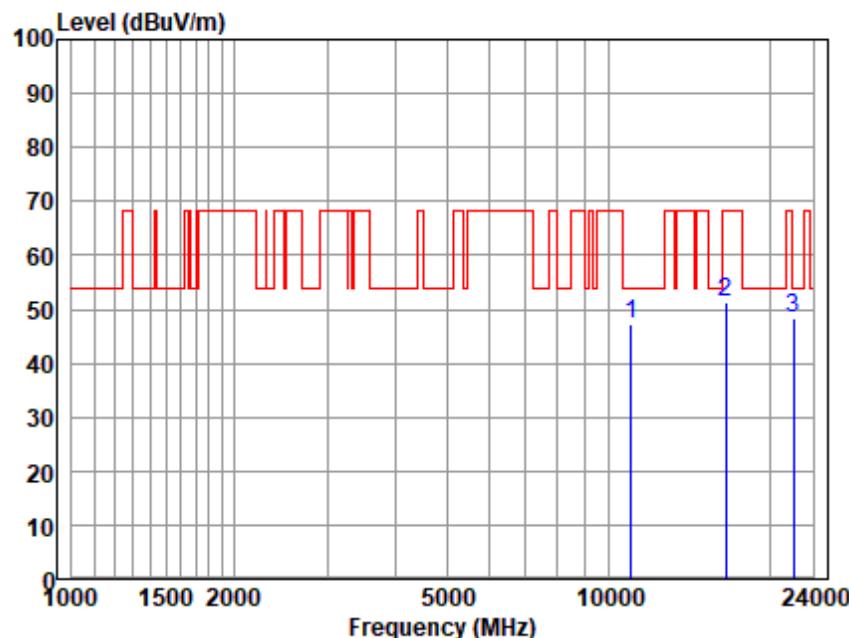


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11000.900	33.87	38.28	9.37	34.15	47.37	54.00	-6.63	Peak
16494.770	32.98	41.74	12.79	36.20	51.31	68.20	-16.89	Peak
22026.500	29.86	44.36	14.88	40.70	48.40	54.00	-5.60	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

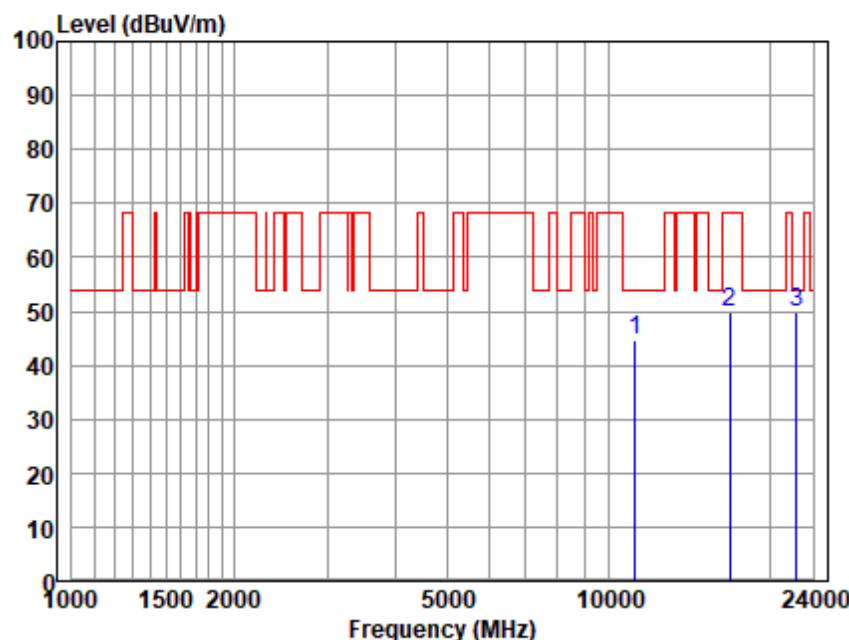


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11193.360	31.59	38.28	9.63	34.67	44.83	54.00	-9.17	Peak
16812.320	31.09	41.70	12.85	35.90	49.74	68.20	-18.46	Peak
22379.300	31.68	44.47	14.99	41.19	49.95	54.00	-4.05	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

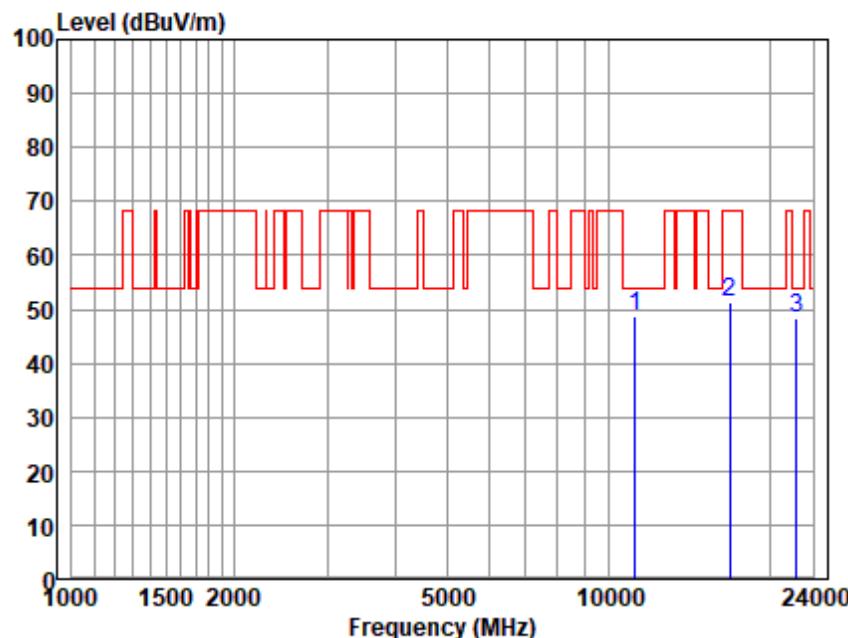


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11193.360	35.31	38.28	9.63	34.67	48.55	54.00	-5.45	Peak
16812.320	32.71	41.70	12.85	35.90	51.36	68.20	-16.84	Peak
22379.300	29.98	44.47	14.99	41.19	48.25	54.00	-5.75	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

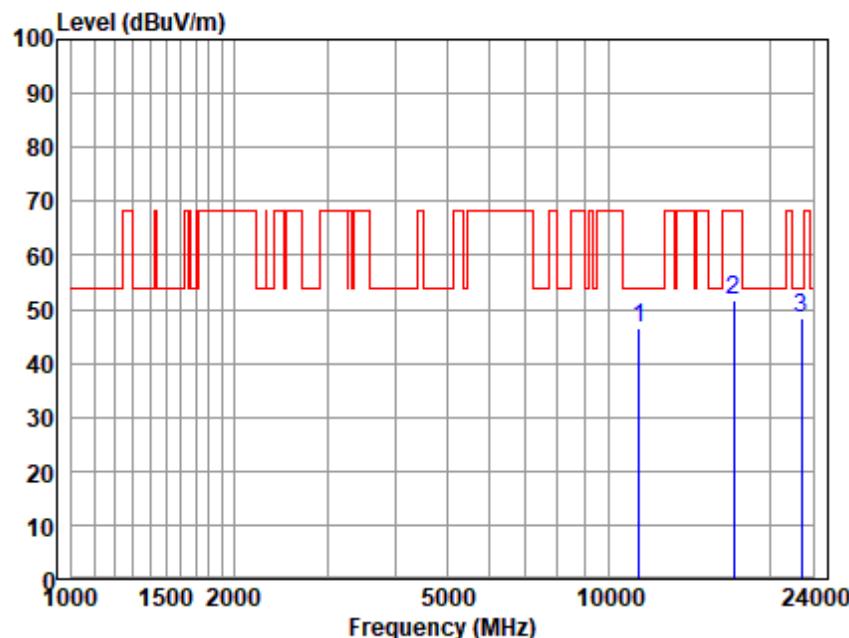


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11400.850	33.90	38.28	9.85	35.43	46.60	54.00	-7.40	Peak
17081.600	32.53	41.79	13.09	35.58	51.83	68.20	-16.37	Peak
22810.130	30.45	44.60	15.12	41.79	48.38	54.00	-5.62	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

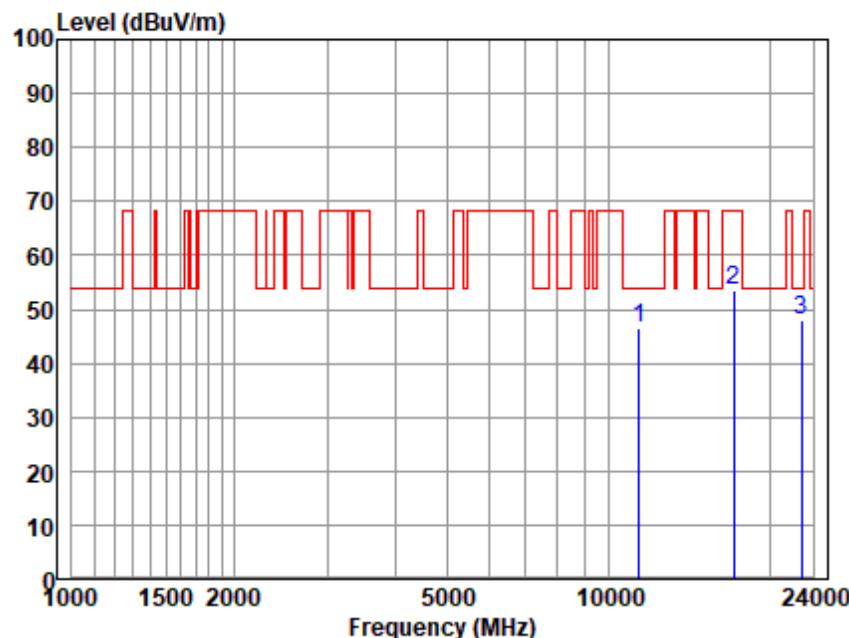


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11400.850	33.83	38.28	9.85	35.43	46.53	54.00	-7.47	Peak
17081.600	34.35	41.79	13.09	35.58	53.65	68.20	-14.55	Peak
22810.130	30.14	44.60	15.12	41.79	48.07	54.00	-5.93	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

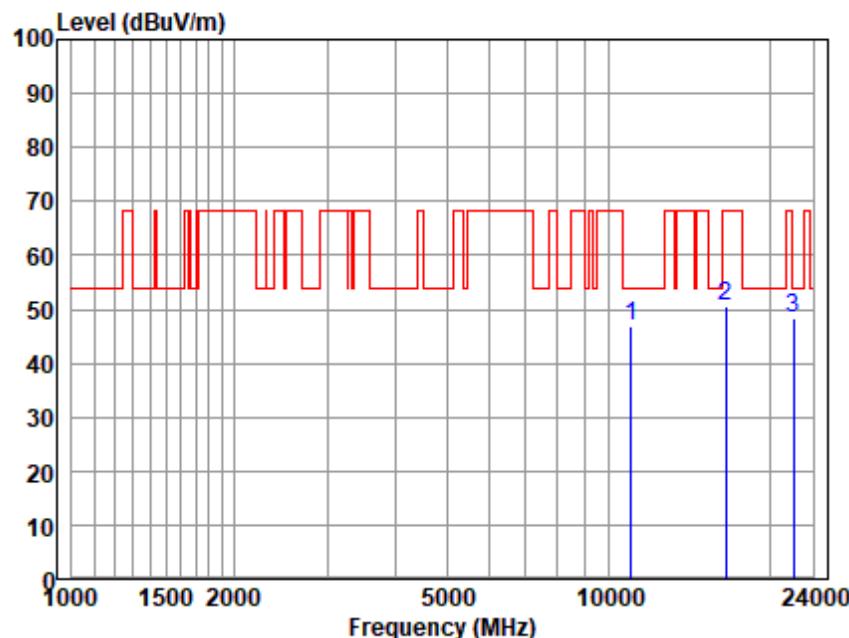


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11000.900	33.24	38.28	9.37	34.15	46.74	54.00	-7.26	Peak
16494.770	32.24	41.74	12.79	36.20	50.57	68.20	-17.63	Peak
22026.500	29.84	44.36	14.88	40.70	48.38	54.00	-5.62	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

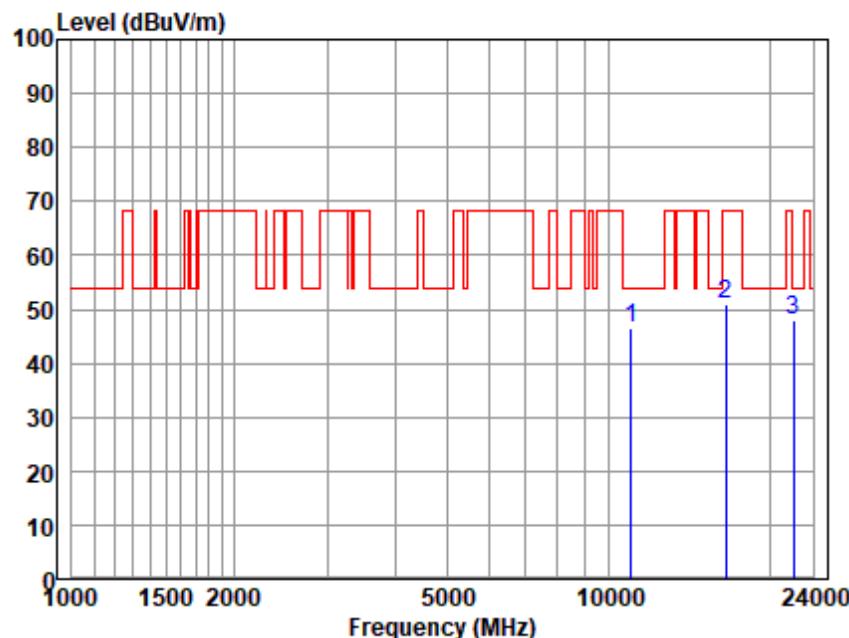


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11000.900	33.17	38.28	9.37	34.15	46.67	54.00	-7.33	Peak
16494.770	32.72	41.74	12.79	36.20	51.05	68.20	-17.15	Peak
22026.500	29.59	44.36	14.88	40.70	48.13	54.00	-5.87	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

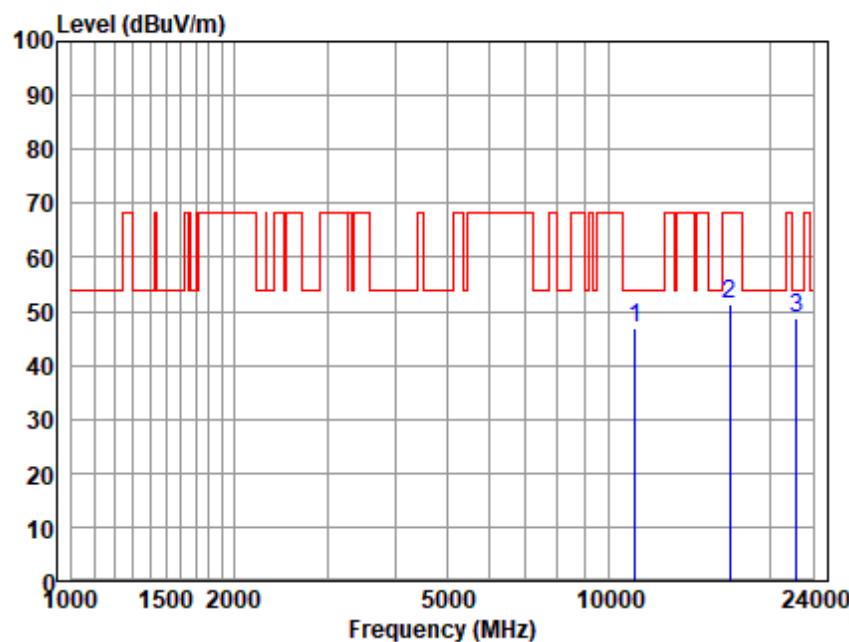


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11200.360	33.44	38.28	9.63	34.67	46.68	54.00	-7.32	Peak
16812.320	32.50	41.70	12.85	35.90	51.15	68.20	-17.05	Peak
22379.300	30.40	44.47	14.99	41.19	48.67	54.00	-5.33	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

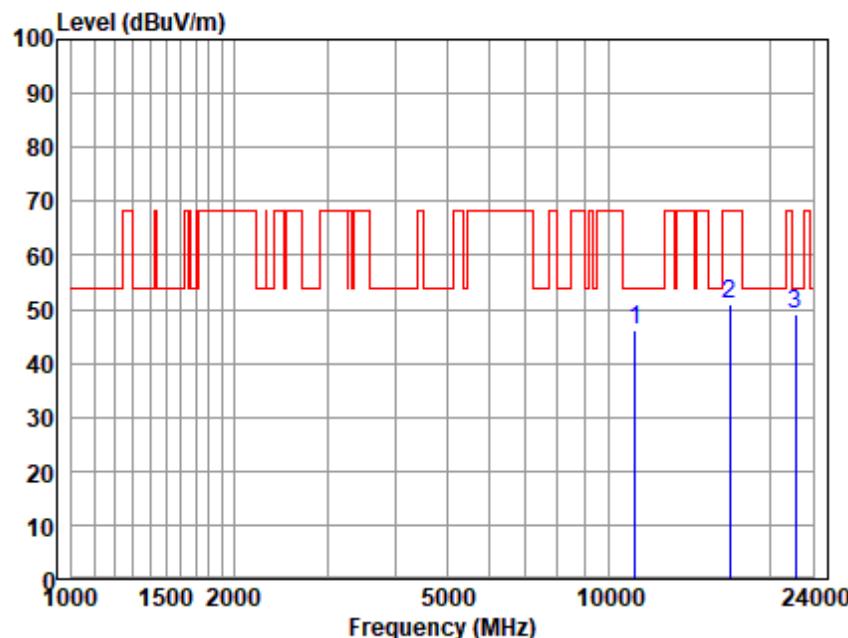


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11200.360	32.73	38.28	9.63	34.67	45.97	54.00	-8.03	Peak
16812.320	32.40	41.70	12.85	35.90	51.05	68.20	-17.15	Peak
22308.290	30.74	44.44	14.97	41.09	49.06	54.00	-4.94	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

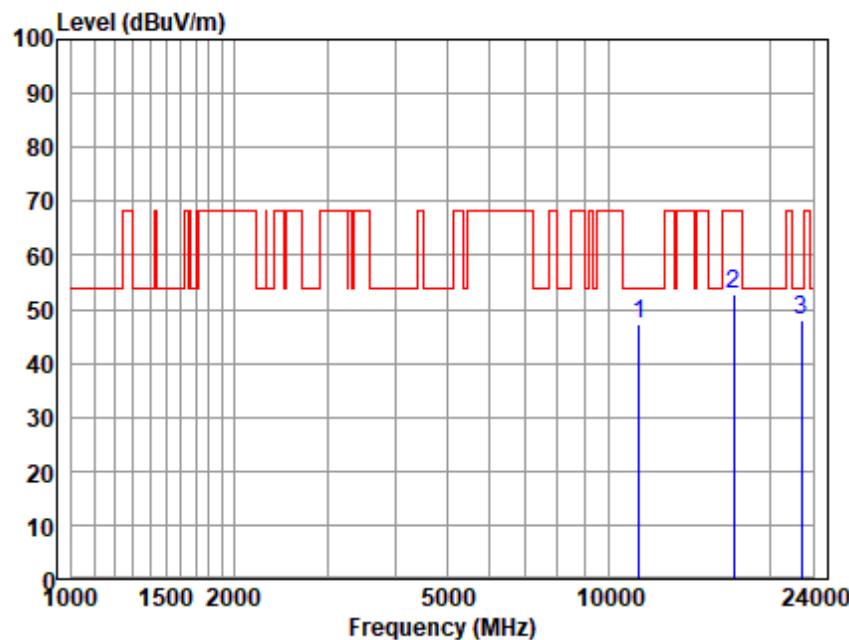


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11400.850	34.61	38.28	9.85	35.43	47.31	54.00	-6.69	Peak
17081.600	33.42	41.79	13.09	35.58	52.72	68.20	-15.48	Peak
22810.130	30.12	44.60	15.12	41.79	48.05	54.00	-5.95	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

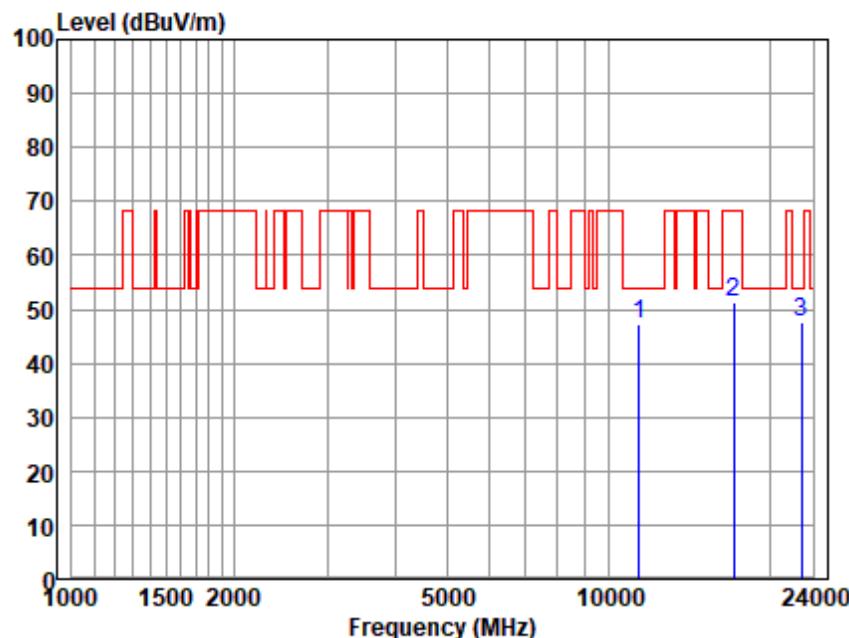


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11400.850	34.43	38.28	9.85	35.43	47.13	54.00	-6.87	Peak
17081.600	31.92	41.79	13.09	35.58	51.22	68.20	-16.98	Peak
22810.130	29.57	44.60	15.12	41.79	47.50	54.00	-6.50	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

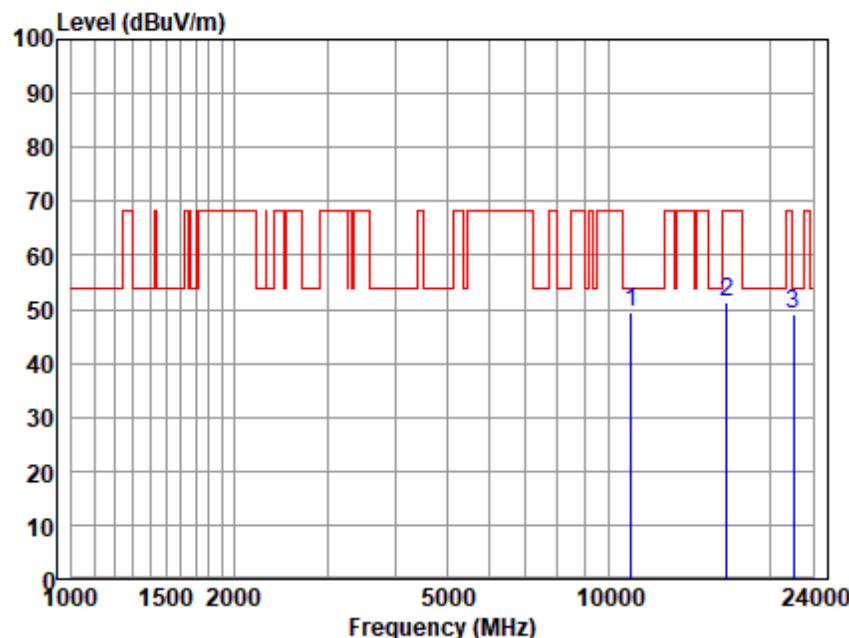


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11020.900	36.11	38.28	9.37	34.15	49.61	54.00	-4.39	Peak
16547.280	32.96	41.67	12.79	36.16	51.26	68.20	-16.94	Peak
22026.500	30.52	44.36	14.88	40.70	49.06	54.00	-4.94	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

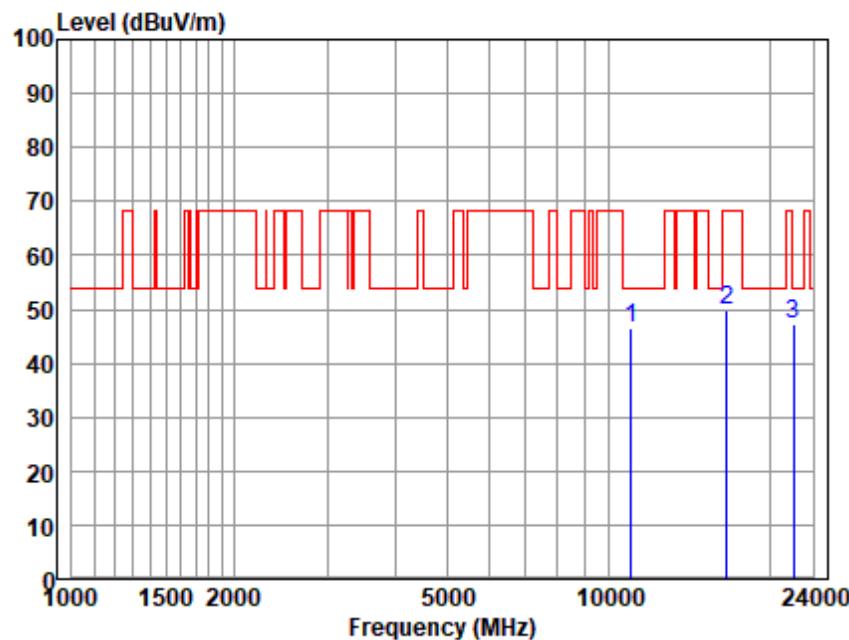


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11020.900	32.84	38.28	9.37	34.15	46.34	54.00	-7.66	Peak
16547.280	31.69	41.67	12.79	36.16	49.99	68.20	-18.21	Peak
22026.500	28.70	44.36	14.88	40.70	47.24	54.00	-6.76	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

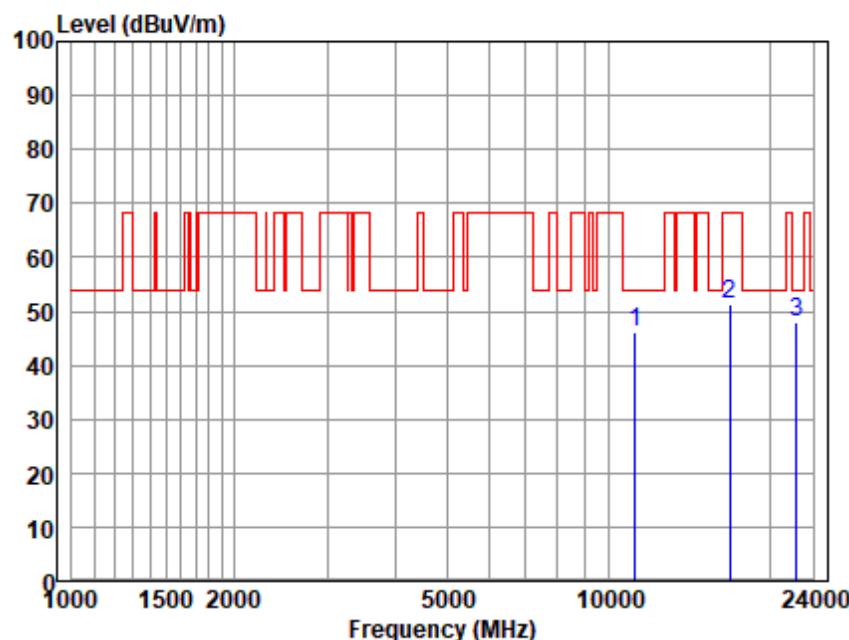


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11180.360	32.75	38.28	9.63	34.67	45.99	54.00	-8.01	Peak
16758.970	32.85	41.69	12.78	35.97	51.35	68.20	-16.85	Peak
22379.300	29.58	44.47	14.99	41.19	47.85	54.00	-6.15	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

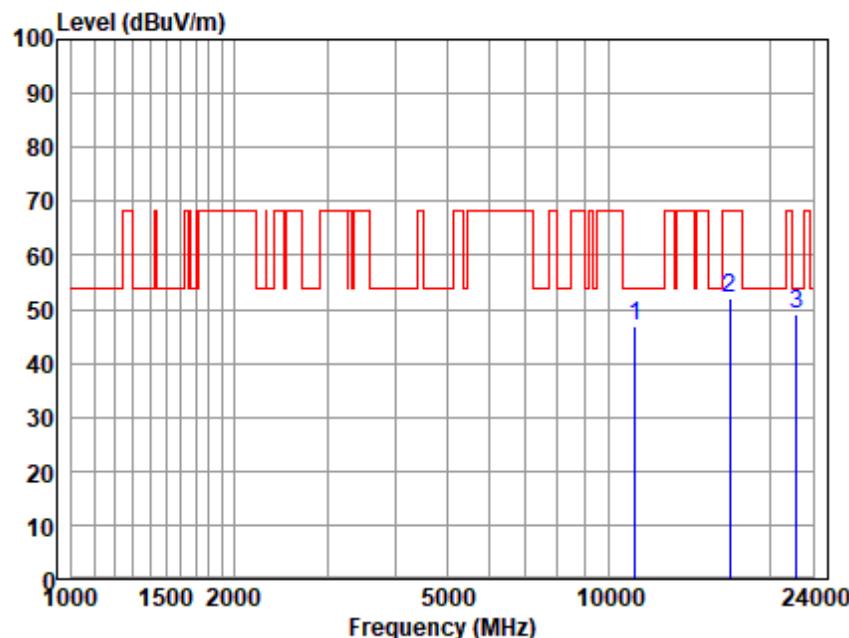


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11180.360	33.62	38.28	9.63	34.67	46.86	54.00	-7.14	Peak
16758.970	33.57	41.69	12.78	35.97	52.07	68.20	-16.13	Peak
22379.300	30.96	44.47	14.99	41.19	49.23	54.00	-4.77	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

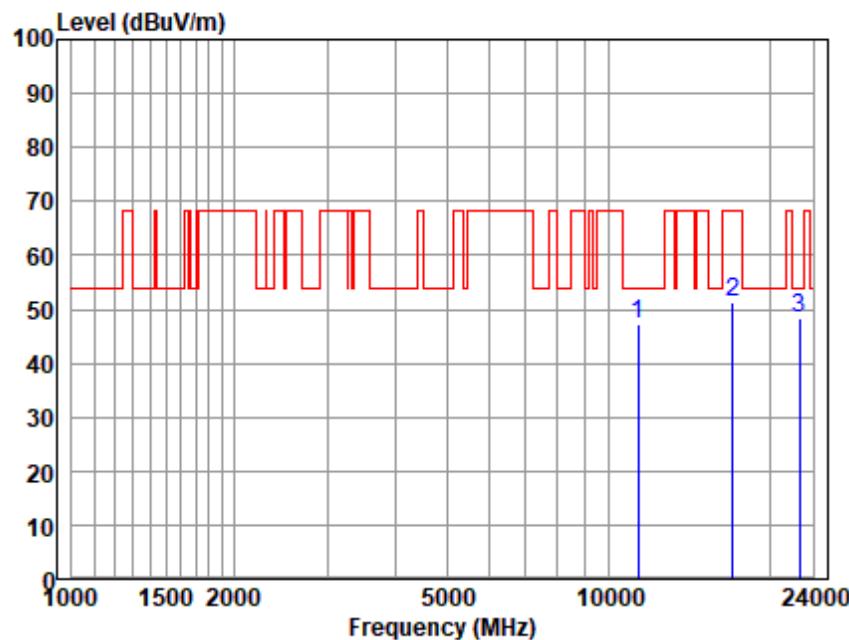


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11340.560	34.13	38.28	9.81	35.17	47.05	54.00	-6.95	Peak
17027.400	32.20	41.72	13.08	35.64	51.36	68.20	-16.84	Peak
22665.610	30.15	44.55	15.08	41.59	48.19	54.00	-5.81	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

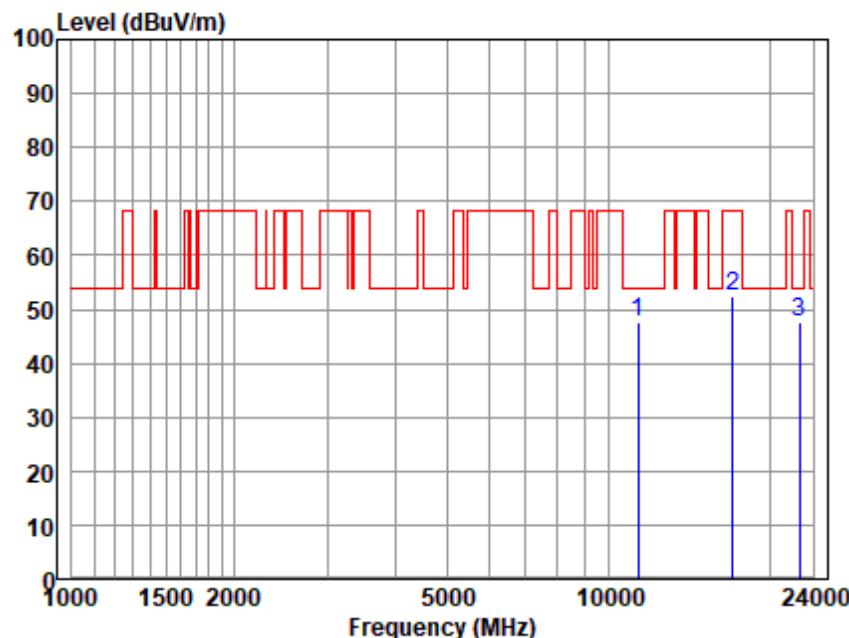


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
11340.560	34.66	38.28	9.81	35.17	47.58	54.00	-6.42	Peak
17027.400	33.08	41.72	13.08	35.64	52.24	68.20	-15.96	Peak
22665.610	29.73	44.55	15.08	41.59	47.77	54.00	-6.23	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

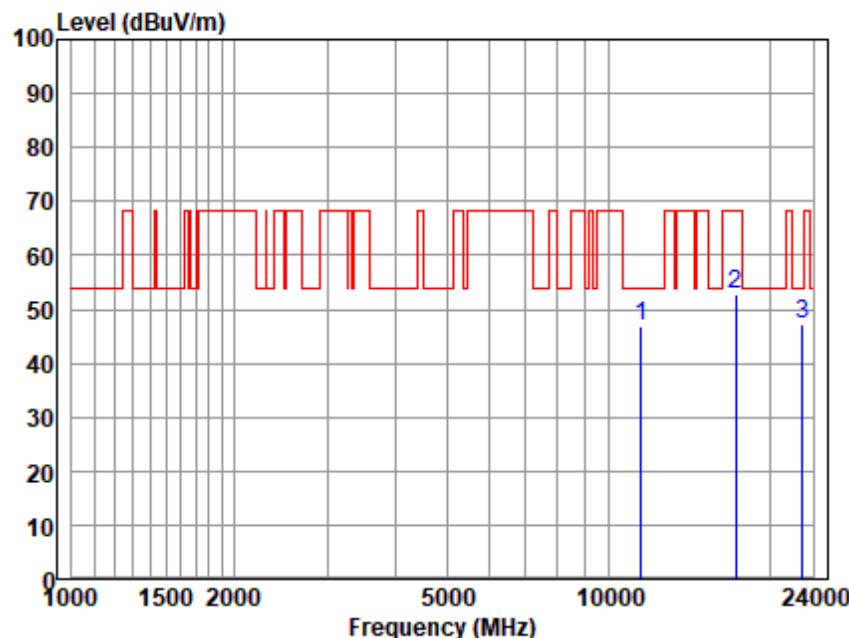


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.600	34.36	38.28	9.88	35.68	46.84	54.00	-7.16	Peak
17245.240	33.17	42.00	13.15	35.39	52.93	68.20	-15.27	Peak
22955.580	29.59	44.64	15.17	41.99	47.41	54.00	-6.59	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

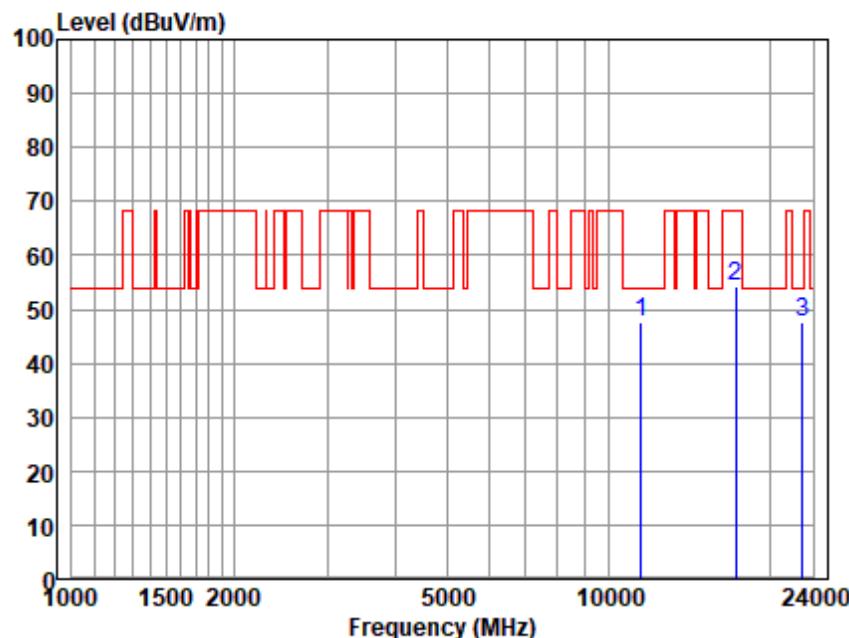


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.600	35.00	38.28	9.88	35.68	47.48	54.00	-6.52	Peak
17245.240	34.41	42.00	13.15	35.39	54.17	68.20	-14.03	Peak
22955.580	29.79	44.64	15.17	41.99	47.61	54.00	-6.39	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

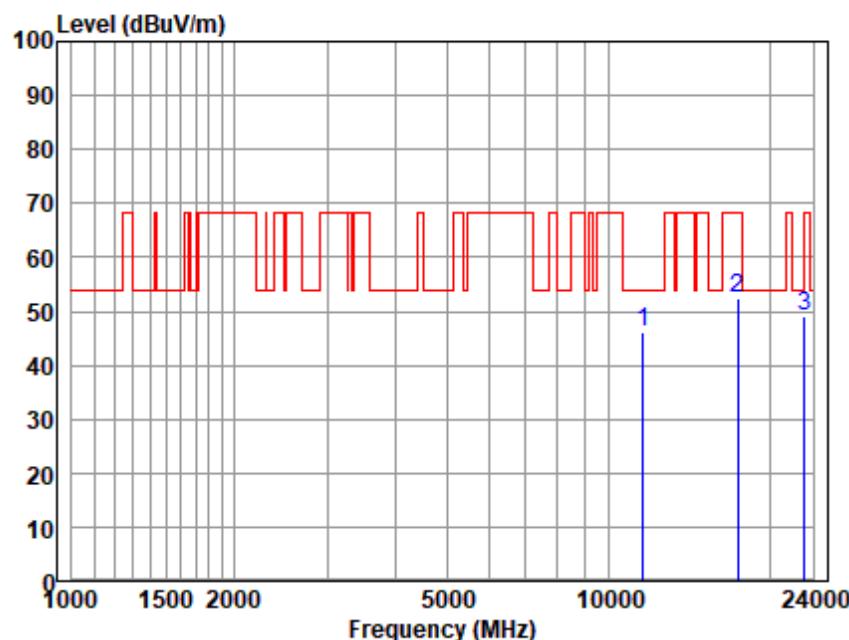


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.810	33.95	38.29	9.90	35.96	46.18	54.00	-7.82	Peak
17355.200	32.22	42.22	13.19	35.24	52.39	68.20	-15.81	Peak
23175.490	31.47	44.71	15.24	42.28	49.14	68.20	-19.06	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

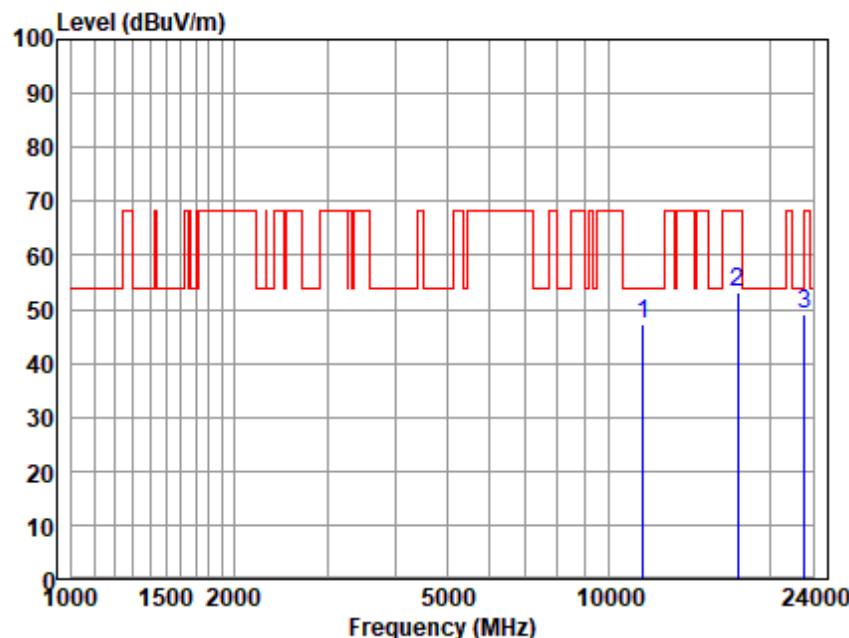


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.810	35.04	38.29	9.90	35.96	47.27	54.00	-6.73	Peak
17355.200	32.93	42.22	13.19	35.24	53.10	68.20	-15.10	Peak
23175.490	31.36	44.71	15.24	42.28	49.03	68.20	-19.17	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

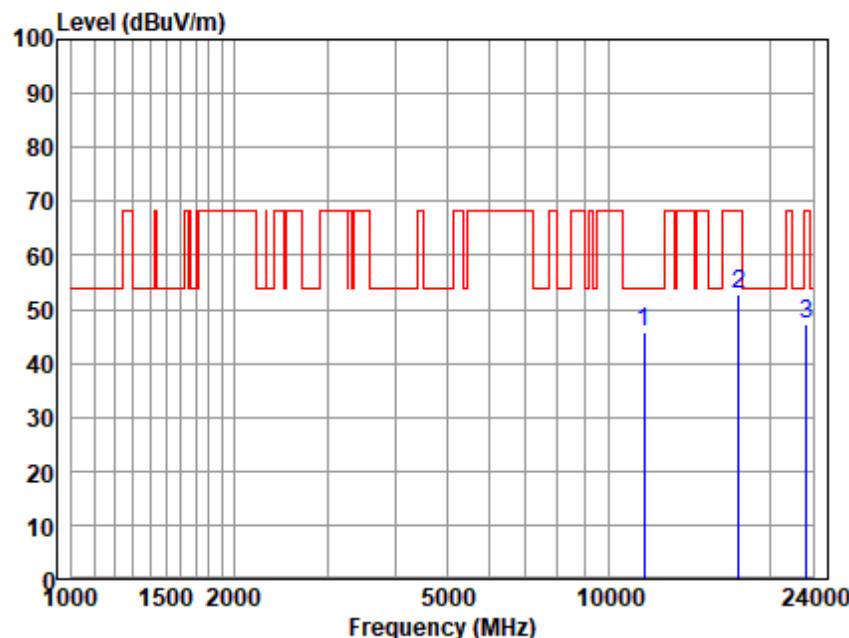


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.500	34.04	38.30	9.91	36.41	45.84	54.00	-8.16	Peak
17465.870	32.25	42.26	13.23	35.08	52.66	68.20	-15.54	Peak
23323.270	29.65	44.75	15.28	42.48	47.20	68.20	-21.00	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

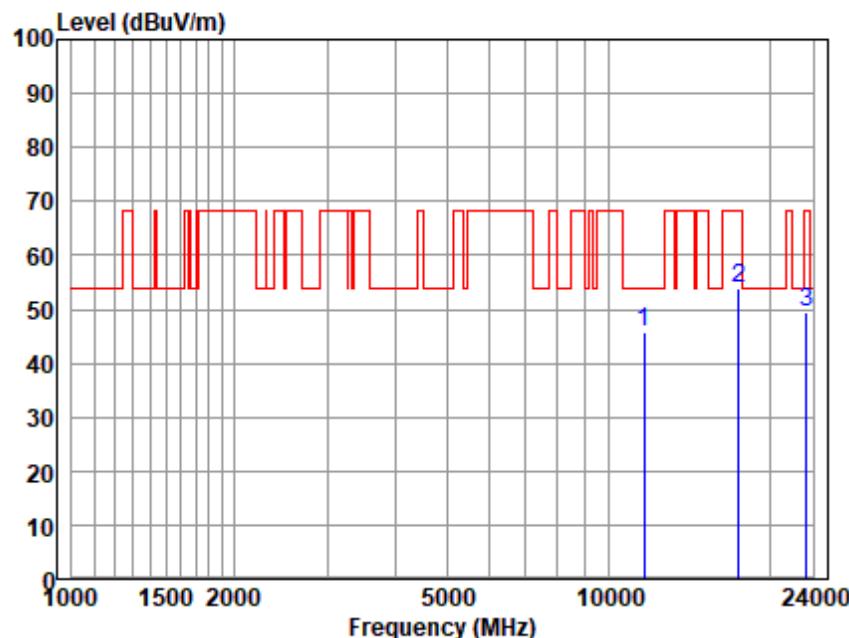


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.500	34.09	38.30	9.91	36.41	45.89	54.00	-8.11	Peak
17465.870	33.43	42.26	13.23	35.08	53.84	68.20	-14.36	Peak
23323.270	31.80	44.75	15.28	42.48	49.35	68.20	-18.85	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

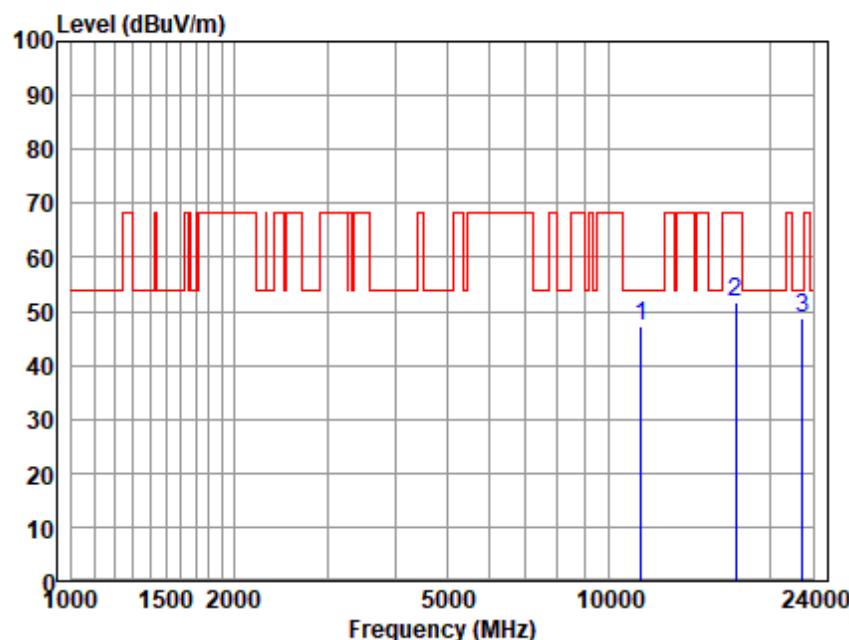


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.600	34.67	38.28	9.88	35.68	47.15	54.00	-6.85	Peak
17245.240	32.00	42.00	13.15	35.39	51.76	68.20	-16.44	Peak
22955.580	30.71	44.64	15.17	41.99	48.53	54.00	-5.47	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

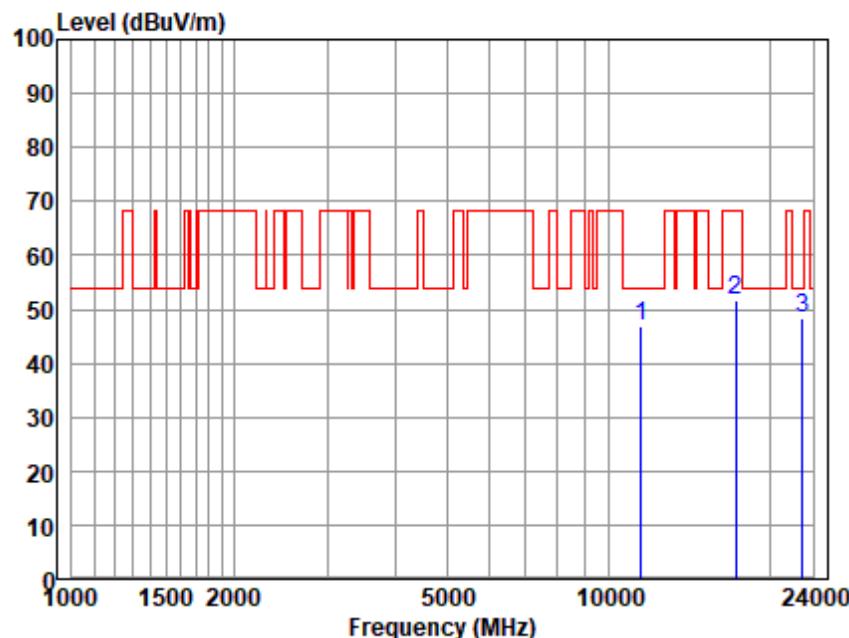


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11490.600	34.25	38.28	9.88	35.68	46.73	54.00	-7.27	Peak
17245.240	32.00	42.00	13.15	35.39	51.76	68.20	-16.44	Peak
22955.580	30.54	44.64	15.17	41.99	48.36	54.00	-5.64	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

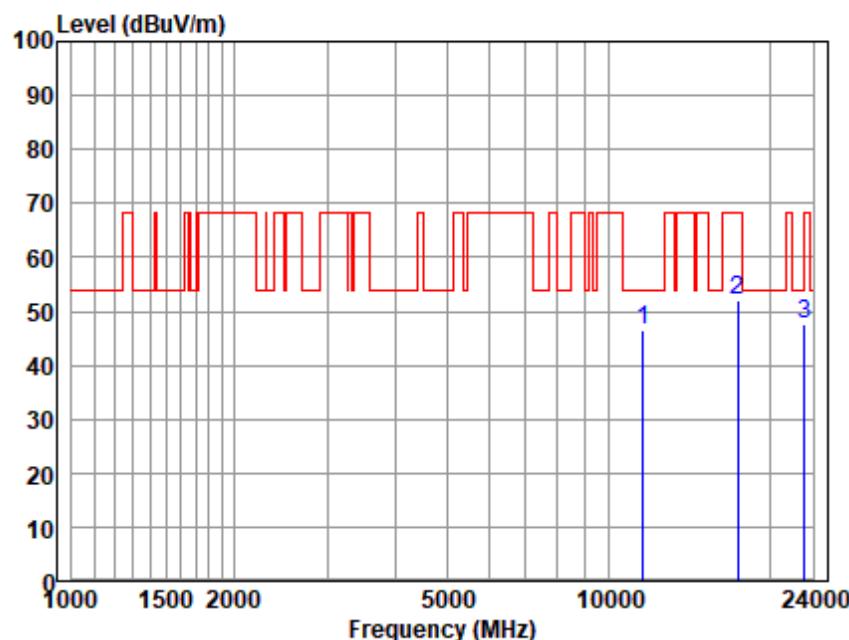


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.810	34.36	38.29	9.90	35.96	46.59	54.00	-7.41	Peak
17355.200	31.87	42.22	13.19	35.24	52.04	68.20	-16.16	Peak
23175.490	29.88	44.71	15.24	42.28	47.55	68.20	-20.65	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

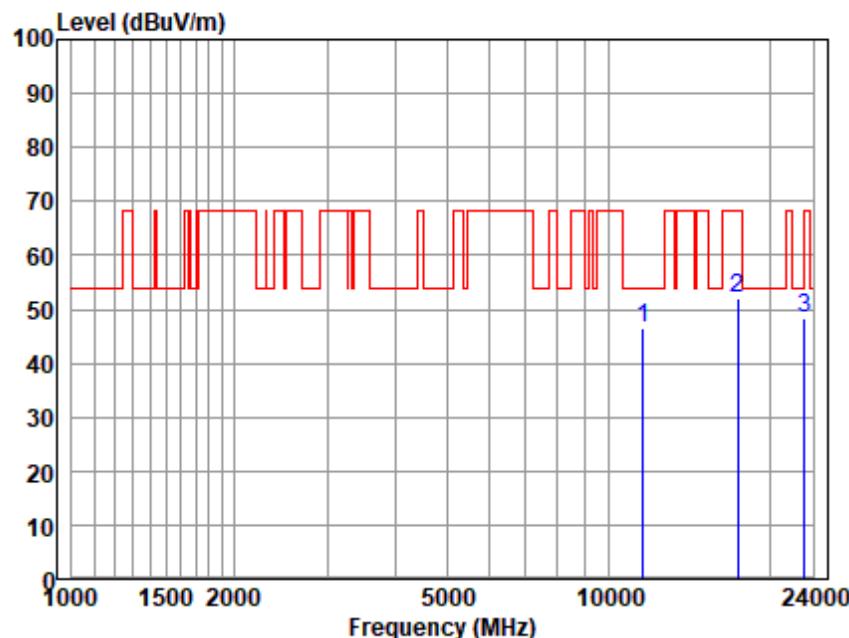


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11570.810	34.33	38.29	9.90	35.96	46.56	54.00	-7.44	Peak
17355.200	31.84	42.22	13.19	35.24	52.01	68.20	-16.19	Peak
23175.490	30.52	44.71	15.24	42.28	48.19	68.20	-20.01	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

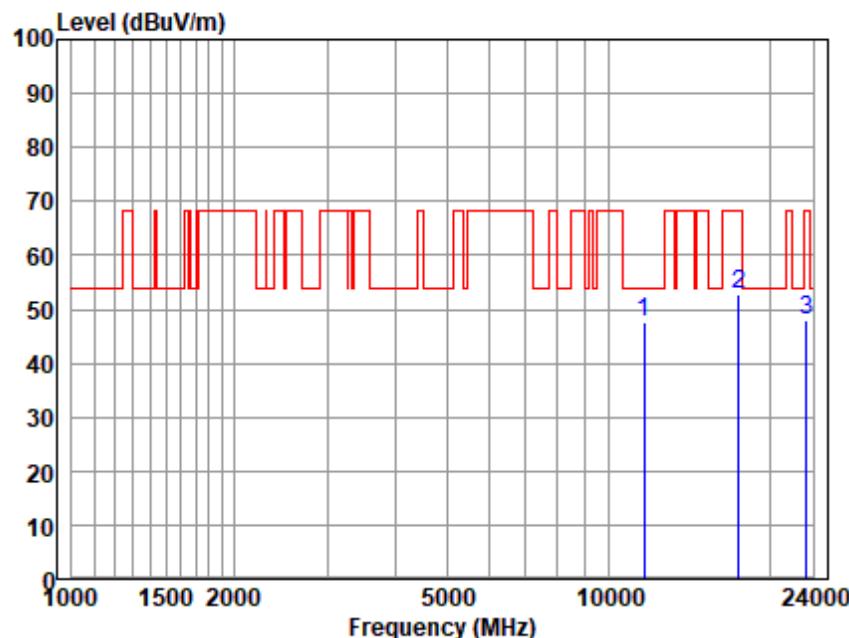


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.500	35.73	38.30	9.91	36.41	47.53	54.00	-6.47	Peak
17465.870	32.39	42.26	13.23	35.08	52.80	68.20	-15.40	Peak
23323.270	30.52	44.75	15.28	42.48	48.07	68.20	-20.13	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

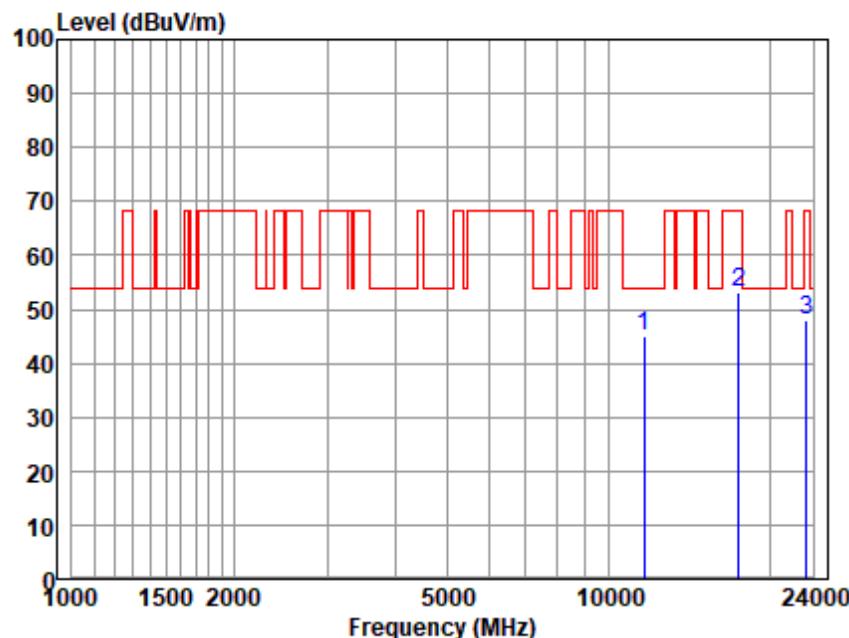


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11650.500	33.33	38.30	9.91	36.41	45.13	54.00	-8.87	Peak
17465.870	32.85	42.26	13.23	35.08	53.26	68.20	-14.94	Peak
23323.270	30.38	44.75	15.28	42.48	47.93	68.20	-20.27	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

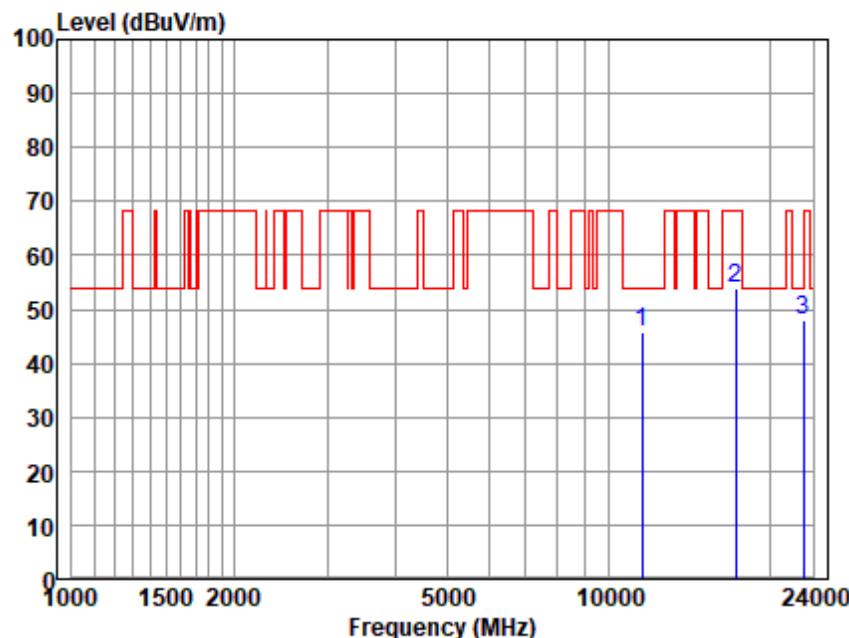


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11510.140	33.32	38.29	9.89	35.80	45.70	54.00	-8.30	Peak
17245.240	33.94	42.00	13.15	35.39	53.70	68.20	-14.50	Peak
23028.650	30.18	44.66	15.19	42.08	47.95	54.00	-6.05	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

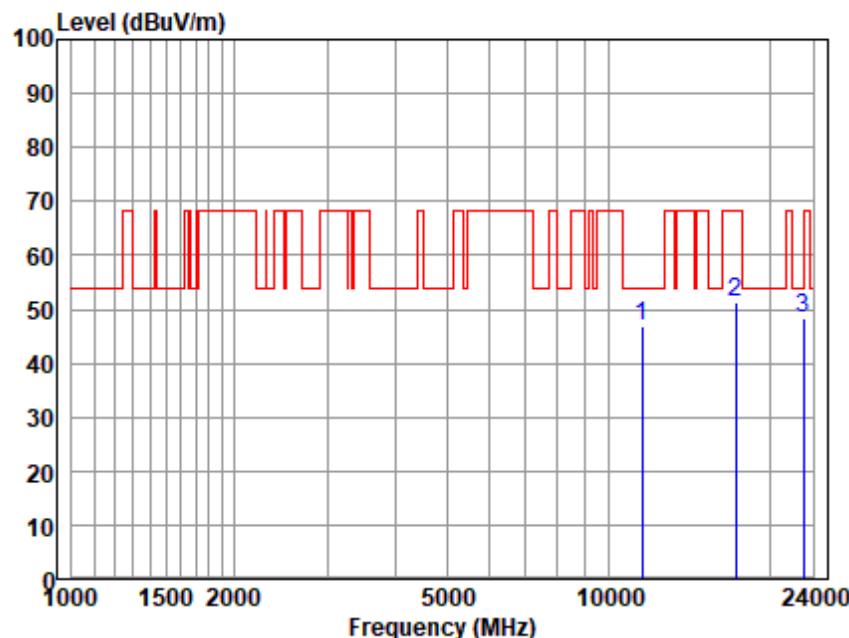


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11510.140	34.60	38.29	9.89	35.80	46.98	54.00	-7.02	Peak
17245.240	31.54	42.00	13.15	35.39	51.30	68.20	-16.90	Peak
23028.650	30.44	44.66	15.19	42.08	48.21	54.00	-5.79	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

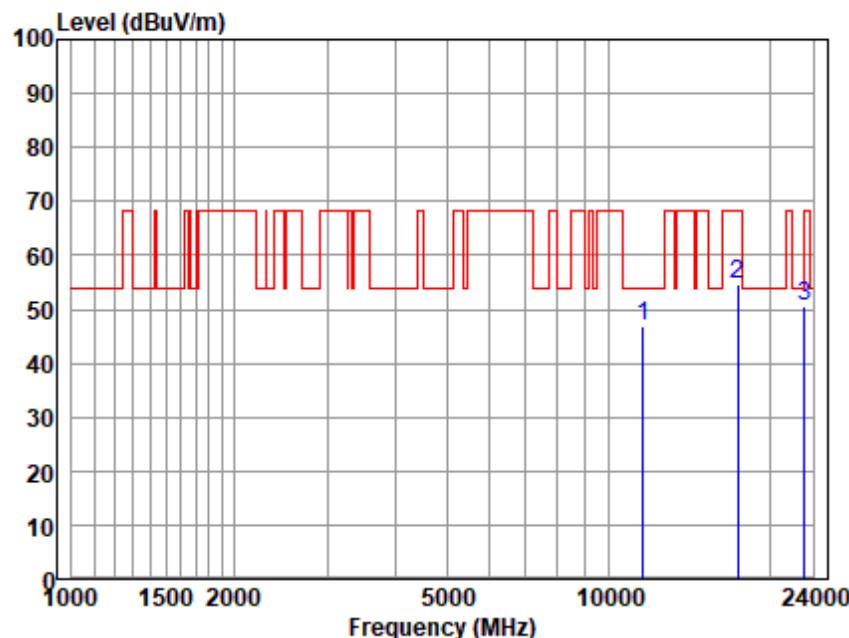


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11590.590	34.71	38.29	9.92	36.11	46.81	54.00	-7.19	Peak
17410.450	34.34	42.24	13.21	35.16	54.63	68.20	-13.57	Peak
23175.490	33.04	44.71	15.24	42.28	50.71	68.20	-17.49	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

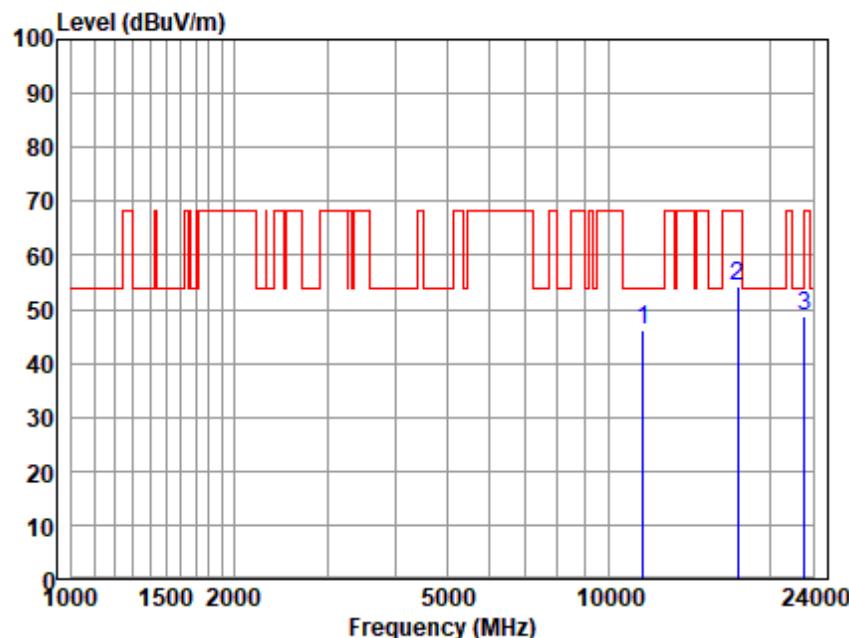

Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
11590.590	34.16	38.29	9.92	36.11	46.26	54.00	-7.74	Peak
17410.450	33.99	42.24	13.21	35.16	54.28	68.20	-13.92	Peak
23175.490	31.11	44.71	15.24	42.28	48.78	68.20	-19.42	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

6.3 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.3.1 E.U.T. Operation

Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all

		modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n20/40, Only the data of worst case is recorded in the report.

6.3.3 Test Setup Diagram

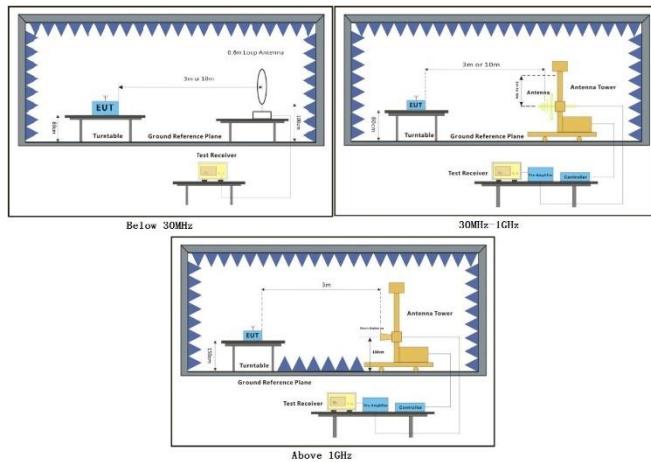

6.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

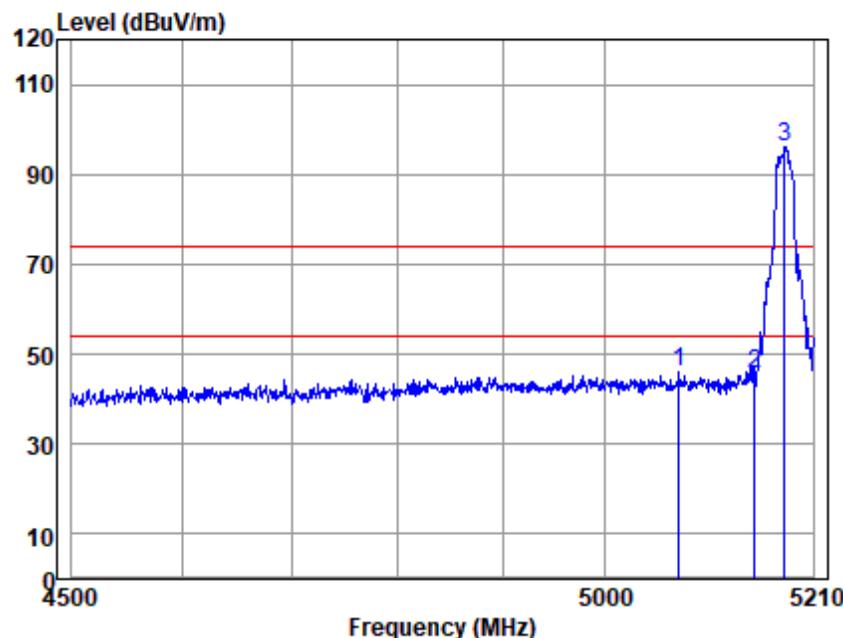


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5073.662	43.54	33.68	5.64	36.86	46.00	74.00	-28.00	Peak
5150.000	43.23	33.78	5.54	36.88	45.67	74.00	-28.33	Peak
5181.076	93.35	33.87	5.65	36.89	95.98	74.00	21.98	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

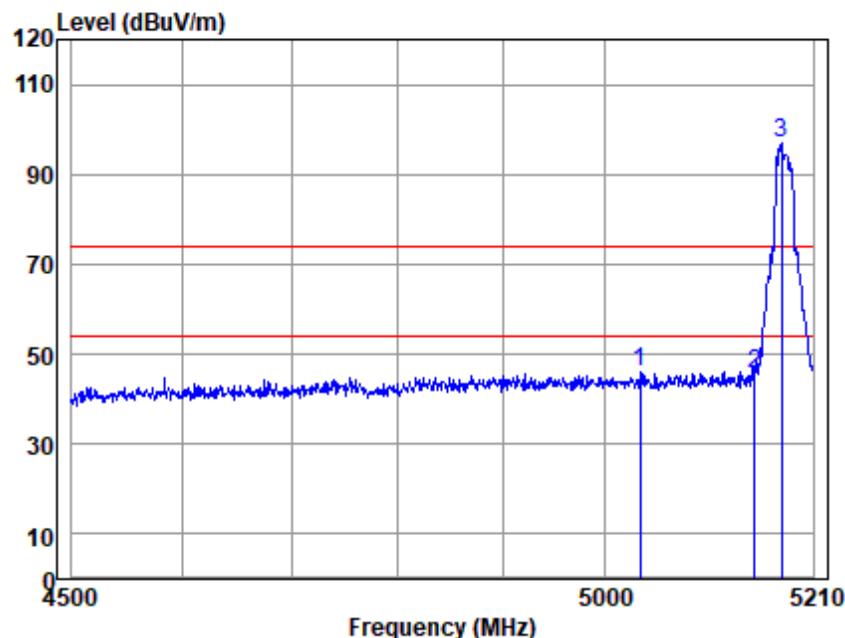


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5035.157	43.80	33.69	5.61	36.85	46.25	74.00	-27.75	Peak
5150.000	43.01	33.78	5.54	36.88	45.45	74.00	-28.55	Peak
5178.041	94.27	33.87	5.65	36.89	96.90	74.00	22.90	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

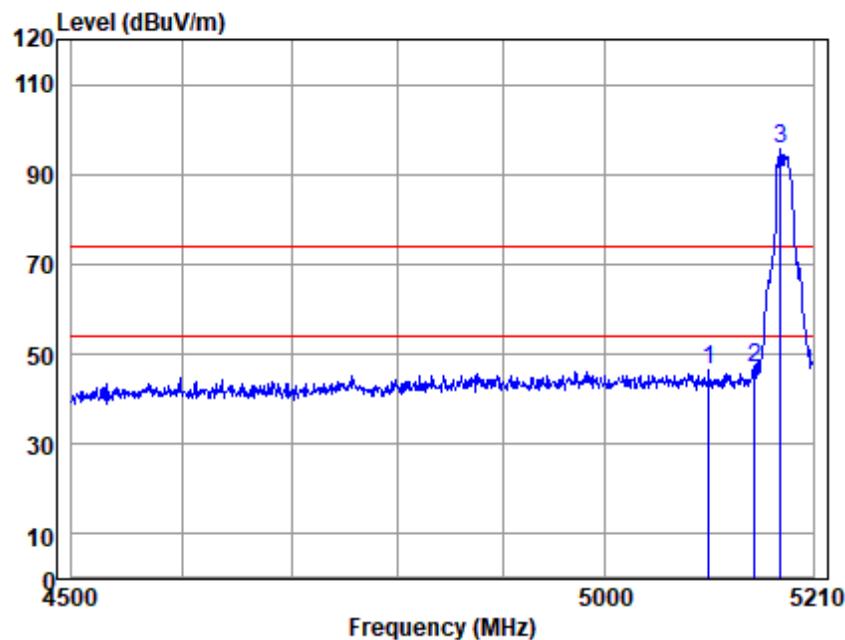


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5104.229	43.95	33.67	5.53	36.87	46.28	74.00	-27.72	Peak
5150.000	44.38	33.78	5.54	36.88	46.82	74.00	-27.18	Peak
5176.524	92.80	33.87	5.65	36.89	95.43	74.00	21.43	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

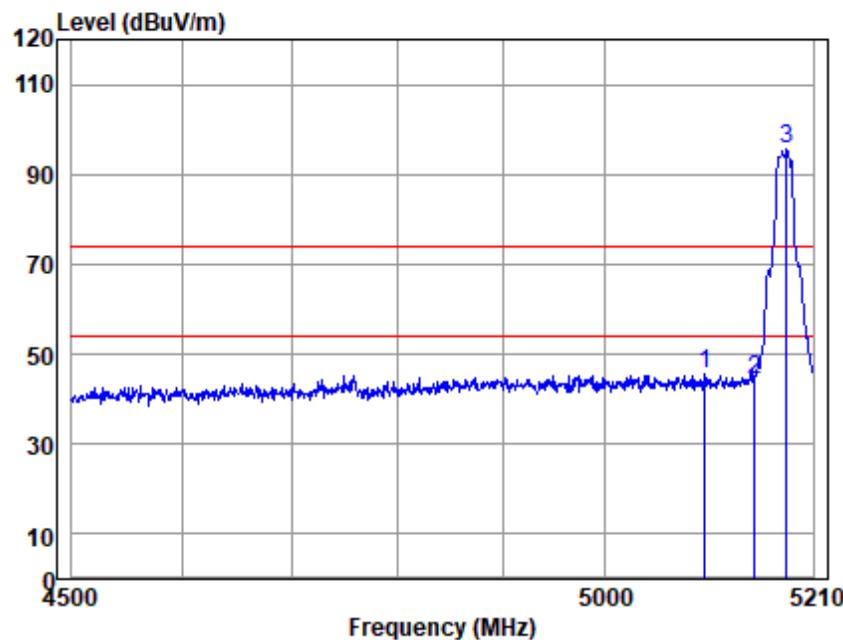


Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5099.745	43.47	33.67	5.53	36.87	45.80	74.00	-28.20	Peak
5150.000	41.89	33.78	5.54	36.88	44.33	74.00	-29.67	Peak
5182.594	93.01	33.87	5.65	36.89	95.64	74.00	21.64	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

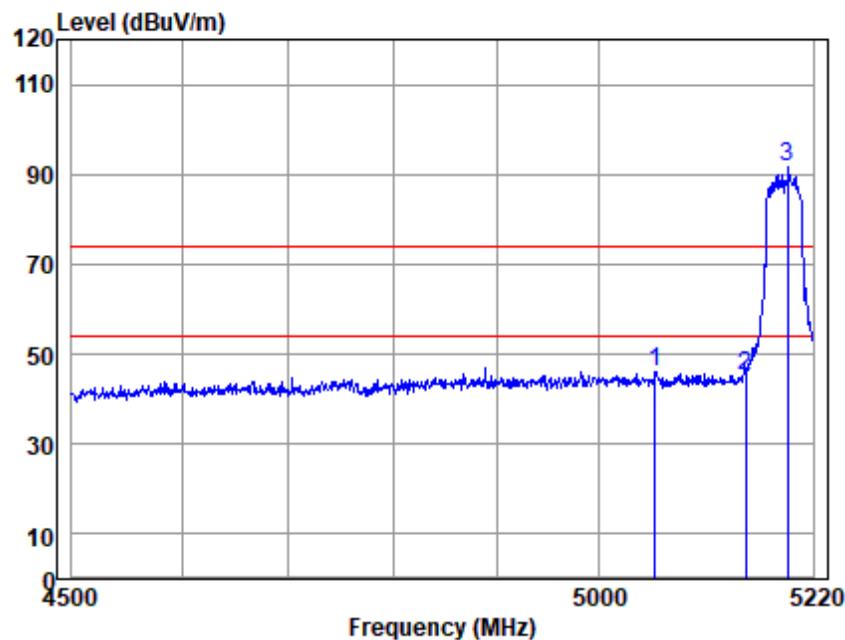


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5057.559	43.64	33.68	5.72	36.86	46.18	74.00	-27.82	Peak
5150.000	42.58	33.78	5.54	36.88	45.02	74.00	-28.98	Peak
5193.725	88.82	33.91	5.65	36.89	91.49	74.00	17.49	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

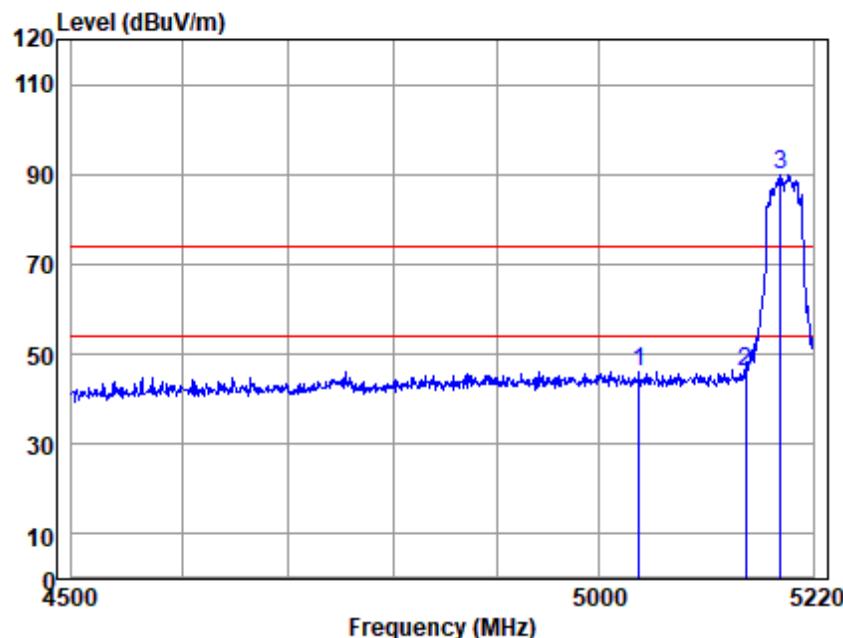


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5041.072	43.79	33.69	5.59	36.85	46.22	74.00	-27.78	Peak
5150.000	43.62	33.78	5.54	36.88	46.06	74.00	-27.94	Peak
5186.022	87.17	33.87	5.65	36.89	89.80	74.00	15.80	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

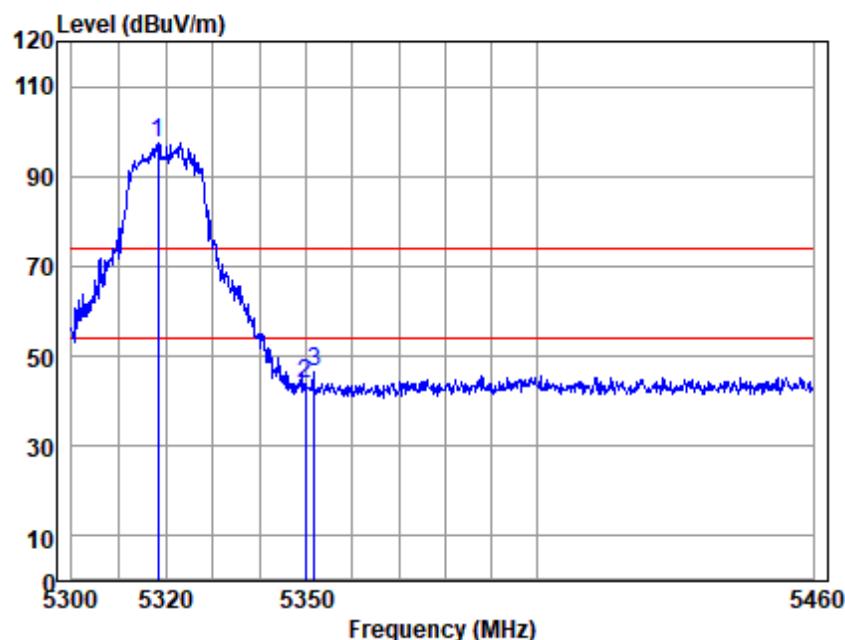


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5318.317	94.83	34.16	5.44	36.93	97.50	74.00	23.50	Peak
5350.000	41.19	34.19	5.60	36.94	44.04	74.00	-29.96	Peak
5351.797	43.52	34.19	5.60	36.94	46.37	74.00	-27.63	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

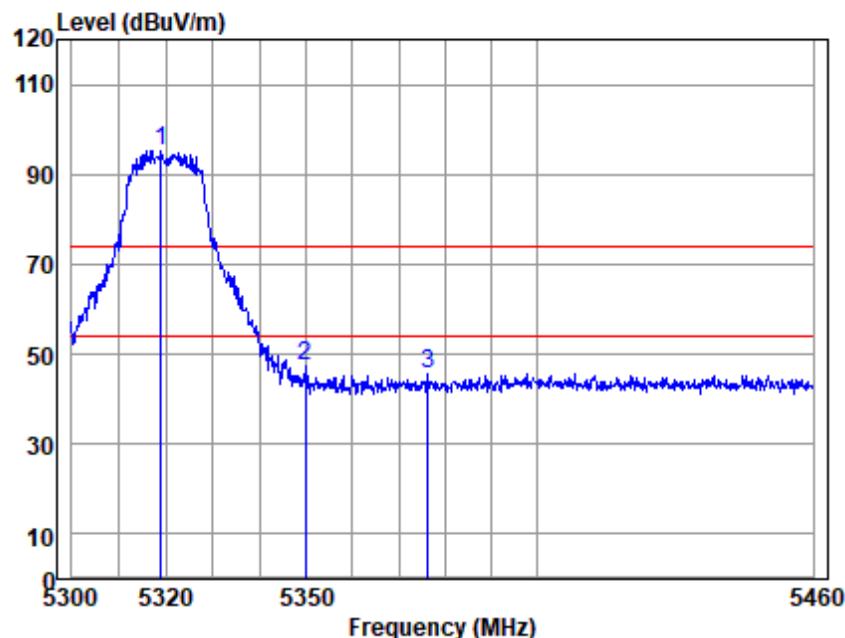


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5319.108	92.61	34.16	5.44	36.93	95.28	74.00	21.28	Peak
5350.000	44.40	34.19	5.60	36.94	47.25	74.00	-26.75	Peak
5376.366	42.70	34.29	5.63	36.95	45.67	74.00	-28.33	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

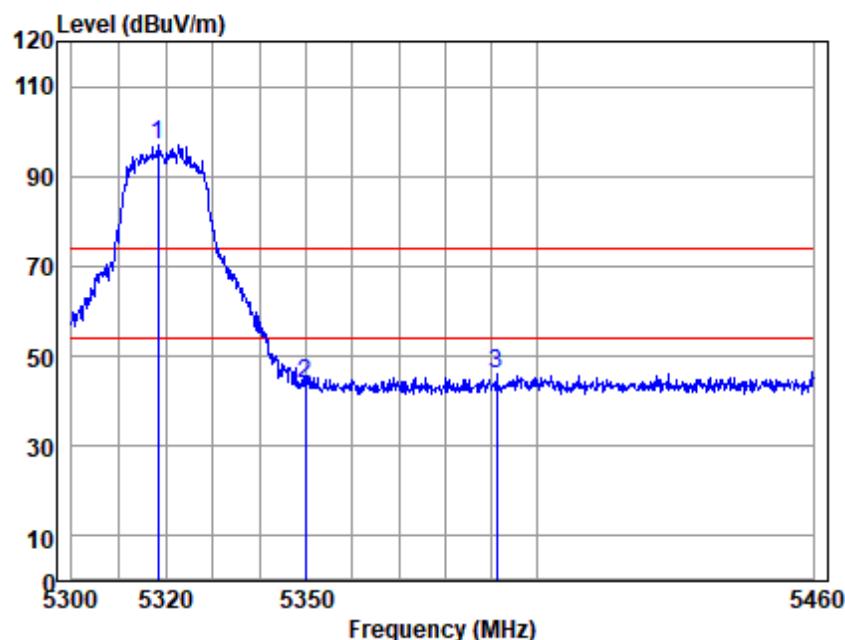


Antenna Polarity :HORIZONTAL

EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5318.317	94.31	34.16	5.44	36.93	96.98	74.00	22.98	Peak
5350.000	40.83	34.19	5.60	36.94	43.68	74.00	-30.32	Peak
5391.098	42.84	34.34	5.70	36.95	45.93	74.00	-28.07	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

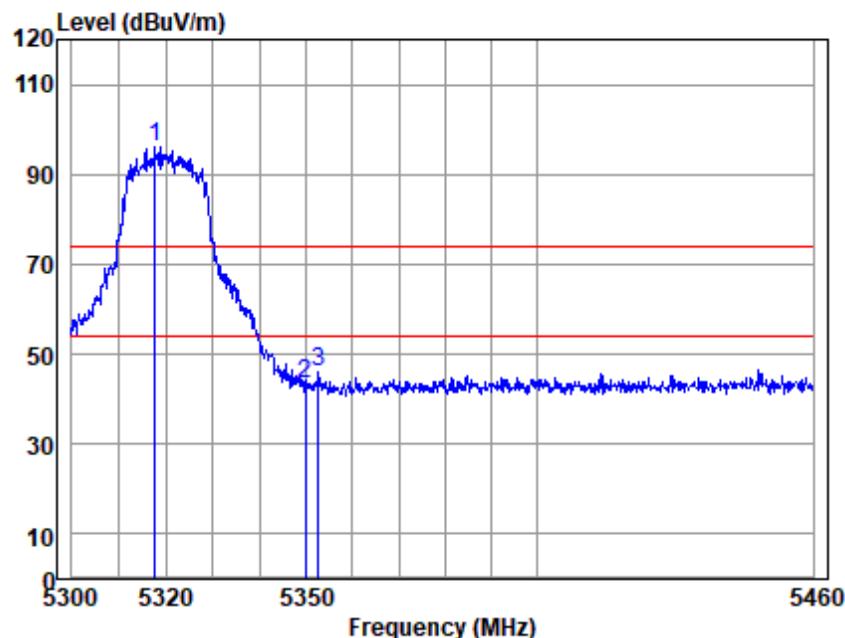


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
5317.684	93.58	34.16	5.44	36.93	96.25	74.00	22.25	Peak
5350.000	40.61	34.19	5.60	36.94	43.46	74.00	-30.54	Peak
5352.752	43.35	34.19	5.60	36.94	46.20	74.00	-27.80	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

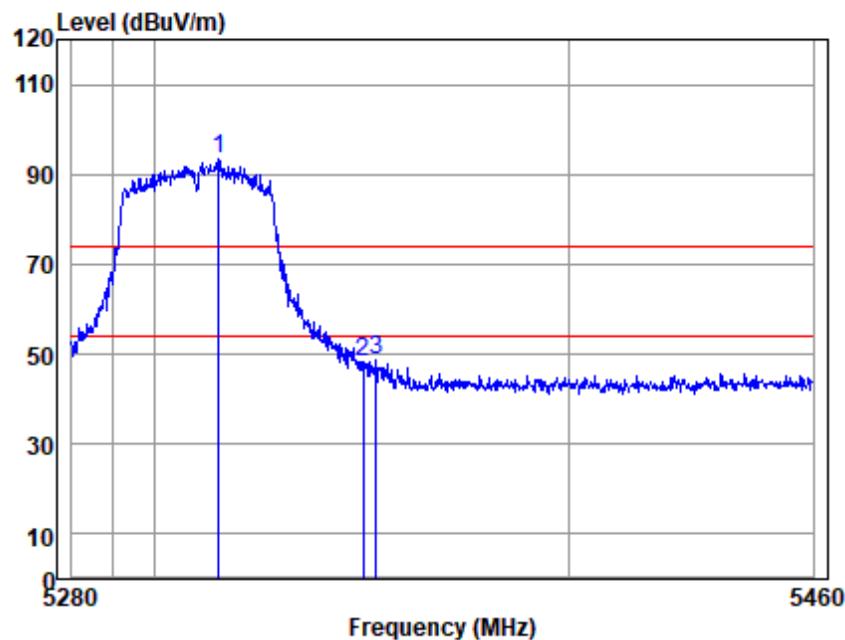


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5315.341	90.90	34.16	5.44	36.93	93.57	74.00	19.57	Peak
5350.000	45.37	34.19	5.60	36.94	48.22	74.00	-25.78	Peak
5353.071	45.86	34.19	5.60	36.94	48.71	74.00	-25.29	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

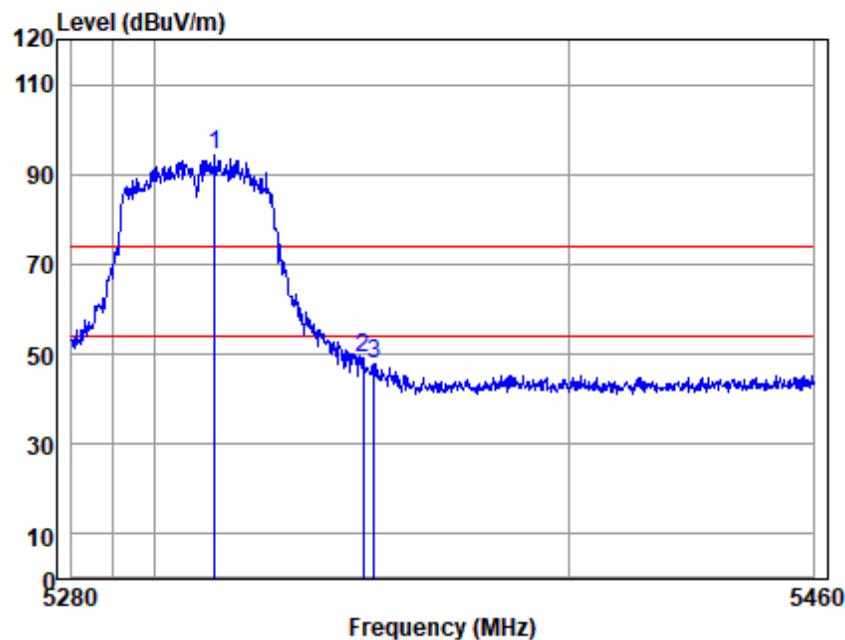


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5314.271	91.56	34.16	5.44	36.93	94.23	74.00	20.23	Peak
5350.000	46.13	34.19	5.60	36.94	48.98	74.00	-25.02	Peak
5352.712	44.90	34.19	5.60	36.94	47.75	74.00	-26.25	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

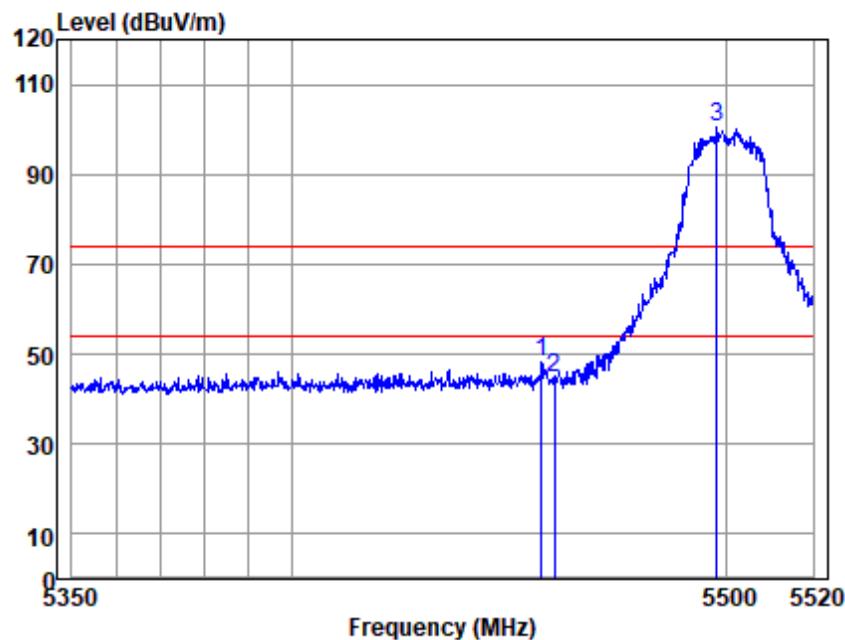


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5457.162	45.01	34.44	5.75	36.97	48.23	74.00	-25.77	Peak
5460.000	41.52	34.44	5.75	36.97	44.74	74.00	-29.26	Peak
5497.598	97.20	34.52	5.73	36.98	100.47	74.00	26.47	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

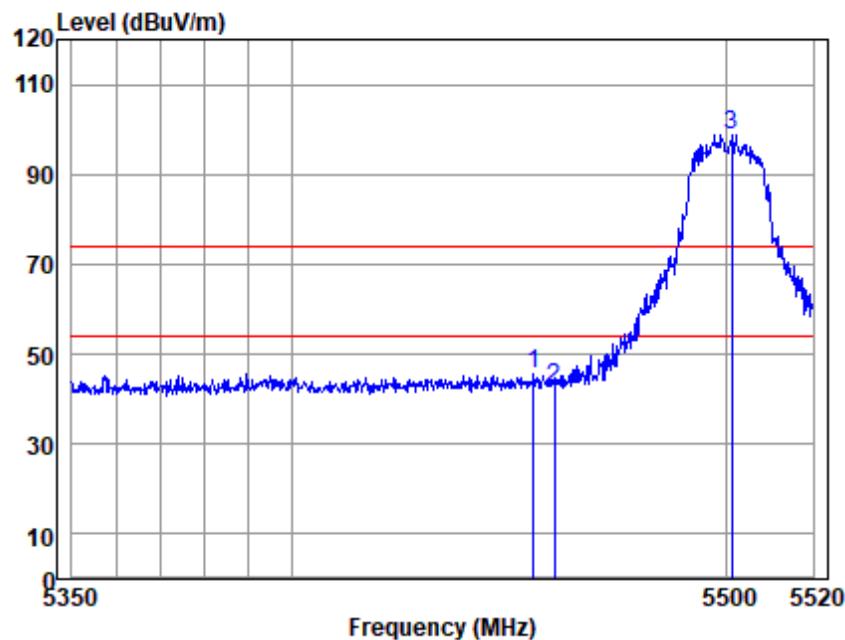


Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5455.285	42.60	34.44	5.75	36.97	45.82	74.00	-28.18	Peak
5460.000	39.44	34.44	5.75	36.97	42.66	74.00	-31.34	Peak
5501.211	95.41	34.52	5.73	36.98	98.68	74.00	24.68	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

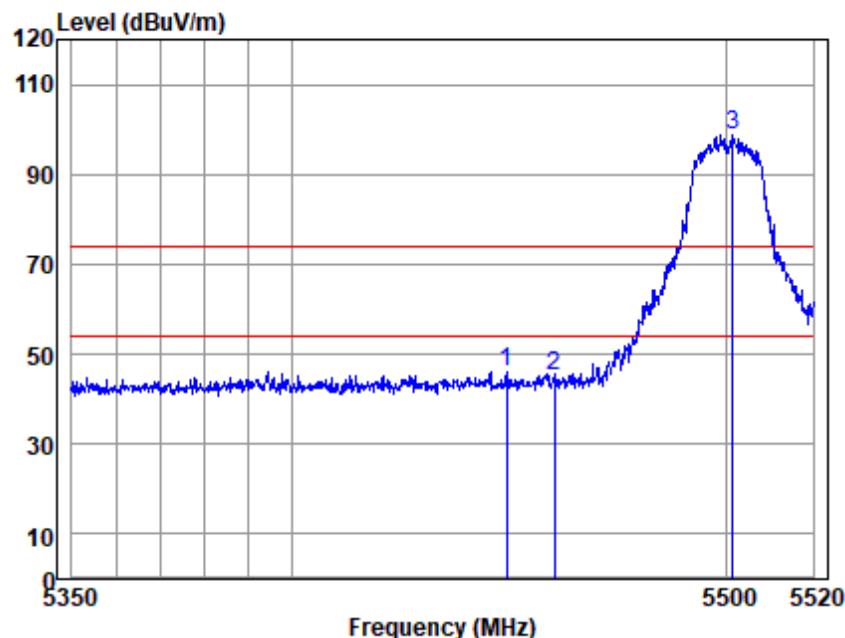


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5449.145	42.83	34.44	5.75	36.97	46.05	74.00	-27.95	Peak
5460.000	42.06	34.44	5.75	36.97	45.28	74.00	-28.72	Peak
5501.383	95.55	34.52	5.73	36.98	98.82	74.00	24.82	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

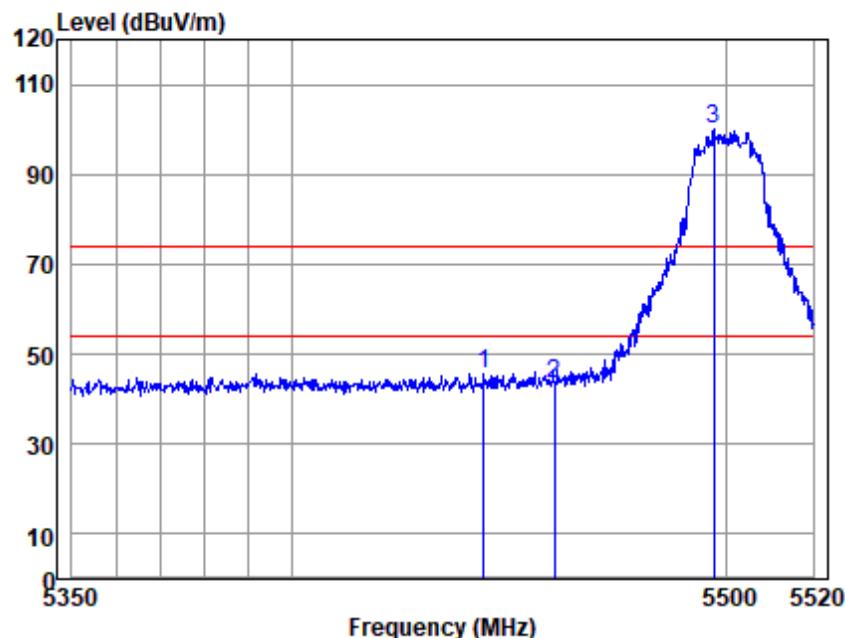


Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5443.863	42.45	34.42	5.72	36.96	45.63	74.00	-28.37	Peak
5460.000	40.17	34.44	5.75	36.97	43.39	74.00	-30.61	Peak
5496.910	96.86	34.52	5.73	36.98	100.13	74.00	26.13	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 05; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

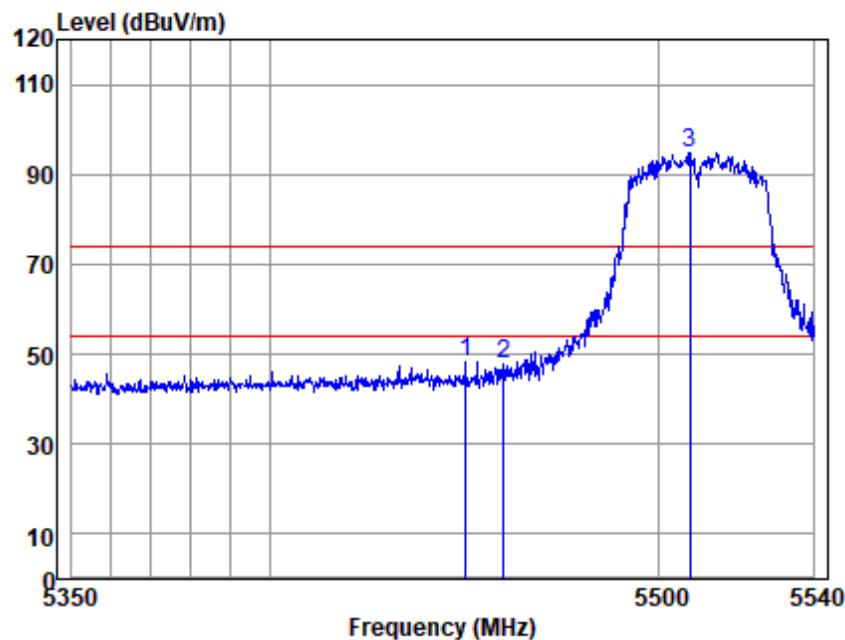


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5450.064	45.21	34.44	5.75	36.97	48.43	74.00	-25.57	Peak
5460.000	44.53	34.44	5.75	36.97	47.75	74.00	-26.25	Peak
5507.999	91.40	34.52	5.73	36.98	94.67	74.00	20.67	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss+Preamp Factor

Test Mode: 05; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

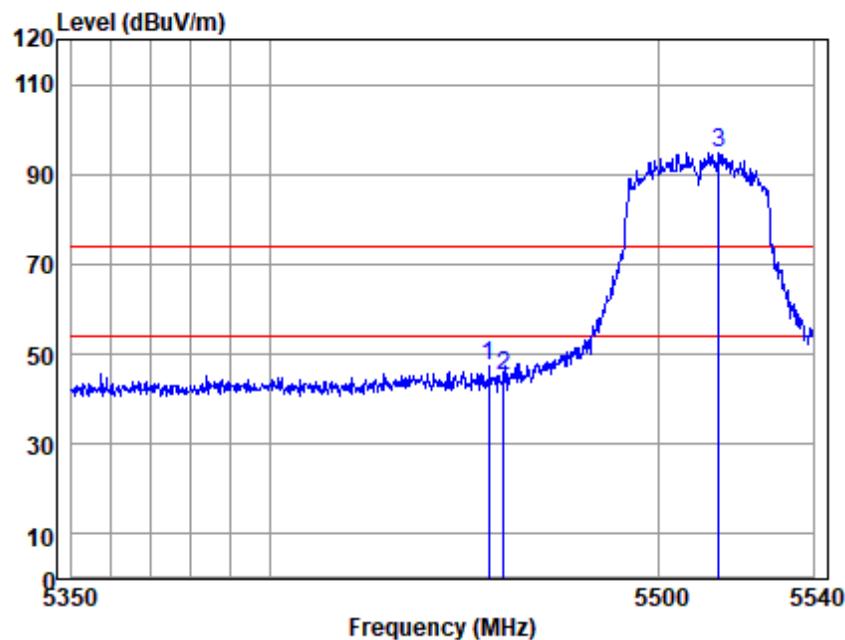


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5456.154	43.96	34.44	5.75	36.97	47.18	74.00	-26.82	Peak
5460.000	41.87	34.44	5.75	36.97	45.09	74.00	-28.91	Peak
5515.501	91.57	34.52	5.71	36.98	94.82	74.00	20.82	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

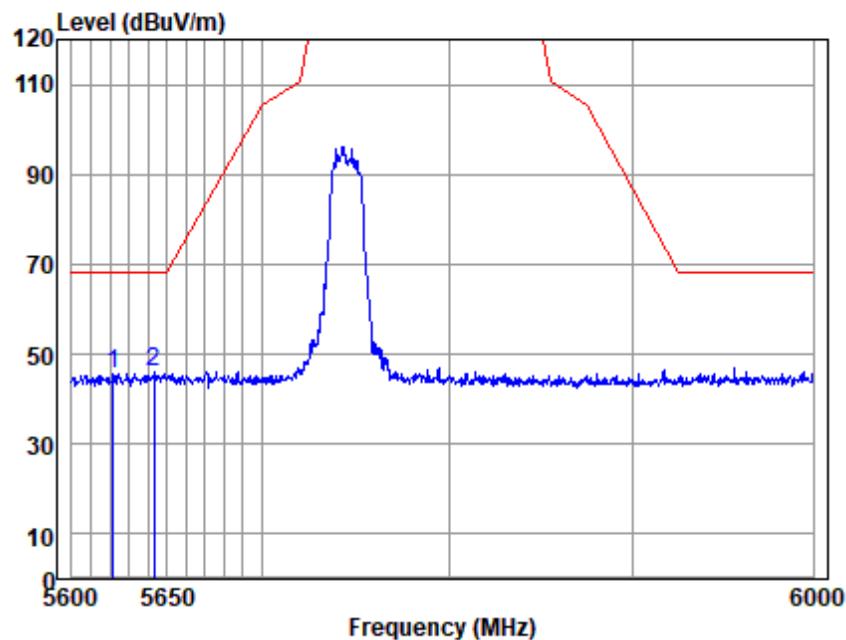


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5621.678	42.51	34.52	5.79	37.00	45.82	68.20	-22.38	Peak
5643.051	42.53	34.53	5.87	37.00	45.93	68.20	-22.27	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

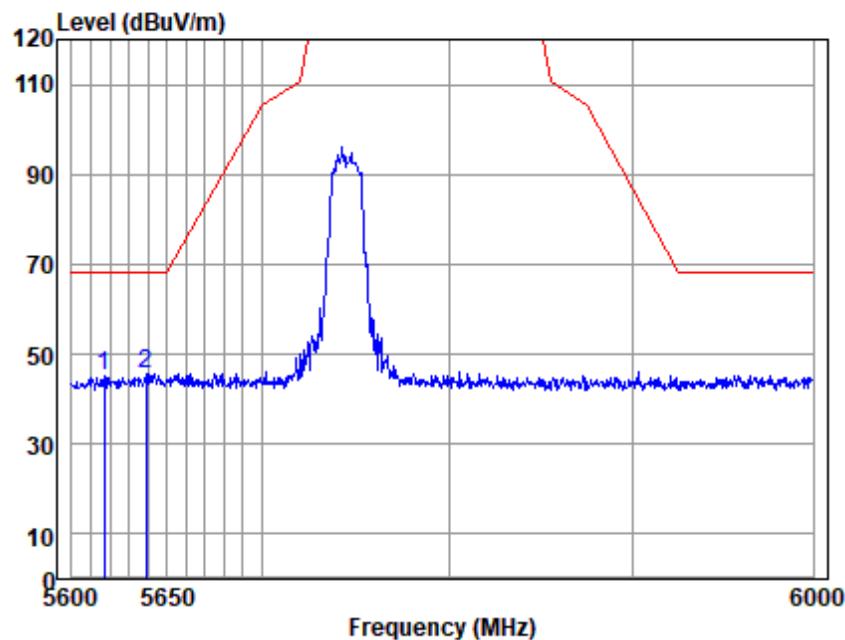


Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5617.026	41.90	34.52	5.79	37.00	45.21	68.20	-22.99	Peak
5638.770	42.38	34.53	5.83	37.00	45.74	68.20	-22.46	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

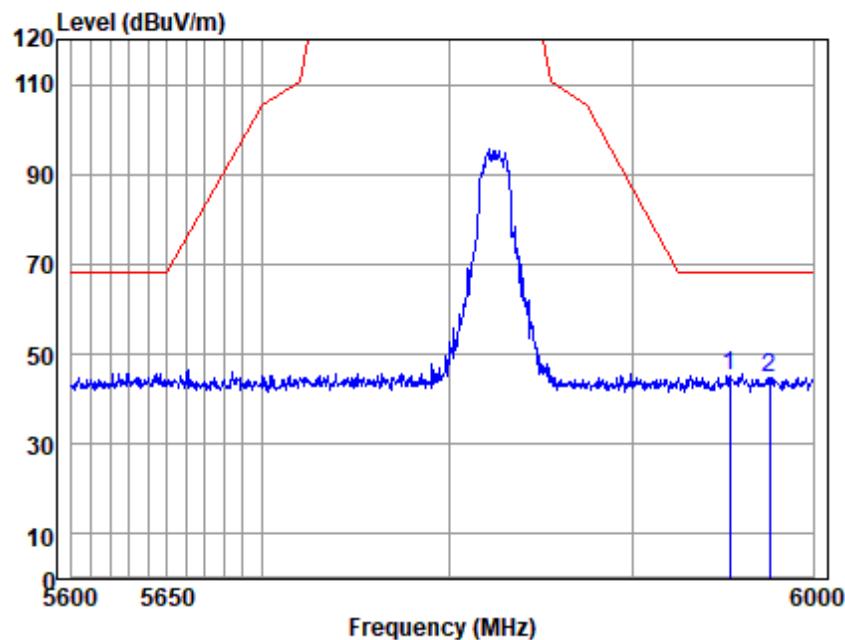


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5953.405	41.61	34.85	5.71	37.05	45.12	68.20	-23.08	Peak
5975.626	41.08	34.90	5.97	37.05	44.90	68.20	-23.30	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

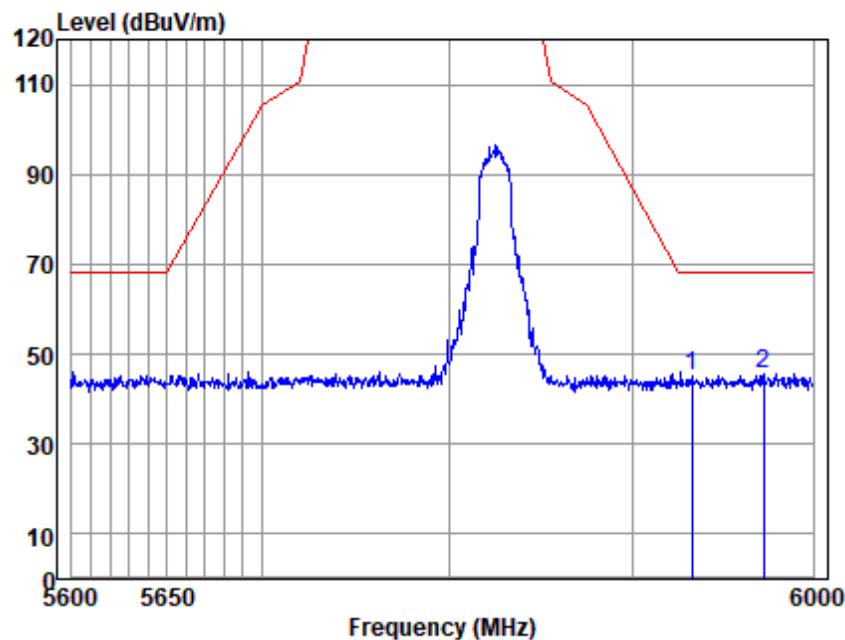


Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5932.903	41.62	34.81	5.91	37.05	45.29	68.20	-22.91	Peak
5972.741	42.00	34.90	5.97	37.05	45.82	68.20	-22.38	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

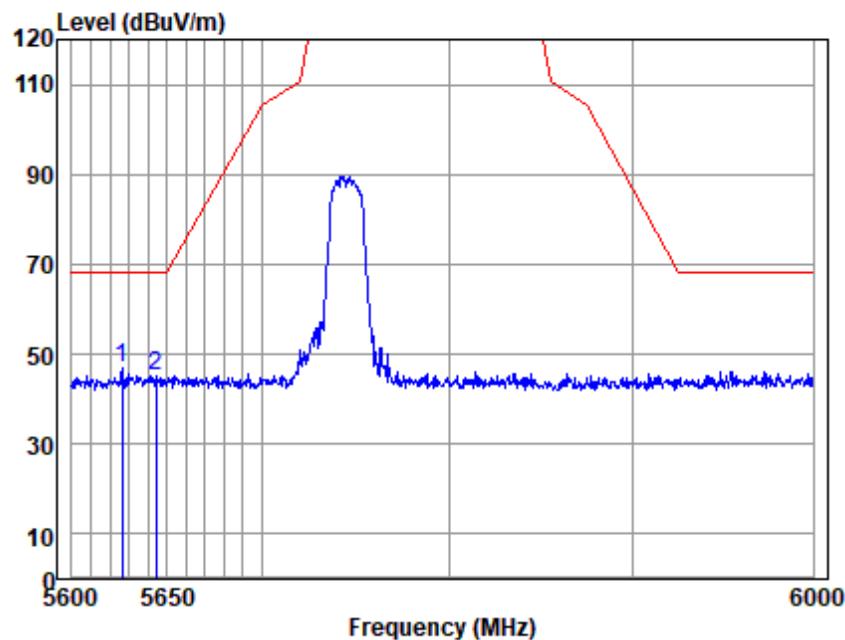


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5626.334	43.36	34.53	5.83	37.00	46.72	68.20	-21.48	Peak
5644.219	41.75	34.53	5.87	37.00	45.15	68.20	-23.05	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

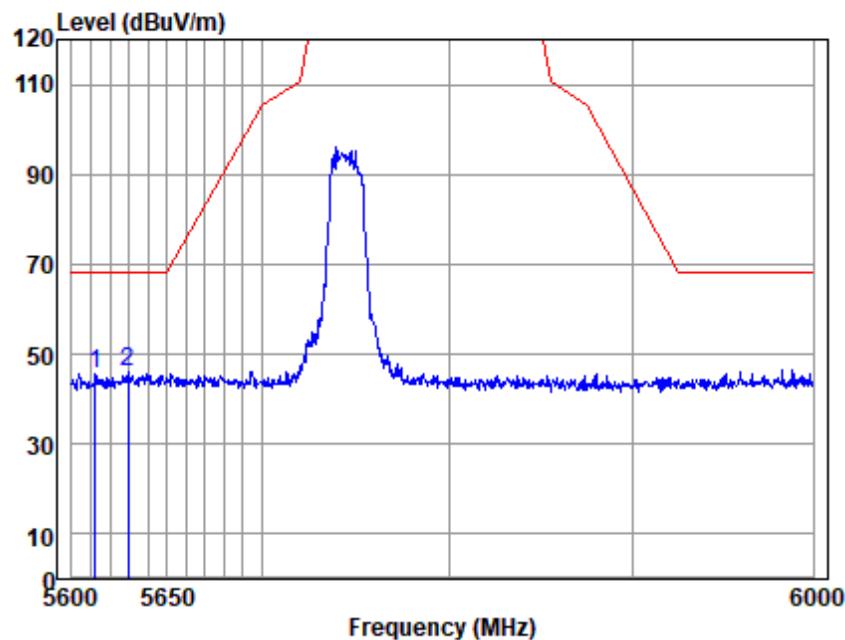


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5612.377	42.18	34.52	5.79	37.00	45.49	68.20	-22.71	Peak
5629.440	42.55	34.53	5.83	37.00	45.91	68.20	-22.29	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

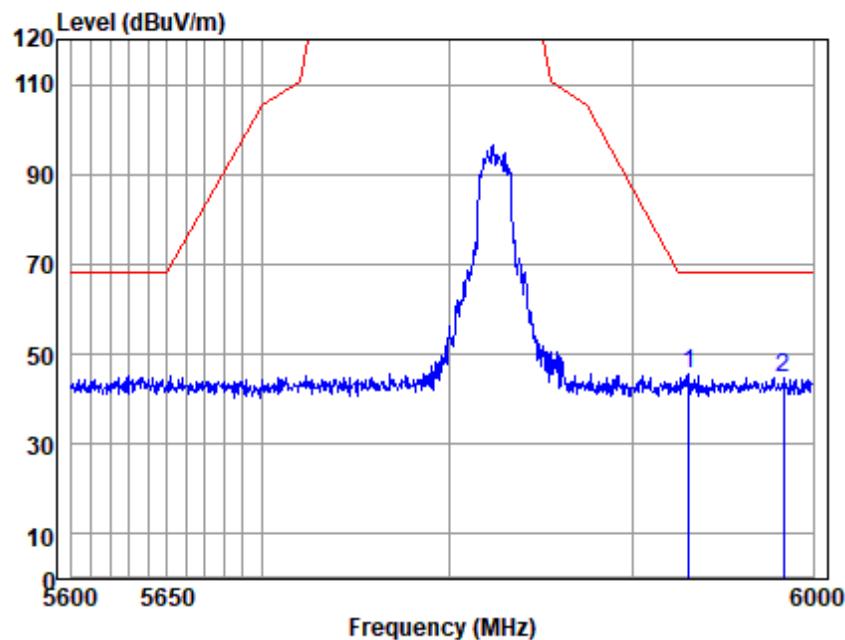


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5930.856	42.05	34.81	5.91	37.05	45.72	68.20	-22.48	Peak
5983.464	40.84	34.94	5.88	37.06	44.60	68.20	-23.60	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

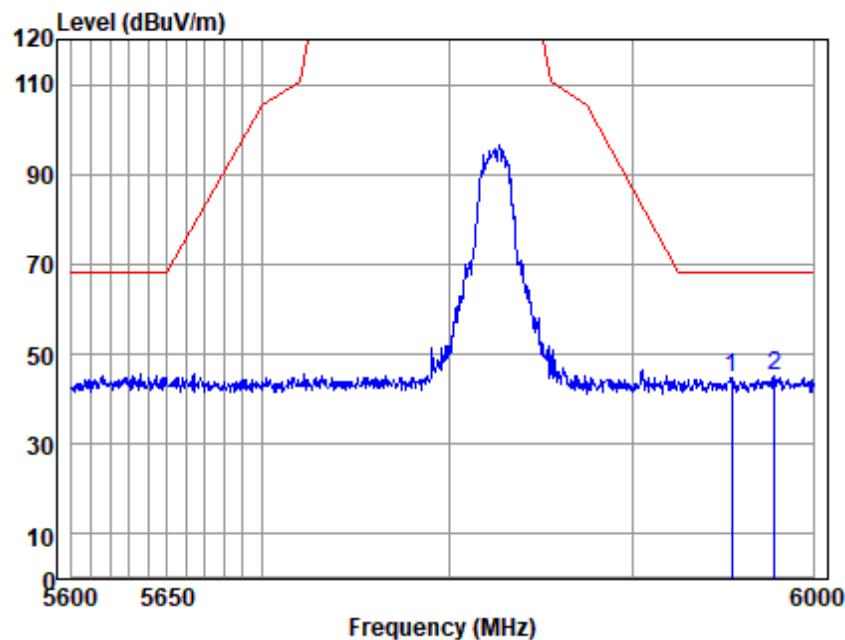


Antenna Polarity : VERTICAL

EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5954.637	41.29	34.85	5.71	37.05	44.80	68.20	-23.40	Peak
5978.513	41.27	34.94	5.88	37.06	45.03	68.20	-23.17	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

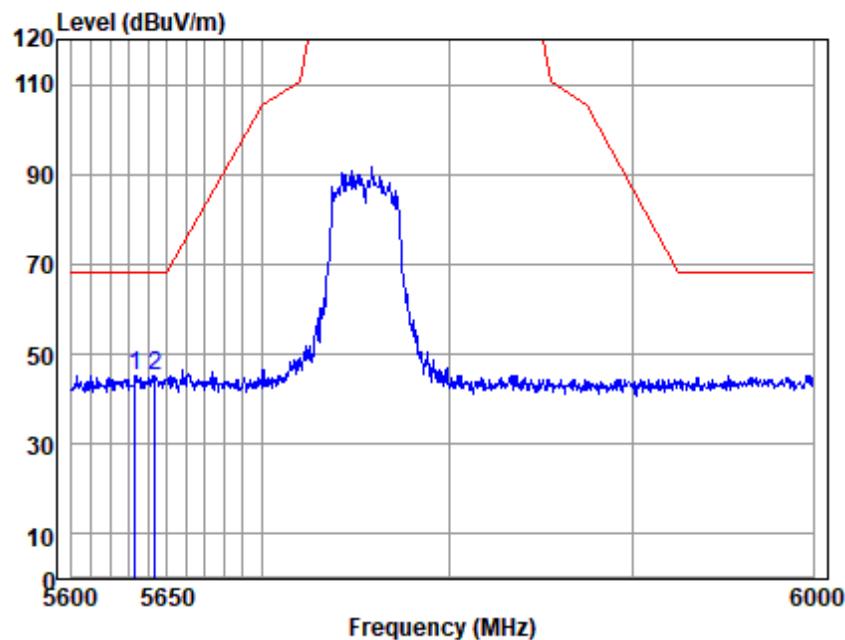


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5633.326	41.80	34.53	5.83	37.00	45.16	68.20	-23.04	Peak
5643.829	41.75	34.53	5.87	37.00	45.15	68.20	-23.05	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

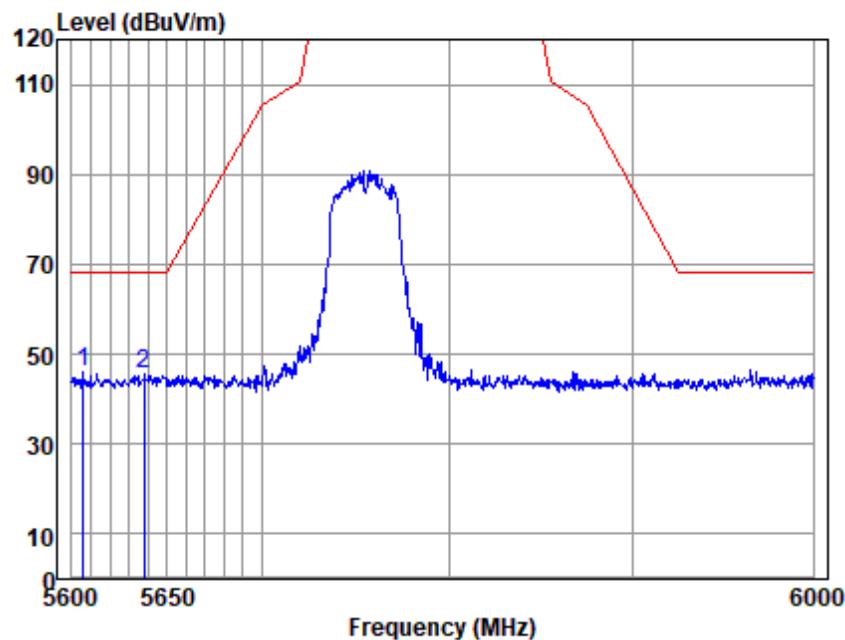


Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5606.185	42.68	34.52	5.74	37.00	45.94	68.20	-22.26	Peak
5637.992	42.09	34.53	5.83	37.00	45.45	68.20	-22.75	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 06; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

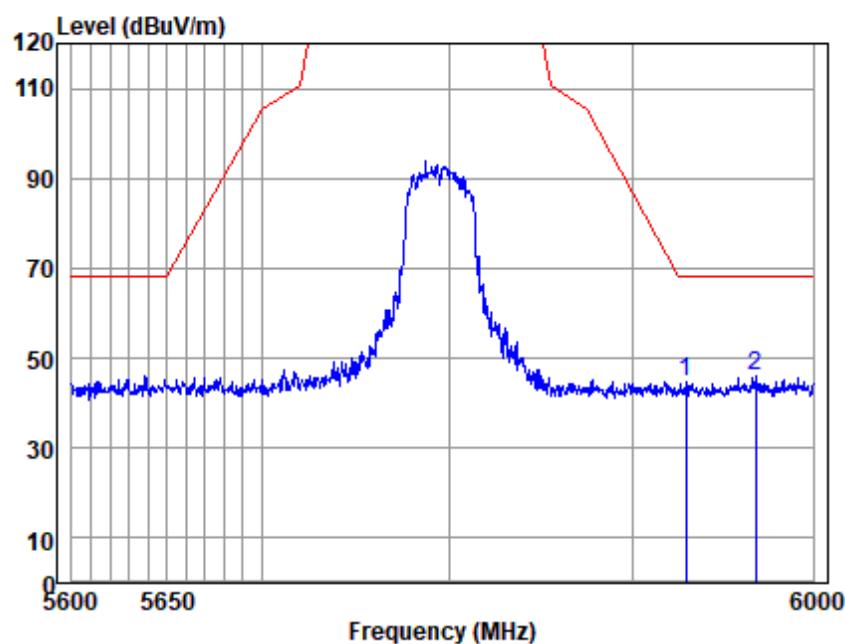


Antenna Polarity :HORIZONTAL
EUT/Project :0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Over Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5929.220	41.23	34.81	5.91	37.05	44.90	68.20	-23.30	Peak
5967.798	42.40	34.90	5.97	37.05	46.22	68.20	-21.98	Peak

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 06; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

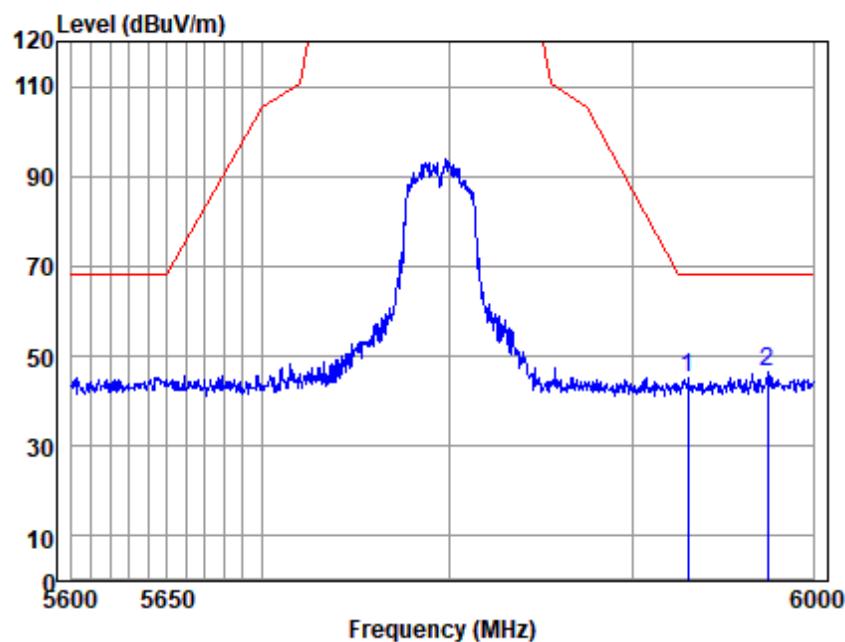

Antenna Polarity : VERTICAL
EUT/Project : 0535ME

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
5930.447	41.61	34.81	5.91	37.05	45.28	68.20	-22.92	Peak
5974.802	42.62	34.90	5.97	37.05	46.44	68.20	-21.76	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2503000535ME

8 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2503000535ME

- End of the Report -