

Measurement Report

Product.....: UPS
Applicant.....: UIS ABLER ELECTRONICS CO.,LTD.
FCC ID.....: OUAUIS-VSAL
Model.....: HOPE550 Series / VS550 Series (See Appendix II)
Report No......: MLT0009P15001
Test Date.....: September 22 .2000

Test By

Max Light Technology Co.,Ltd.

*Room 5, 8F, No.125, Section 3 Roosevelt Road,
Taipei, Taiwan., R.O.C.*

Tel: 886-2-2363-2447 Fax: 886-2-2363-2597

**The test report consists of 32 pages in total. It may be duplicated completely
for legal use with the allowance of the applicant. It shall not be reproduced
except in full, without the written approval of our laboratory.**



MAX LIGHT

MEASUREMENT REPORT

Page: 2/29

Table of Contents :

I. General	4
II. Conducted Emissions Requirements	9
III. Radiated Emissions Requirements	17
Appendix I (EUT Test Setup)	27
Appendix II (Model List)	29



MAX LIGHT

MEASUREMENT REPORT

Page: 3/29

CERTIFICATION

We here by verify that :

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4-1992. All test were conducted by MLT(Max Light Technology Co.,Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with Class B radiated and conducted emission limit of FCC Rules Part 15 Subpart B.

EUT : UPS

**Applicant : UIS ABLER ELECTRONICS CO.,LTD.
1F., No. 3, Lane 7, Paokao Rd., Hsintien 23114
Taipei Hsien, Taiwan**

**Manufacturer : UIS ABLER ELECTRONICS CO.,LTD.
1F., No. 3, Lane 7, Paokao Rd., Hsintien 23114
Taipei Hsien, Taiwan**

Model No : HOPE550 Series / VS550 Series (See Appendix II)

FCC ID : OUAUIS-VSAL

Prepared by *Country Huang* *Approved by :* *Roger Chen*
Country Huang *Roger Chen*



MAX LIGHT

MEASUREMENT REPORT

Page: 4/29

I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of **UIS ABLER ELECTRONICS CO.,LTD.** In support of a Class B Digital Device certification in accordance with Part2 Subpart J and Part 15 Subpart A And B of the Commission's and Regulations.

1.2 Description of EUT

EUT : DOCSIS Cable Modem

Applicant : **UIS ABLER ELECTRONICS CO.,LTD.**
1F., No. 3, Lane 7, Paokao Rd., Hsintien 23114
Taipei Hsien, Taiwan

Manufacturer : **UIS ABLER ELECTRONICS CO.,LTD.**
1F., No. 3, Lane 7, Paokao Rd., Hsintien 23114
Taipei Hsien, Taiwan

Model No : **HOPE550 Series / VS550 Series (See Appendix II)**

FCC ID : **OUAUIS-VSAL**

Power Type : **Powered by AC 120V 50Hz/60Hz**

RJ-45 Jack : **RJ-45 x2 (Nonshielded, Plastic hoods)**

RS-232 Jack : **9pin RS-232 Jack x1 (Nonshielded)**

During testing the EUT was operated at charge mode & run "RS-232 Commination Software" to monitor the UPS for each emission measured. This was done in order to ensure that maximum emission levels were attained.

1.2 Model Difference

1.2.1 Plastic enclosure is different.

1.2.1 Enclosure style is different.



HOPE550 Series



VS550 Series



MAX LIGHT

MEASUREMENT REPORT

Page: 6/29

1.3 Description of Support Equipment

In order to construct the minimum system which required by the ANSI C63.4-1991, following equipments were used as the support units.

Computer : IBM

Model No. : 16W

Serial No. : BNC345M

FCC ID : FCC DOC

Keyboard : IBM

Model No. : KB-9930

Serial No. : 09N5395

FCC ID : FCC DOC

Monitor : IBM

Model No. : 10L6145 030

Serial No. : 23-092079

FCC ID : FCC DOC

Mouse : IBM

Model No. : 0180-05N

Serial No. : 23-96142

FCC ID : EMJMUSJJ

Printer : PANASONIC

Model No. : KX-P1080I

Serial No. : 7CKAKE98933


FCC ID : ACJ5Z6KX-P10801

Light : N/A

Model No. : N/A

Serial No. : N/A

1.4 Configuration of System Under Test

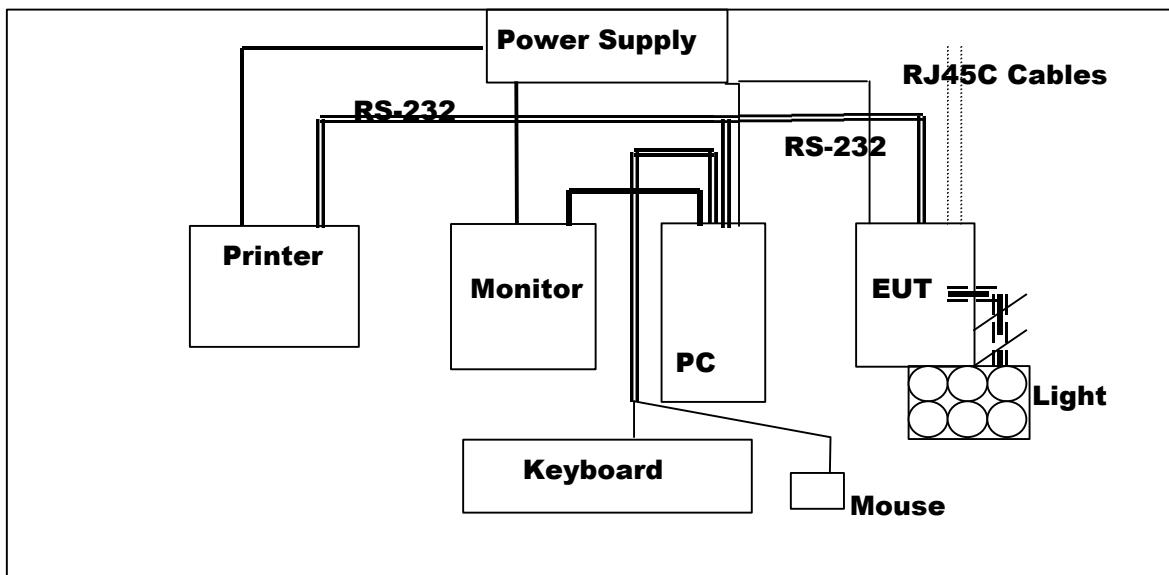

During testing the EUT(UPS) was connected to the RS-232 port of IBM PC. So there is no need for additional I/O card. A mouse was connected to the mouse port and a printer was connected to the parallel port. A Light(370W load) connected the AC output of EUT. The other AC output were connected to unterminated AC power cables. The two RJ-45 Jack of EUT were connected to two unterminated RJ-45 cables.

1.5 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI C63.4-1992 "Measurement of unintentional Radiators."



MAX LIGHT

MEASUREMENT REPORT

Page: 8/29

1.6 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use, were investigated. The system's radiated and conducted emissions were investigated.

II. Conducted Emissions Requirements

2.1 General & Setup :

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 450 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.6.

2.2 Test Equipment List:


- A. EMCO 3825/2 LISN (S/N:2654)**
- B. EMCO 3825/2 LISN (S/N:2658)**
- C. HP 8591EM 9KHZ-1.8GHz Spectrum Analyzer (S/N:73412A00110)**
- D. Shielded Room (MLT-SR1)**

2.3 Test Configuration:

2.3.1 Test Configuration(HOPE550 Series):



**Front View of The Test Configuration
(HOPE550 Series)**

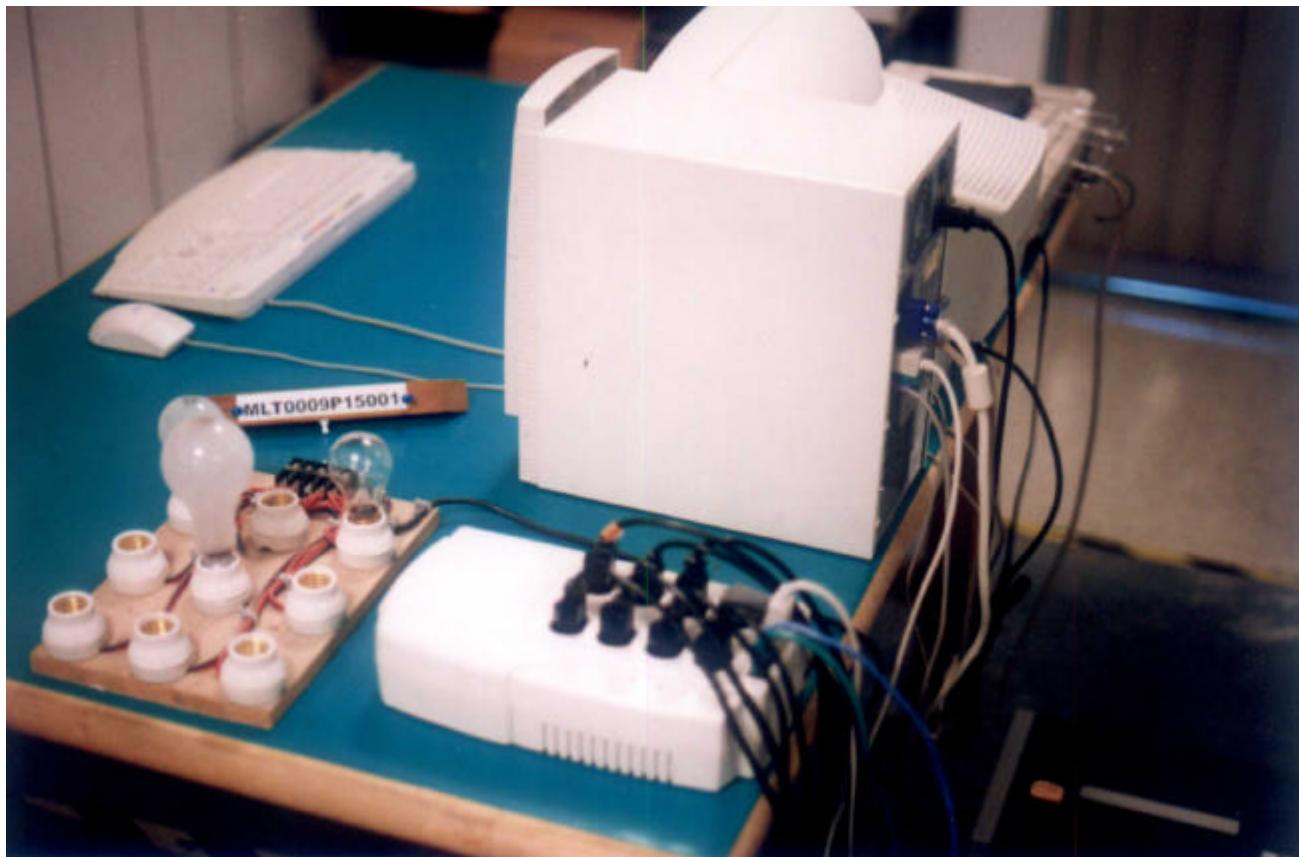


**Rear View of The Test Configuration
(HOPE550 Series)**

2.3.2 Test Configuration(VS550 Series):



**Front View of The Test Configuration
(VS550 Series)**

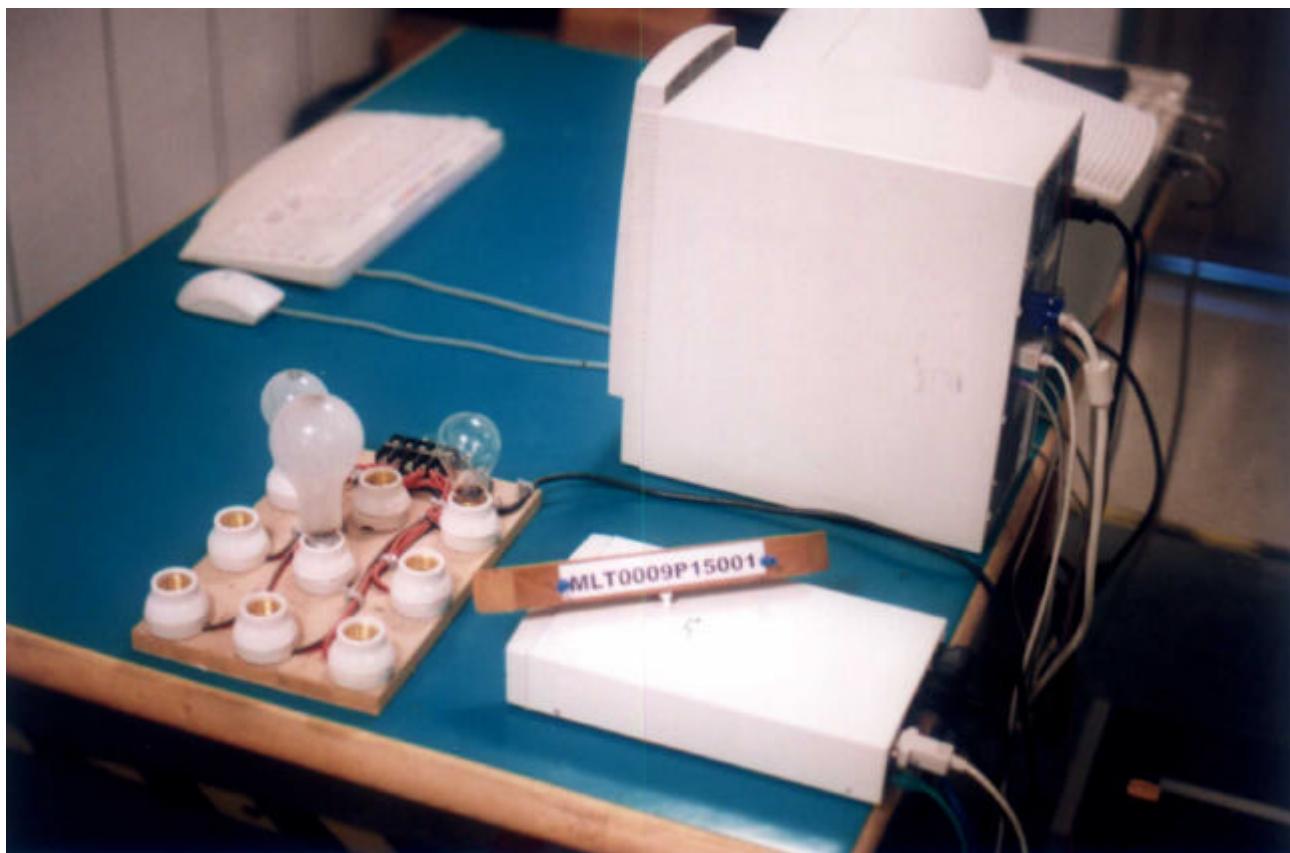

**Rear View of The Test Configuration
(VS550 Series)**

2.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

2.5 Conducted Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Limits (dBuV)</i>
0.45 to 30	47.9

2.6 Measurement Data Of Conducted Emissions:

2.6.1 Measurement Data(HOPE550 Series):

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Manufacturer : *UIS ABLER ELECTRONICS CO.,LTD..*

Model No : *HOPE550 Series (See Appendix II)*

EUT : *UPS*

Power Line Conducted Emissions (Class B)			
Conductor	Frequency (MHz)	Peak Amplitude (dBuV)	Limits (dBuV)
L1	0.45	34.31	47.9
	1.45	33.27	47.9
	1.87	34.75	47.9
	3.50	33.99	47.9
	21.81	36.42	47.9
	24.56	33.33	47.9
	28.63	35.03	47.9
L2	0.45	34.06	47.9
	1.92	38.03	47.9
	3.47	34.78	47.9
	21.55	35.74	47.9
	27.06	32.96	47.9
	28.63	33.66	47.9
	29.38	33.51	47.9

Notes :

- 1. L1: One end & Ground L2: The other end & Ground**
- 2. Height of table on which the EUT was placed : 0.8 m.**
- 3. The above test results are obtained under the normal condition.**

2.6.2 Measurement Data(VS550 Series):

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Manufacturer : *UIS ABLER ELECTRONICS CO.,LTD..*

Model No : *VS550 Series (See Appendix II)*

EUT : *UPS*

Power Line Conducted Emissions (Class B)			
Conductor	Frequency (MHz)	Peak Amplitude (dBuV)	Limits (dBuV)
L1	0.45	32.43	47.9
	1.53	33.15	47.9
	1.88	34.64	47.9
	3.50	33.21	47.9
	17.42	33.64	47.9
	21.81	34.57	47.9
	28.16	34.58	47.9
L2	0.45	34.21	47.9
	1.54	35.42	47.9
	2.78	34.59	47.9
	16.99	35.83	47.9
	21.06	34.22	47.9
	28.63	34.92	47.9
	29.41	32.09	47.9

Notes : **1. L1: One end & Ground L2: The other end & Ground**
2. Height of table on which the EUT was placed : 0.8 m.
3. The above test results are obtained under the normal condition.

III. Radiated Emissions Requirements

3.1 General & Setup :

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591EM Spectrum Analyzer, EMCO Biconical Antenna (Model 3142) for 30-1000MHz. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz, and the analyzer was operated in the quasi-peak detection mode. The highest emission amplitudes relative to the appropriate limit were measured and recorded in paragraph 3.6.

3.2 Test Equipment List:

- A. HP 8591EM 9KHz-1.8GHz Spectrum Analyzer (S/N:73412A00230)**
- B. HP 8447D Pre Amplifier (S/N:2944A08954)**
- C. EMCO 3142 Biconilog Antenna (S/N:1184)**
- D. HP 8590A 10KHz-1.5GHz Spectrum Analyzer (S/N:5212A000211)**

3.3 Test Configuration:

3.3.1 Test Configuration(HOPE550 Series):



**Front View of The Test Configuration
(HOPE550 Series)**



**Rear View of The Test Configuration
(HOPE550 Series)**

3.3.2 Test Configuration(VS550 Series):



**Front View of The Test Configuration
(VS550 Series)**



**Rear View of The Test Configuration
(VS550 Series)**

3.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

3.5 Radiated Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Peak(dBuV)</i>
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

3.6 Measurement Data Of Radiated Emissions:

3.6.1 Open Field Radiated Emissions (HORIZONTAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Manufacturer : UIS ABLER ELECTRONICS CO.,LTD.

Model No : HOPE550 Series (See Appendix II)

EUT : UPS

Radiated Emissions (HORIZONTAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
56.78	31.76	1	180	40	-8.24
76.54	30.04	1.5	270	40	-9.96
89.59	34.97	1	300	43.5	-8.53
119.63	33.26	2	360	43.5	-10.24
134.74	34.53	2.5	150	43.5	-8.97
173.11	34.72	1.5	300	43.5	-8.78
200.74	32.56	1	360	43.5	-10.94
265.18	32.73	2	210	46	-13.27
299.56	35.19	1.5	270	46	-10.81
355.43	36.57	2	300	46	-9.43
420.39	37.42	1.5	270	46	-8.58

Notes : 1. Margin= Amplitude - Limits

2. Distance of Measurement : 3 Meter (30-1000MHz)

3. Height of table for EUT placed: 0.8 Meter.

4. ANT= Antenna height.

**5. Amplitude= Reading Amplitude Amplifier gain+Cable loss
+Antenna factor**

(Auto calculate in spectrum analyzer)



MAX LIGHT

MEASUREMENT REPORT

Page: 24/29

3.6.2 Open Field Radiated Emissions (VERTICAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Manufacturer : UIS ABLER ELECTRONICS CO., LTD..

Model No : HOPE550 Series (See Appendix II)

EUT : UPS

Radiated Emissions (VERTICAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
56.78	33.76	1	300	40	-6.24
76.54	32.76	1.5	360	40	-7.24
89.59	36.78	2	90	43.5	-6.72
119.63	33.05	1.5	270	43.5	-10.45
134.74	35.47	2	300	43.5	-8.03
173.11	32.67	1.5	200	43.5	-10.83
200.74	30.46	1	350	43.5	-13.04
265.18	31.78	1.5	360	46	-14.22
299.56	34.52	1	40	46	-11.48
355.43	36.01	2	180	46	-9.99
420.39	36.87	1	90	46	-9.13

Notes : 1. **Margin= Amplitude - Limits**

2. Distance of Measurement : 3 Meter (30-1000MHz)

3. Height of table for EUT placed: 0.8 Meter.

4. ANT= Antenna height.

**5. Amplitude = Reading Amplitude \times Amplifier gain + Cable loss
+ Antenna factor**

(Auto calculate in spectrum analyzer)

3.6.3 Open Field Radiated Emissions (HORIZONTAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Manufacturer : *UIS ABLER ELECTRONICS CO.,LTD.*

Model No : *VS550 Series (See Appendix II)*

EUT : *UPS*

Radiated Emissions (HORIZONTAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
56.72	30.12	1.5	270	40	-9.88
73.65	31.28	1	360	40	-8.72
89.58	34.76	1.5	360	43.5	-8.74
120.11	33.29	1	300	43.5	-10.21
134.75	31.03	2	170	43.5	-12.47
172.79	31.98	1.5	260	43.5	-11.52
213.89	32.57	2.5	200	43.5	-10.93
265.78	33.06	2	190	46	-12.94
300.09	34.93	1.5	360	46	-11.07
354.92	32.68	1.5	300	46	-13.32
389.76	31.87	2	120	46	-14.13

Notes : 1. Margin= Amplitude - Limits

2. Distance of Measurement : 3 Meter (30-1000MHz)

3. Height of table for EUT placed: 0.8 Meter.

4. ANT= Antenna height.

5. Amplitude= Reading Amplitude Amplifier gain+Cable loss
+Antenna factor

(Auto calculate in spectrum analyzer)

3.6.4 Open Field Radiated Emissions (VERTICAL)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Manufacturer : *UIS ABLER ELECTRONICS CO.,LTD..*

Model No : *VS550 Series (See Appendix II)*


EUT : *DOCSIS Cable Modem*

Radiated Emissions (VERTICAL)					
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Limits(Class B) (dBuV/m)	Margin (dB)
56.72	32.87	1	300	40	-7.13
73.65	30.56	1.5	180	40	-9.44
89.58	35.87	1	360	43.5	-7.63
120.11	32.12	1	200	43.5	-11.38
134.75	34.98	2	360	43.5	-8.52
172.79	31.11	1.5	270	43.5	-12.39
213.89	32.67	2	360	43.5	-10.83
265.78	31.76	1.5	180	46	-14.24
300.09	34.51	1	270	46	-11.49
354.92	34.42	1.5	280	46	-11.58
389.76	31.28	2	210	46	-14.72

Notes : 1. **Margin= Amplitude - Limits**
 2. **Distance of Measurement : 3 Meter (30-1000MHz)**
 3. **Height of table for EUT placed: 0.8 Meter.**
 4. **ANT= Antenna height.**
 5. **Amplitude= Reading Amplitude Amplifier gain+Cable loss +Antenna factor**
(Auto calculate in spectrum analyzer)


Appendix I- EUT Test SETUP

MEASUREMENT OF POWER LINE CONDUCTED RFI VOLTAGE

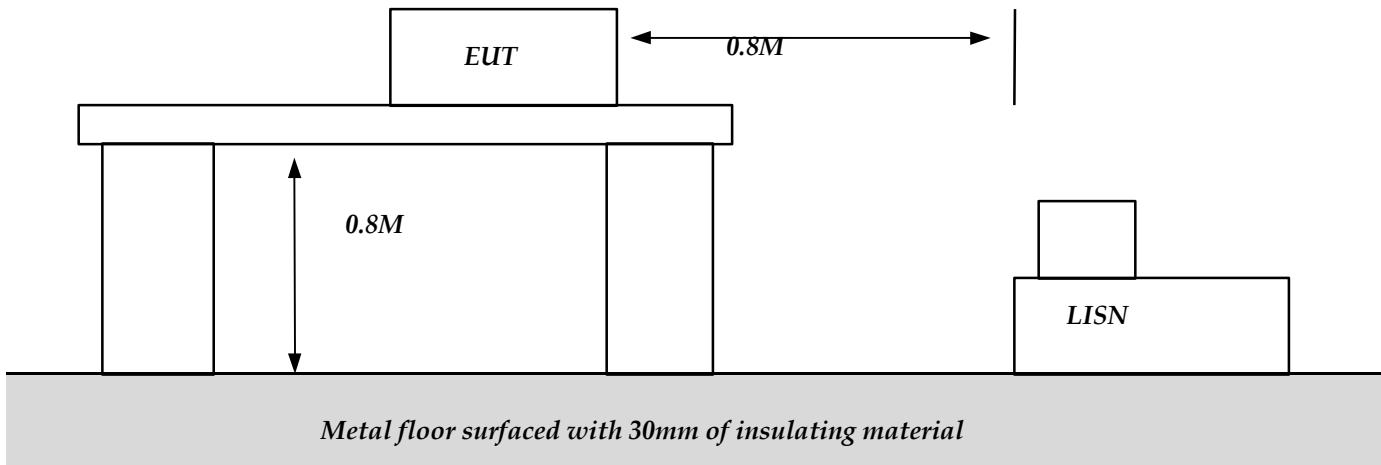

Appendix I- EUT Test SETUP

MEASUREMENT OF RADIATED EMISSION

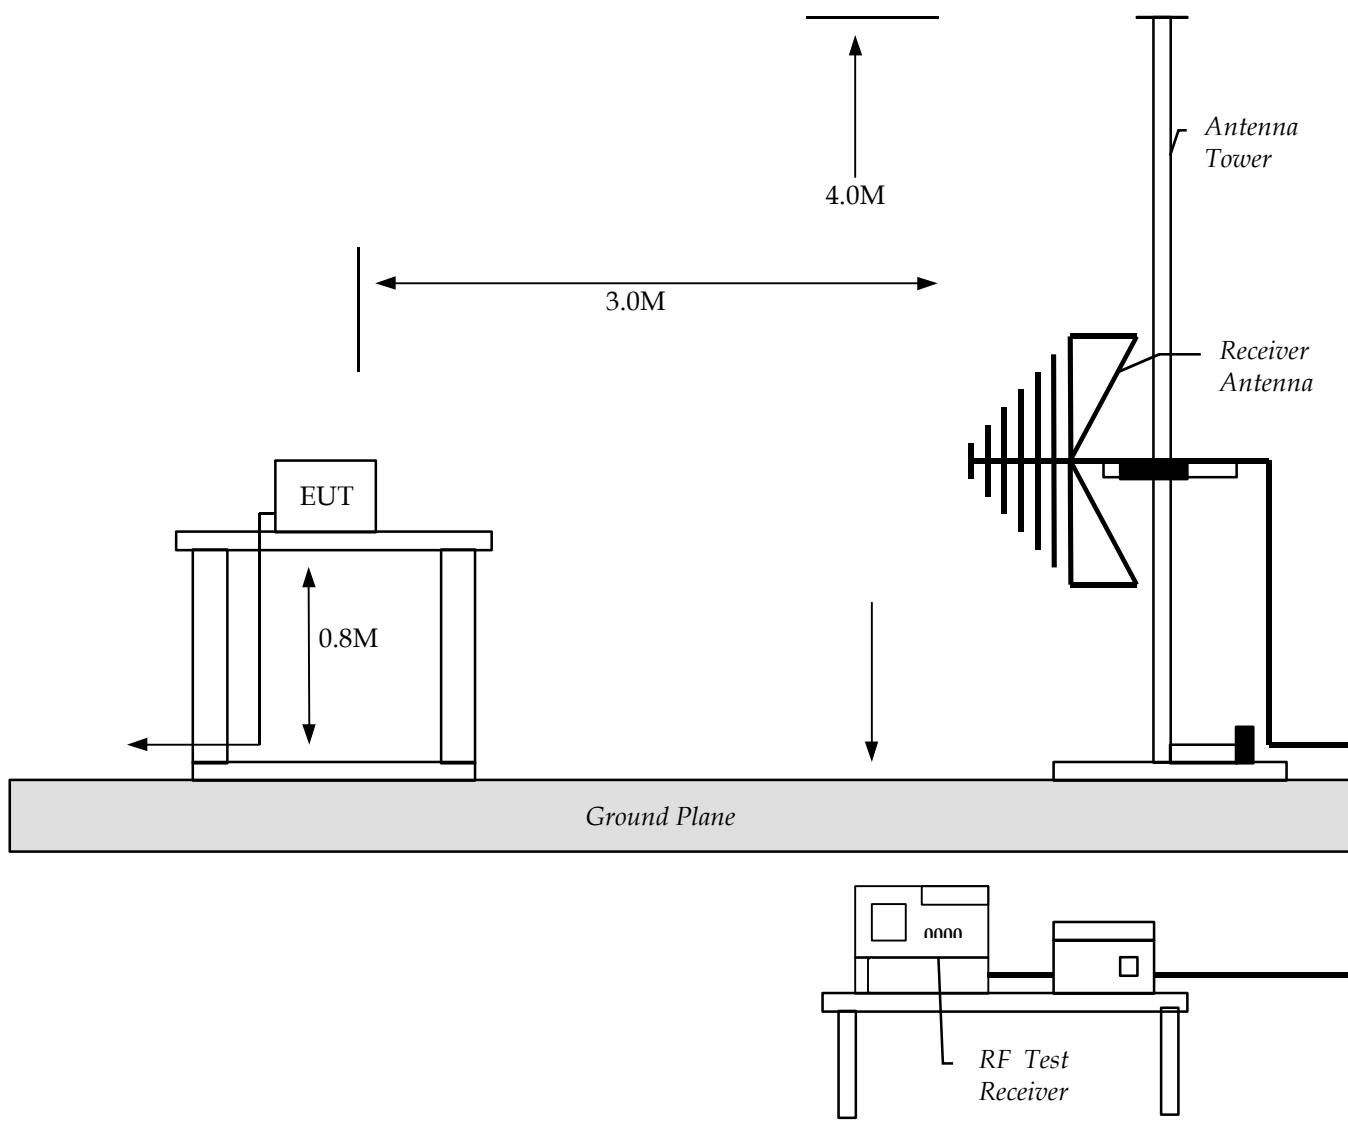



MAX LIGHT

MEASUREMENT REPORT

Page: 29/29

Appendix II- Model List

HOPE550 Series

Trade Name	Model No.
UIS	HOPE550

VS550 Series

Trade Name	Model No.
UIS	VS350 / VS350A / VSX350 / VSX350A VS550 / VS550A / VSX550 / VSX550A