


# ENGINEERING TEST REPORT



**XBee-PRO**  
**Model No.: XBP24**

**FCC ID: OUR-XBEEPRO**

*Applicant:*

**MaxStream, Inc.**  
355 South 520 West Suite 180  
Lindon, UT 84058

*In Accordance With*

**Federal Communications Commission (FCC)**  
**Part 15, Subpart C, Section 15.247**  
**Digital Modulation Systems (DTS) Operating in 2400 – 2483.5 MHz Band**

**UltraTech's File No.: DIGI-042F15C247C2PC**

This Test report is Issued under the Authority of  
Tri M. Luu, BASc  
Vice President of Engineering  
UltraTech Group of Labs

Date: May 16, 2011

Report Prepared by: Dan Huynh

Tested by: Mr. Hung Trinh

Issued Date: May 16, 2011

Test Dates: April 4 & 25, 2011

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)

FCC



91038

1309



46390-2049



NvLap Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL  
CA2049

## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION.....</b>	<b>1</b>
1.1. SCOPE .....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S) .....	1
1.3. NORMATIVE REFERENCES .....	1
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT.....</b>	<b>2</b>
2.1. CLIENT INFORMATION .....	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS.....	3
2.4. ASSOCIATED ANTENNA DESCRIPTION .....	3
2.5. LIST OF EUT'S PORTS.....	4
2.6. ANCILLARY EQUIPMENT .....	4
<b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....</b>	<b>5</b>
3.1. CLIMATE TEST CONDITIONS.....	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS.....	5
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
4.1. LOCATION OF TESTS .....	6
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	6
<b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>	<b>7</b>
5.1. TEST PROCEDURES.....	7
5.2. MEASUREMENT UNCERTAINTIES .....	7
5.3. MEASUREMENT EQUIPMENT USED .....	7
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER .....	7
5.5. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)] .....	8
5.6. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205] .....	12
<b>EXHIBIT 6. TEST EQUIPMENT LIST.....</b>	<b>19</b>
<b>EXHIBIT 7. MEASUREMENT UNCERTAINTY.....</b>	<b>20</b>
7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	20
7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	20

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	FCC Part 15, Subpart C, Section 15.247
<b>Title:</b>	Code of Federal Regulations (CFR), Title 47 – Telecommunication, Part 15
<b>Purpose of Test:</b>	Class II Permissive Change application for equipment certification of Digital Modulation Systems (DTS) Transmitter Operating in the Frequency Band 2400-2483.5 MHz.
<b>Test Procedures:</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Environmental Classification:</b>	<input checked="" type="checkbox"/> Commercial, industrial or business environment <input checked="" type="checkbox"/> Residential environment

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

### 1.3. NORMATIVE REFERENCES

Publication	Year	Title
47 CFR Parts 0-19	2010	Code of Federal Regulations (CFR), Title 47 – Telecommunication
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
CISPR 22 & EN 55022	2008-09, Edition 6.0 2006	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances
47 CFR Parts 0-19	2010	Code of Federal Regulations (CFR), Title 47 – Telecommunication
FCC Public Notice DA 00-1407	2000	Part 15 Unlicensed Modular Transmitter Approval

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	MaxStream, Inc.
<b>Address:</b>	355 South 520 West Suite 180 Lindon, UT 84058 USA
<b>Contact Person:</b>	Mr. Paul Dahl Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: Paul.dahl@digi.com

MANUFACTURER	
<b>Name:</b>	Digi International Inc.
<b>Address:</b>	11001 Bren Road East Minnetonka, MN 55343 USA
<b>Contact Person:</b>	Mr. Paul Dahl Phone #: 801-765-9885 Fax #: 801-765-9895 Email Address: Paul.dahl@digi.com

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name:</b>	MaxStream, Inc.
<b>Product Name:</b>	XBee-PRO
<b>Model Name or Number:</b>	XBP24
<b>Serial Number:</b>	Test Sample
<b>Type of Equipment:</b>	Digital Modulation Transmitter
<b>Input Power Supply Type:</b>	2.8 Vdc – 3.4 Vdc Hewlett Packard DC Power Supply Model: E3615A S/N: KR61303416
<b>Primary User Functions of EUT:</b>	Wireless modem

### 2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
<b>Equipment Type:</b>	<ul style="list-style-type: none"><li>• Mobile</li><li>• Base Station (fixed use)</li></ul>
<b>Intended Operating Environment:</b>	<ul style="list-style-type: none"><li>• Commercial, industrial or business</li><li>• Residential</li></ul>
<b>Power Supply Requirement:</b>	2.8 – 3.4 Vdc
<b>RF Output Power Rating:</b>	From 10 mW (10 dBm) to 86 mW (19 dBm)
<b>Operating Frequency Range:</b>	2410 - 2470 MHz
<b>RF Output Impedance:</b>	50 Ohm
<b>Channel Spacing:</b>	5 MHz
<b>Duty Cycle:</b>	100%
<b>6 dB bandwidth:</b>	1.60 MHz
<b>Modulation Type:</b>	QPSK
<b>Oscillator Frequencies:</b>	16 MHz
<b>Antenna Connector Type:</b>	<ul style="list-style-type: none"><li>• Integral</li><li>• Unique connector (IPX or U.FL)</li></ul>

### 2.4. ASSOCIATED ANTENNA DESCRIPTION

1. Salient 2.4 GHz RSM Waveguide Antenna (Max. Antenna Gain: 7.1 dBi)

## 2.5. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	RF IN/OUT Port	1	U.FL or IPX	Shielded
2	DC Supply & I/O Port	1	Pin Header	No cable, direct connection

## 2.6. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Test Jig Cable
Brand name:	MaxStream
Model Name or Number:	N/A
Serial Number:	N/A
Connected to EUT's Port:	Module pin signals

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	2.8 – 3.4 Vdc

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

<b>Operating Modes:</b>	Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements.
<b>Special Test Software:</b>	Special software and hardware by the Applicant to operate the EUT at each channel frequency continuously. For example, the transmitter will be operated at each of the lowest, middle and highest frequencies individually continuously during testing.
<b>Special Hardware Used:</b>	The RF Module could be tested outside of the enclosure using Maxtream Test Jig Board connected to EUT.
<b>Transmitter Test Antenna:</b>	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral / non-integral antenna equipment as described with the test results.

<b>Transmitter Test Signals</b>	
<b>Frequency Band(s):</b>	2410 - 2470 MHz
<b>Frequency(ies) Tested:</b> (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	<ul style="list-style-type: none"><li>• 2410 MHz</li><li>• 2440 MHz</li><li>• 2465 MHz</li></ul>
<b>RF Power Output:</b> (measured maximum output power at antenna terminals)	0.087 watts (19.40 dBm)
<b>Normal Test Modulation:</b>	QPSK
<b>Modulating Signal Source:</b>	Internal

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).
- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2014-04-04.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Compliance (Yes/No)
15.203	Antenna requirements	See Note 1
15.207(a)	AC Power Line Conducted Emissions	See Note 2
15.247(a)(2)	6 dB Bandwidth	See Note 2
15.247(b)(3)	Peak Conducted Output Power - DTS	Yes
15.247(d)	Band-Edge and RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	See Note 2
15.247(d), 15.209 & 15.205	Transmitter Spurious Radiated Emissions	Yes
15.247(e)	Power Spectral Density	See Note 2
15.247(i)	RF Exposure	See Note 2

Note 1: The EUT complies with the requirement, it employs a unique (non-standard) antenna connector (IPX or U.FL), for all external antennas proposed for use with the EUT.

Note 2: Refer to original filing.

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

---

## EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

### 5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.10; FCC KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems.

### 5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

### 5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

### 5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

Wireless modem.

## 5.5. PEAK CONDUCTED OUTPUT POWER - DTS [§ 15.247(b)(3)]

### 5.5.1. Limit(s)


**§ 15.247(b)(3):** For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

**§15.247(b)(4):** The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.5.2. Method of Measurements & Test Arrangement

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247) and ANSI C63.10.

#### 5.5.2.1. Test Arrangement

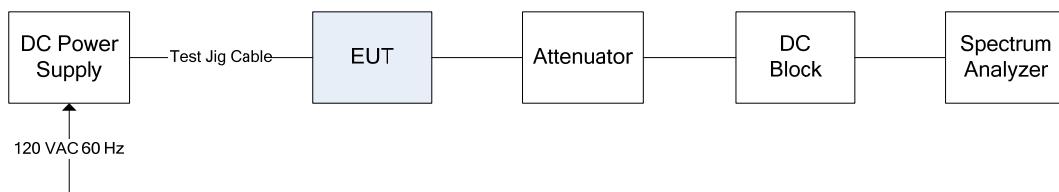


### 5.5.3. Test Data


Frequency (MHz)	Peak Conducted Power (dBm)	Peak EIRP* (dBm)	Peak Conducted Power Limit (dBm)	EIRP Limit (dBm)
2410	19.18	26.28	30	36
2440	18.92	26.02	30	36
2465	19.40	26.50	30	36

\* Peak EIRP calculation assumed no cable loss for worst -case, Peak EIRP is Peak Conducted Power + Maximum Antenna Gain in dBi. The maximum Peak EIRP is 19.40 dBm + 7.1 dBi = 26.50 dBm.


**Plot 5.5.3.1. Peak Conducted Output Power**  
Test Frequency: 2410 MHz

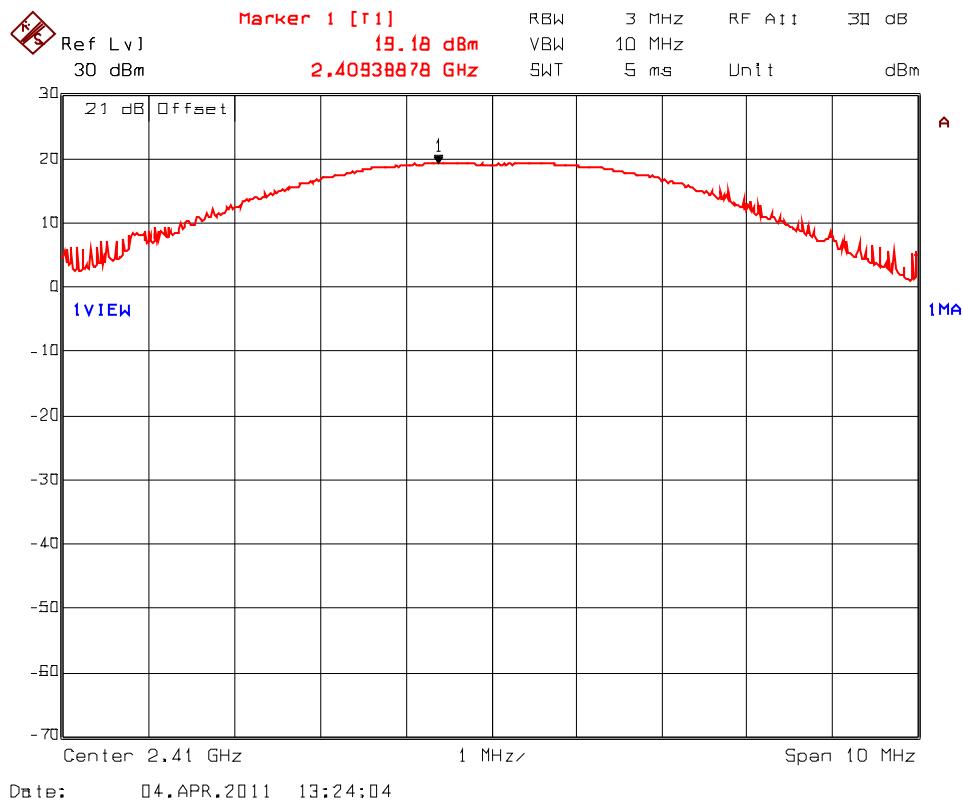

**Plot 5.5.3.2. Peak Conducted Output Power**  
Test Frequency: 2440 MHz

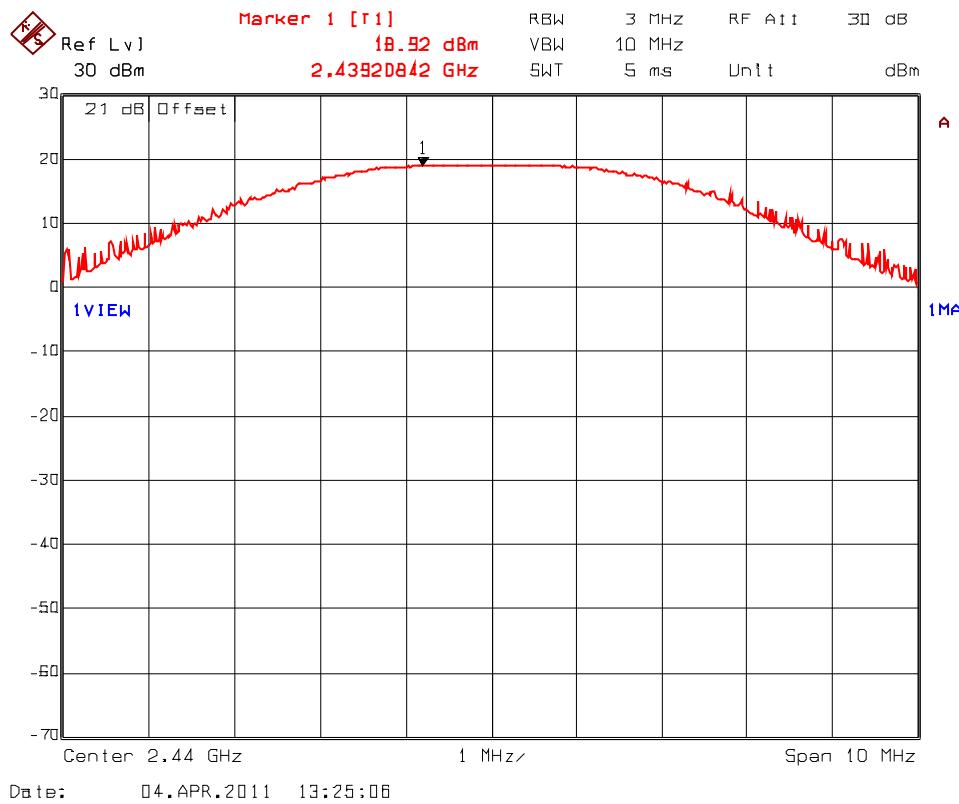

**Plot 5.5.3.3. Peak Conducted Output Power**  
Test Frequency: 2465 MHz

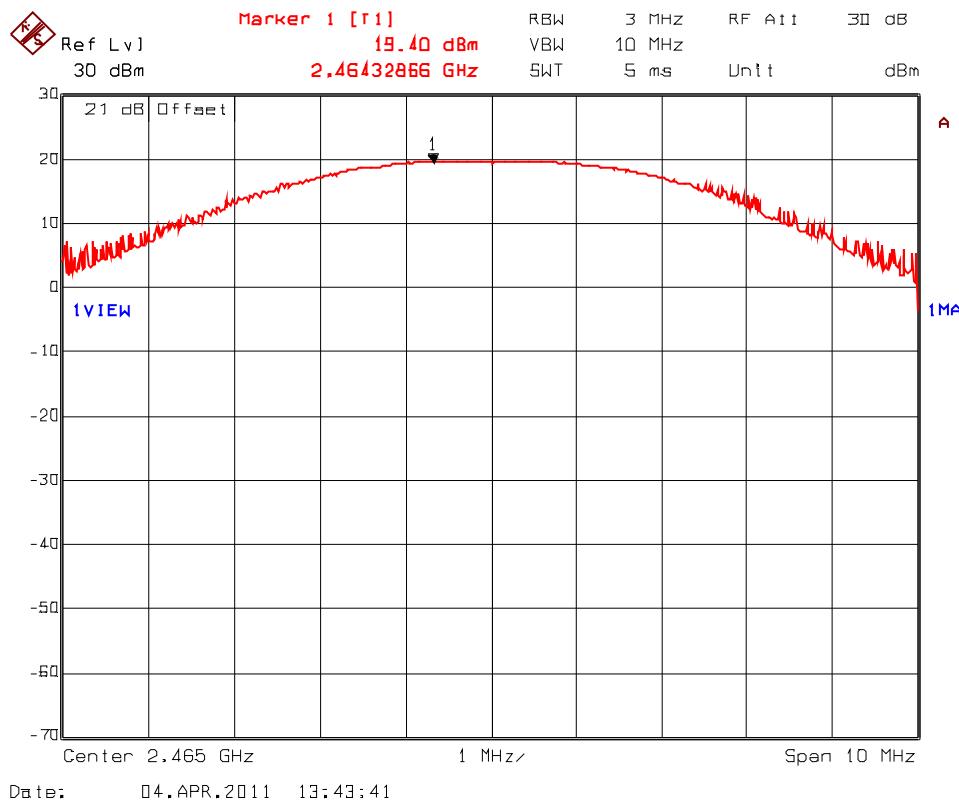

## 5.6. TRANSMITTER SPURIOUS RADIATED EMISSIONS AT 3 METERS [§§ 15.247(d), 15.209 & 15.205]

### 5.6.1. Limit(s)

**§ 15.247 (d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Section 15.205(a) - Restricted Bands of Operation

MHz	MHz	MHz	GHz
0.090–0.110 .....	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505 .....	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905 .....	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128 .....	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775 .....	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775 .....	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218 .....	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825 .....	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225 .....	123–138	2200–2300	14.47–14.5
8.291–8.294 .....	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366 .....	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675 .....	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475 .....	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293 .....	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025 .....	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725 .....	322–335.4	3600–4400	( <sup>2</sup> )
13.36–13.41.			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

<sup>2</sup> Above 38.6


### Section 15.209(a) -- Field Strength Limits within Restricted Frequency Bands --

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 5.6.2. Method of Measurements

KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247) and ANSI C63.10.

### 5.6.3. Test Arrangement

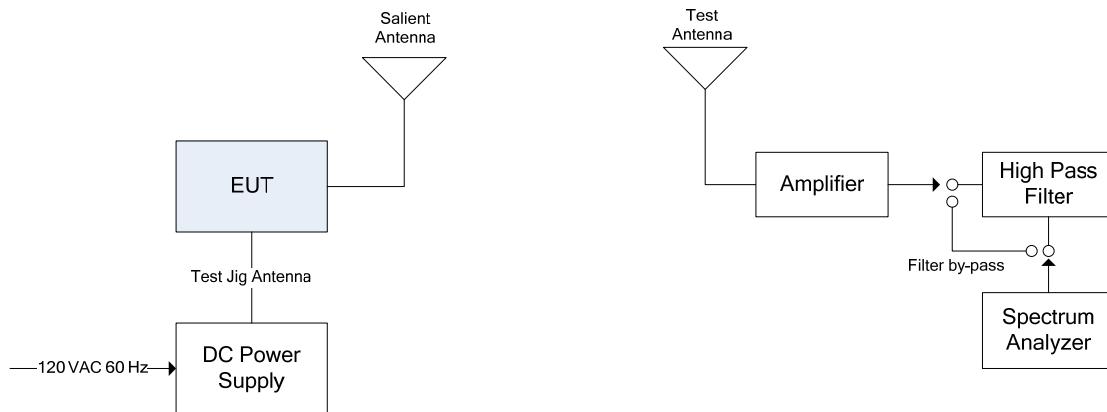

### 5.6.4. Test Data

#### Remarks:

- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT shall be tested in three orthogonal positions.
- The following test results are the worst-case measurements.

Fundamental Frequency: 2410 MHz							
Test Frequency Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
2410	117.36	--	V	--	--	--	--
2410	116.11	--	H	--	--	--	--
4820	52.15	35.35	V	54.0	97.4	-18.7	Pass*
4820	51.33	34.70	H	54.0	97.4	-19.3	Pass*

\*Field strength of emissions appearing within restricted frequency bands shall not exceed the limits in § 15.209.

Fundamental Frequency: 2440 MHz Test Frequency Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
2440	118.45	--	V	--	--	--	--
2440	116.87	--	H	--	--	--	--
4880	53.21	35.90	V	54.0	98.5	-18.1	Pass*
4880	52.23	34.14	H	54.0	98.5	-19.9	Pass*
7320	59.59	40.88	V	54.0	98.5	-13.1	Pass*
7320	56.12	39.76	H	54.0	98.5	-14.2	Pass*


\*Field strength of emissions appearing within restricted frequency bands shall not exceed the limits in § 15.209.

Fundamental Frequency: 2465 MHz Test Frequency Range: 30 MHz – 25 GHz							
Frequency (MHz)	RF Peak Level (dB $\mu$ V/m)	RF Avg Level (dB $\mu$ V/m)	Antenna Plane (H/V)	Limit 15.209 (dB $\mu$ V/m)	Limit 15.247 (dB $\mu$ V/m)	Margin (dB)	Pass/Fail
2465	119.26	--	V	--	--	--	--
2465	117.13	--	H	--	--	--	--
4930	54.76	36.58	V	54.0	99.3	-17.4	Pass*
4930	54.11	36.52	H	54.0	99.3	-17.5	Pass*
7395	61.28	42.38	V	54.0	99.3	-11.6	Pass*
7395	55.12	39.86	H	54.0	99.3	-14.1	Pass*


\*Field strength of emissions appearing within restricted frequency bands shall not exceed the limits in § 15.209.

See the following test data plots for band-edge emissions.

**Plot 5.6.4.1.** Band-Edge RF Radiated Emissions @ 3 m  
Low End of Frequency Band  
Rx Antenna Orientation: Horizontal

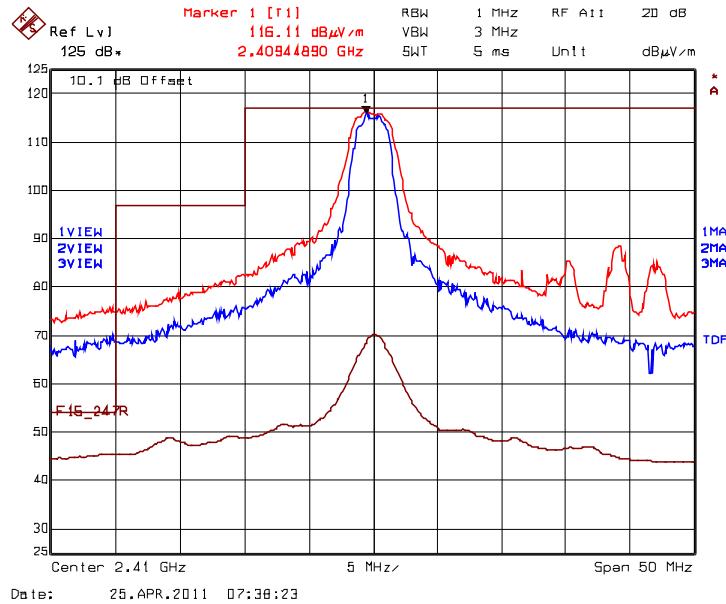

**Plot 5.6.4.2.** Band-Edge RF Radiated Emissions @ 3 m  
Low End of Frequency Band  
Rx Antenna Orientation: Horizontal

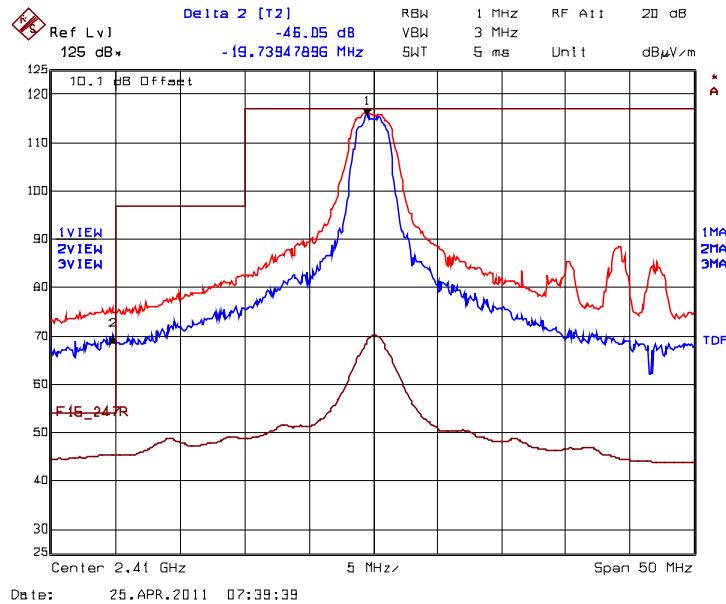


Trace 1: RBW = 1 MHz, VBW = 3 MHz

Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 46.05 dB


Trace 3: RBW = 1 MHz, VBW = 10 Hz

Peak Band-Edge at 2390 MHz: Peak = 116.11 dB $\mu$ V/m – 46.05 dB = 70.06 dB $\mu$ V/m (limit 74 dB $\mu$ V/m)

**Plot 5.6.4.3. Band-Edge RF Radiated Emissions @ 3 m**  
**Low End of Frequency Band**  
**Rx Antenna Orientation: Vertical**

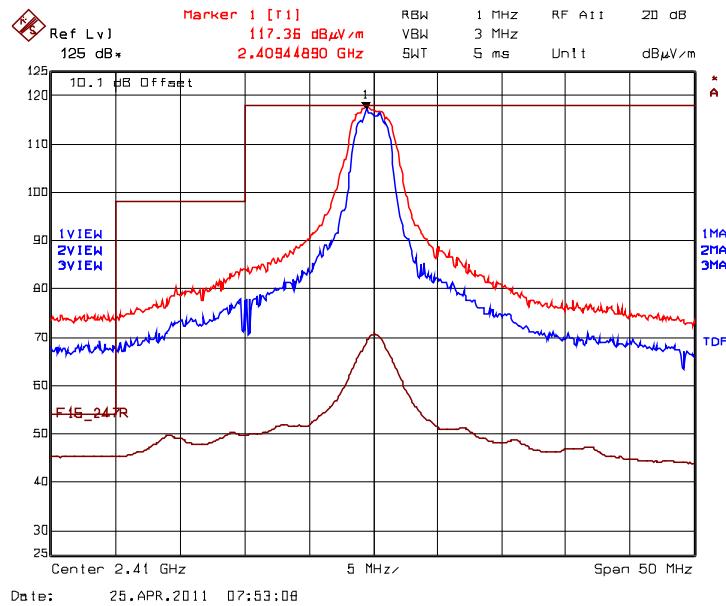

**Plot 5.6.4.4. Band-Edge RF Radiated Emissions @ 3 m**  
**Low End of Frequency Band**  
**Rx Antenna Orientation: Vertical**

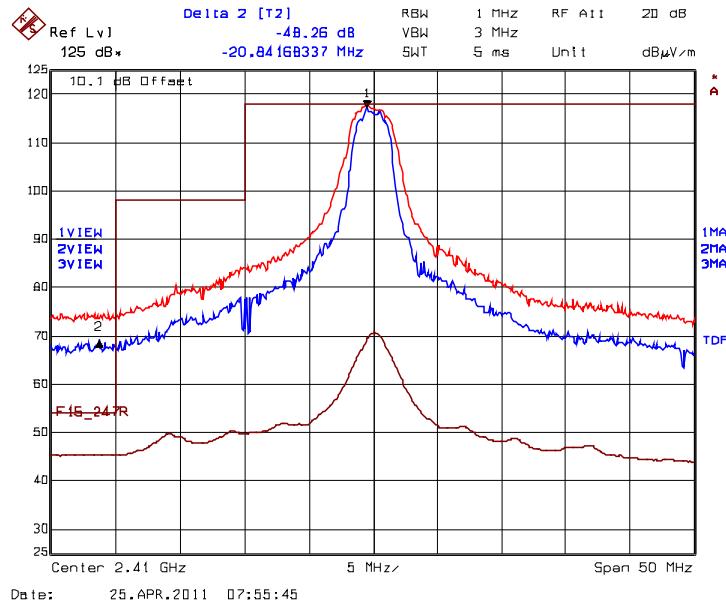


Trace 1: RBW = 1 MHz, VBW = 3 MHz

Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 48.26 dB


Trace 3: RBW = 1 MHz, VBW = 10 Hz

Peak Band-Edge at 2390 MHz: Peak = 117.36 dB $\mu$ V/m – 48.26 dB = 69.10 dB $\mu$ V/m (limit 74 dB $\mu$ V/m)

**Plot 5.6.4.5. Band-Edge RF Radiated Emissions @ 3 m**  
**High End of Frequency Band**  
**Rx Antenna Orientation: Horizontal**

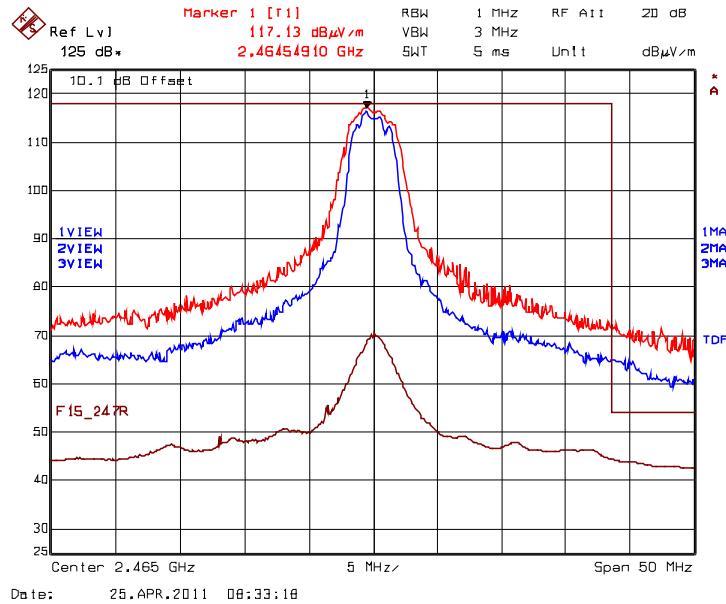

**Plot 5.6.4.6. Band-Edge RF Radiated Emissions @ 3 m**  
**High End of Frequency Band**  
**Rx Antenna Orientation: Horizontal**

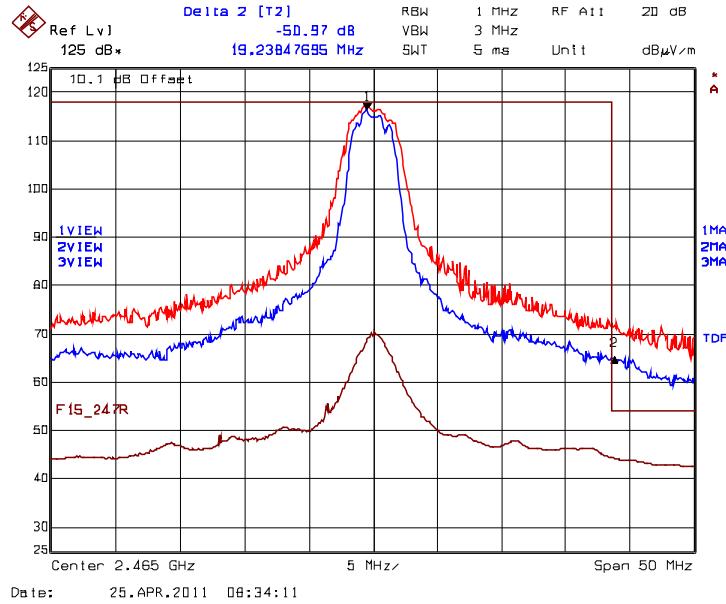


Trace 1: RBW = 1 MHz, VBW = 3 MHz

Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 50.97 dB


Trace 3: RBW = 1 MHz, VBW = 10 Hz

Peak Band-Edge at 2483.5 MHz: Peak = 117.13 dB $\mu$ V/m – 50.97dB = 66.16 dB $\mu$ V/m (limit 74 dB $\mu$ V/m)

**Plot 5.6.4.7. Band-Edge RF Radiated Emissions @ 3 m**  
**High End of Frequency Band**  
**Rx Antenna Orientation: Vertical**

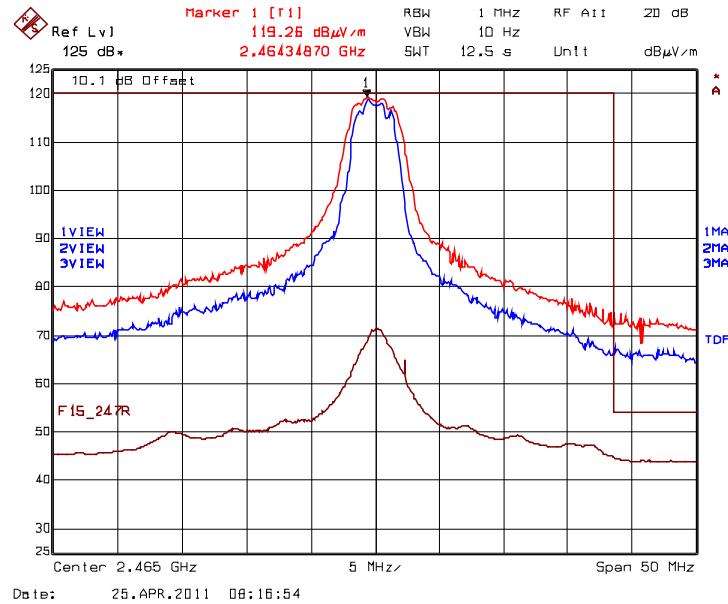

**Plot 5.6.4.8. Band-Edge RF Radiated Emissions @ 3 m**  
**High End of Frequency Band**  
**Rx Antenna Orientation: Vertical**

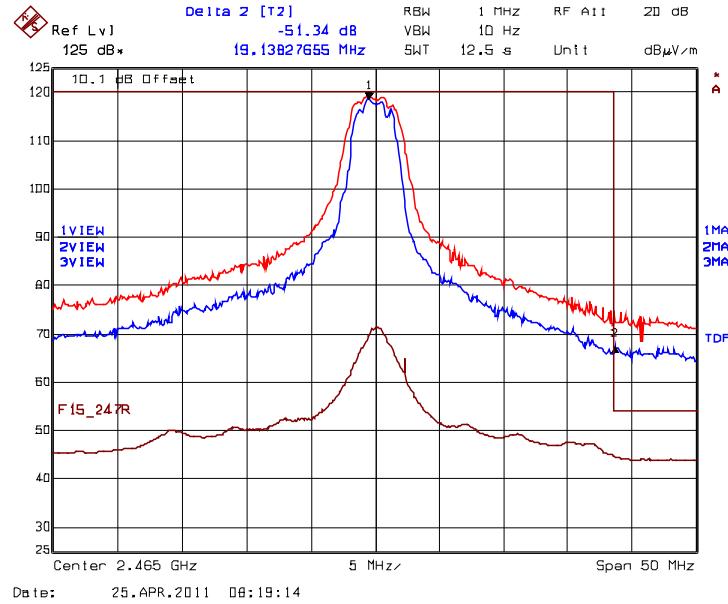

Trace 1: RBW = 1 MHz, VBW = 3 MHz

Trace 2: RBW = 500 kHz, VBW = 1 MHz, Delta (Peak to Band-Edge): 51.34 dB

Trace 3: RBW = 1 MHz, VBW = 10 Hz

Peak Band-Edge at 2483.5 MHz: Peak = 119.26 dB $\mu$ V/m – 51.34 dB = 67.92 dB $\mu$ V/m (limit 74 dB $\mu$ V/m)

**EXHIBIT 6. TEST EQUIPMENT LIST**

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20 Hz – 40 GHz	14 Aug 2011
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz	15 Mar 2012
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	17 Feb 2012
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	15 Mar 2012
High Pass Filter	K & L	11SH10-4000/T12000	4	Cut off 2.4 GHz	Cal. on use
Horn Antenna	Emco	3155	6570	1 – 18 GHz	22 Feb 2012
Biconi-Log Antenna	Emco	3142C	00034792	26 – 3000 MHz	26 April 2012
Dipole Antenna	Emco	3121C	434	26 – 1000 MHz	16 Aug 2011
Signal Generator	Hewlett Packard	8648C	3443U00391	100 kHz – 3200 MHz	16 Dec, 2011
Power Divider	Mini-Circuits	15542	0235	DC – 18 GHz	Cal. on use
Attenuator	Narda	4768-20	-	DC – 40 GHz	Cal. on use
DC Block	Hewlett-Packard	11742A	12460	0.045 – 26.5 GHz	Cal. on use
Spectrum Analyzer	Agilent	E7401A	US40240432	9 kHz – 1.5 GHz	10 Jan 2012
LISN	Schwarzbeck	NSLK8127	8127276	-	07 April 2012
Attenuator	Pasternack	PE7010-20	-	-	18 Jan 2012
Power Meter	Hewlett Packard	8900D	2131A01044	01 – 18 GHz	24 Jun 2011
Power Sensor	Hewlett Packard	84811A	2551A01484	01 – 18 GHz	24 Jun 2011

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

### 7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

	Line Conducted Emission Measurement Uncertainty (150 kHz – 30 MHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 1.57$	$\pm 1.8$
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 3.14$	$\pm 3.6$

### 7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 2.15$	$\pm 2.6$
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 4.30$	$\pm 5.2$

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 2.39$	$\pm 2.6$
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 4.78$	$\pm 5.2$

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
$u_c$	<b>Combined standard uncertainty:</b> $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	$\pm 1.87$	Under consideration
$U$	<b>Expanded uncertainty U:</b> $U = 2u_c(y)$	$\pm 3.75$	Under consideration