

FCC TEST REPORT	
FCC 47 CFR Part 90	
Private Land Mobile Radio Services (PMR)	
Report Reference No.	G0M-1612-6135-TFC90PMR-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	Kamstrup A/S
Address	Industrivej 28 8660 Skanderborg DENMARK
Test specification:	
Standard	47 CFR Part 90I
Equipment under test (EUT):	
Product description	Ultrasonic water meter
Model No.	FlowIQ 2250
Additional Model(s)	None
Brand Name(s)	Kamstrup
Hardware version	620120102 rev 00
Firmware / Software version	12790101 rev 00
	FCC-ID: OUY-FLOW2250 IC: N/A
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %

Date of receipt of test item : 2017-02-27

Date (s) of performance of tests : 2017-02-27 – 2017-03-01

Compiled by : Toralf Jahn

Tested by (+ signature) : Toralf Jahn
(Responsible for Test)

Approved by (+ signature) : Christian Weber
(Head of Lab)

Date of issue : 2017-03-16

Total number of pages : 40


.....


.....

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
01	2017-03-16	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos - Equipment external	7
1.2	Photos - Equipment internal	10
1.3	Photos – Test setup	14
1.4	Supporting Equipment Used During Testing	15
1.5	Test Modes	15
1.6	Test Equipment Used During Testing	16
2	RESULT SUMMARY	17
3	TEST CONDITIONS AND RESULTS	18
3.1	Power	18
3.2	Emission Mask and authorized bandwidth	19
3.3	Spurious emission at antenna terminal	24
3.4	Spurious emissions radiated	28
3.5	Frequency Stability	31
3.6	Transient Frequency Behavior	33

1 Equipment (Test item) Description

Description	Ultrasonic water meter	
Model	FlowIQ 2250	
Additional Model(s)	None	
Brand Name(s)	Kamstrup	
Serial number	None	
Hardware version	620120102 rev 00	
Software / Firmware version	12790101 rev 00	
PMN	None	
HVIN	FlowIQ 2250	
FVIN	None	
HMN	None	
FCC-ID	OUI-FLOW2250	
IC	N/A	
Equipment type	End Product	
Radio type	PMR	
Number of Radios	1	
Operating frequency range	450.025 – 469.9875 MHz	
Assigned frequency band	421 – 512 MHz	
Main test frequencies	F _{LOW}	450.025 MHz
	F _{MID}	460.11875 MHz
	F _{HIGH}	469.9875 MHz
Modulations	4-GFSK	
Emission designator	F1D	
Channel bandwidth	12.5 kHz	
Authorized bandwidth	11.25 kHz	
Channel spacing	6.25 kHz	
Number of antennas	3	

Antenna 1	Type	external, rod antenna
	Model	1653094
	Manufacturer	Kamstrup A/S
	Gain	-0.6 dBi
Antenna 2	Type	external, 1 meter cable length
	Model	6699490
	Manufacturer	Kamstrup A/S
	Gain	0.5 dBi
Antenna 3	Type	external (as Antenna 2), up to 20 meter cable length
	Model	6699491
	Manufacturer	Kamstrup A/S
	Gain	-2.5 dBi
Manufacturer	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	
Power supply	V _{NOM}	3.6 VDC (lithium battery)
	V _{MIN}	3.0
	V _{MAX}	3.6
AC/DC-Adaptor	Model	none
	Vendor	none
	Input	none
	Output	none
Temperature	T _{NOM}	20°C
	T _{MIN}	-30°C
	T _{MAX}	65°C

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laboratory power supply	Statron	2224.2	The EUT battery does not last to perform the tests. Therefore an external power supply was necessary.
CBL	Auxillary cable			To connect EUT and power supply.
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Test Modes

Mode #	Description	
Transmit modulated	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone mode Modulation = 4-GFSK Duty cycle = 100% Power level = maximum
Transmit unmodulated	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone mode Modulation = none Duty cycle = 100% Power level = maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Conducted					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2016-03	2017-03
Modulation Domain Analyzer	R&S	FSIQ 26	EF00151	2016-03	2017-03
Rubidium Frequency Standard	EFRATOM	MFS	EF00308	2013-05	2018-05

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD Antenna	R&S	HL 223	EF00187	2016-05	2019-05
LPD Antenna	R&S	HL 025	EF00327	2015-10	2018-10

2 Result Summary

FCC 47 CFR Part 90I				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
FCC 90.205 FCC 2.1046	Power	TIA-603-D 2.2.17.2	PASS	
FCC 90.209 FCC 90.210 FCC 2.1049	Authorized bandwidth Emission masks Occupied bandwidth	FCC 90.210	PASS	
FCC 90.210 FCC 2.1051	Spurious emissions at antenna terminal	FCC 90.210 TIA-603-D 2.2.13	PASS	
FCC 90.210 FCC 2.1053	Spurious emissions radiated	FCC 90.210 TIA-603-D 2.2.12	PASS	
FCC 90.213 FCC 2.1055	Frequency stability	TIA-603-D 2.2.2	PASS	
FCC 90.214	Transient frequency behavior	TIA-603-D 2.2.19.2	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Power

Maximum peak conducted power acc. to FCC 90.205				Verdict: PASS	
EUT requirement rule parts and clause		Reference			
		FCC 90.205, FCC 2.1046			
Test according to measurement reference		Reference Method			
		TIA-603-D 2.2.17.2			
Test frequency range		Tested frequencies			
		F _{LOW} / F _{MID} / F _{HIGH}			
EUT test mode		Transmit unmodulated			
Maximum antenna gain		0.5 dBi			
Limit					
2 W (33 dBm) ERP					
Test setup					
Spectrum Analyzer EUT					
Test procedure					
- EUT set to transmit mode - Center frequency set to test channel center frequency - Span set to twice the 20 dB bandwidth and detector to peak and max hold - Resolution bandwidth is set to 3 MHz - Peak conducted power is determined from peak of spectrum envelope					
ERP calculation					
- EIRP [dBm] = Conducted power [dBm] + Max EUT antenna gain [dBi] - ERP [dBm] = EIRP [dBm] -2.15 dB					
Test results					
Channel	Conducted peak power [dbm]	ERP peak power [dbm]	ERP peak power [W]	ERP Limit [dBm]	Margin [dB]
F _{LOW}	30.0	28.4	0.692	33	4.6
F _{MID}	30.0	28.4	0.692	33	4.6
F _{HIGH}	30.0	28.4	0.692	33	4.6
Comments:					

3.2 Emission Mask and authorized bandwidth

Emission mask acc. to FCC 90.209, FCC 90.210		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 90.209(b), FCC 90.210 (d), FCC 2.1049	
Test according to measurement reference	Reference Method	
	FCC 90.210	
Test frequency range	Tested frequencies	
	F _{LOW} / F _{MID} / F _{HIGH}	
EUT test mode	Transmit modulated	
Limits		
Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized a 11.25 kHz bandwidth. Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows: (1) On any frequency from the center of the authorized bandwidth f₀ to 5.625 kHz removed from f₀: Zero dB. (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(f_d–2.88 kHz) dB. (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.		
Test setup		
EUT Spectrum Analyzer Rubidium Reference		
Test procedure		
- EUT set to transmit mode - Center frequency set to test channel center frequency and the highest emission is determined - Resolution bandwidth is set to 100 Hz and detector to peak and max hold. - As for the authorized bandwidth the 99% power bandwidth is measured.		


Test results emission mask			
Channel	Verdict		
F _{LOW}	PASS		
F _{MID}	PASS		
F _{HIGH}	PASS		
Test results authorized bandwidth			
Channel	Authorized bandwidth [kHz]	Limit [kHz]	Verdict
F _{LOW}	9.8	11.25	PASS
F _{MID}	9.8	11.25	PASS
F _{HIGH}	9.8	11.25	PASS
Comments:			

Emission Mask, F_{Low}

Emission mask

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
 EUT Name: Ultrasonic water meter
 Model: FlowIQ 2250
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Test Conditions: Tnom / Vnom
 Mode: Channel Low
 Test Date: 2017-02-28
 Verdict: PASS

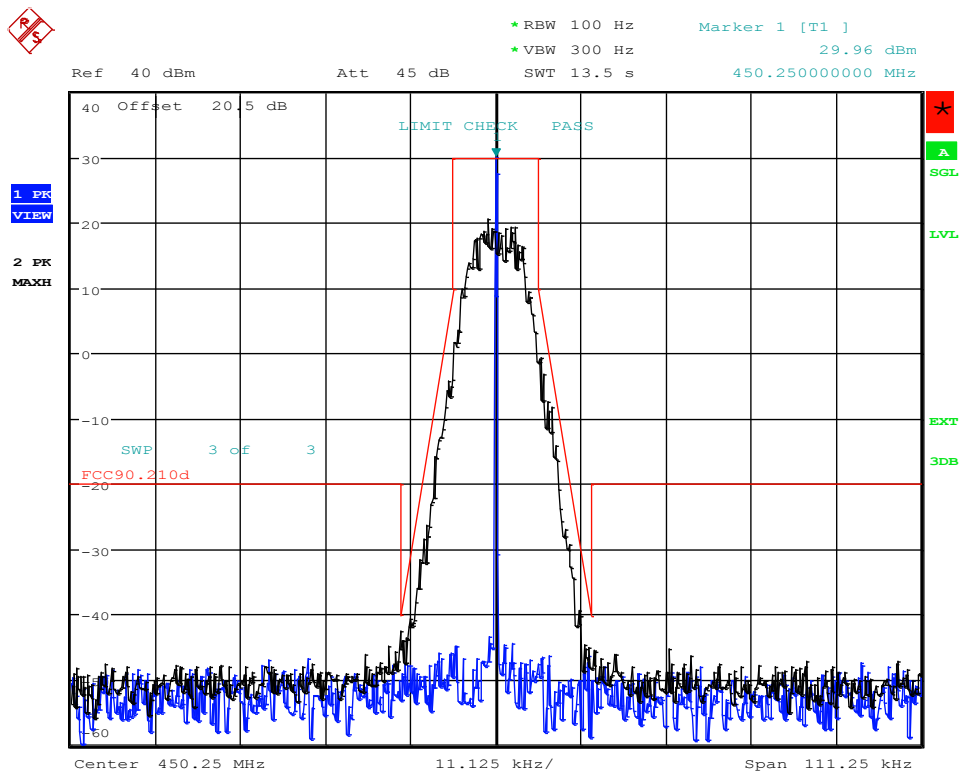

Date: 28.FEB.2017 11:16:19

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Emission Mask, F_{MID}

Emission mask

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
 EUT Name: Ultrasonic water meter
 Model: FlowIQ 2250
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Test Conditions: Tnom / Vnom
 Mode: Channel Mid
 Test Date: 2017-02-28
 Verdict: PASS

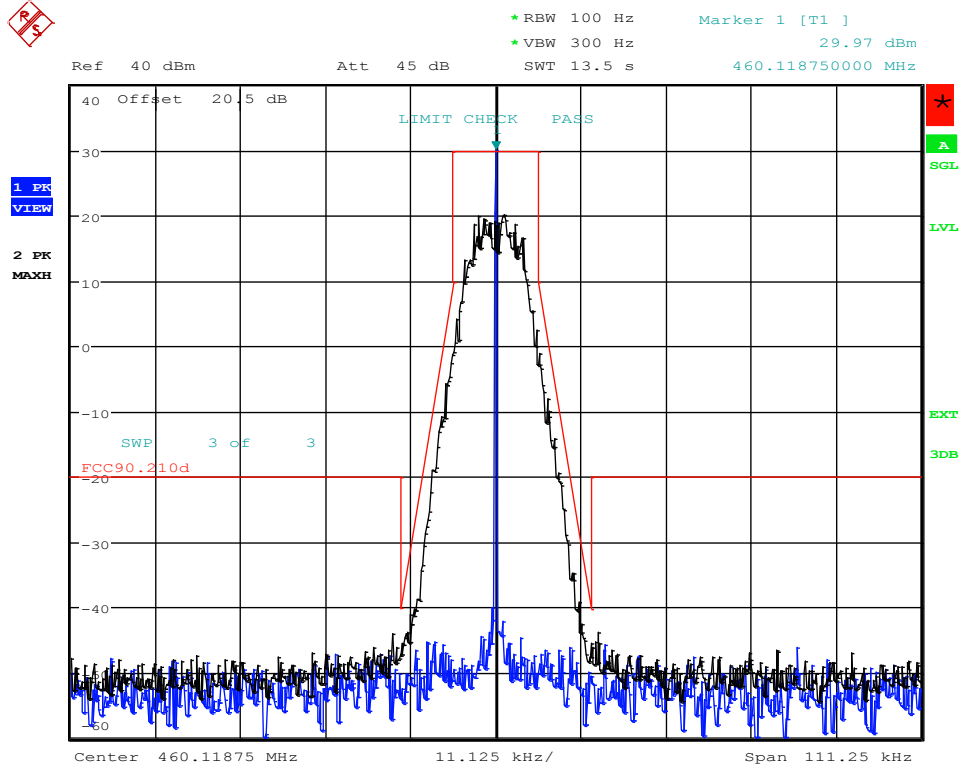

Date: 28.FEB.2017 11:13:03

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Emission Mask, F_{HIGH}

Emission mask

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
 EUT Name: Ultrasonic water meter
 Model: FlowIQ 2250
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Test Conditions: Tnom / Vnom
 Mode: Channel High
 Test Date: 2017-02-28
 Verdict: PASS

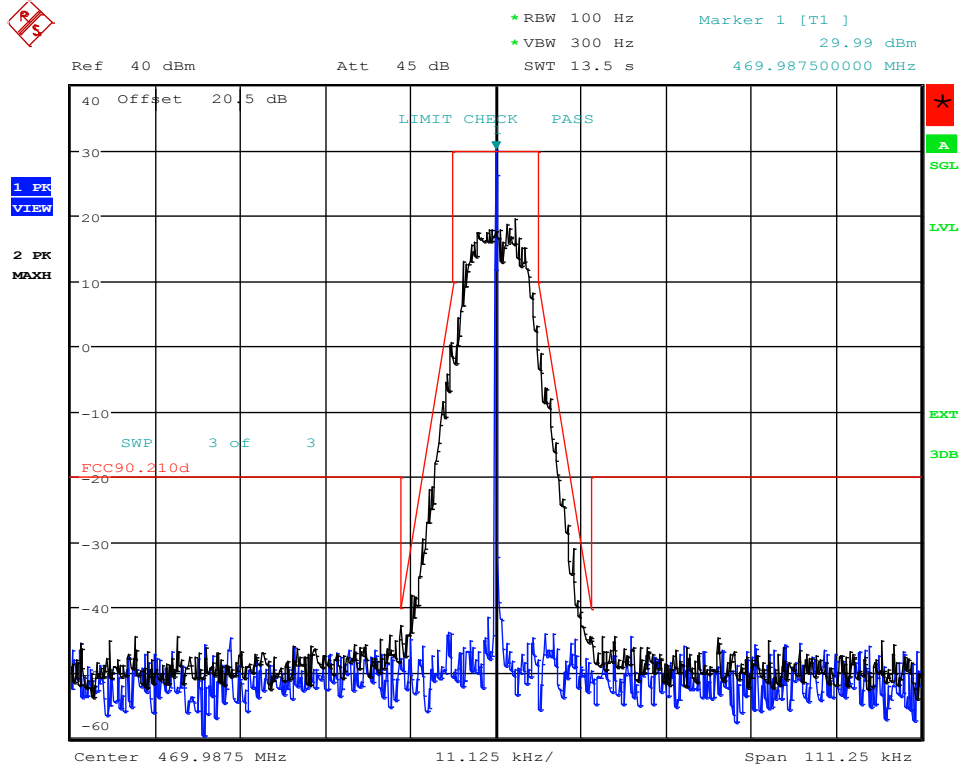

Date: 28.FEB.2017 11:09:38

Test Report No.: G0M-1612-6135-TFC90PMR-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.3 Spurious emission at antenna terminal


Spurious emission at antenna terminal acc. to FCC 90.210		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 90.210 (d), FCC 2.1051	
Test according to measurement reference	Reference Method	
	FCC 90.210, TIA-603-D 2.2.13	
Test frequency range	Tested frequencies	
	10 MHz – 10 th Harmonic	
EUT test mode	Transmit unmodulated	
Limits		
On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.		
Test setup		
EUT Spectrum Analyzer		
Test procedure		
- EUT set to transmit mode - Center frequency set to test channel center frequency - Below 1 GHz the carrier is suppressed with a notch filter. Above 1 GHz the carrier is suppressed with a high pass filter. - The detector is set to peak and max hold - Below 1 GHz the resolution bandwidth is set to 100 kHz. Above 1 GHz the resolution bandwidth is set to 1 MHz.		
Test results		
Channel	Limit [dBm]	Verdict
F _{LOW}	-20	PASS
F _{MID}	-20	PASS
F _{HIGH}	-20	PASS
Comments:		

Spurious emission at antenna terminal, F_{Low}

Conducted spurious emissions

Project Number: GOM-1612-6135

Applicant: Kamstrup A/S
 EUT Name: Ultrasonic water meter
 Model: FlowIQ 2250
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Test Conditions: T_{nom} / V_{nom}
 Mode: Channel Low
 Test Date: 2017-02-28
 Verdict: PASS

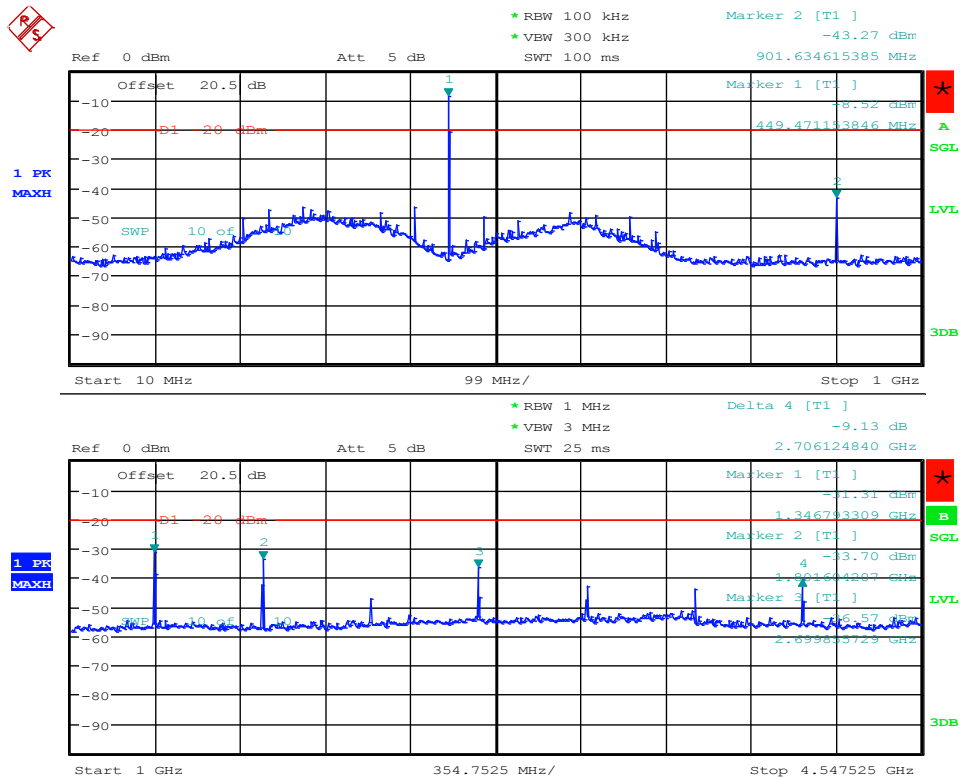



Date: 28.FEB.2017 10:43:55

Spurious emission at antenna terminal, F_{MID}

Conducted spurious emissions

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
 EUT Name: Ultrasonic water meter
 Model: FlowIQ 2250
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Test Conditions: T_{nom} / V_{nom}
 Mode: Channel Mid
 Test Date: 2017-02-28
 Verdict: PASS

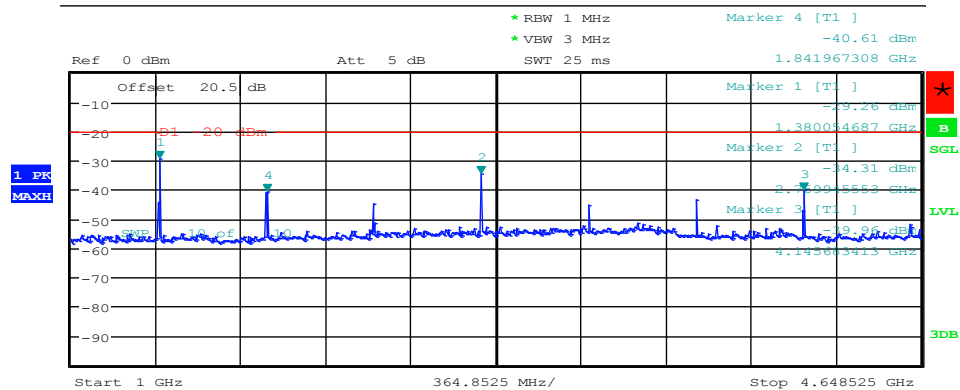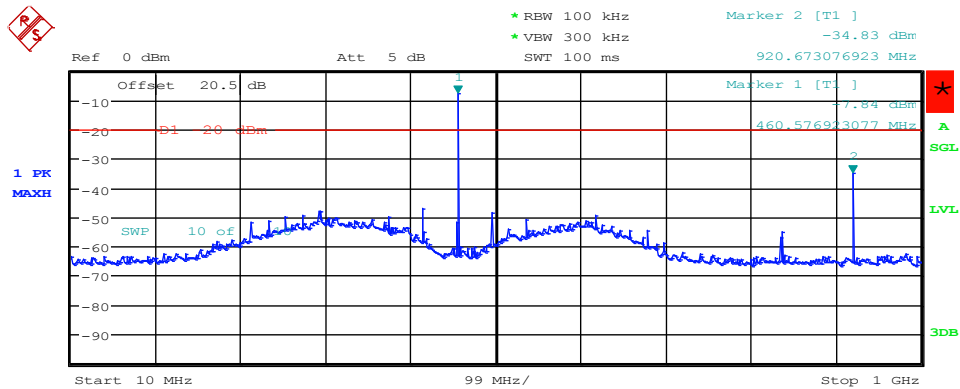

Date: 28.FEB.2017 10:52:17

Test Report No.: G0M-1612-6135-TFC90PMR-V01



Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emission at antenna terminal, F_{HIGH}

Conducted spurious emissions


Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
 EUT Name: Ultrasonic water meter
 Model: FlowIQ 2250
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Test Conditions: T_{nom} / V_{nom}
 Mode: Channel High
 Test Date: 2017-02-28
 Verdict: PASS

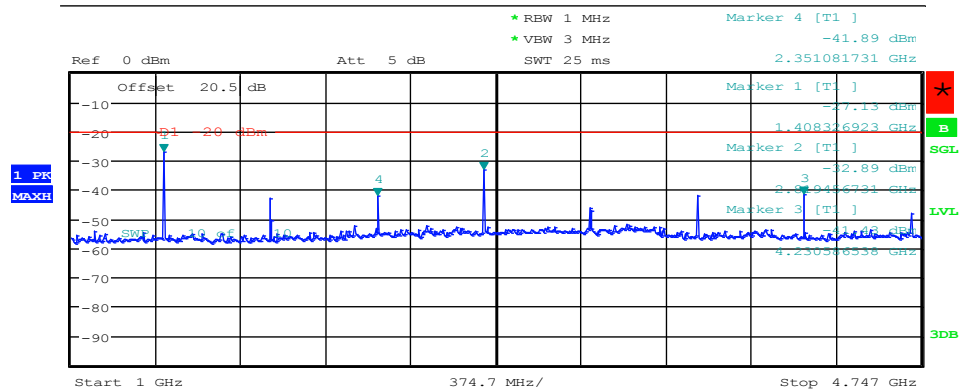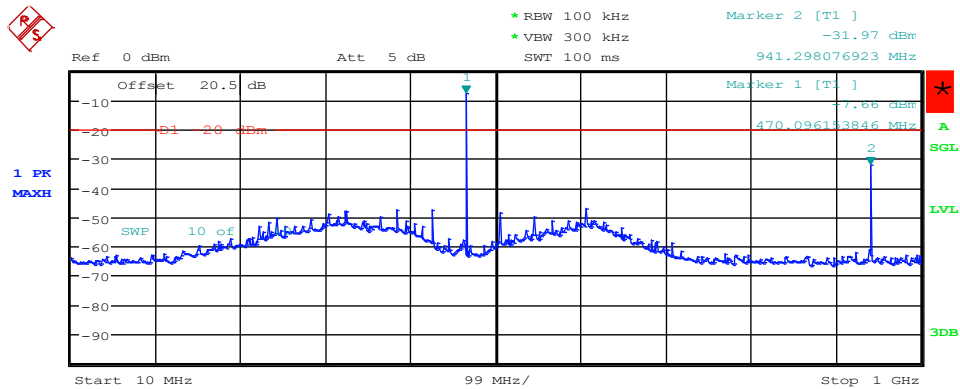

Date: 28.FEB.2017 10:58:04

3.4 Spurious emissions radiated

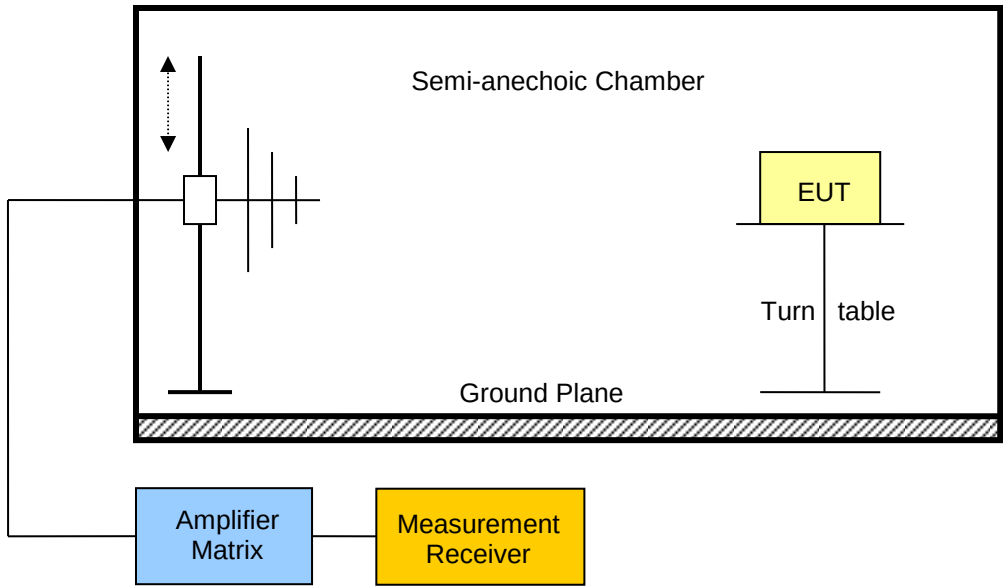Spurious emissions radiated acc. to FCC 90.210		Verdict: PASS
Test according referenced standards	Reference Method	
	FCC 15.210(d), FCC 2.1053	
Test according to measurement reference	Reference Method	
	FCC 90.210, TIA-603-D 2.2.12	
Test frequency range	Tested frequencies	
	30 MHz – 10 th Harmonic	
EUT test mode	Transmit unmodulated	
Limits		
On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation..		
Test setup		
		
Test procedure		
1. EUT antenna output connected to 50 Ohm load. 2. EUT set to transmit mode 3. Maximum emission level is measured by rotating the EUT and adjusting the antenna height for vertical polarization 4. The EUT is replaced by a substitution antenna and generator 5. The power level is set to obtain the same power reading 6. Measurement is repeated for horizontal polarization		

Test results					
Channel	Emission [MHz]	Level [dbm]	Pol.	Limit [dBm]	Margin [dB]
F _{LOW}	900.5	-52.50	hor	-20.00	-32.47
F _{LOW}	1350.	-39.90	hor	-20.00	-19.86
F _{LOW}	1348	-46.30	ver	-20.00	-26.26
F _{LOW}	1798	-46.20	hor	-20.00	-26.21
F _{LOW}	1798	-47.70	ver	-20.00	-27.73
F _{LOW}	2248	-48.90	hor	-20.00	-28.91
F _{LOW}	2248	-48.70	ver	-20.00	-28.72
F _{LOW}	2698	-48.00	hor	-20.00	-27.96
F _{LOW}	2698	-45.20	ver	-20.00	-25.17
F _{LOW}	3148	-53.00	hor	-20.00	-33.05
F _{LOW}	3148	-54.40	ver	-20.00	-34.44
F _{LOW}	3598	-48.00	hor	-20.00	-28.02
F _{LOW}	3598	-53.70	ver	-20.00	-33.70
F _{LOW}	4048	-55.20	ver	-20.00	-35.19
F _{LOW}	4056	-58.10	hor	-20.00	-38.07
F _{LOW}	4504	-57.50	ver	-20.00	-37.52
F _{LOW}	4504	-57.30	hor	-20.00	-37.27
F _{MID}	920	-55.30	hor	-20.00	-35.26
F _{MID}	920	-54.40	ver	-20.00	-34.40
F _{MID}	1378	-43.70	ver	-20.00	-23.70
F _{MID}	1378	-41.60	hor	-20.00	-21.58
F _{MID}	1840	-50.20	ver	-20.00	-30.24
F _{MID}	1840	-49.20	hor	-20.00	-29.17
F _{MID}	2296	-43.50	ver	-20.00	-23.48
F _{MID}	2296	-41.40	hor	-20.00	-21.42
F _{MID}	2758	-46.10	ver	-20.00	-26.11
F _{MID}	2758	-46.60	hor	-20.00	-26.61
F _{MID}	3220	-49.40	ver	-20.00	-29.41
F _{MID}	3220	-51.50	hor	-20.00	-31.45
F _{MID}	3676	-55.40	ver	-20.00	-35.40
F _{MID}	3676	-53.40	hor	-20.00	-33.42
F _{MID}	4136	-56.80	ver	-20.00	-36.78
F _{MID}	4144	-57.10	hor	-20.00	-37.08
F _{MID}	4600	-55.90	hor	-20.00	-35.93

Test Report No.: G0M-1612-6135-TFC90PMR-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

F _{MID}	4600	-57.10	ver	-20.00	-37.06
F _{HIGH}	939.2	-56.70	hor	-20.00	-36.73
F _{HIGH}	939.2	-52.90	ver	-20.00	-32.89
F _{HIGH}	1408	-43.50	ver	-20.00	-23.51
F _{HIGH}	1408	-42.80	hor	-20.00	-22.76
F _{HIGH}	1876	-49.80	ver	-20.00	-29.85
F _{HIGH}	1876	-50.60	hor	-20.00	-30.60
F _{HIGH}	2350	-47.40	ver	-20.00	-27.41
F _{HIGH}	2350	-41.10	hor	-20.00	-21.09
F _{HIGH}	2818	-50.70	ver	-20.00	-30.72
F _{HIGH}	2818	-47.10	hor	-20.00	-27.07
F _{HIGH}	3286	-51.20	ver	-20.00	-31.21
F _{HIGH}	3286	-46.90	hor	-20.00	-26.87
F _{HIGH}	3754	-52.40	hor	-20.00	-32.43
F _{HIGH}	3760	-53.10	ver	-20.00	-33.08
F _{HIGH}	4216	-56.10	ver	-20.00	-36.06
F _{HIGH}	4224	-55.00	hor	-20.00	-35.00
F _{HIGH}	4696	-54.10	hor	-20.00	-34.15
F _{HIGH}	4696	-55.00	ver	-20.00	-35.00
Comments:					


3.5 Frequency Stability

Frequency stability acc. to FCC 90.213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 90.213, FCC 2.1055	
Test according to measurement reference	Reference Method	
	TIA-603-D 2.2.2	
Test frequency range	Tested frequencies	
	F_{MID}	
EUT test mode	Transmit unmodulated	
Limits		
In the 421-512 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 1.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 0.5 ppm.		
In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.		
Test setup		
 <pre> graph LR EUT[EUT] --- SA[Spectrum Analyzer] SA --- RR[Rubidium Reference] </pre>		
Test procedure		
- The EUT is placed in a climatic chamber - EUT set to transmit mode - The frequency counter function of the spectrum analyzer is used - The frequency stability measurements are repeated within temperature and voltage range		

Test results				
Voltage	Temperature	Frequency Error [ppm]	Limit [ppm]	Verdict
3.0 VDC	20°C	-0.09	± 2.5	PASS
3.6 VDC	20°C	0.21	± 2.5	PASS
3.6 VDC	-30°C	0.25	± 2.5	PASS
3.6 VDC	-20°C	0.23	± 2.5	PASS
3.6 VDC	-10°C	0.26	± 2.5	PASS
3.6 VDC	0°C	0.2	± 2.5	PASS
3.6 VDC	10°C	0.16	± 2.5	PASS
3.6 VDC	20°C	0.21	± 2.5	PASS
3.6 VDC	30°C	0.16	± 2.5	PASS
3.6 VDC	40°C	-0.12	± 2.5	PASS
3.6 VDC	50°C	-0.1	± 2.5	PASS
3.6 VDC	60°C	-0.02	± 2.5	PASS
3.6 VDC	65°C	0.02	± 2.5	PASS

3.6 Transient Frequency Behavior

Frequency stability acc. to FCC 90.214			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC 90.214		
Test according to measurement reference	Reference Method		
	TIA-603-D 2.2.19.2		
Test frequency range	Tested frequencies		
	F _{LOW} , F _{MID} , F _{HIGH}		
EUT test mode	Transmit unmodulated		
Limits			
Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment ⁴	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms
1 on is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.			
t1 is the time period immediately following t on.			
t2 is the time period immediately following t1.			
t3 is the time period from the instant when the transmitter is turned off until t off.			
t off is the instant when the 1 kHz test signal starts to rise.			
2 During the time from the end of t2 to the beginning of t3, the frequency difference must not exceed the limits specified in §90.213.			
3 Difference between the actual transmitter frequency and the assigned transmitter frequency.			
4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.			


Test setup		
 <pre> graph LR EUT[EUT] --- MD[Modulation Domain Analyzer] MD --- RR[Rubidium Reference] </pre>		
Test procedure		
- EUT set to transmit mode - Center frequency set to test channel center frequency - The transient behavior is captured during switching the transmitter on and off		
Test results		
Channel	State	Verdict
F_{LOW}	Tx off	PASS
F_{MID}	Tx off	PASS
F_{HIGH}	Tx off	PASS
F_{LOW}	Tx on	PASS
F_{MID}	Tx on	PASS
F_{HIGH}	Tx on	PASS
Comments:		

Transient stability Tx off, F_{Low}

Transient stability Tx off

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
EUT Name: Ultrasonic water meter
Model: FlowIQ 2250
Test Site: Eurofins Product Service GmbH
Operator: Toralf Jahn
Test Conditions: Tnom / Vnom
Mode: Channel Low
Test Date: 2017-02-28
Verdict: PASS

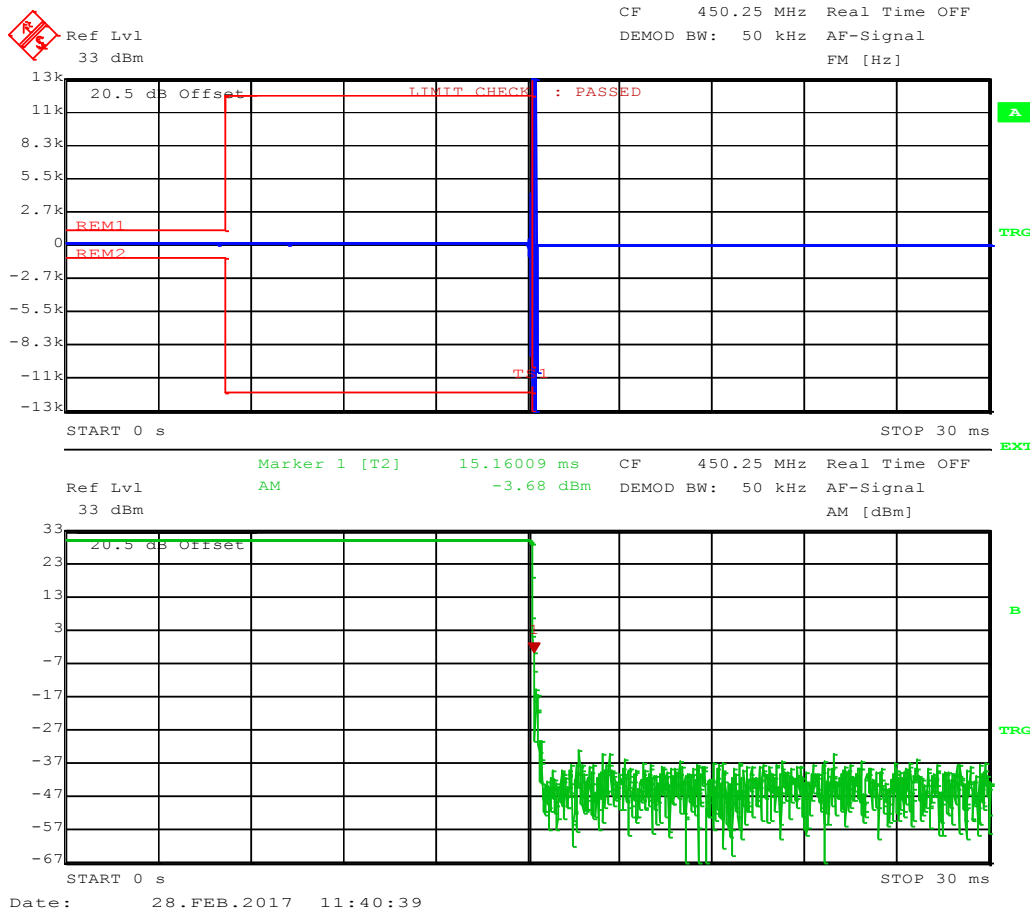

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transient stability Tx off, F_{MID}

Transient stability Tx off

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
EUT Name: Ultrasonic water meter
Model: FlowIQ 2250
Test Site: Eurofins Product Service GmbH
Operator: Toralf Jahn
Test Conditions: T_{nom} / V_{nom}
Mode: Channel Mid
Test Date: 2017-02-28
Verdict: PASS

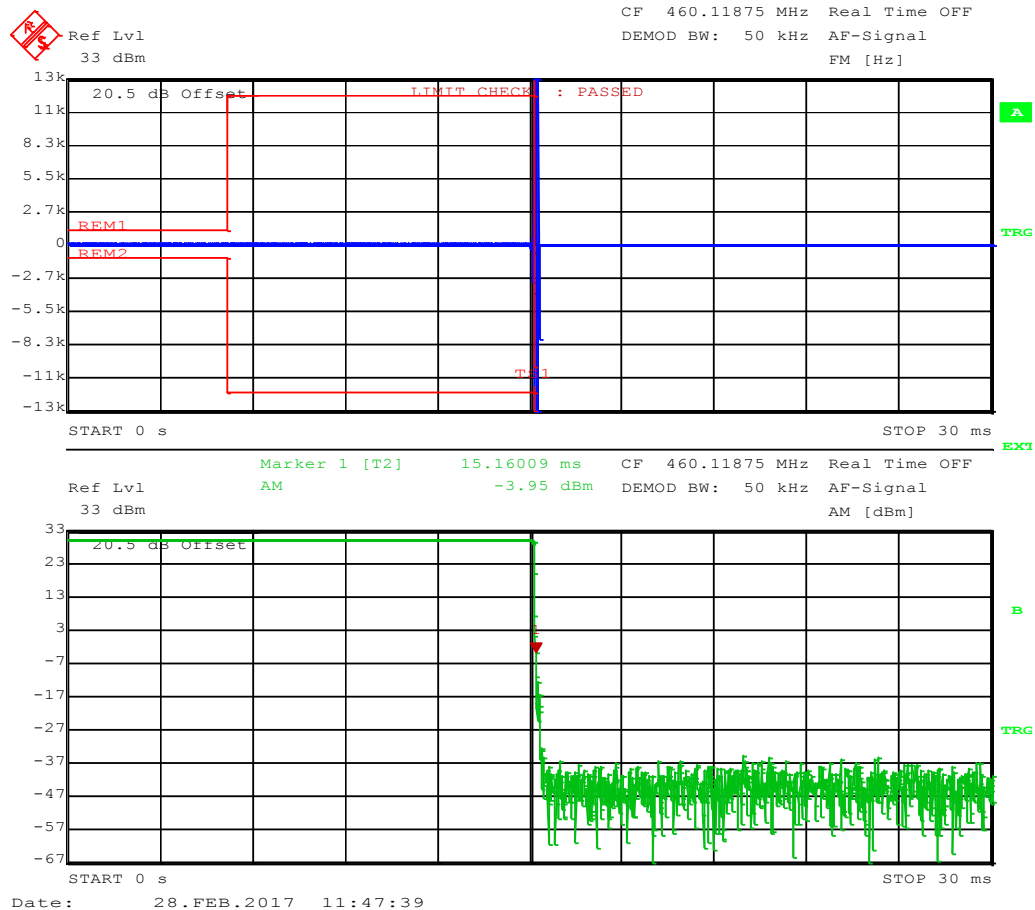

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transient stability Tx off, F_{HIGH}

Transient stability Tx off

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
EUT Name: Ultrasonic water meter
Model: FlowIQ 2250
Test Site: Eurofins Product Service GmbH
Operator: Toralf Jahn
Test Conditions: Tnom / Vnom
Mode: Channel High
Test Date: 2017-02-28
Verdict: PASS

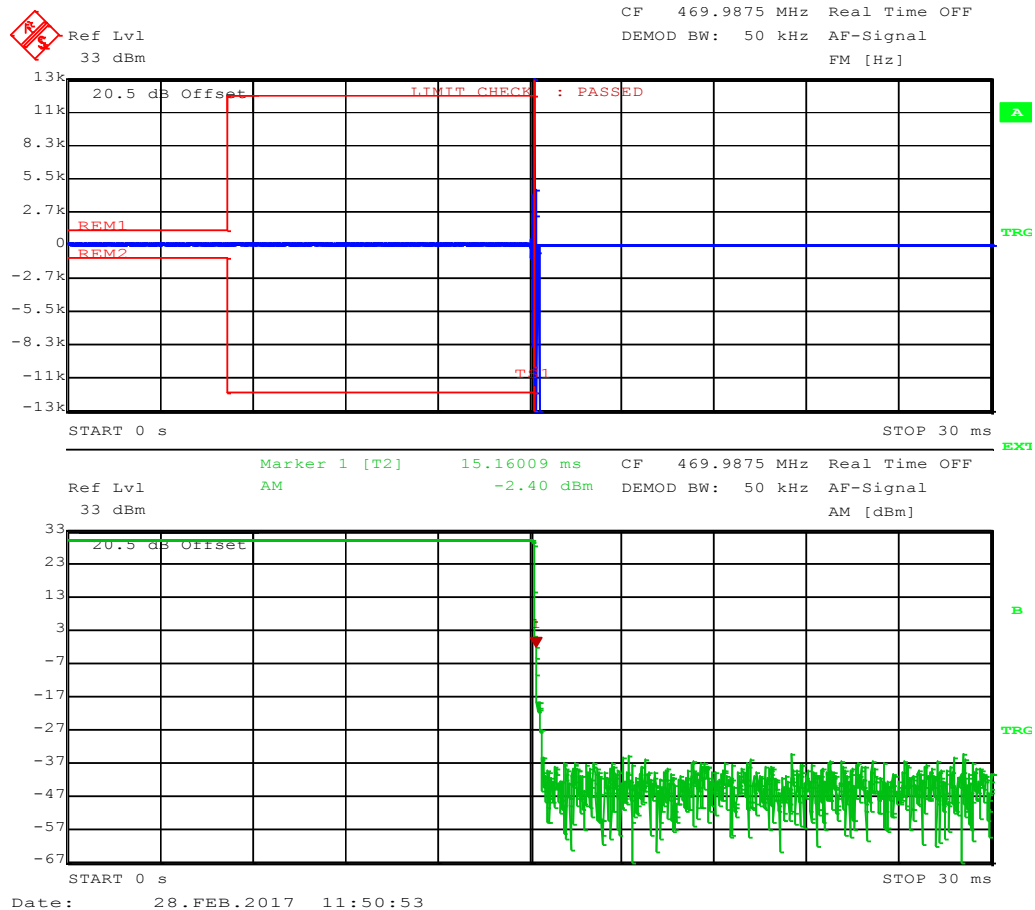

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transient stability Tx on, F_{Low}

Transient stability Tx on

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
EUT Name: Ultrasonic water meter
Model: FlowIQ 2250
Test Site: Eurofins Product Service GmbH
Operator: Toralf Jahn
Test Conditions: Tnom / Vnom
Mode: Channel Low
Test Date: 2017-02-28
Verdict: PASS

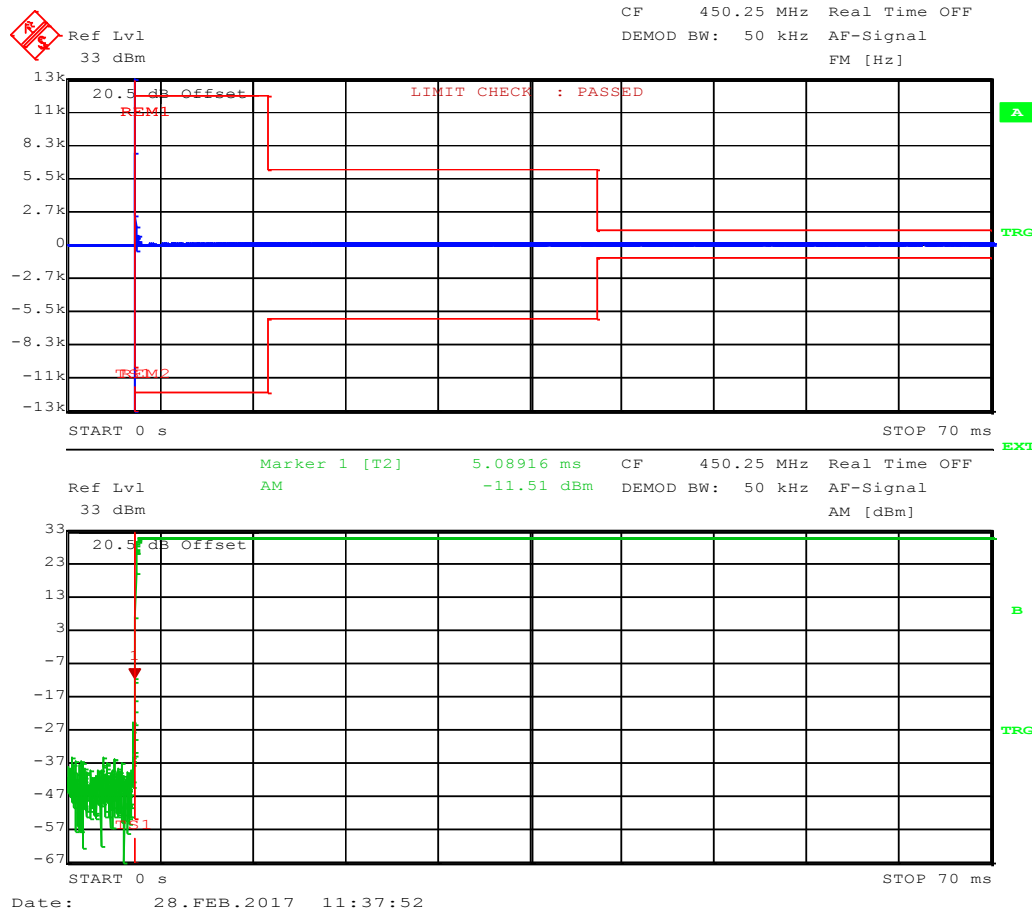

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transient stability Tx on, F_{MID}

Transient stability Tx on

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
EUT Name: Ultrasonic water meter
Model: FlowIQ 2250
Test Site: Eurofins Product Service GmbH
Operator: Toralf Jahn
Test Conditions: Tnom / Vnom
Mode: Channel Mid
Test Date: 2017-02-28
Verdict: PASS

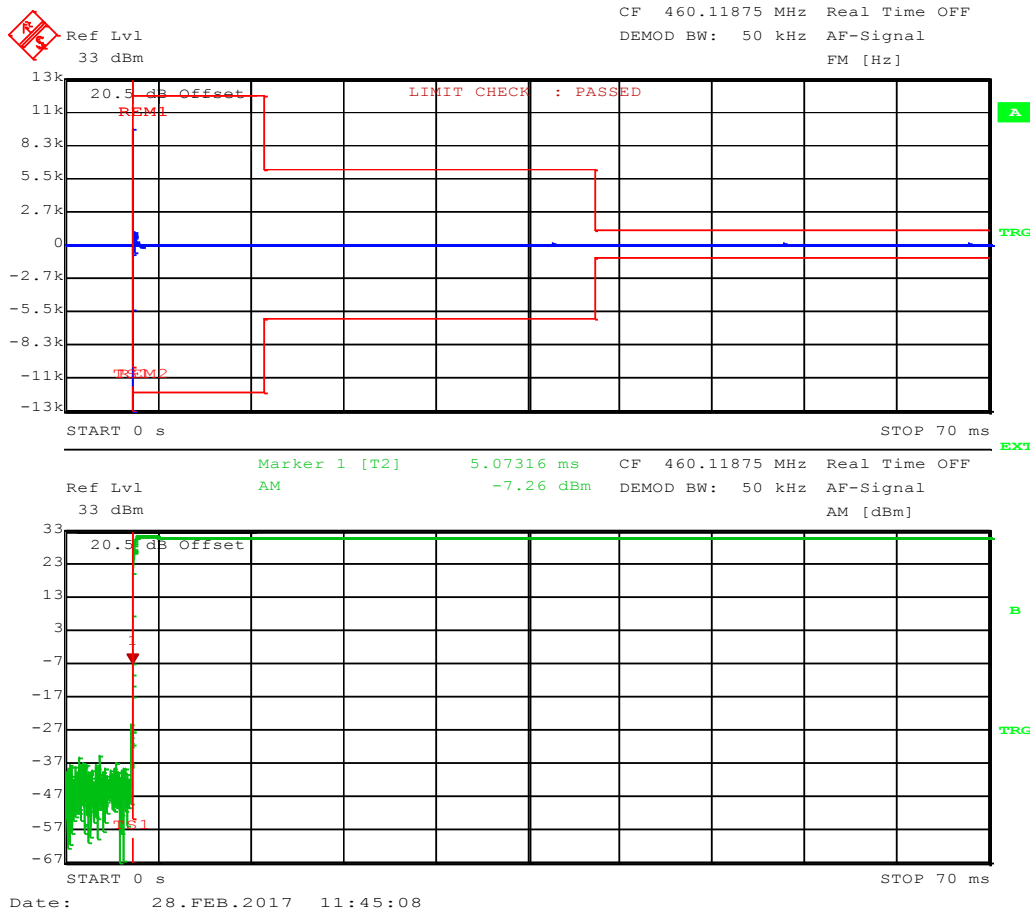

Test Report No.: G0M-1612-6135-TFC90PMR-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Transient stability Tx on, F_{HIGH}

Transient stability Tx on

Project Number: G0M-1612-6135

Applicant: Kamstrup A/S
EUT Name: Ultrasonic water meter
Model: FlowIQ 2250
Test Site: Eurofins Product Service GmbH
Operator: Toralf Jahn
Test Conditions: Tnom / Vnom
Mode: Channel High
Test Date: 2017-02-28
Verdict: PASS

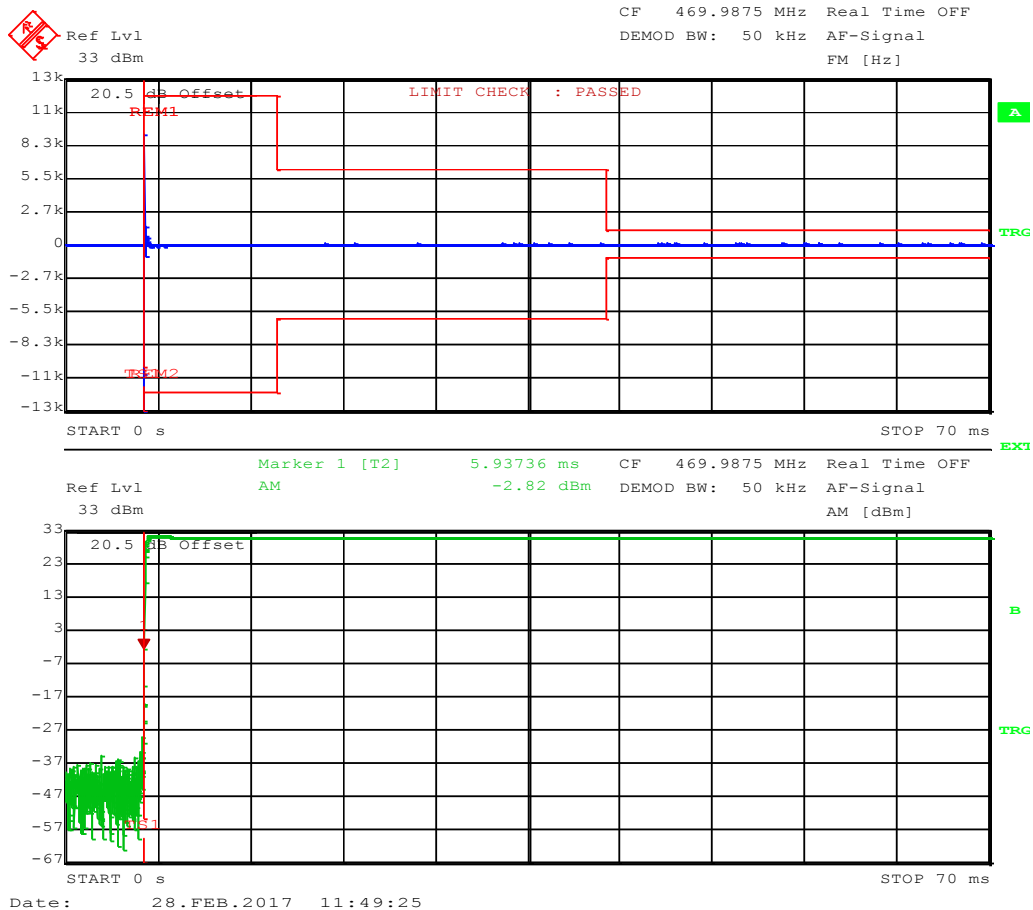

Test Report No.: G0M-1612-6135-TFC90PMR-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany