

Federal Communications Commission
Authorization and Evaluation division
Equipment Authorization Branch
7435 Oakland Mills Road
Columbia, MD 21046
U.S.A.

Kamstrup A/S
Industrivej 28, Stilling
DK-8660 Skanderborg
TEL: +45 89 93 10 00
FAX: +45 89 93 10 01
E-MAIL: kamstrup@kamstrup.dk
WEB: www.kamstrup.com

2017.02.27

Subject: Declaration concerning Antenna Specification for flowIQ 2250 and fccid OUY-FLOW2250

To Whom It May Concern:

The device specified above confirms to the FCC recommendations for a wall mounted antenna type described below:
There exists two different model numbers. The antenna and connector are the same, only difference is cable length. One is delivered with a fixed length of 2 meters. The other with up to 20-meter cable.

- **Manufacturer and model No. of antenna:** Kamstrup Wall antenna, 6699490 with fixed cable length of 2 meters, 6699491 with cable length up to 20 meters .
- **Type of antenna:** Dual band inverted F antenna attached to the meter RF part through a unique Kamstrup designed connector.
- **Frequency range:**

Low band: 450 – 470 MHz.
High band 902 – 928 MHz.


- **Antenna gain:**

Antenna gain listed below with 2 meter cable. A longer antenna cable will effectively reduce the antenna gain with up to 3 dB at low band and 5 dB at high band.


Band	Low			High		
Frequency	450 MHz	460 MHz	470 MHz	902 MHz	915 MHz	928 MHz
Gain	-0.68 dBi	-0.23 dBi	0.45 dBi	-2 dBi	-2.48 dBi	-1.58 dBi



Wall antenna with unique Kamstrup connector.

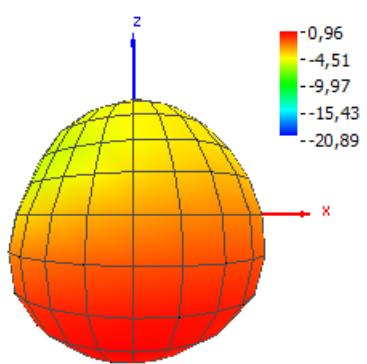

Antenna pattern, low band.

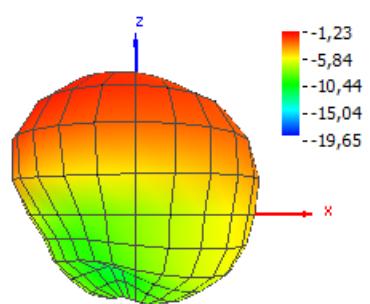

Antenna pattern, high band.

Please contact me if there is any information you may need.

Sincerely,

Kamstrup A/S

Kris Kaagaard
Product Specialist
Meter Division, Water
Direct phone: +45 89 93 14 35
E-mail: krk@kamstrup.com