


EMC TEST REPORT	
FCC 47 CFR Part 15B, ISED ICES-003 Issue 6	
Report Reference No	G0M-1912-8647-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAkks - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkks - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	Kamstrup A/S
Address	Industrivej 28 8660 Skanderborg DENMARK
Test Specification Standard(s)	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	heat / cooling meter
Model(s)	MULTICAL® 403
Additional Model(s)	MULTICAL® 603 MULTICAL® 803
Brand Name(s)	MULTICAL® 403 MULTICAL® 603 MULTICAL® 803
Hardware Version(s)	MULTICAL® 403 55501733 A4 (MC 403 pt 100) / 55501677 A6 (MC 403 pt 500) MULTICAL® 603 55501723 A12 / 55501724 B12 / 55501725 A12 MULTICAL® 803 55501706 K3
Software Version(s)	MULTICAL® 403 5098 1454 B1 MULTICAL® 603 5098 1335 P1 MULTICAL® 803 5098 1489 F1
Contains FCC-ID	OUY-HC-003-34
Contains IC	22376-HC00334
Test Result	PASSED

Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Date of receipt of test item	2020-01-06	
Report:		
Compiled by	Stephan Liebich	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
	Stephan Liebich	
Approved by (+ signature) (Deputy Head of Lab)	Jens Marquardt	
Date of Issue	2020-03-30	
Total number of pages	59	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T _{NOM}	Nominal operating temperature
V _{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-03-30	Initial Release	-

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	15
1.4	Support Equipment.....	23
1.5	Operational Modes	23
1.6	EUT Configuration	23
1.7	Sample emission level calculation	24
2	Result Summary	25
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	26
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	54



1 Equipment (Test Item) Under Test



Description	heat / cooling meter	
Model	MULTICAL® 403	
Additional Model(s)	MULTICAL® 603 MULTICAL® 803	
Brand Name(s)	MULTICAL® 403 MULTICAL® 603 MULTICAL® 803	
Serial Number(s)	MULTICAL® 403	71769201/MG/19
	MULTICAL® 603	80512882/9Z/19
	MULTICAL® 803	79803026/MG/20
Hardware Version(s)	MULTICAL® 403	55501733 A4 (MC 403 pt 100) / 55501677 A6 (MC 403 pt 500)
	MULTICAL® 603	55501723 A12 / 55501724 B12 / 55501725 A12
	MULTICAL® 803	55501706 K3
Software Version(s)	MULTICAL® 403	5098 1454 B1
	MULTICAL® 603	5098 1335 P1
	MULTICAL® 803	5098 1489 F1
Contains FCC-ID	OUY-HC-003-34	
Contains IC	22376-HC00334	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	3760	
Radio Module	Type	Short Range Device (SRD)
	Model	unknown
	Manufacturer	Kamstrup A/S
	FCC-ID	OUY-HC-003-34
	IC	22376-HC-00334
Supply Voltage	V _{NOM}	3.6 V DC by internal battery for MULTICAL® 403 24 V AC for MULTICAL® 603 / MULTICAL® 803
AC/DC-Adaptor	Model	60200004000000 A4
	Vendor	Kamstrup A/S
	Input	24 V AC
	Output	3.6 V DC
Manufacturer	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	



1.1 Equipment Ports



Name	Type	Attributes	Comment
POWER	AC	Count: 1 Direction: In Service only: No	Only for MULTICAL® 603 and MULTICAL® 803
EXTERNAL ANTENNA	IO	Count: 1 Direction: IO Service only: No	-
EXTERNAL SENSOR	IO	Count: 1 Direction: IO Service only: No	Only for MULTICAL® 403
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
BAT	DC power input port connected to external battery		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		



1.2 Equipment Photos - Internal

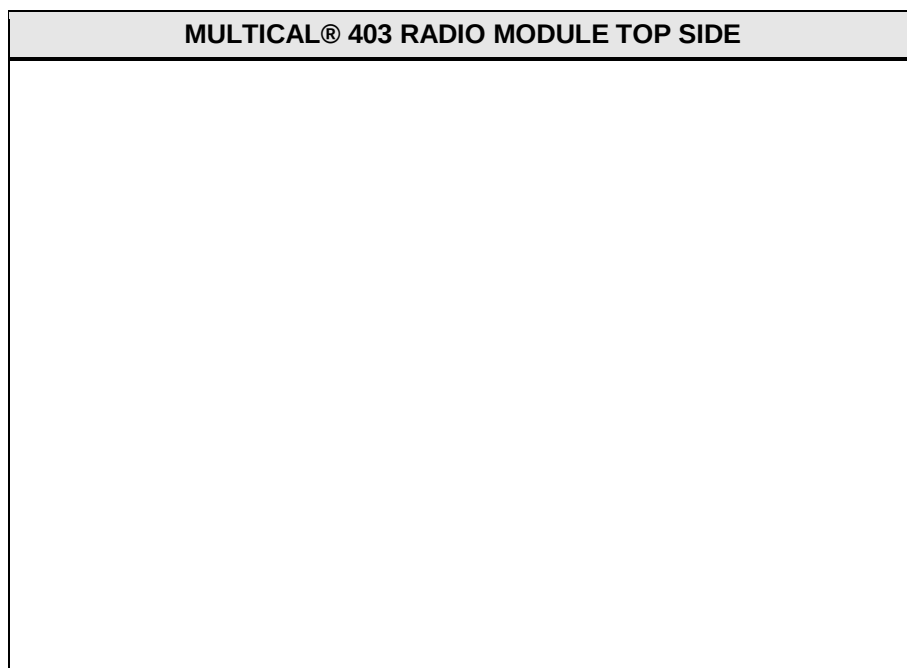
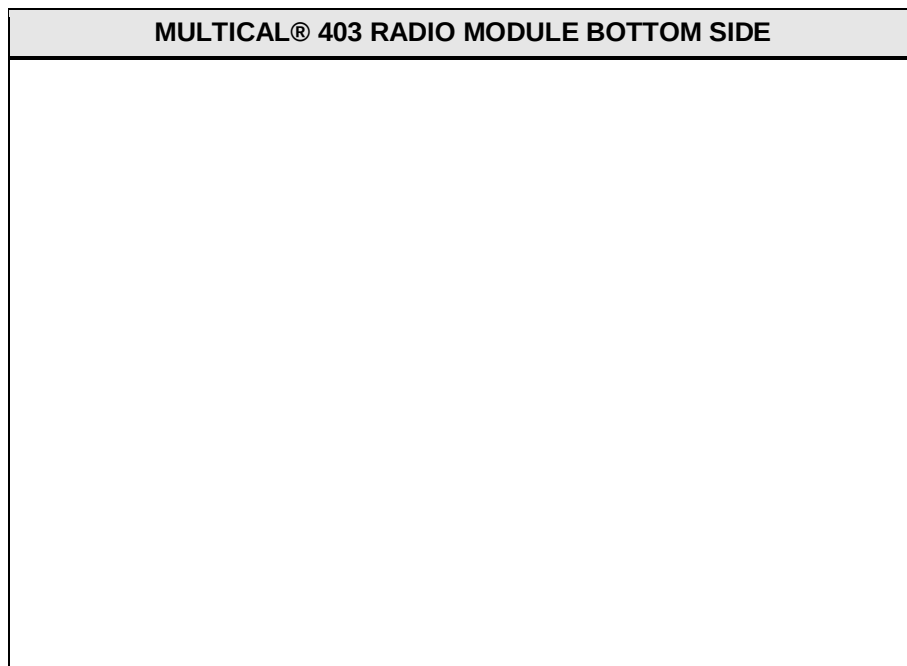




MULTICAL® 403 CASE FRONT SIDE**MULTICAL® 403 CASE REAR SIDE**

MULTICAL® 403 PCB BOTTOM SIDE**MULTICAL® 403 PCB TOP SIDE**



MULTICAL® 603 CASE FRONT SIDE**MULTICAL® 603 CASE REAR SIDE**


MULTICAL® 603 PCB BOTTOM SIDE**MULTICAL® 603 PCB TOP SIDE**



MULTICAL® 803 CASE FRONT SIDE**MULTICAL® 803 CASE REAR SIDE**

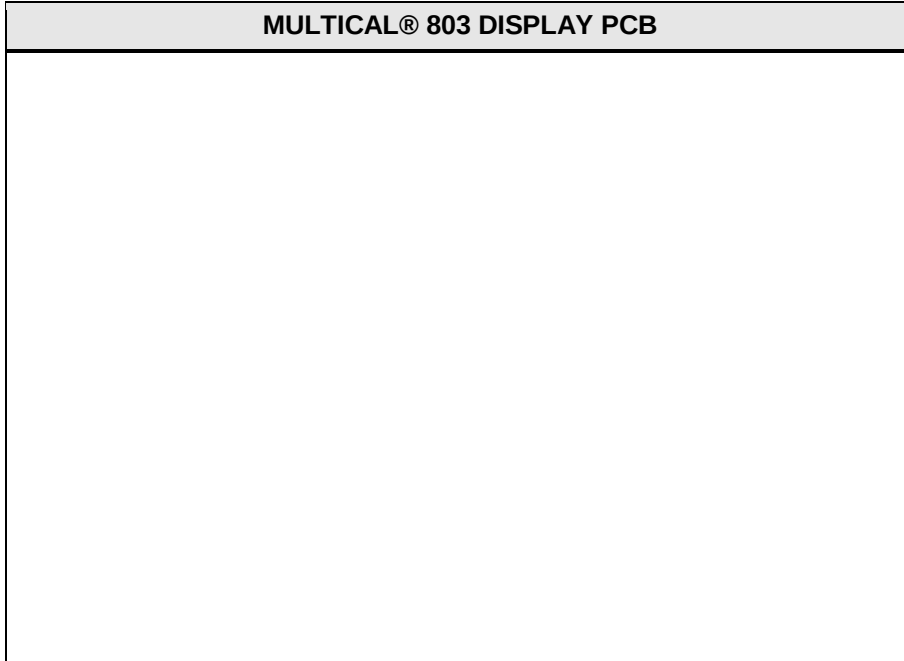
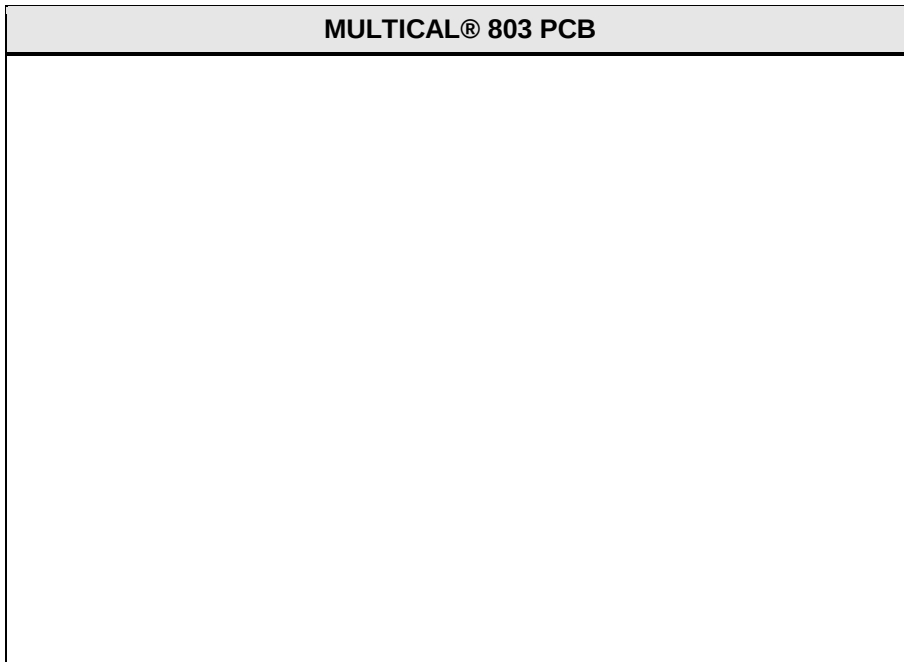
MULTICAL® 803 DISPLAY PCB**MULTICAL® 803 PCB**


1.3 Equipment Photos - External

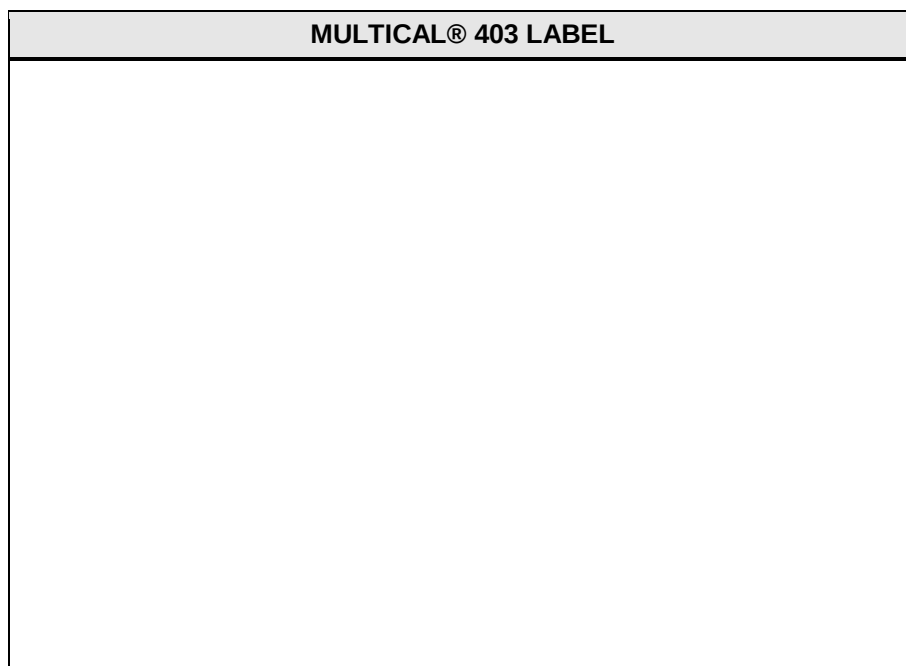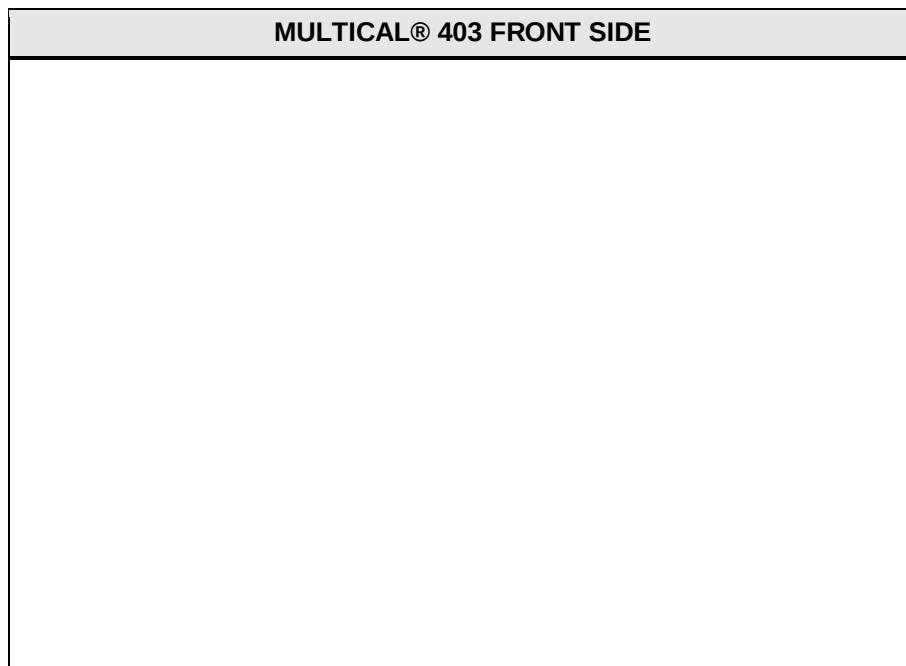



MULTICAL® 403 LEFT BOTTOM SIDE**MULTICAL® 403 REAR SIDE**

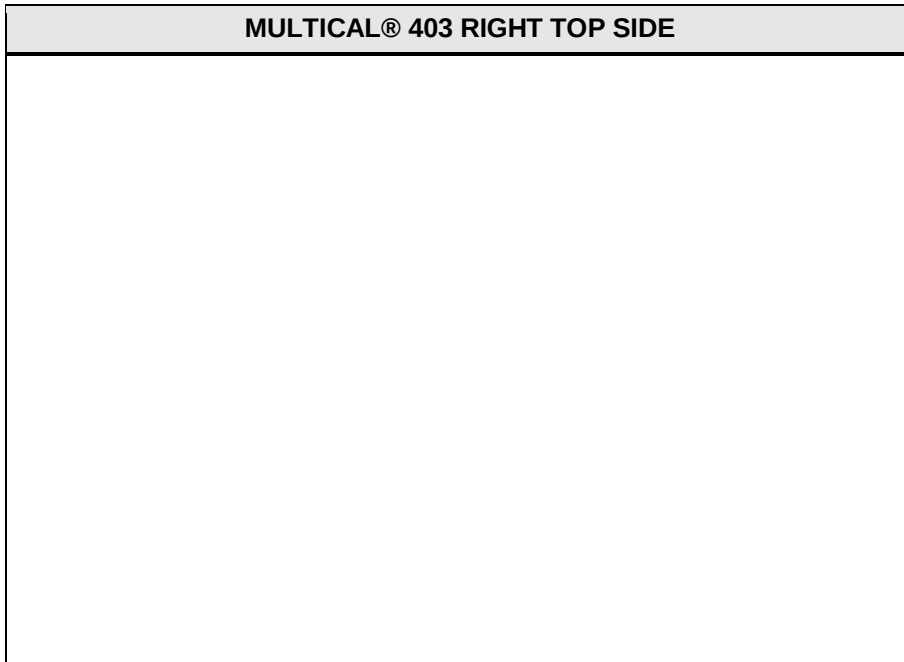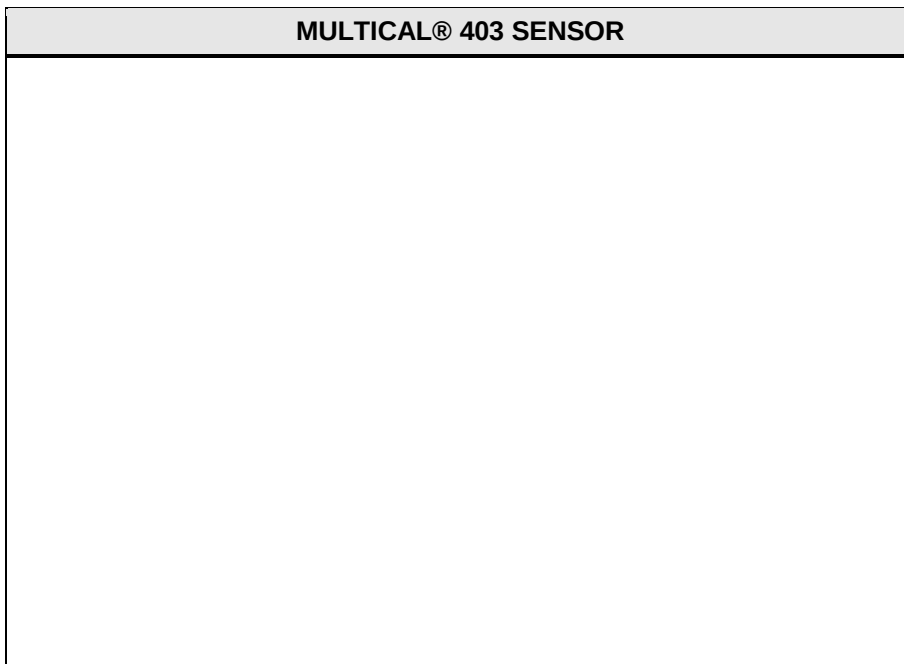MULTICAL® 403 RIGHT TOP SIDE**MULTICAL® 403 SENSOR**

MULTICAL® 603 FRONT SIDE**MULTICAL® 603 LABEL**

MULTICAL® 603 LEFT BOTTOM SIDE**MULTICAL® 603 REAR SIDE**

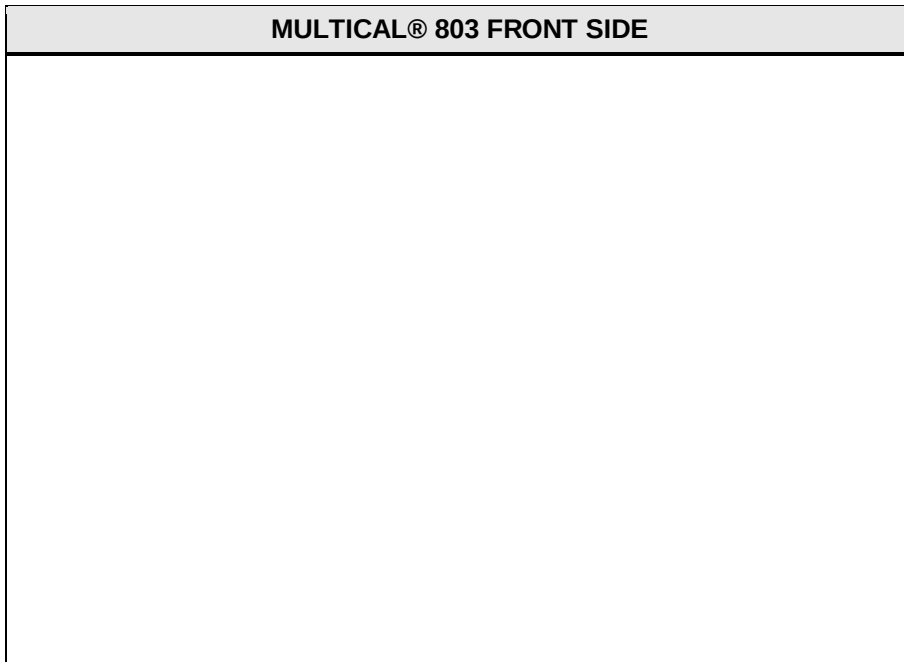MULTICAL® 603 RIGHT TOP SIDE**MULTICAL® 803 FRONT SIDE**

MULTICAL® 803 LEFT FRONT SIDE**MULTICAL® 803 REAR SIDE**

MULTICAL® 803 RIGHT BOTTOM SIDE

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	External antenna	smarteq	6699448 A4	-
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
1	SRD Tx (EUT sends permanently status information via SRD 915 MHz connection)
Comment:	

1.6 EUT Configuration

Configuration #	Description
1	MULTICAL® 403 is powered up and powered with 3.6 V DC internal battery. MULTICAL® 403 sends permanently status information via SRD 915 MHz connection.
2	MULTICAL® 603 is powered up and powered with 24 V / 60 Hz external power supply. MULTICAL® 603 sends permanently status information via SRD 915 MHz connection.
3	MULTICAL® 803 is powered up and powered with 24 V / 60 Hz external power supply. MULTICAL® 803 sends permanently status information via SRD 915 MHz connection.
Comment:	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dBµV. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBµV + 26 dB/m	= 47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	1
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	PASS	1
Comment: 1 → The test data of the worst-case conditions were recorded and shown on the next pages.				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4


2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	3760
Measurement range	30 MHz to 18800 MHz
Temperature [°C]	21
Humidity [%]	32
Operator	Stephan Liebich
Date	2020-01-13


2.1.2 Setup

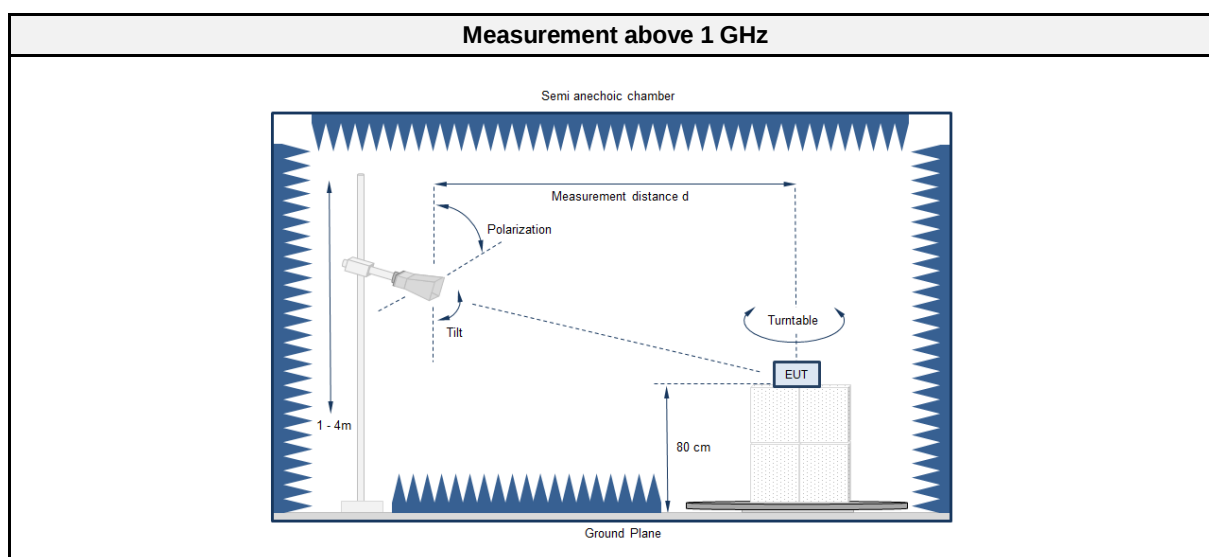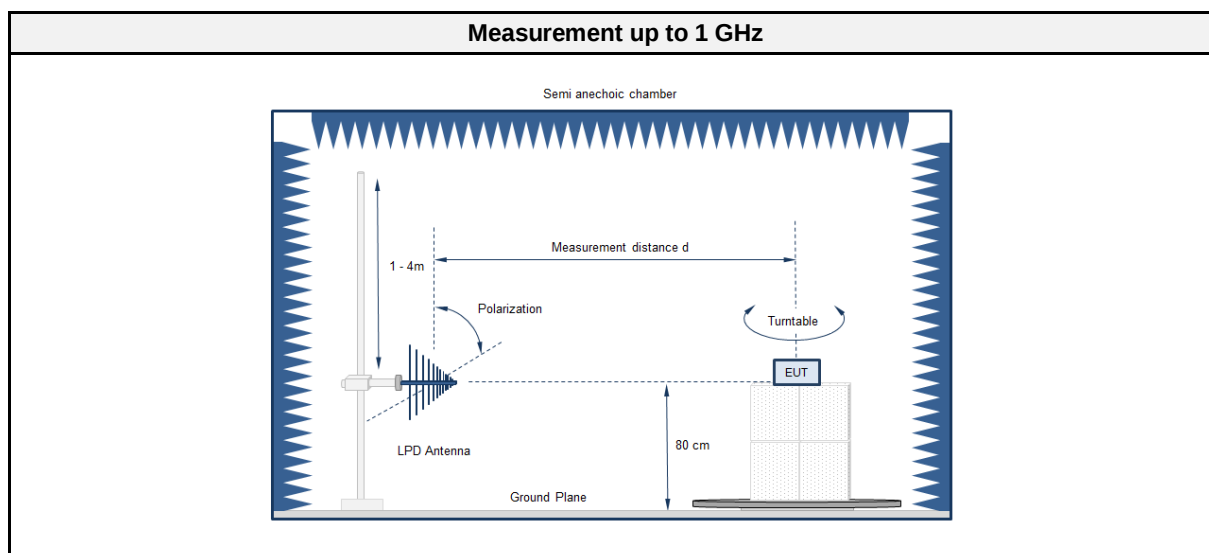

Equipment placement - Table top

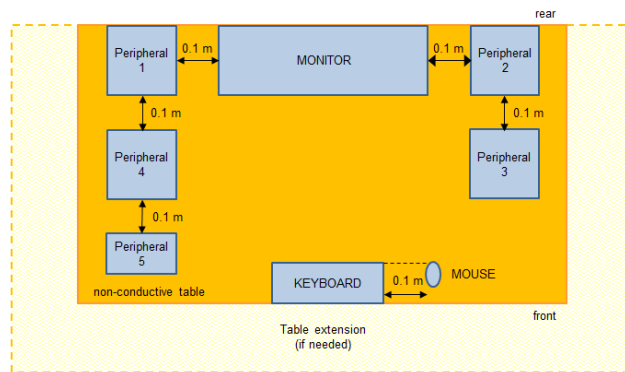

Test Setup

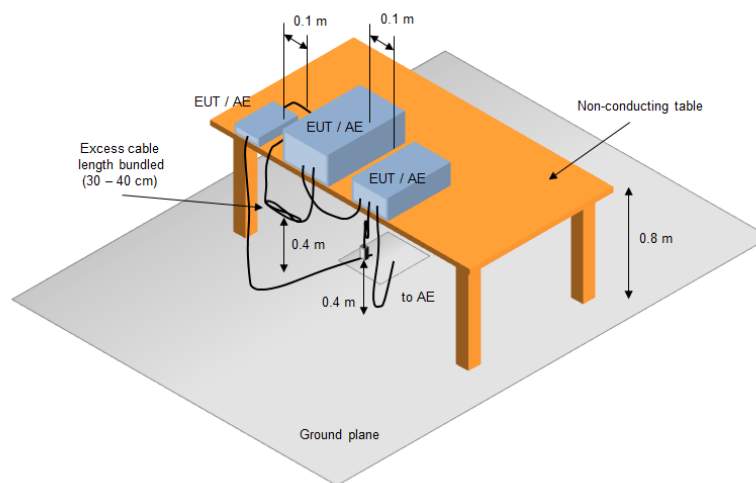

2.1.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2019-09	2020-09
Spectrum analyzer	Rohde & Schwarz Vertriebs GmbH	FSW43	EF00896	2019-07	2020-07
Horn antenna	Schwarzbeck	BBHA 9120D (1-18GHz)	EF00018	2019-10	2022-10
40GHz High Gain Antenna	Amplifier Research	AT4560	EF00302	2019-05	2020-05
Biconical Antenna	R&S	HK 116	EF00030	2019-04	2022-04
LPD Antenna	R&S	HL 223	EF00187	2019-05	2022-05
Climatic Sensor	Embedded Data Systems, LLC.	2800100000254 17E	EF01054	2019-05	2020-05

2.1.4 Procedure

Exploratory measurement
1. The EUT was placed on a non-conductive table at a height of 0.8m. 2. The EUT and support equipment, if needed, were set up to simulate typical usage. 3. Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage. 4. The antenna was placed at a distance of 3 or 10 m. 5. The received signal was monitored at the measurement receiver. 6. This procedure has to be performed in both antenna polarizations, horizontal and vertical. 7. The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

Final measurement
1. The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver. 2. A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast. 3. The EUT and cable arrangement were based on the exploratory measurement results. 4. Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded. 5. The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits

Class B @ 3 m		
Frequency [MHz]	Detector	Limit [dBμV/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54

Class A @ 10 m		
Frequency [MHz]	Detector	Limit [dBμV/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5

2.1.6 Results


Test Results			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	1
1	2	PASS	1
1	3	PASS	1
1 → The test data of the worst-case conditions from 30 MHz to 17 GHz were recorded and shown on the next pages. No relevant peaks were detected above 17 GHz with Spectrum analyzer.			

2.1.7 Setup Photos

TEST SETUP 1 EUT CONFIGURATION 1 RADIATED EMISSION




TEST SETUP 1 EUT CONFIGURATION 2 RADIATED EMISSION




TEST SETUP 1 EUT CONFIGURATION 3 RADIATED EMISSION

TEST SETUP 2 EUT CONFIGURATION 1 RADIATED EMISSION

TEST SETUP 2 EUT CONFIGURATION 2 RADIATED EMISSION




TEST SETUP 2 EUT CONFIGURATION 3 RADIATED EMISSION



TEST SETUP 3 EUT CONFIGURATION 1 RADIATED EMISSION

TEST SETUP 3 EUT CONFIGURATION 2 RADIATED EMISSION


TEST SETUP 3 EUT CONFIGURATION 3 RADIATED EMISSION




TEST SETUP FOCUS EUT CONFIGURATION 1 RADIATED EMISSION



TEST SETUP FOCUS EUT CONFIGURATION 2 RADIATED EMISSION



TEST SETUP FOCUS EUT CONFIGURATION 3 RADIATED EMISSION




2.1.8 Records

**Radiated emissions
according to FCC part 15B**

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 403
 Test Sample ID: 71769201/MG/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 3.6 V DC (internal battery)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:


Index 1

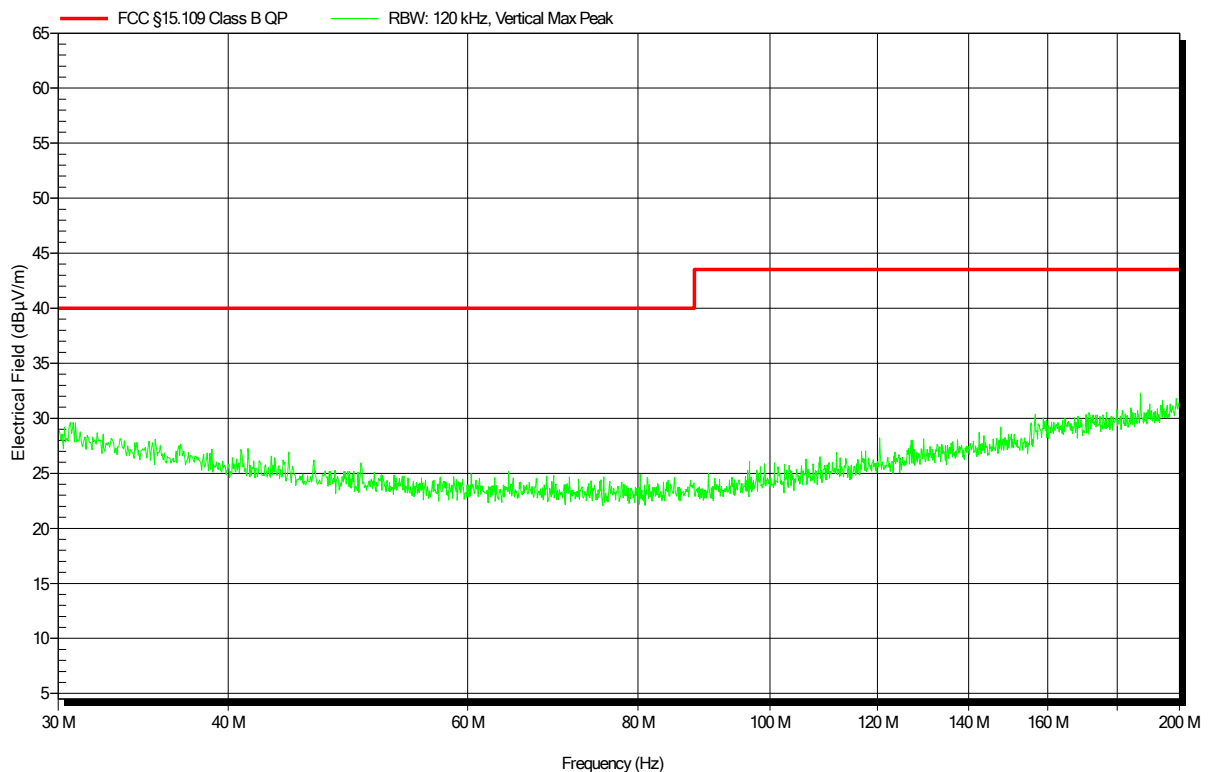

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 403
 Test Sample ID: 71769201/MG/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 3.6 V DC (internal battery)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:


Index 2

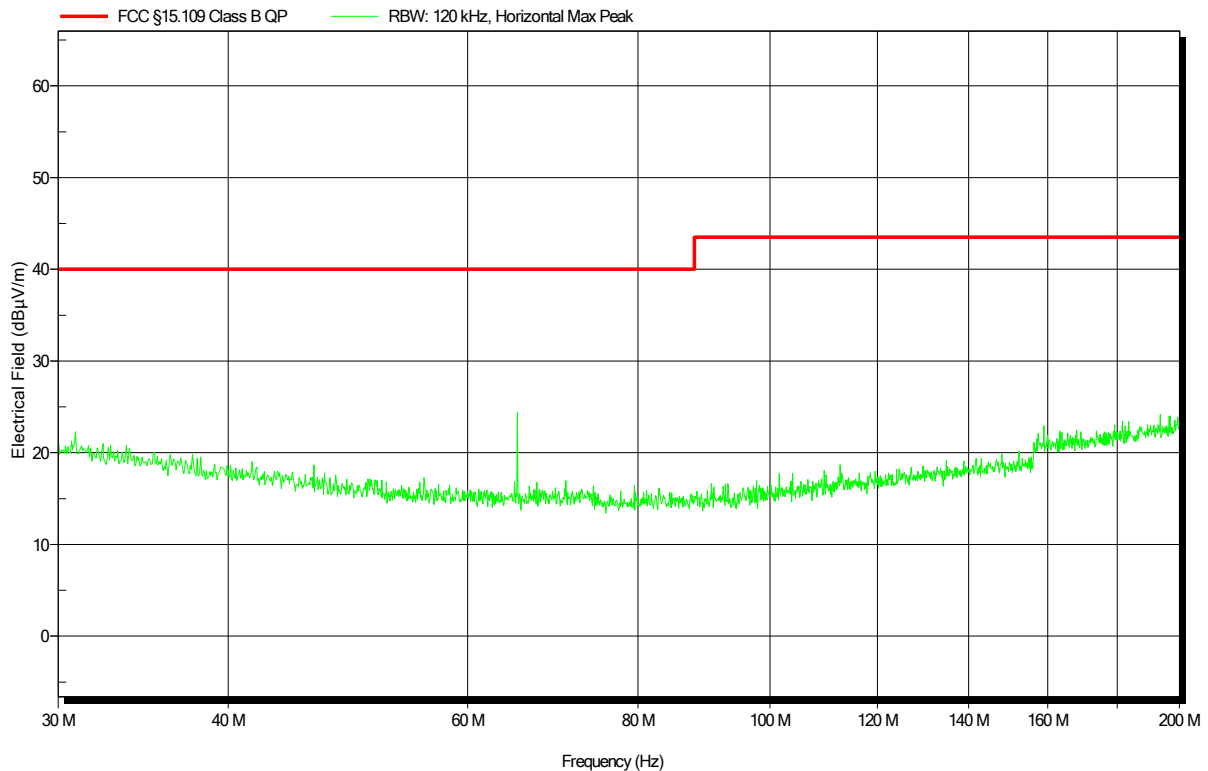

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 403
 Test Sample ID: 71769201/MG/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 3.6 V DC (internal battery)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 5

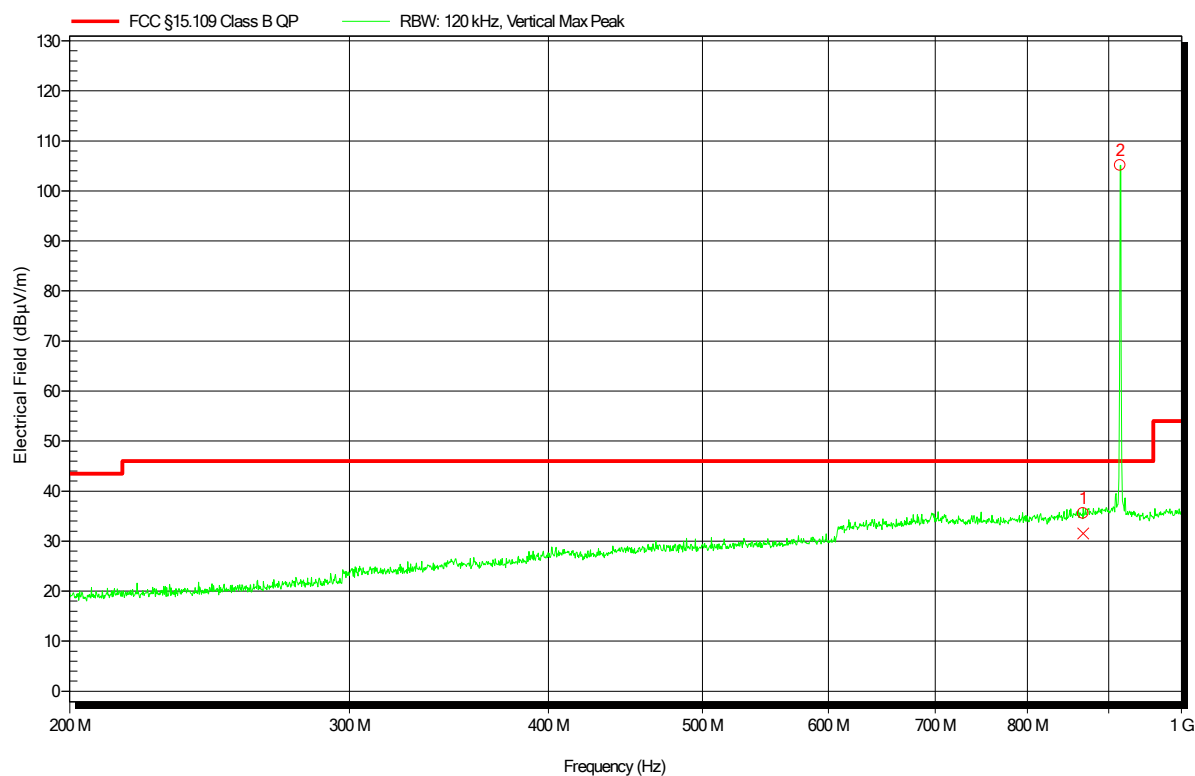

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	867.163 MHz	31.52 dBµV/m	46.02 dBµV/m	-14.5 dB	Pass	0 Degree	1 m
2	914.8 MHz		SRD-Carrier			0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 403
 Test Sample ID: 71769201/MG/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 3.6 V DC (internal battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 6

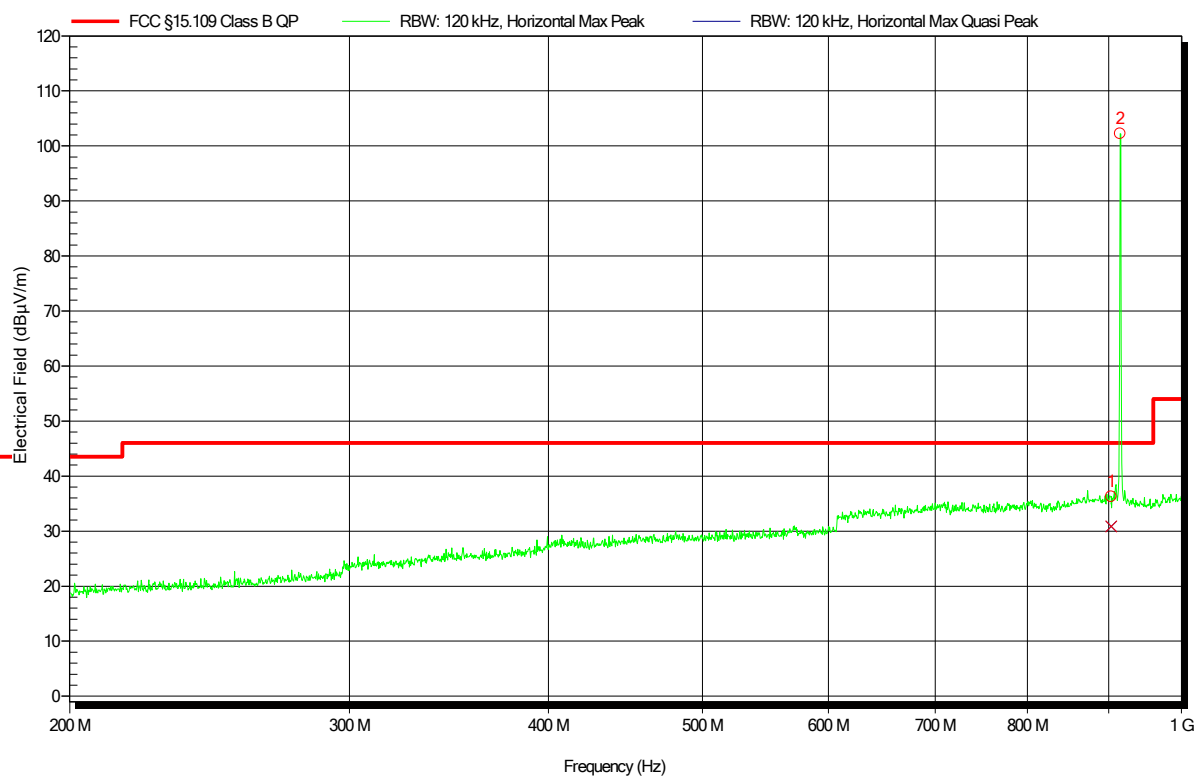

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	903.41 MHz	30.85 dBµV/m	46.02 dBµV/m	-15.17 dB	Pass	0 Degree	1 m
2	914.8 MHz		SRD-Carrier			0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 403
 Test Sample ID: 71769201/MG/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 3.6 V DC (internal battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 7

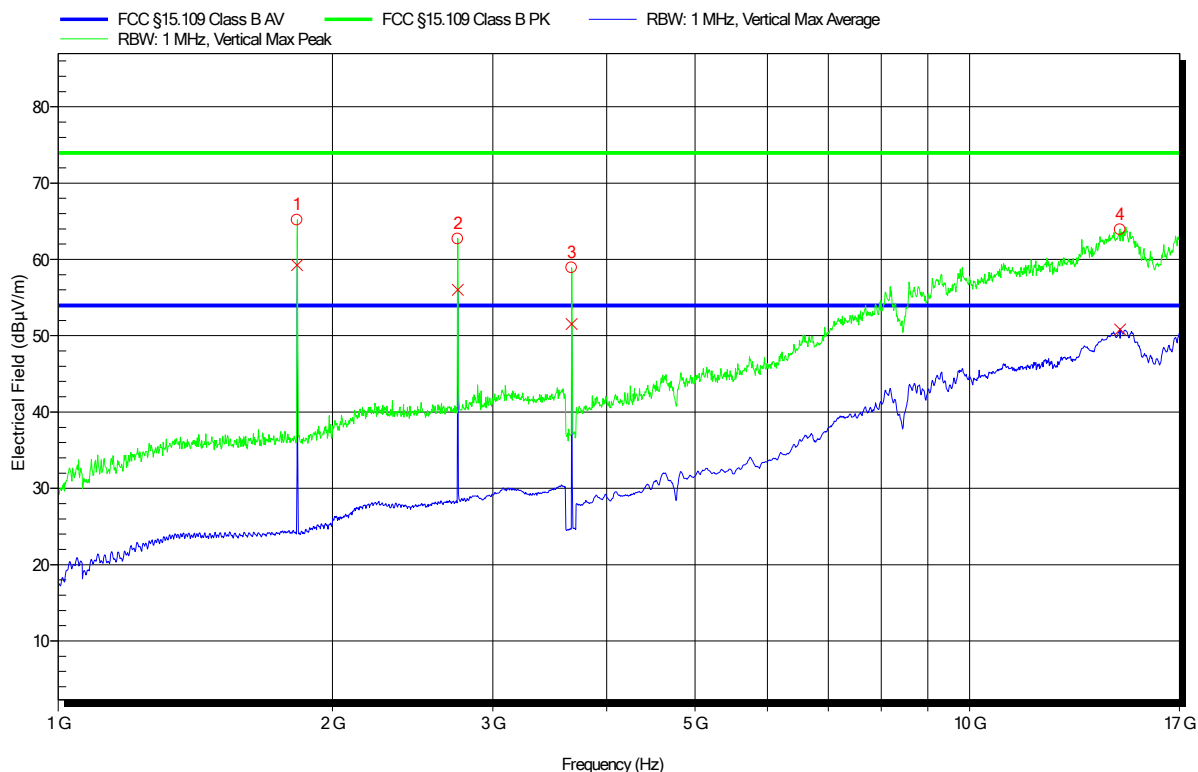

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.829 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m
2	2.746 GHz		3. Harmonic of SRD-Carrier			0 Degree	1 m
3	3.661 GHz		4. Harmonic of SRD-Carrier			0 Degree	1 m
4	14.627 GHz	63.9 dBµV/m	73.98 dBµV/m	-10.08 dB	Pass	0 Degree	1 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.829 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m
2	2.746 GHz		3. Harmonic of SRD-Carrier			0 Degree	1 m
3	3.661 GHz		4. Harmonic of SRD-Carrier			0 Degree	1 m
4	14.627 GHz	50.81 dBµV/m	53.98 dBµV/m	-3.17 dB	Pass	0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 403
 Test Sample ID: 71769201/MG/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 3.6 V DC (internal battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 8

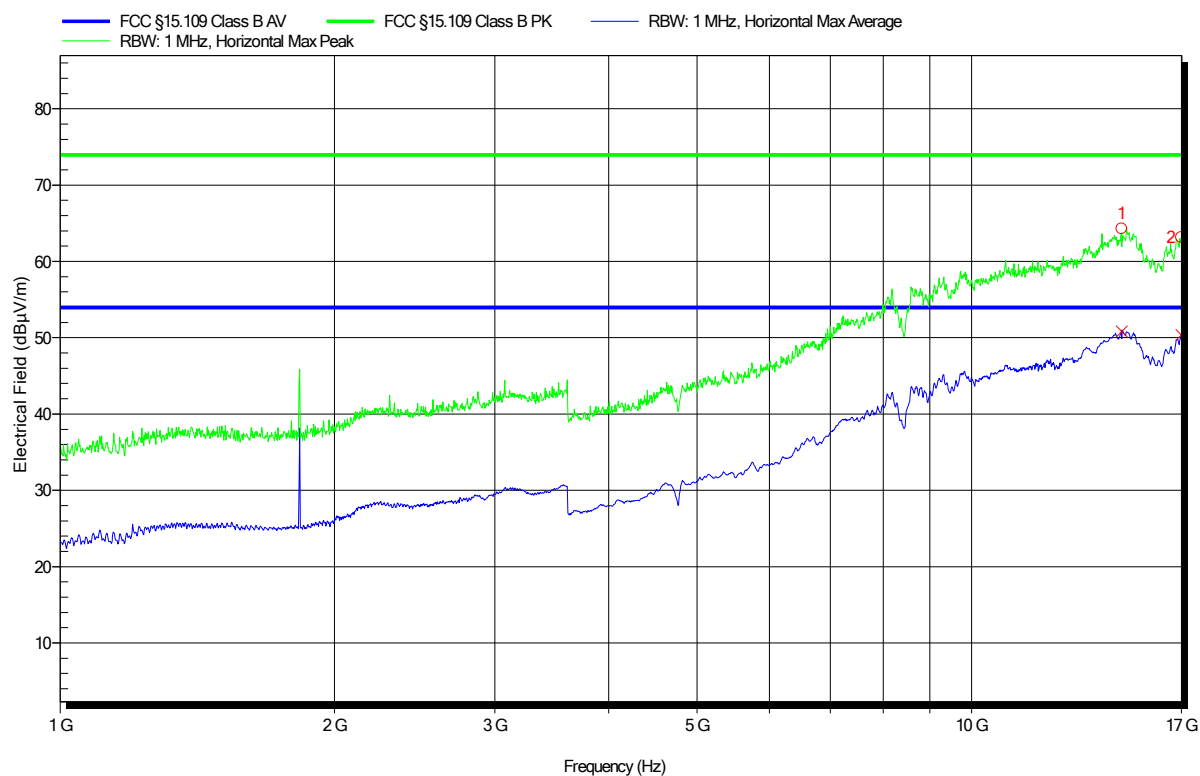

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	14.616 GHz	64.29 dBµV/m	73.98 dBµV/m	-9.69 dB	Pass	0 Degree	1 m
2	16.998 GHz	63.15 dBµV/m	73.98 dBµV/m	-10.83 dB	Pass	0 Degree	1 m

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	14.616 GHz	50.83 dBµV/m	53.98 dBµV/m	-3.15 dB	Pass	0 Degree	1 m
2	16.998 GHz	50.36 dBµV/m	53.98 dBµV/m	-3.62 dB	Pass	0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:


Index 10

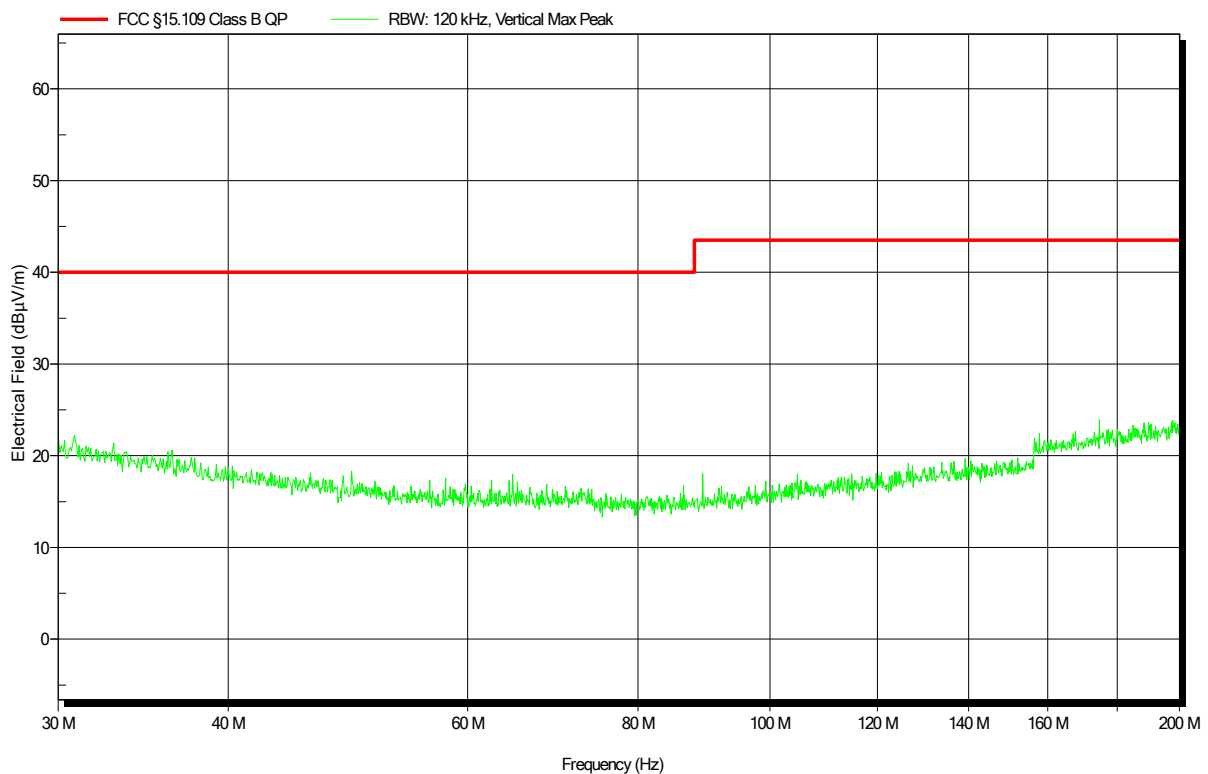

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:


Index 11

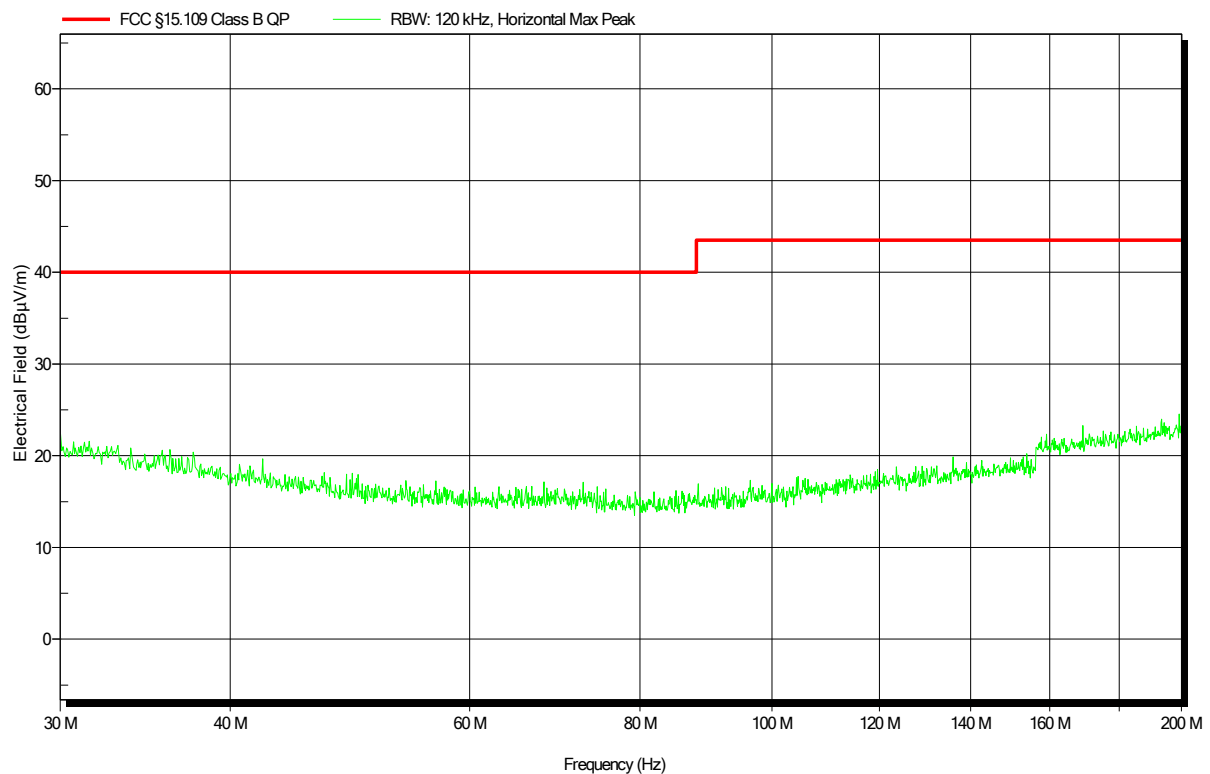

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 8

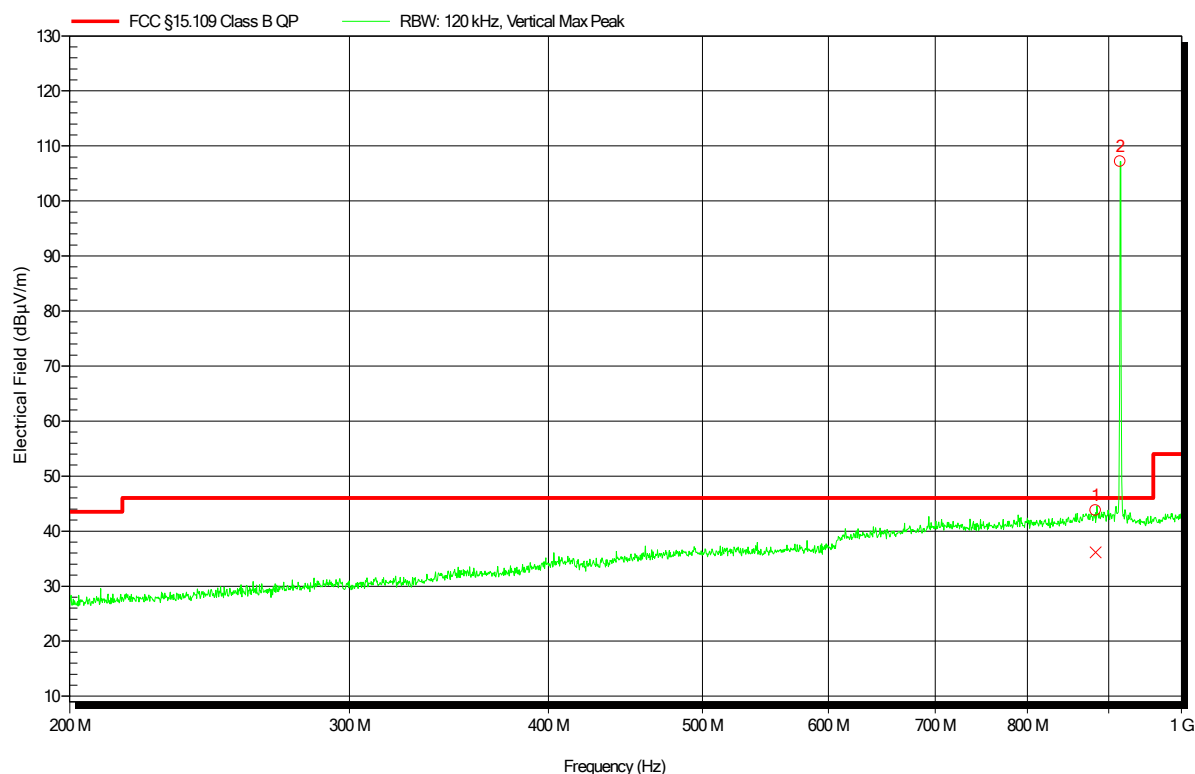

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	882.978 MHz	36.11 dBμV/m	46.02 dBμV/m	-9.91 dB	Pass	0 Degree	1 m
2	914.8 MHz		SRD-Carrier			0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 9

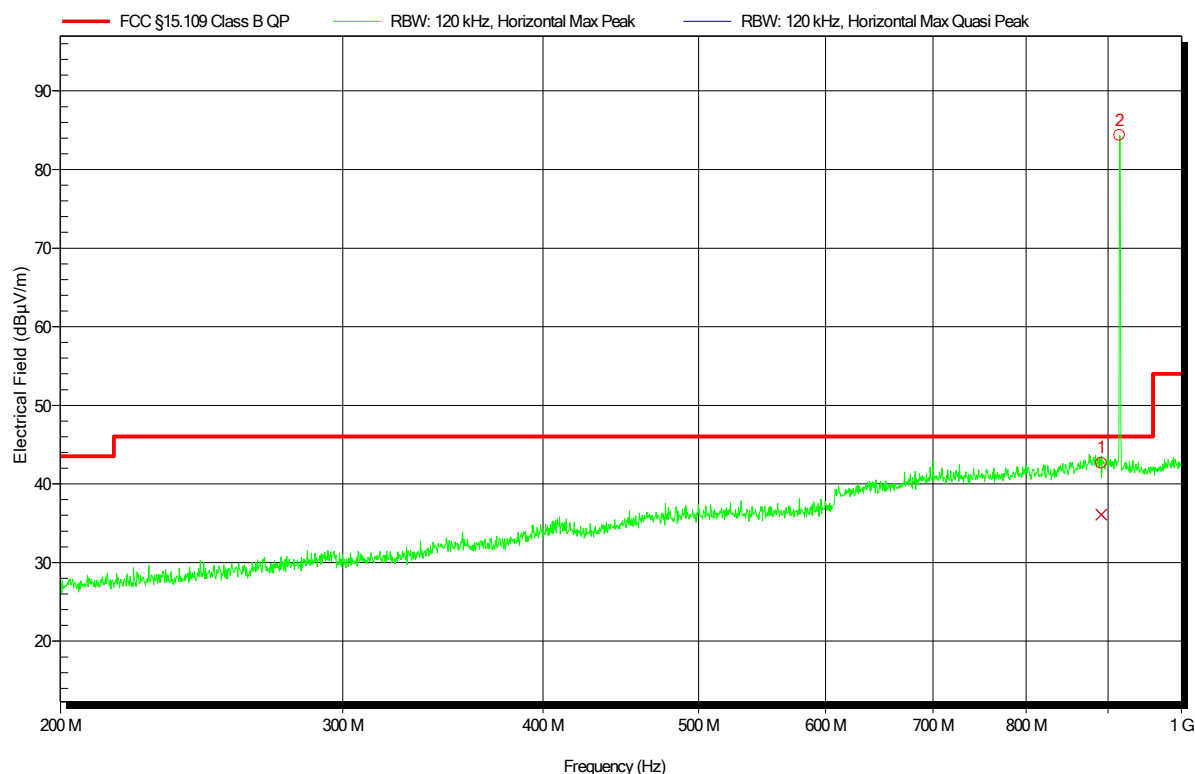


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	891.48 MHz	36.1 dBµV/m	46.02 dBµV/m	-9.92 dB	Pass	0 Degree	1 m
2	914.8 MHz		SRD-Carrier			0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3 m
 Mode: 1

Index 12

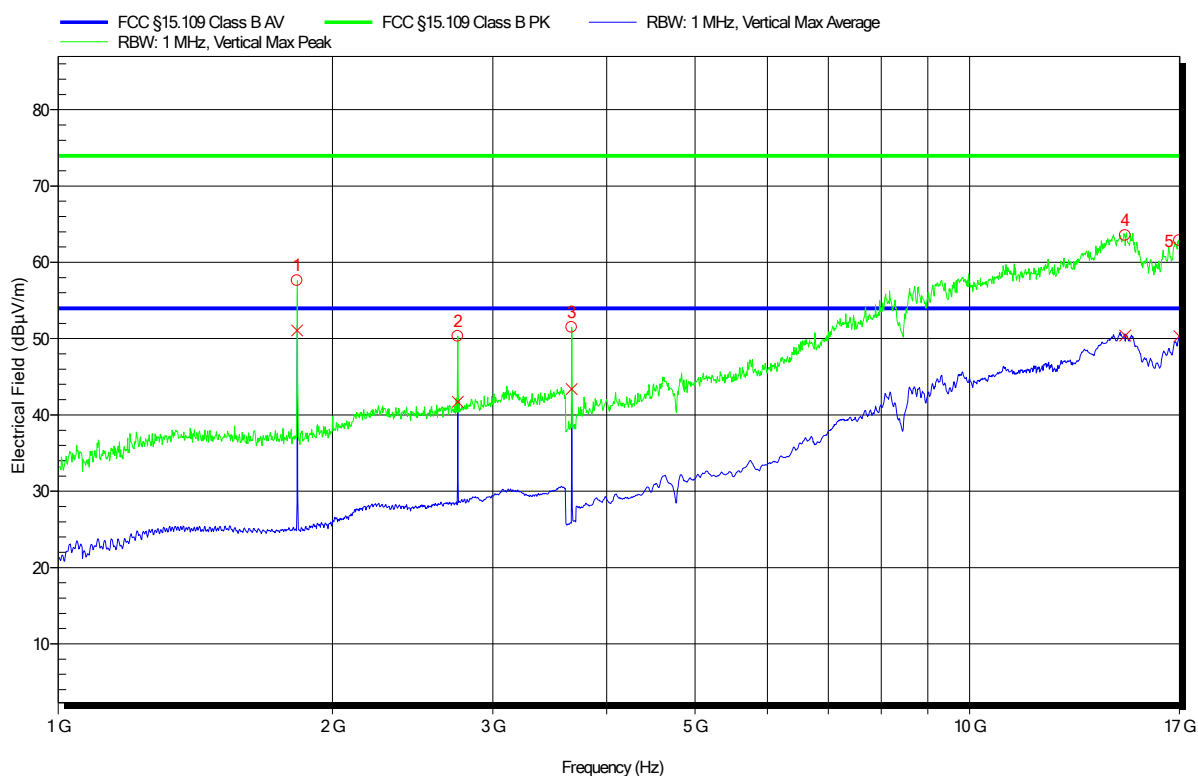

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.829 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m
2	2.744 GHz		3. Harmonic of SRD-Carrier			0 Degree	1 m
3	3.661 GHz		4. Harmonic of SRD-Carrier			0 Degree	1 m
4	14.818 GHz	63.55 dBµV/m	73.98 dBµV/m	-10.43 dB	Pass	0 Degree	1 m
5	16.992 GHz	62.84 dBµV/m	73.98 dBµV/m	-11.14 dB	Pass	0 Degree	1 m

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.829 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m
2	2.744 GHz		3. Harmonic of SRD-Carrier			0 Degree	1 m
3	3.661 GHz		4. Harmonic of SRD-Carrier			0 Degree	1 m
4	14.818 GHz	50.4 dBµV/m	53.98 dBµV/m	-3.58 dB	Pass	0 Degree	1 m
5	16.992 GHz	50.32 dBµV/m	53.98 dBµV/m	-3.66 dB	Pass	0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1:

Index 13

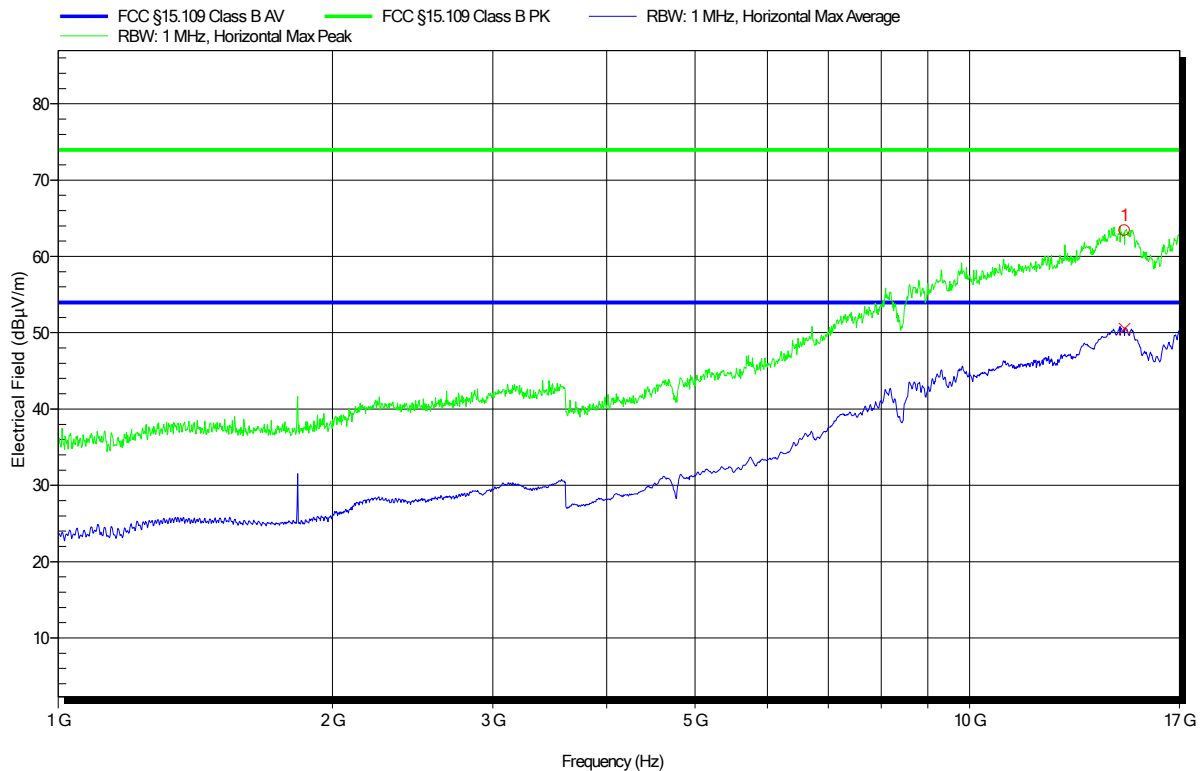

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	14.791 GHz	63.42 dBµV/m	73.98 dBµV/m	-10.56 dB	Pass	0 Degree	1 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	14.791 GHz	50.54 dBµV/m	53.98 dBµV/m	-3.44 dB	Pass	0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:


Index 9

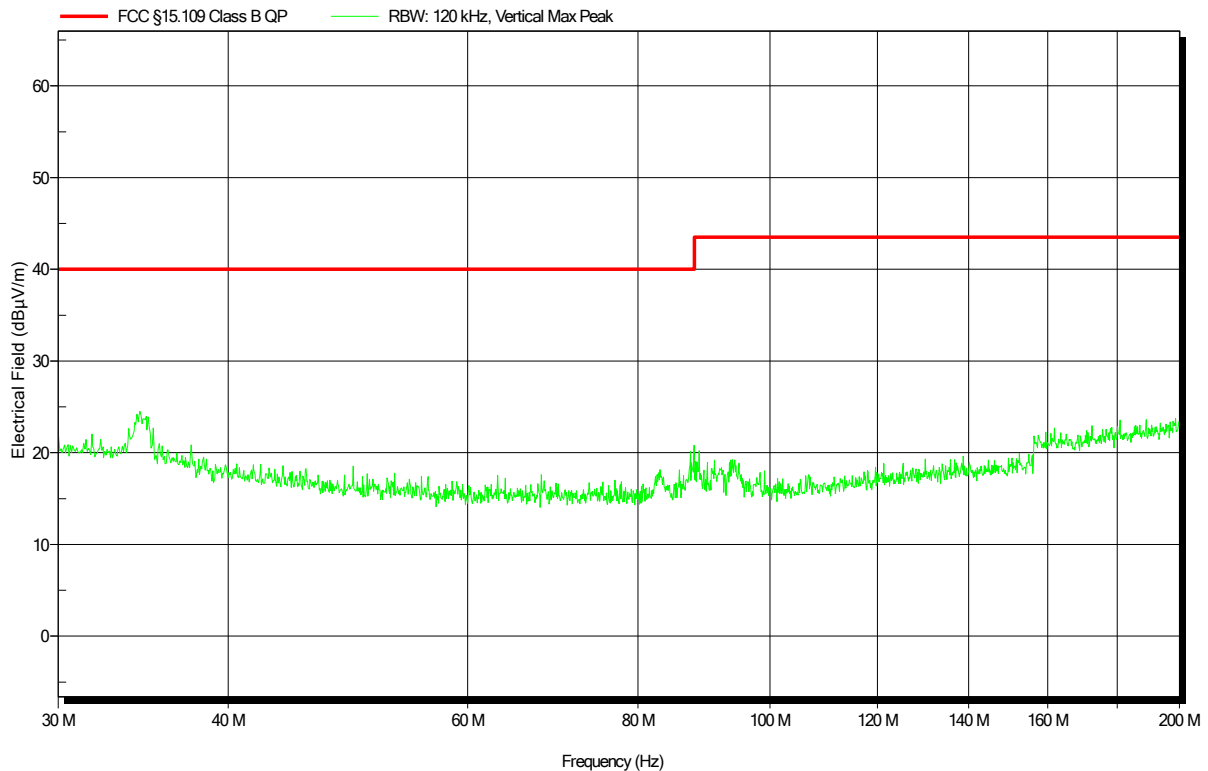

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:


Index 10

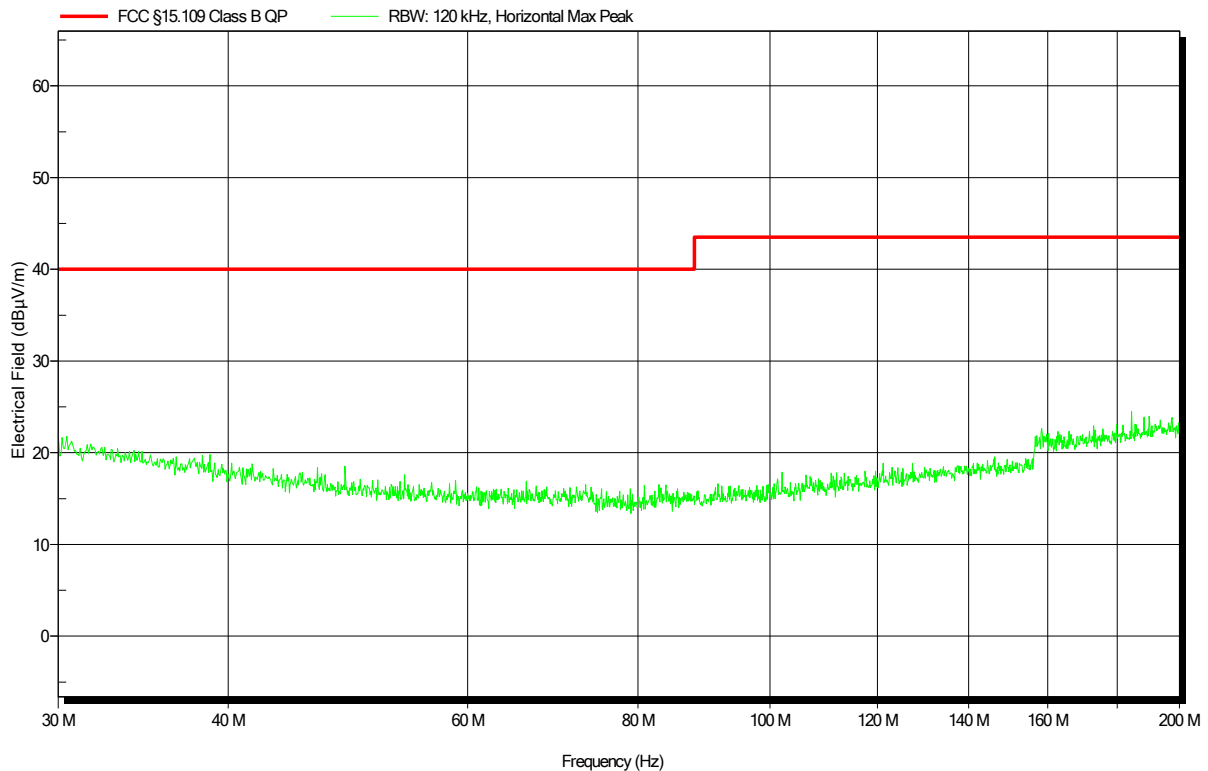

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 7

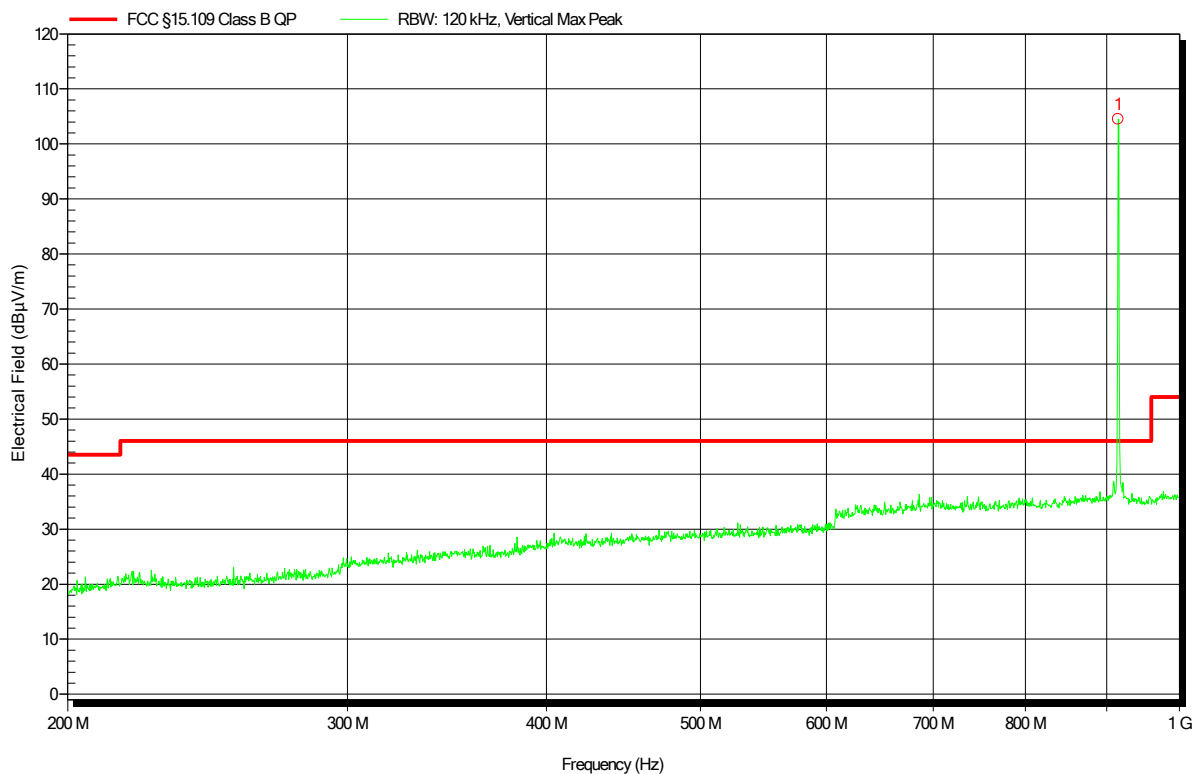


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	914.8 MHz			SRD-Carrier		0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1:

Index 8

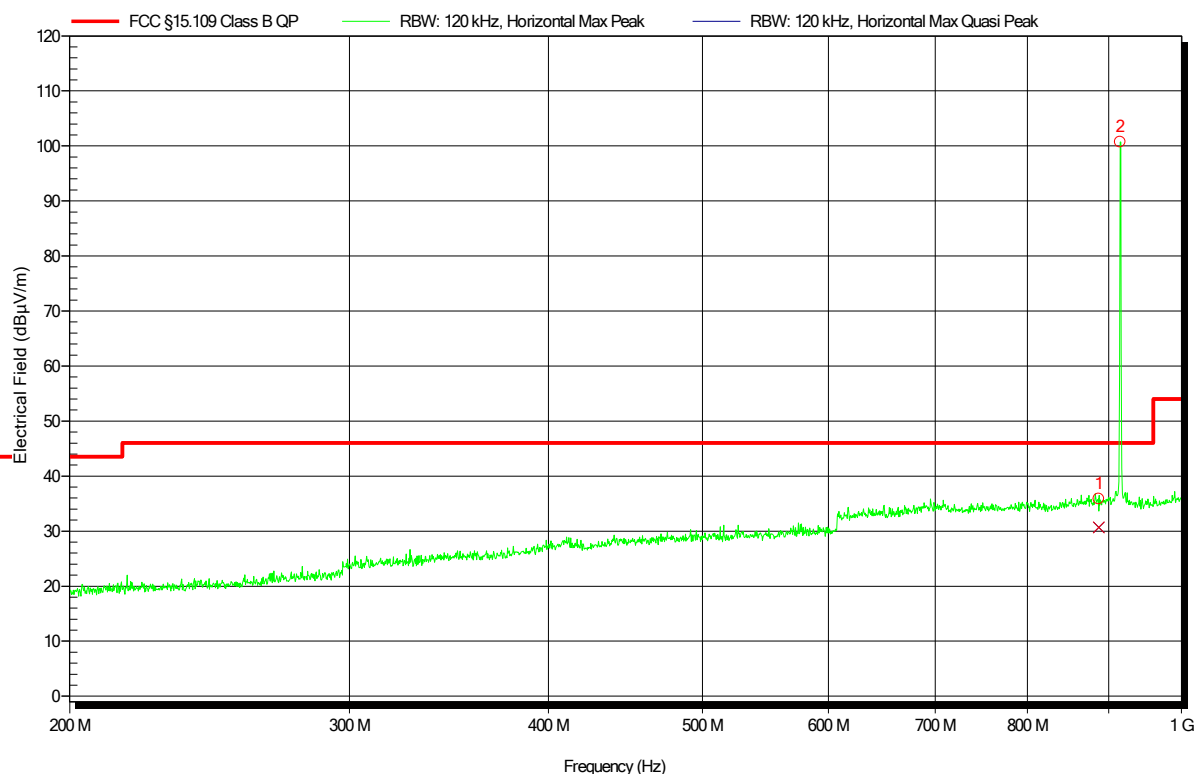

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	887.031 MHz	30.67 dBµV/m	46.02 dBµV/m	-15.35 dB	Pass	0 Degree	1 m
2	914.8 MHz		SRD-Carrier			0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3 m
 Mode: 1

Index 11

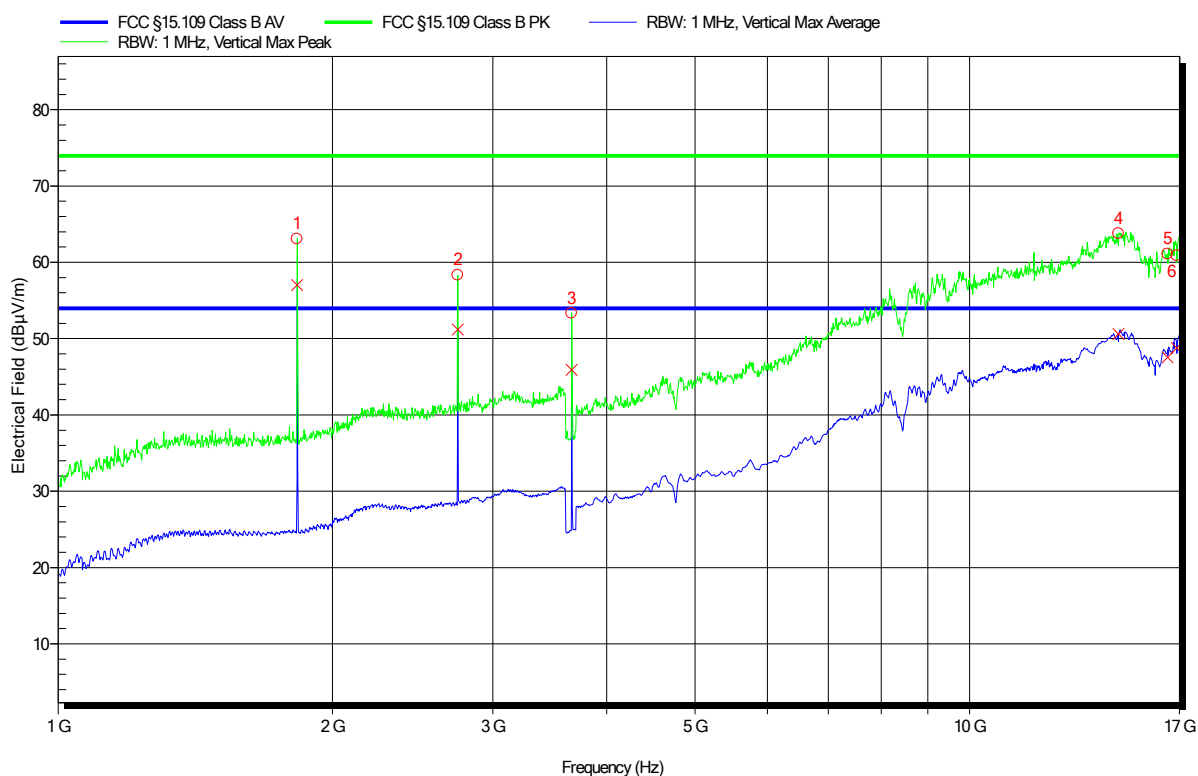

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.829 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m
2	2.746 GHz		3. Harmonic of SRD-Carrier			0 Degree	1 m
3	3.661 GHz		4. Harmonic of SRD-Carrier			0 Degree	1 m
4	14.565 GHz	63.78 dBµV/m	73.98 dBµV/m	-10.2 dB	Pass	0 Degree	1 m
5	16.5 GHz	61.1 dBµV/m	73.98 dBµV/m	-12.88 dB	Pass	0 Degree	1 m
6	16.883 GHz	60.91 dBµV/m	73.98 dBµV/m	-13.07 dB	Pass	0 Degree	1 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.829 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m
2	2.746 GHz		3. Harmonic of SRD-Carrier			0 Degree	1 m
3	3.661 GHz		4. Harmonic of SRD-Carrier			0 Degree	1 m
4	14.565 GHz	50.62 dBµV/m	53.98 dBµV/m	-3.36 dB	Pass	0 Degree	1 m
5	16.5 GHz	47.57 dBµV/m	53.98 dBµV/m	-6.41 dB	Pass	0 Degree	1 m
6	16.883 GHz	48.76 dBµV/m	53.98 dBµV/m	-5.22 dB	Pass	0 Degree	1 m


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-01-13
 Operating Conditions: ambient temperature: 21°C
 power input: 24 V / 60 Hz
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3 m
 Mode: 1

Index 12

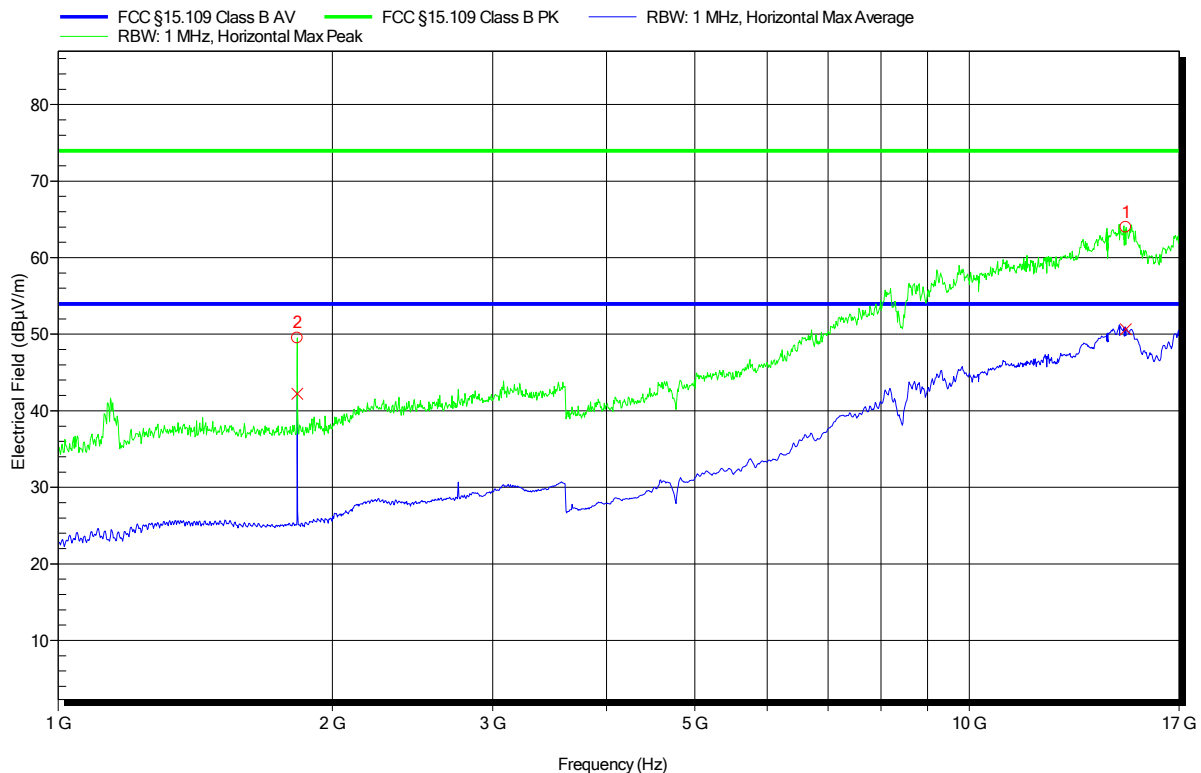

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	14.853 GHz	63.98 dBµV/m	73.98 dBµV/m	-10 dB	Pass	0 Degree	1 m
2	1.83 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m



Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	14.853 GHz	50.66 dBµV/m	53.98 dBµV/m	-3.32 dB	Pass	0 Degree	1 m
2	1.83 GHz		2. Harmonic of SRD-Carrier			0 Degree	1 m

2.2 Test Conditions and Results - Conducted emissions acc. to ANSI C63.4

2.2.1 Information

Test Information	
Reference	FCC 15.107, ICES-003, 8, 6.2
Reference method	ANSI C63.4:2014 Section 12
Measurement range	150 kHz to 30 MHz
Equipment class	Class B
Equipment type	Table top
Temperature [°C]	22
Humidity [%]	33
Operator	Stephan Liebich
Date	2020-03-10

2.2.2 Setup

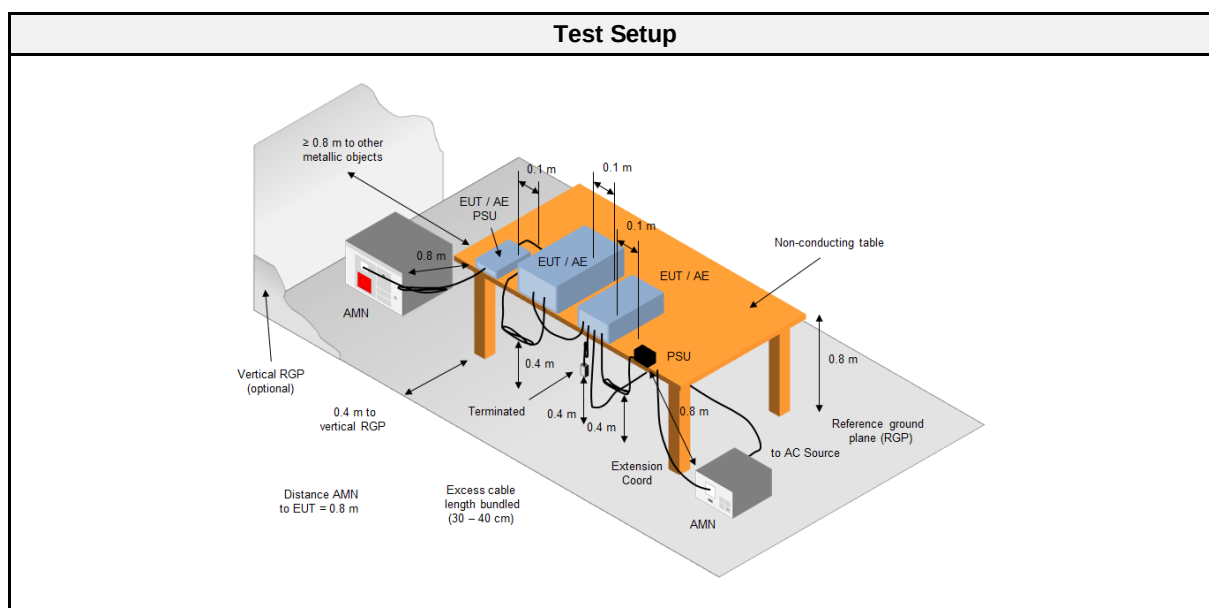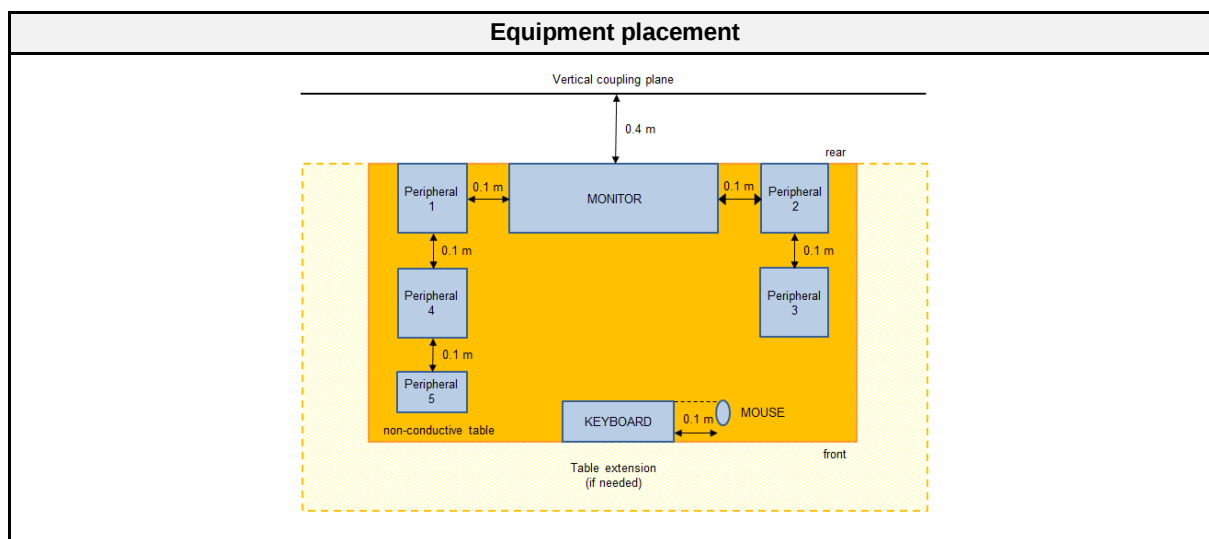

2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Weather Station	ELV Elektronik AG	WS3000	EF00340	2012-02	2015-02
AMN	R&S	ESH3-Z5	EF00036	2019-07	2021-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2019-07	2020-07
EMI Test Receiver	R&S	ESR 7	EF00943	2019-10	2020-10
Power supply	-	2224.2	EF00046	-	-

2.2.4 Procedure

Exploratory measurement	
1.	The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
2.	The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
3.	The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
4.	The LISN measurement port was connected to a measurement receiver
5.	I/O cables were bundled not longer than 0.4 m
6.	Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
7.	To maximize the emissions the cable positions were manipulated
8.	The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Final measurement	
1.	The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
2.	The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
3.	The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
4.	The LISN measurement port was connected to a measurement receiver
5.	The EUT and cable arrangement were based on the exploratory measurement results
6.	The test data of the worst-case conditions were recorded and shown on the next pages

2.2.5 Limits

Class B		
Frequency [MHz]	Quasi-peak Limit [dBμV]	Average Limit [dBμV]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50
* Decreases with the logarithm of the frequency		

2.2.6 Results

AC power line conducted emissions					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
POWER	AMN	2	1	PASS	-
POWER	AMN	3	1	PASS	-

2.2.7 Setup Photos

TEST SETUP EUT CONFIGURATION 2


TEST SETUP EUT CONFIGURATION 3

2.2.8 Records

Conducted emissions at the mains power port according to FCC Part 15b

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 603
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-03-10
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz
 LISN: Rohde & Schwarz ESH3-Z5
 Mode: 1
 Applied to Port: POWER
 Note 1:

Index 22

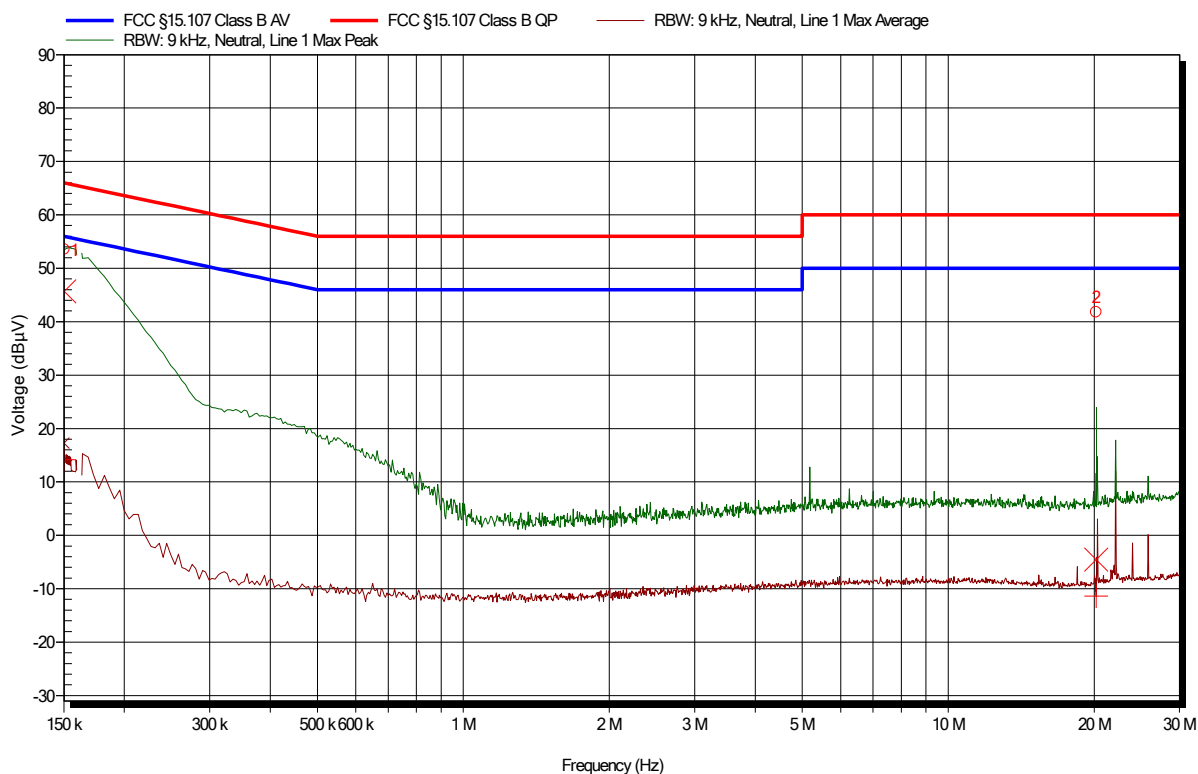

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	150.45 kHz	45.69 dBμV	65.98 dBμV	-20.29 dB	Pass	Line 1
2	20.198 MHz	-4.55 dBμV	60 dBμV	-64.55 dB	Pass	Line 1

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	150.45 kHz	14.15 dBμV	55.98 dBμV	-41.83 dB	Pass	Line 1
2	20.198 MHz	-11.38 dBμV	50 dBμV	-61.38 dB	Pass	Line 1


Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted emissions at the mains power port according to FCC Part 15b

Project Number: G0M-1912-8647
 Applicant: Kamstrup A/S
 Model Description: heat / cooling meter
 Model: MULTICAL® 803
 Test Sample ID: 80512882/9Z/19
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2020-03-10
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz
 LISN: Rohde & Schwarz ESH3-Z5
 Mode: 1
 Applied to Port: POWER
 Note 1:

Index 23

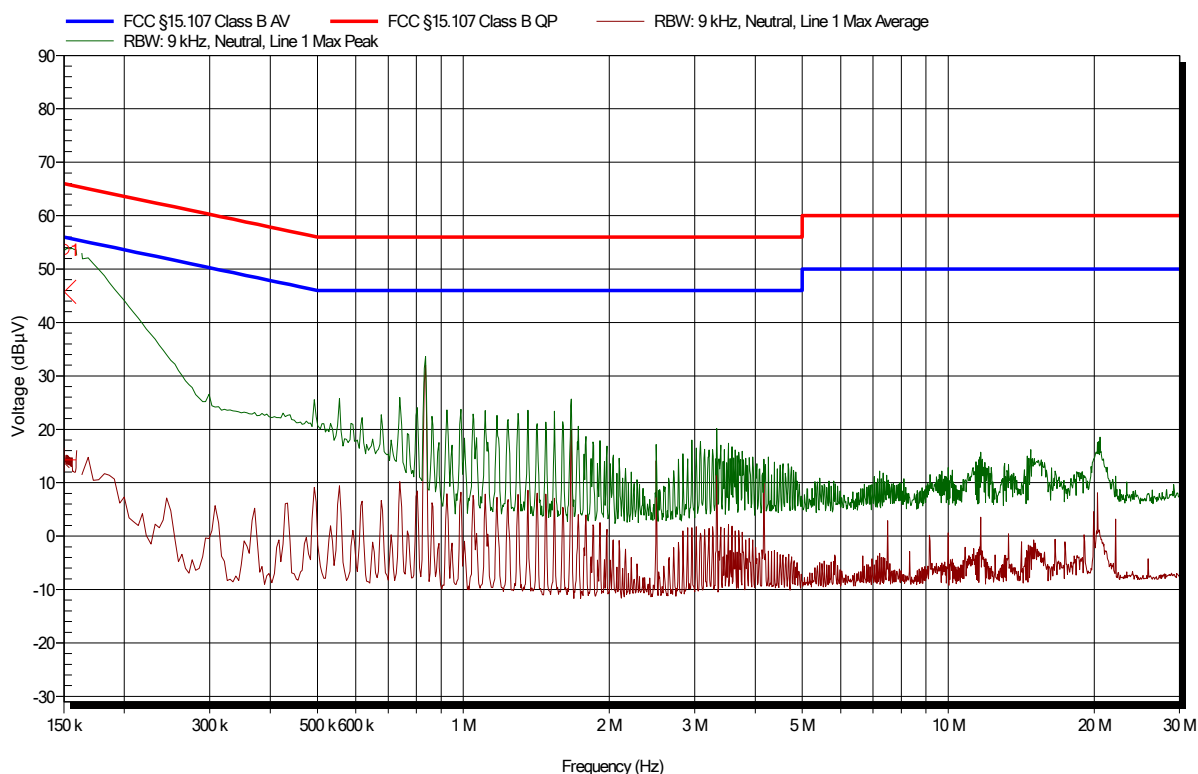

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	150.45 kHz	45.75 dBμV	65.98 dBμV	-20.22 dB	Pass	Line 1
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	150.45 kHz	14.27 dBμV	55.98 dBμV	-41.71 dB	Pass	Line 1

Test Report No.: G0M-1912-8647-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany