

EMC TEST REPORT FCC 47 CFR Part 15B, ISED ICES-003 Issue 6	
Report Reference No	G0M-2002-8859-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAkks - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkks - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	Kamstrup A/S
Address	Industrivej 28 8660 Skanderborg DENMARK
Test Specification Standard(s)	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014+A1:2017
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Ultrasonic water meter
Model(s)	KWM2220
Additional Model(s)	KWM3220
Brand Name(s)	Kamstrup
Hardware Version(s)	Unit: 6201-210-04, rev. 00; RF PCB BOM: 55501823, rev. C1; Flow PCB BOM: 55501813, rev. B3 (KWM2220); Unit: 6201-204-01, rev. A1; RF PCB BOM: 55501823, rev. C1; Flow PCB BOM: 55501523. Rev. B1 (KWM3220);
Software Version(s)	RF: 50981336, rev. N1; Meter: 50981595, rev. 00 (KWM2220); RF: 50981336, rev. N1; Meter: 50981595, rev. 00 (KWM3220);
FCC-ID	OUY-KWMX220
IC	n/a
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Date of receipt of test item	2020-05-28	
Report:		
Compiled by	Matthias Handrik	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2020-07-28	
Total number of pages	73	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		

Additional Comments:

Additional variants have been declared by the manufacturer.
The listed models were not tested, evaluated or assessed in no way.

Additional Model 1	Product Type Description	Ultrasonic water meter
	Model Name	KWM2220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6201-210-01, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501813, rev. B3
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 2	Product Type Description	Ultrasonic water meter
	Model Name	KWM2220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6201-210-02, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501813, rev. B3
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 3	Product Type Description	Ultrasonic water meter
	Model Name	KWM2220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6201-210-03, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501813, rev. B3
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 4	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-205-01, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 5	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-02, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00

Additional Model 6	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-03, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 7	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-04, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 8	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-05, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 9	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-06, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 10	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-07, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00
Additional Model 11	Product Type Description	Ultrasonic water meter
	Model Name	KWM3220
	Brand Name (optional)	Kamstrup
	Hardware Version	Unit: 6202-103-08, rev.00 RF PCB BOM: 55501823, rev. C1 Flow PCB BOM: 55501523, rev. B1
	Software Version	RF: 50981336, rev. N1 Meter: 50981595, rev. 00

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T _{NOM}	Nominal operating temperature
V _{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-07-28	Initial Release	

REPORT INDEX

1	Equipment (Test Item) Under Test.....	8
1.1	Equipment Ports.....	9
1.2	Equipment Photos - Internal.....	10
1.3	Equipment Photos - External.....	15
1.4	Support Equipment.....	19
1.5	Operational Modes.....	20
1.6	EUT Configuration.....	21
1.7	Sample emission level calculation.....	22
2	Result Summary.....	23
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	24

1 Equipment (Test Item) Under Test

Description	Ultrasonic water meter	
Model	KWM2220	
Additional Model(s)	KWM3220	
Brand Name(s)	Kamstrup	
Serial Number(s)	KWM2220: KAM21142842/20 KWM3220: KAM21142842/20	
Hardware Version(s)	KWM2220Unit: 6201-210-04, rev. 00; RF PCB BOM: 55501823, rev. C1; Flow PCB BOM: 55501813, rev. B3 KWM3220 Unit: 6201-204-01, rev. A1; RF PCB BOM: 55501823, rev. C1; Flow PCB BOM: 55501523. Rev. B1	
Software Version(s)	RF: 50981336, rev. N1; Meter: 50981595, rev. 00 (KWM2220); RF: 50981336, rev. N1; Meter: 50981595, rev. 00 (KWM3220);	
FCC-ID	OUY-KWMX220	
IC	n/a	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	3759.9	
Radio Module	Type	SRD
	Model	unspecified
	Manufacturer	Kamstrup
	FCC-ID	None
	IC	None
Radio Module	Type	LMR/PMR
	Model	unspecified
	Manufacturer	Kampstrup
	FCC-ID	None
	IC	None
Supply Voltage	V _{NOM}	3.66V DC via internal Battery
Manufacturer	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	

1.1 Equipment Ports

Name	Type	Attributes	Comment
Antenna Connector	IO	Count: 1 Direction: In Service only: No	-
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
BAT	DC power input port connected to external battery		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		

1.2 Equipment Photos - Internal







1.3 Equipment Photos - External





1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Laptop	DELL	Latitude E6440	-
AE	Optical Readout Head	kamstrup	6699-099	Customer Support Equipment
AE	Antenna	kamstrup	Pit antenna 6697-902	Customer Support Equipment
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
1	EUT stand by for water flow metering. EUT transmit on 460.11875 MHz.
2	EUT stand by for water flow metering. EUT transmit on 915 MHz.
Comment:	

1.6 EUT Configuration

Configuration #	Description
1	EUT powered during test via 3.6V DC laboratory power supply. EUT assembled with external Antenna. Before the measurement is starting, EUT operational mode is setting up via laptop with Optical Readout Head. During measurement, laptop with Optical Readout Head is remove from EUT and outside the measurement chamber.
Comment:	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dBµV. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBµV + 26 dB/m	= 47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 6.2	Radiated emissions	ANSI C63.4:2014 +A1:2017	PASS	-
FCC 15.107 ICES-003, 6.1	AC power line conducted emissions	ANSI C63.4:2014 +A1:2017	N/R	No relevant port
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 6.2
Reference method	ANSI C63.4:2014+A1:2017 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	3759.9
Measurement range	30 MHz to 18799.5 MHz
Temperature [°C]	22 - 23
Humidity [%]	50 - 67
Operator	Matthias Handrik
Date	2020-06-25 – 2020-06-26

2.1.2 Setup

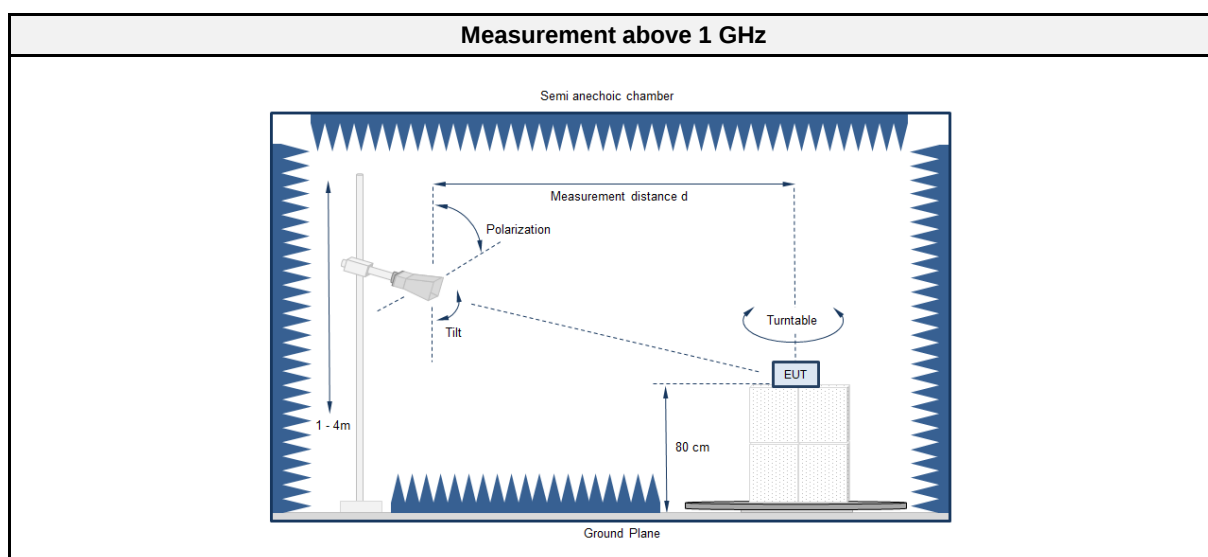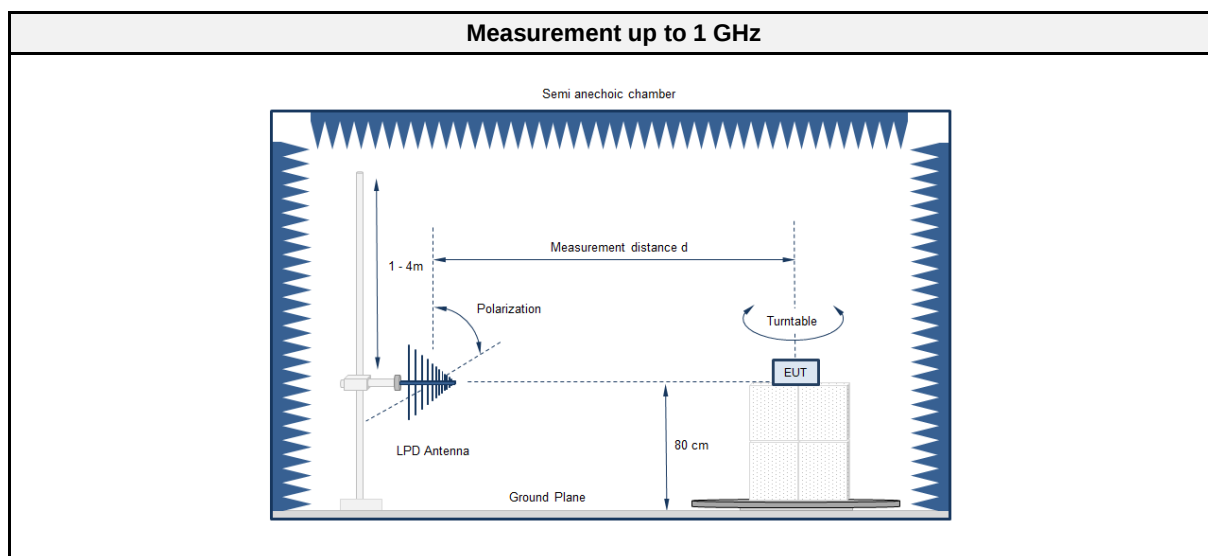

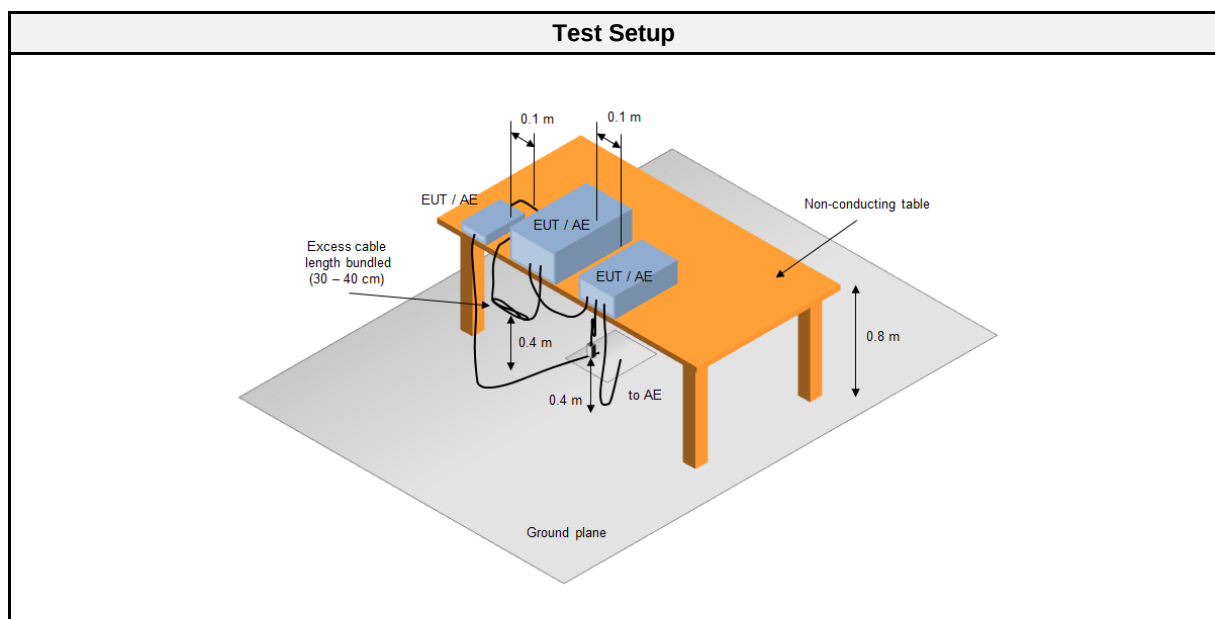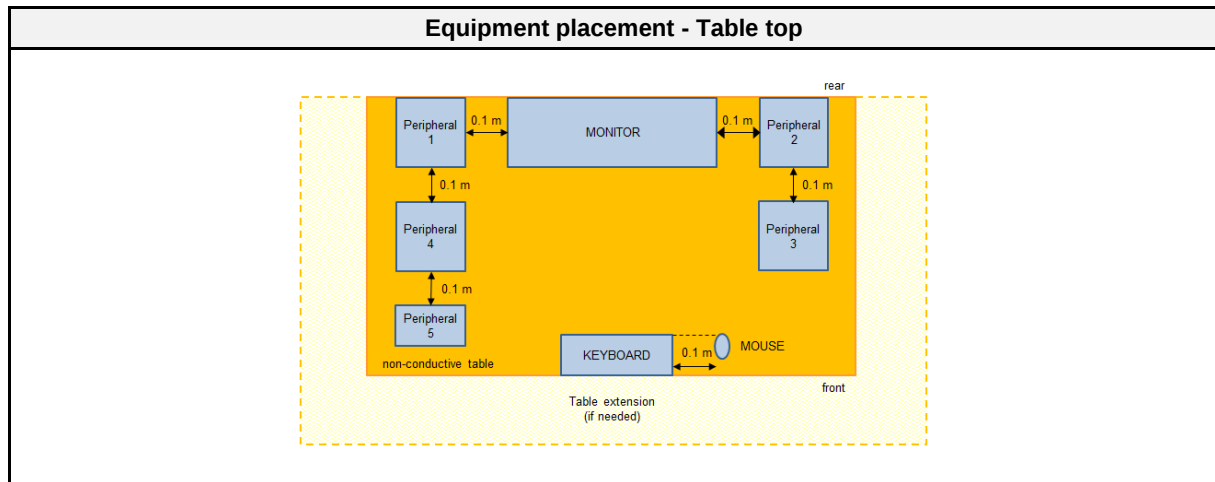

2.1.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Rohde & Schwarz Vertriebs GmbH	ESR7	EF00943	2019-10	2020-10
Spectrum analyzer	Rohde & Schwarz Vertriebs GmbH	FSW43	EF00896	2019-07	2020-07
Biconical Antenna	R&S	HK 116	EF00030	2019-04	2022-04
LPD Antenna	R&S	HL 223	EF00187	2019-05	2022-05
Horn Antenna	Schwarzbeck	BBHA9120D	EF00018	2019-10	2022-10
40GHz High Gain Antenna	Amplifier Research	AT4560	EF00302	2019-05	2021-05
Notchfilter	Schomandel	86883	ETS 0368	functional test	functional test
Notchfilter	Schomandel	86882	ETS 0369	functional test	functional test
Climatic Sensor	Embedded Data Systems, LLC.	2800100000254 17E	EF01054	2020-03	2021-03

2.1.4 Procedure

Exploratory measurement
- The EUT was placed on a non-conductive table at a height of 0.8m. - The EUT and support equipment, if needed, were set up to simulate typical usage. - Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage. - The antenna was placed at a distance of 3 or 10 m. - The received signal was monitored at the measurement receiver. - This procedure has to be performed in both antenna polarizations, horizontal and vertical. - The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

Final measurement
- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver. - A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast. - The EUT and cable arrangement were based on the exploratory measurement results. - Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded. - The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits

Class B @ 3 m		
Frequency [MHz]	Detector	Limit [dBμV/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54

2.1.6 Results

Test Results			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	-
2	1	PASS	-

2.1.7 Setup Photos












2.1.8 Records

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220


Index 1

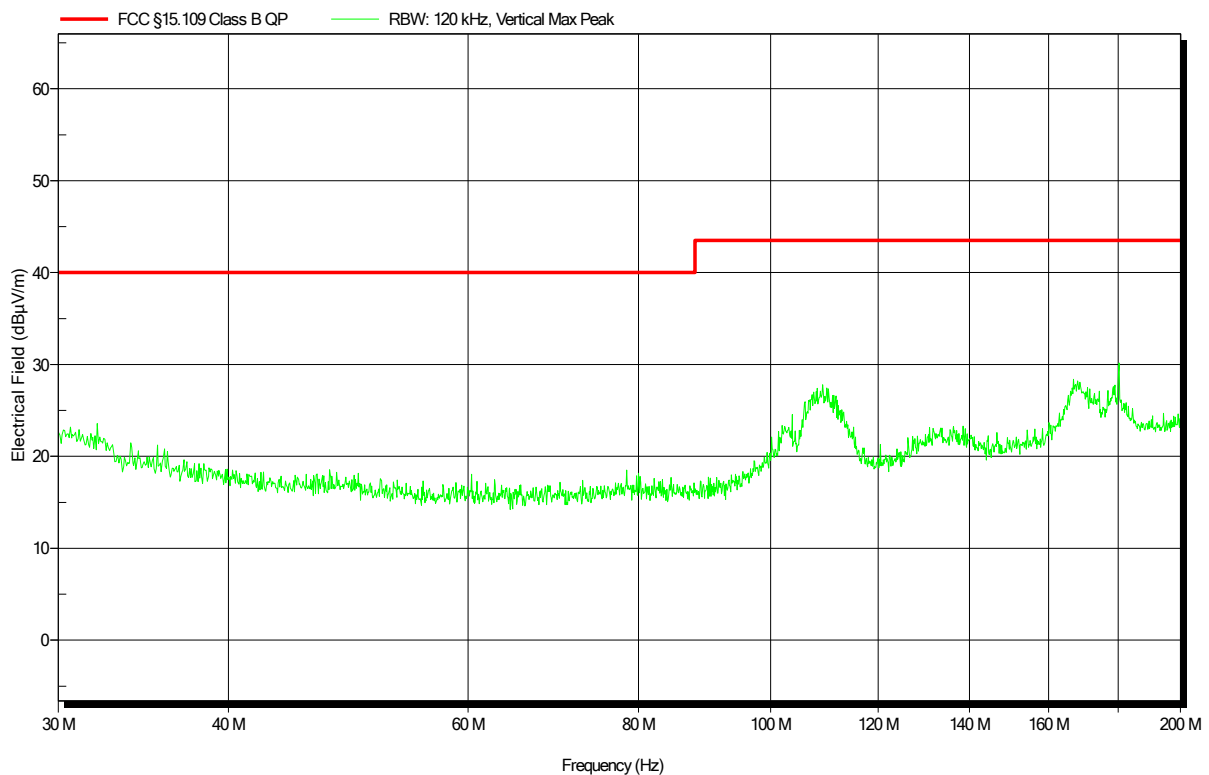

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220


Index 2

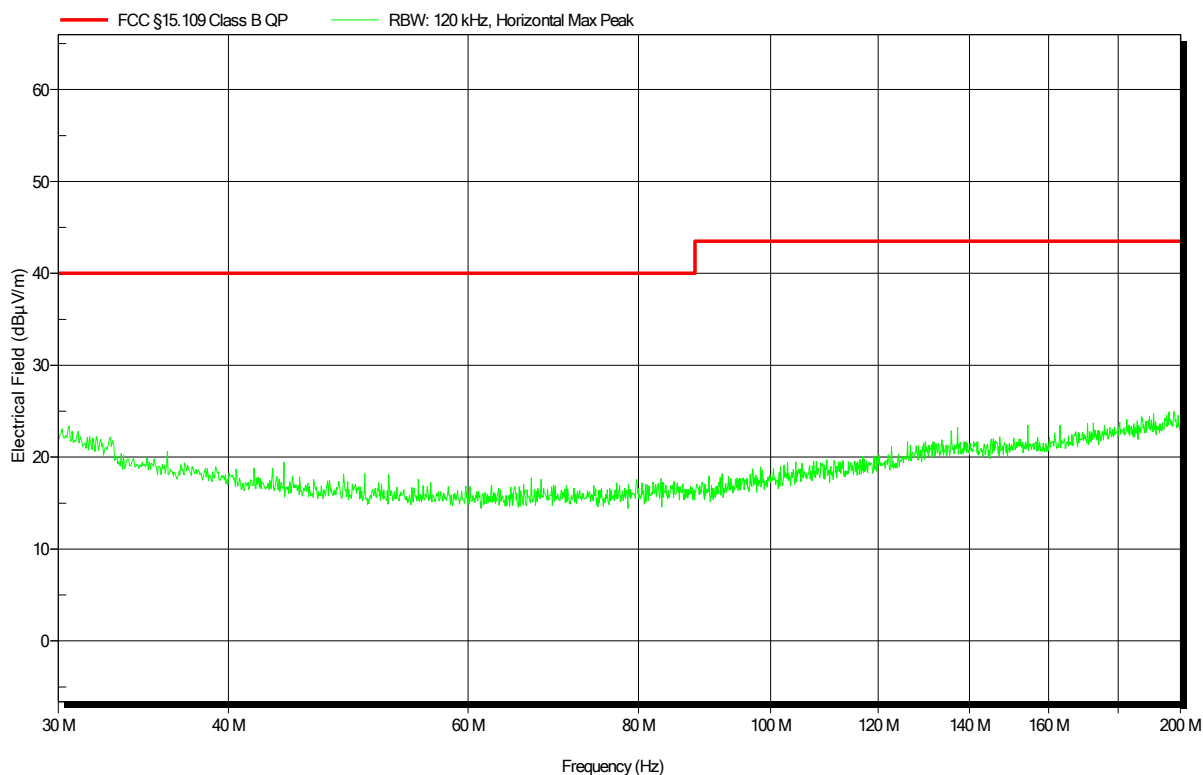

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220

Index 3

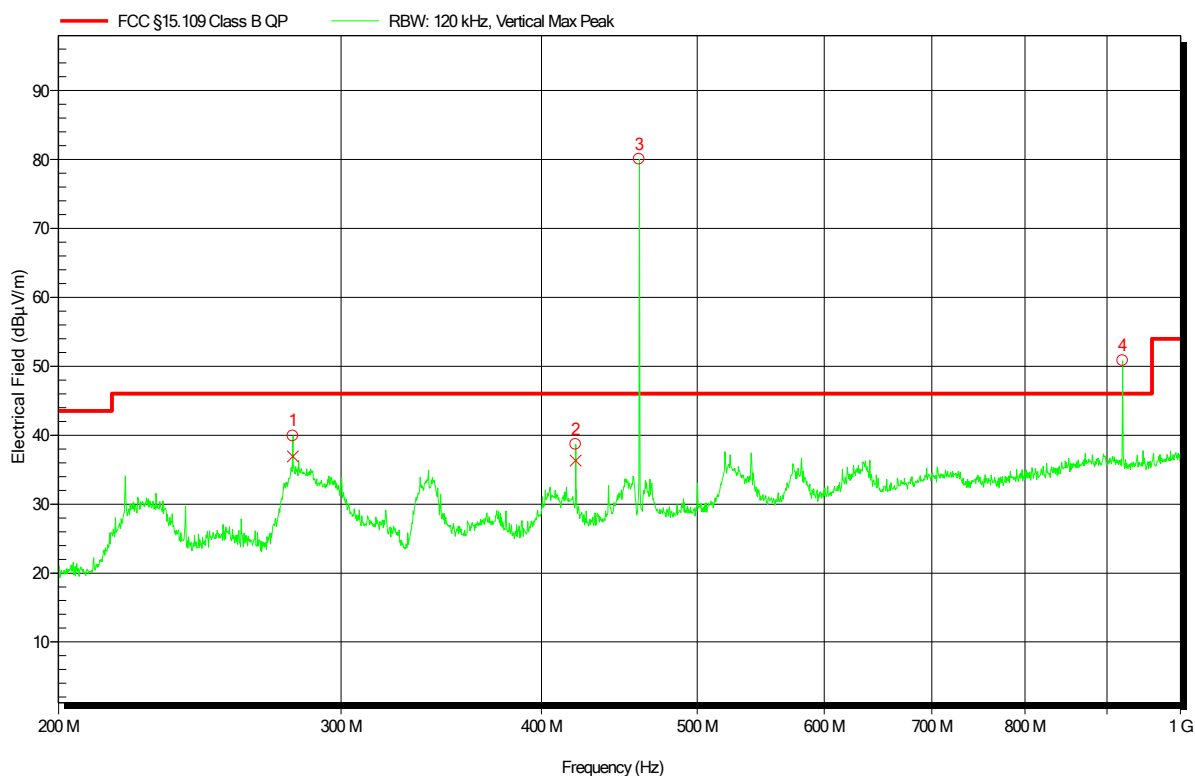


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	279.998 MHz	36.93 dBμV/m	46.02 dBμV/m	-9.09 dB	Pass	0 Degree	1 m
2	420.116 MHz	36.32 dBμV/m	46.02 dBμV/m	-9.7 dB	Pass	0 Degree	1 m
3	460.1 MHz	460MHz carrier					
4	920.24 MHz	2 nd harmonic of radio carrier					

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220

Index 4

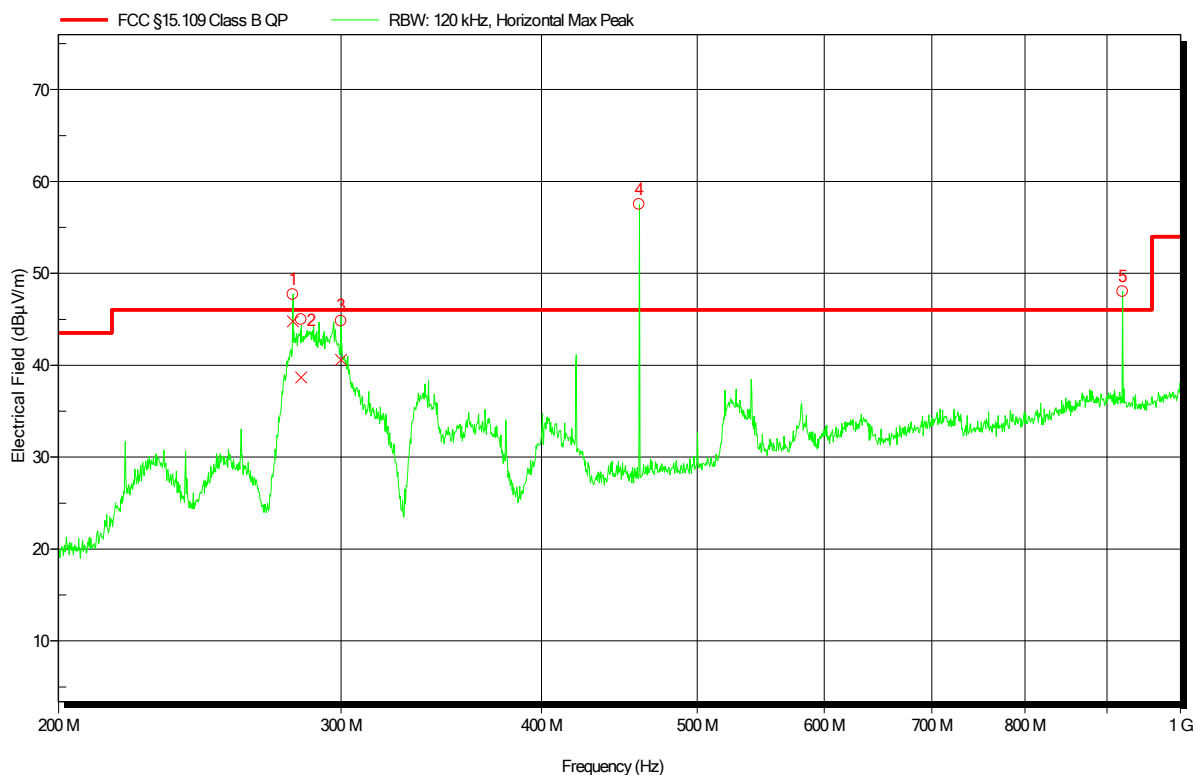


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	279.998 MHz	44.77 dBμV/m	46.02 dBμV/m	-1.25 dB	Pass	123 Degree	1 m
2	283.34 MHz	38.66 dBμV/m	46.02 dBμV/m	-7.36 dB	Pass	123 Degree	1 m
3	300.08 MHz	40.58 dBμV/m	46.02 dBμV/m	-5.44 dB	Pass	123 Degree	1 m
4	460.1 MHz	460MHz carrier					
5	920.24 MHz	2 nd harmonic of radio carrier					

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220

Index 29

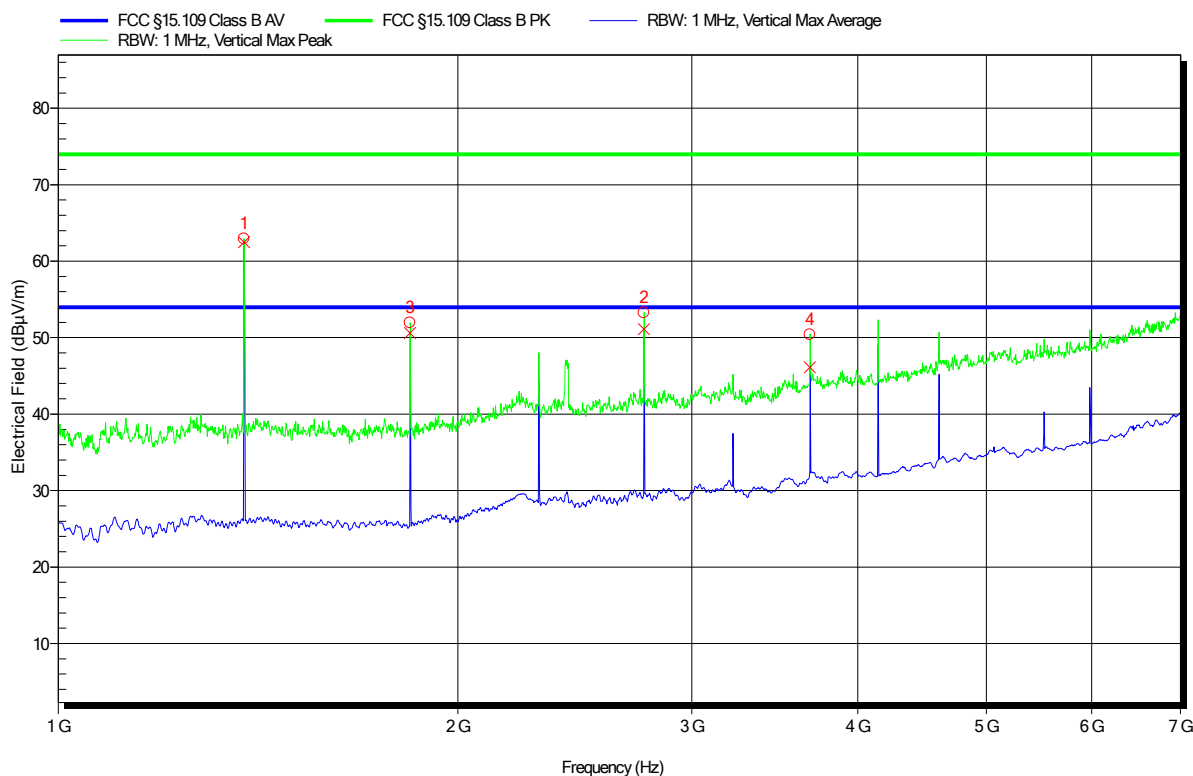


Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.381 GHz	62.93 dBμV/m	3 rd harmonic of radio carrier			0 Degree	1 m
2	2.761 GHz	53.27 dBμV/m	6 th harmonic of radio carrier			0 Degree	1 m
3	1.841 GHz	51.93 dBμV/m	4 th harmonic of radio carrier			0 Degree	1 m
4	3.681 GHz	50.39 dBμV/m	8 th harmonic of radio carrier			0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220

Index 30

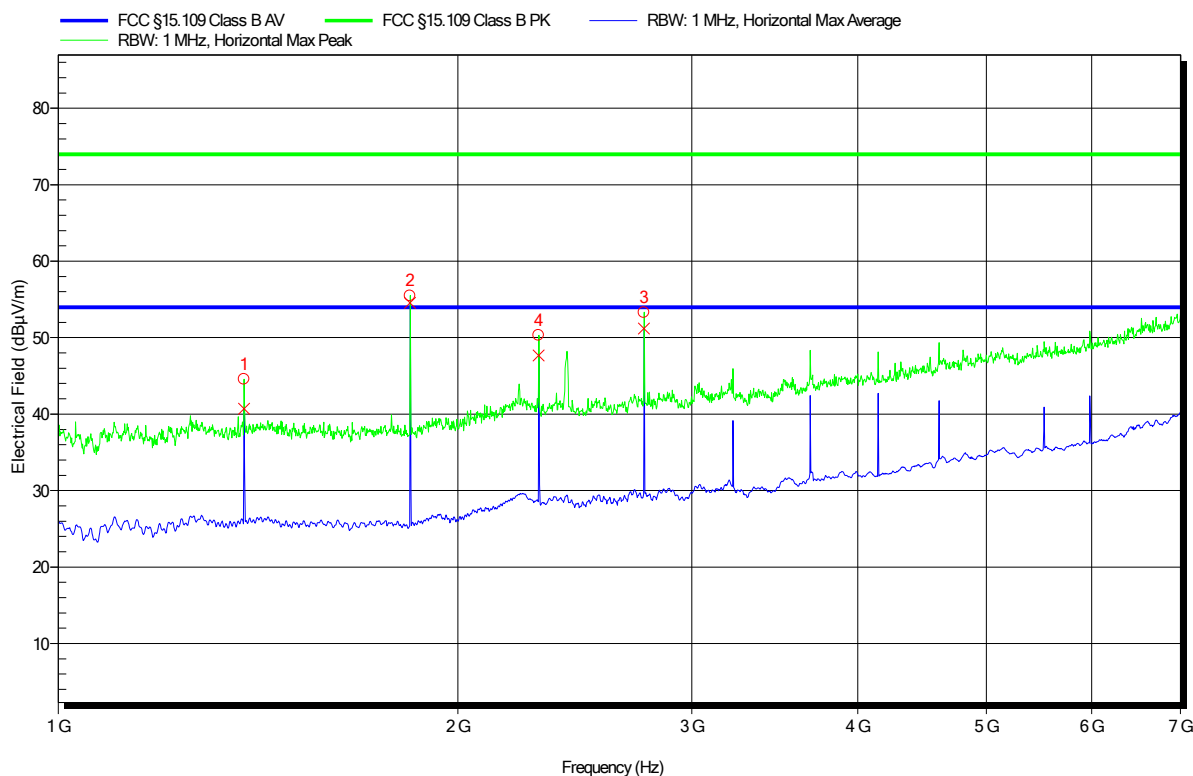


Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.381 GHz	44.57 dBμV/m	3 rd harmonic of radio carrier			0 Degree	1 m
2	1.841 GHz	55.49 dBμV/m	4 th harmonic of radio carrier			0 Degree	1 m
3	2.761 GHz	53.29 dBμV/m	5 th harmonic of radio carrier			0 Degree	1 m
4	2.301 GHz	50.31 dBμV/m	6 th harmonic of radio carrier			0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220


Index 32

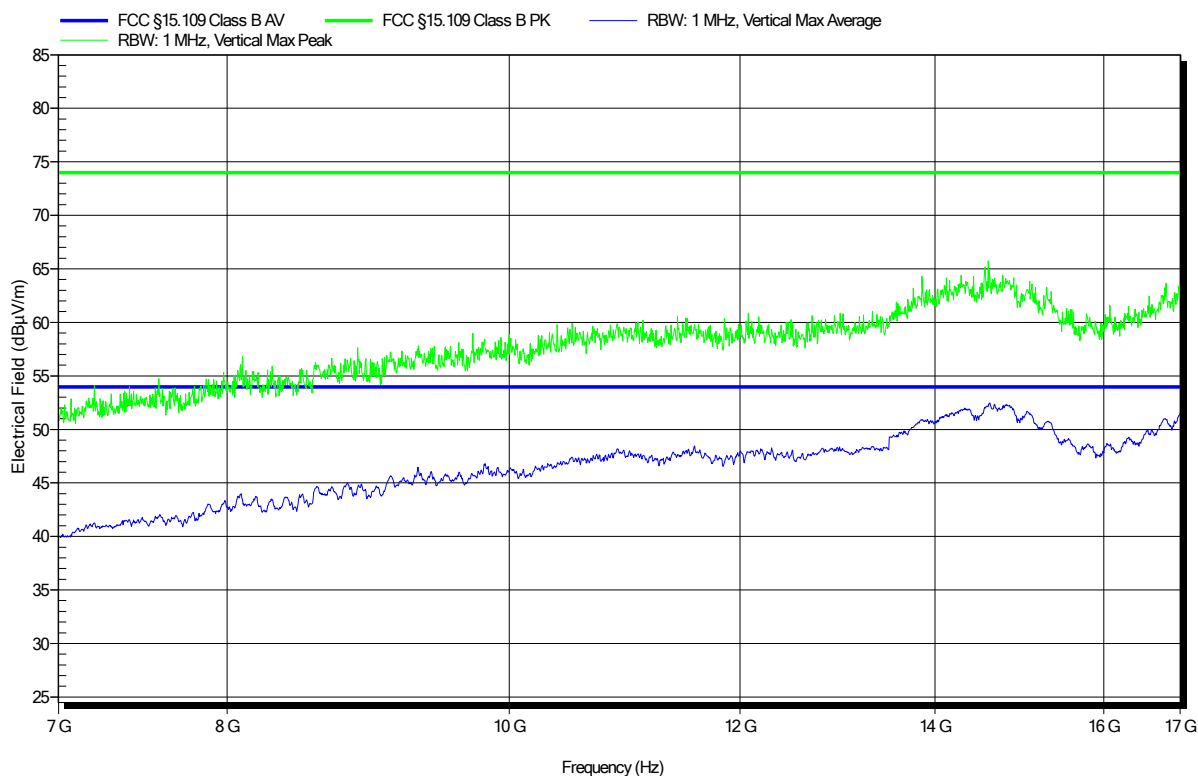

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220


Index 31

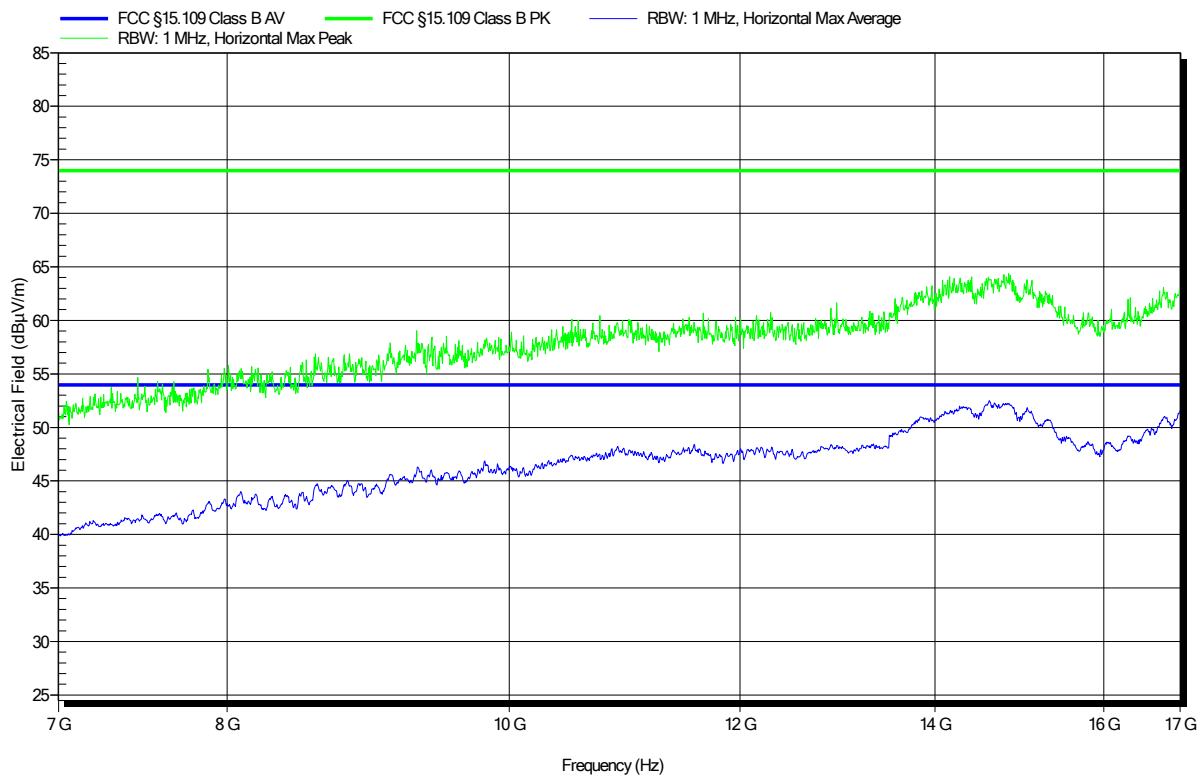

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220


Index 33

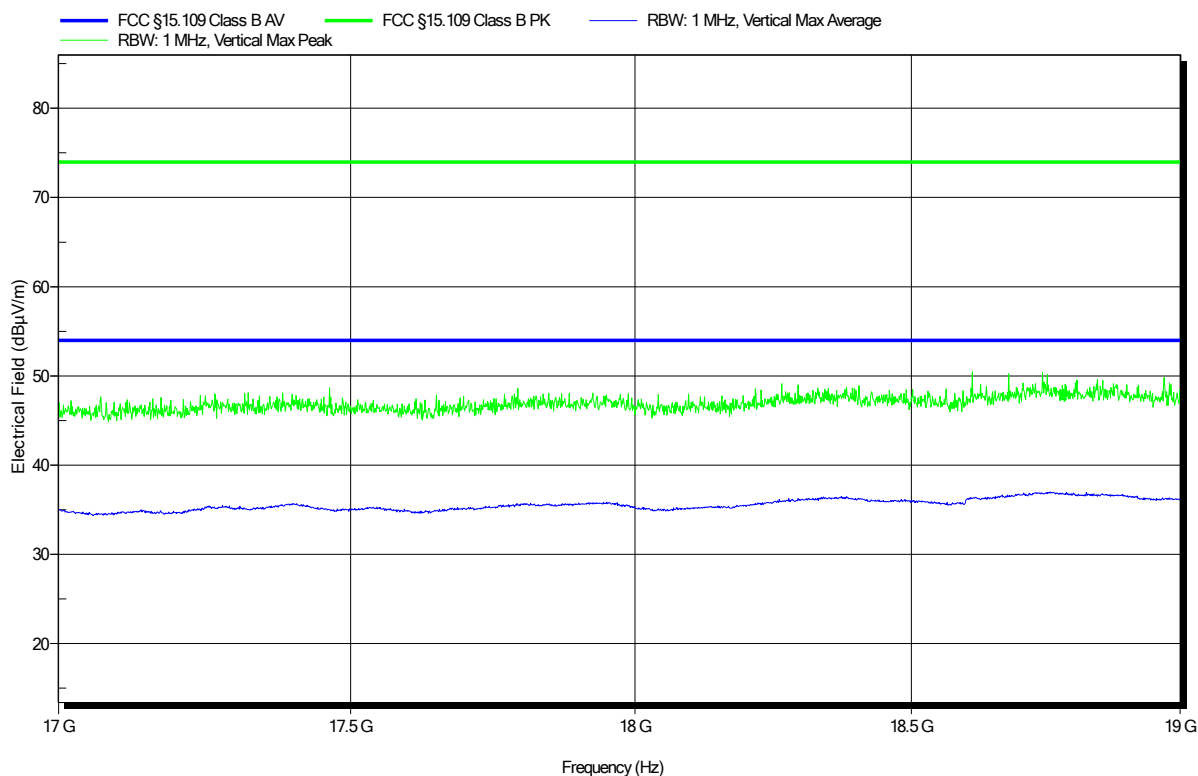

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM2220


Index 34

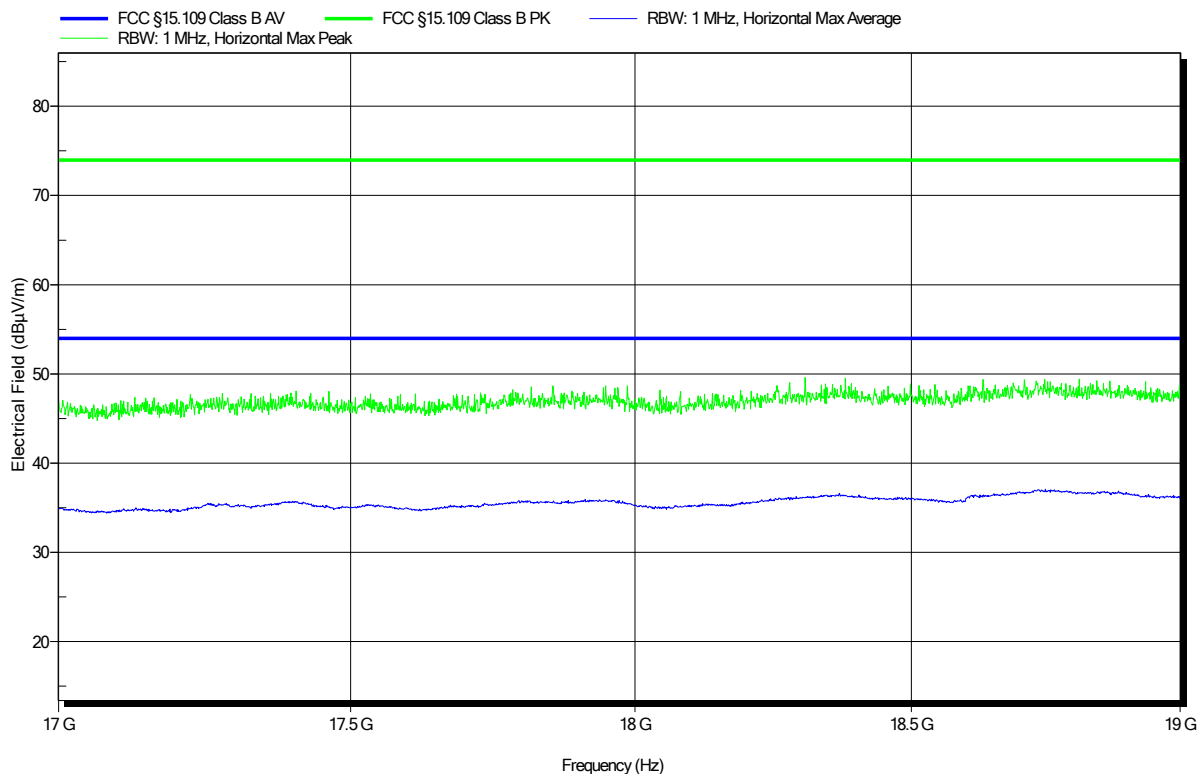

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220


Index 7

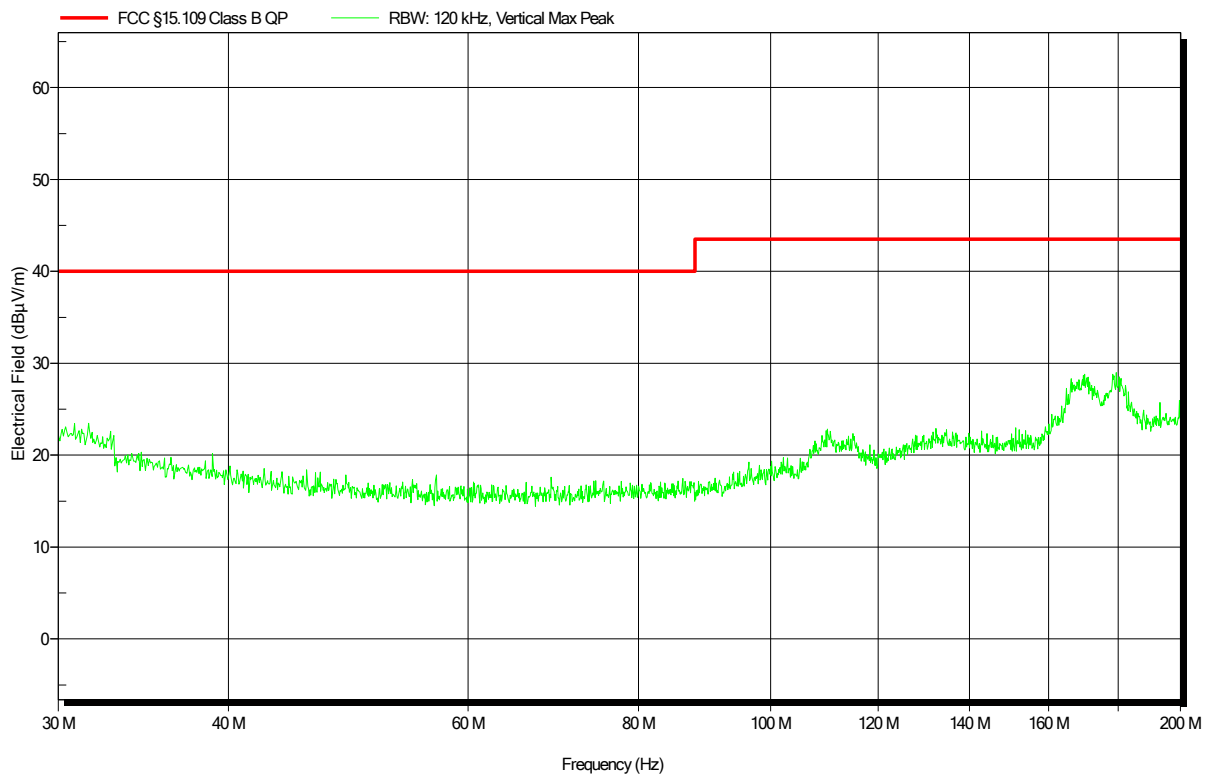

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220


Index 8

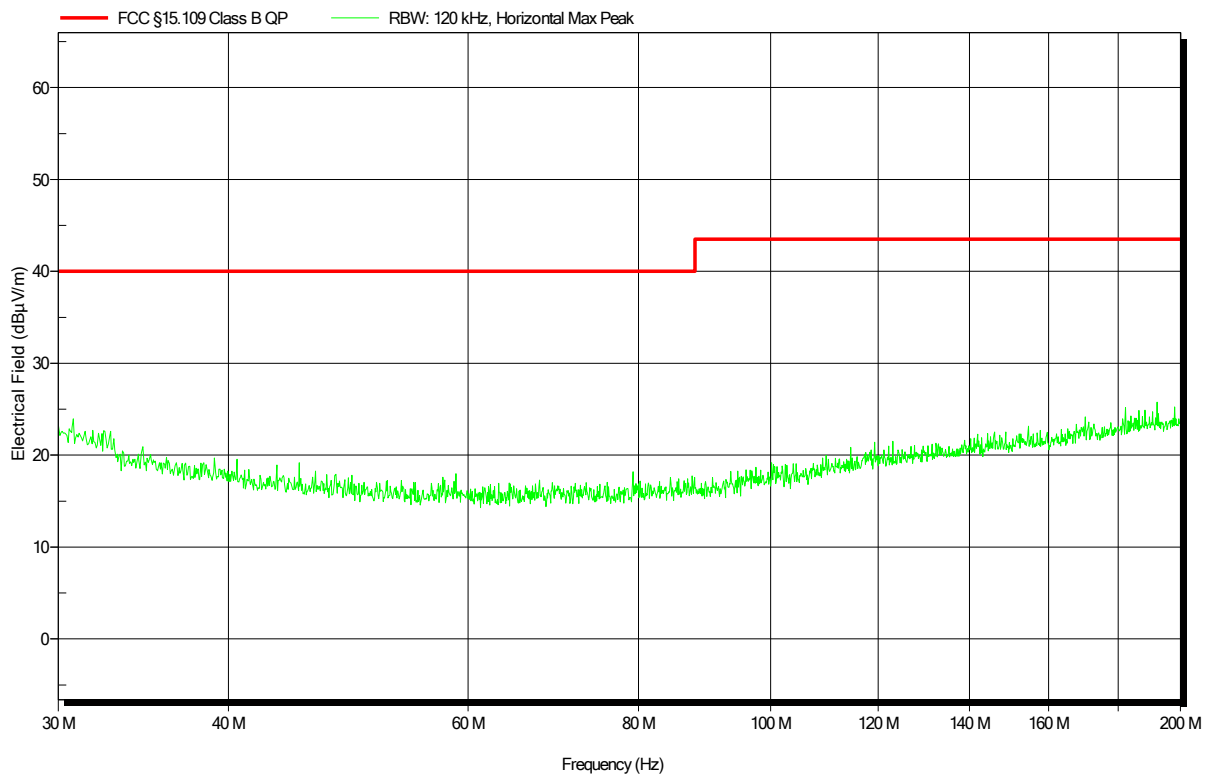

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220

Index 5

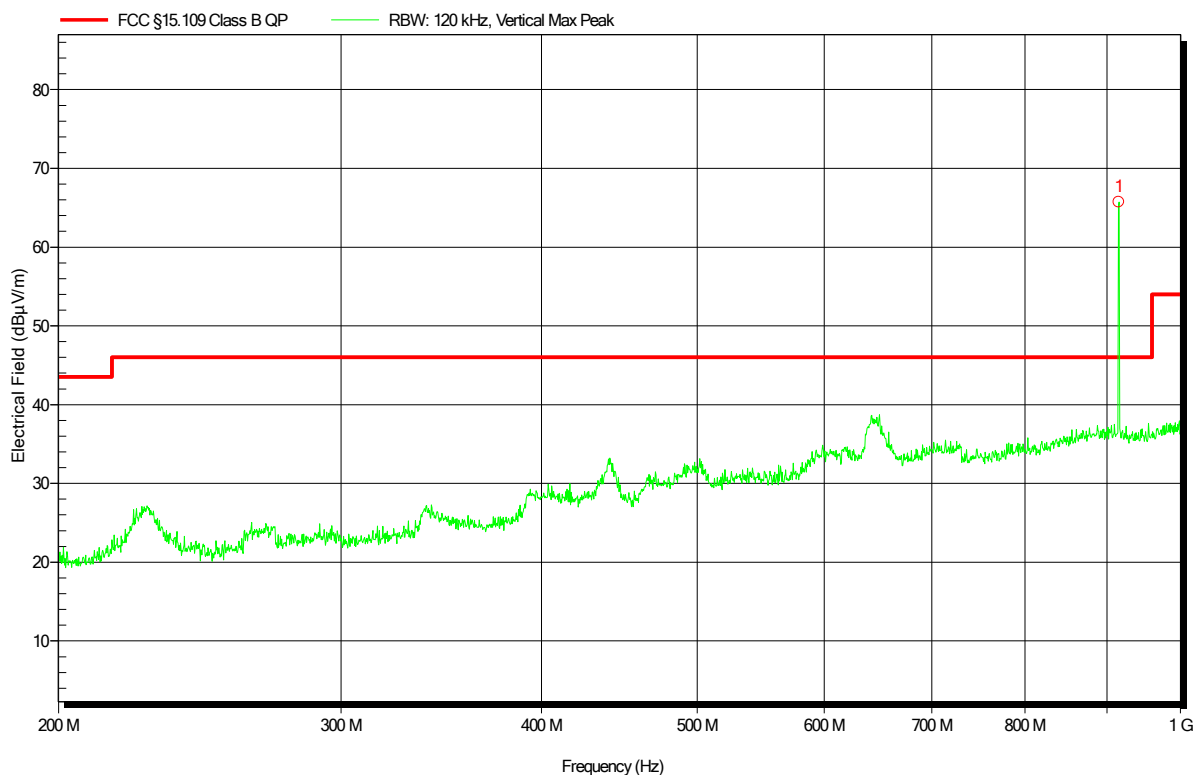


Peak Number	Frequency	Angle	Height
1	915.2 MHz	915 MHz carrier	

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-25
 Operating Conditions: ambient temperature: 23°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220

Index 6

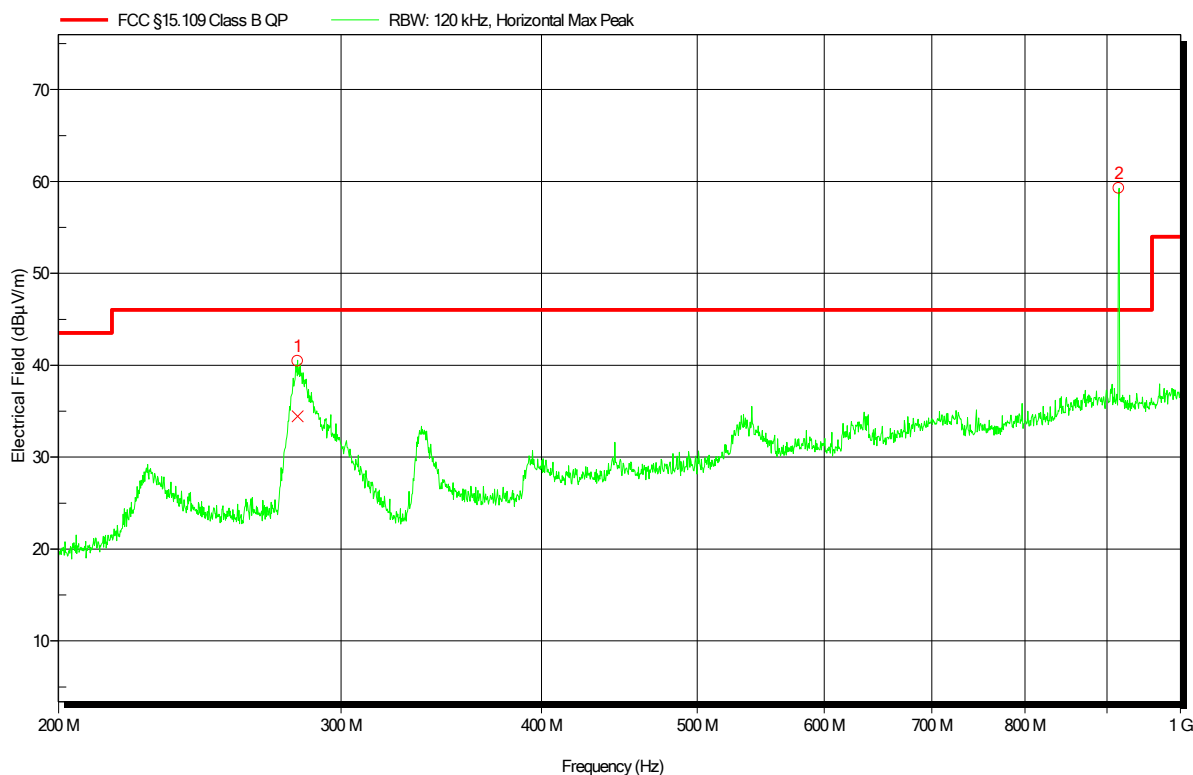


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	281.9 MHz	34.44 dBμV/m	46.02 dBμV/m	-11.58 dB	Pass	147 Degree	1.6 m
2	915.2 MHz	915MHz carrier					

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220


Index 40

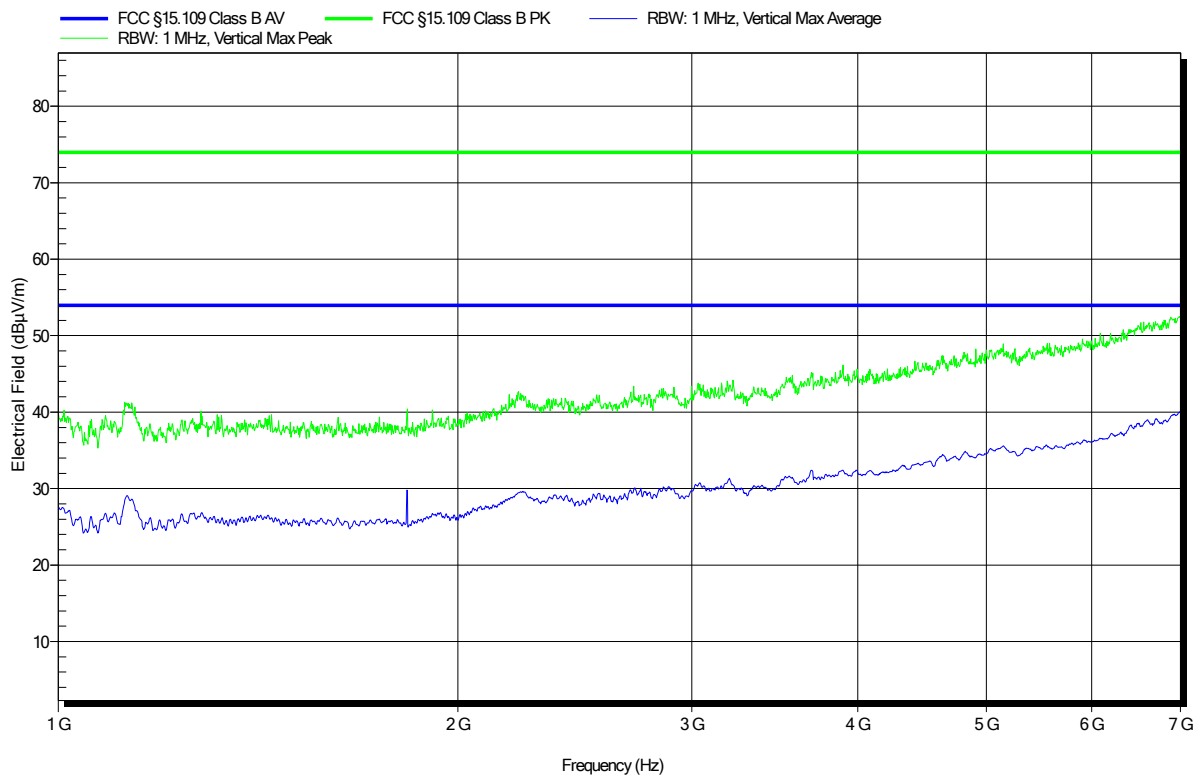

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220

Index 39

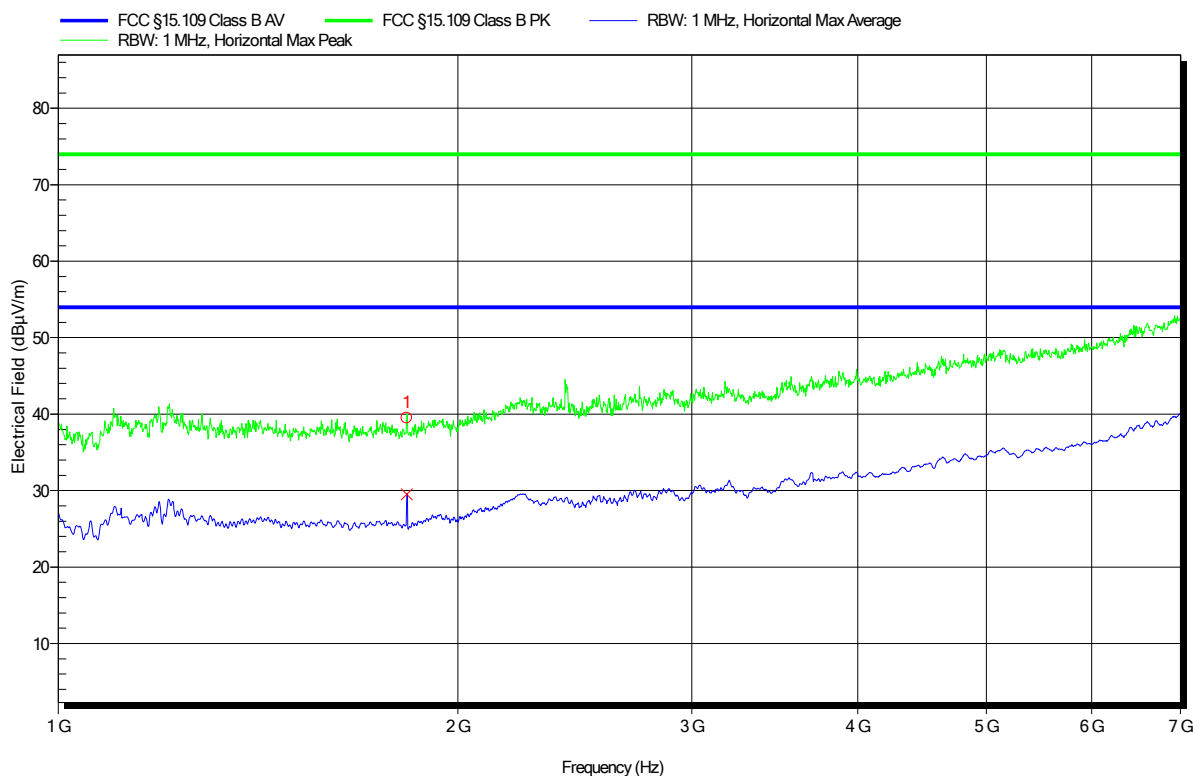


Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.83 GHz	39.48 dBμV/m	2 nd harmonic of radio carrier			0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220


Index 37

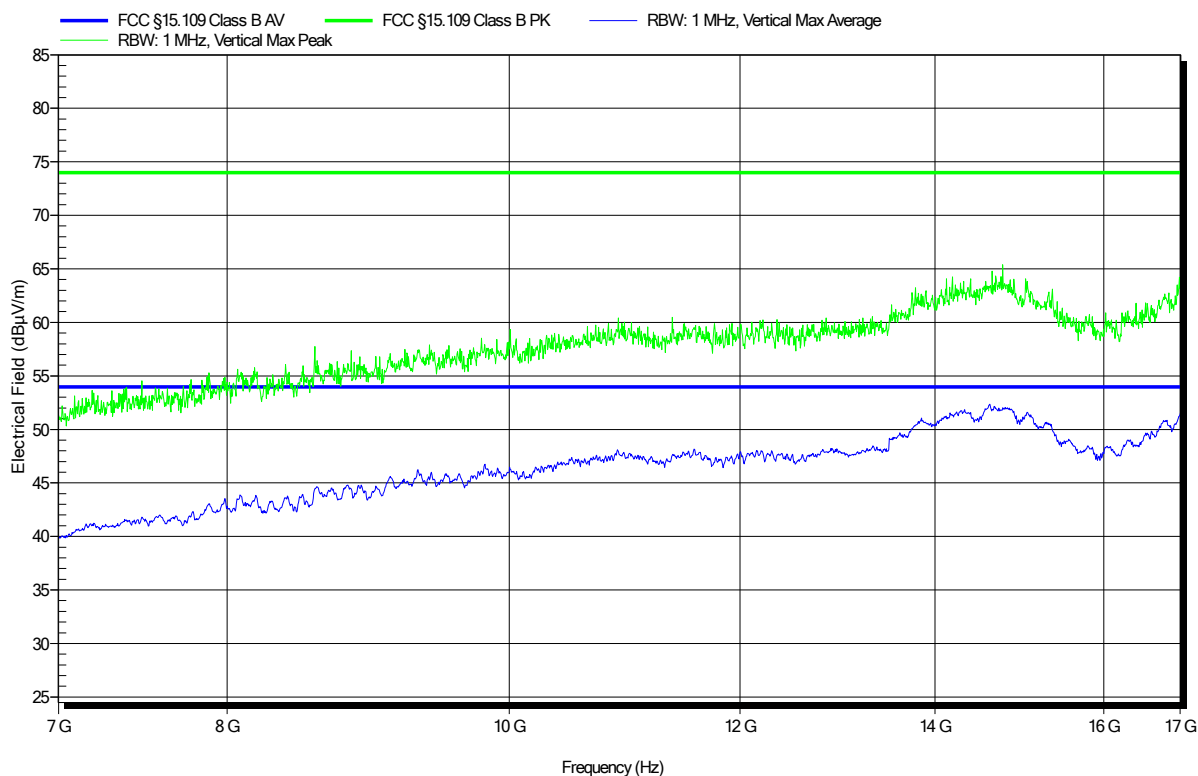

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220


Index 38

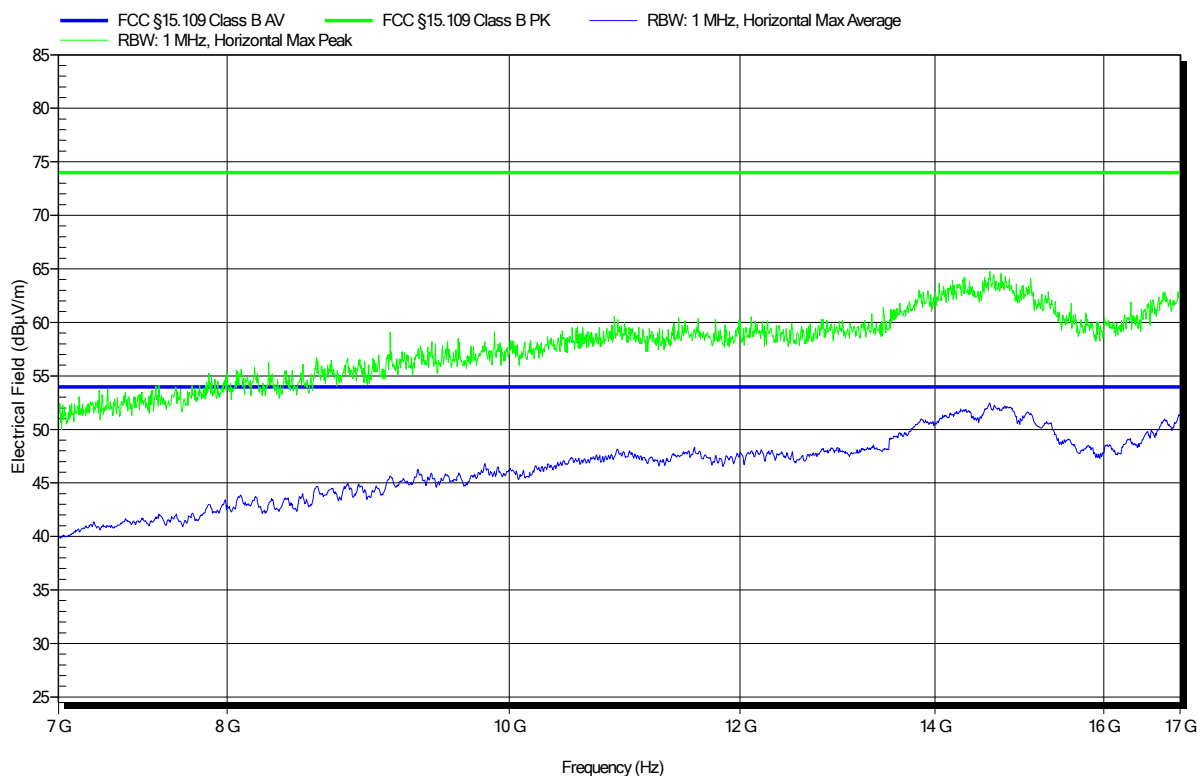

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM2220


Index 35

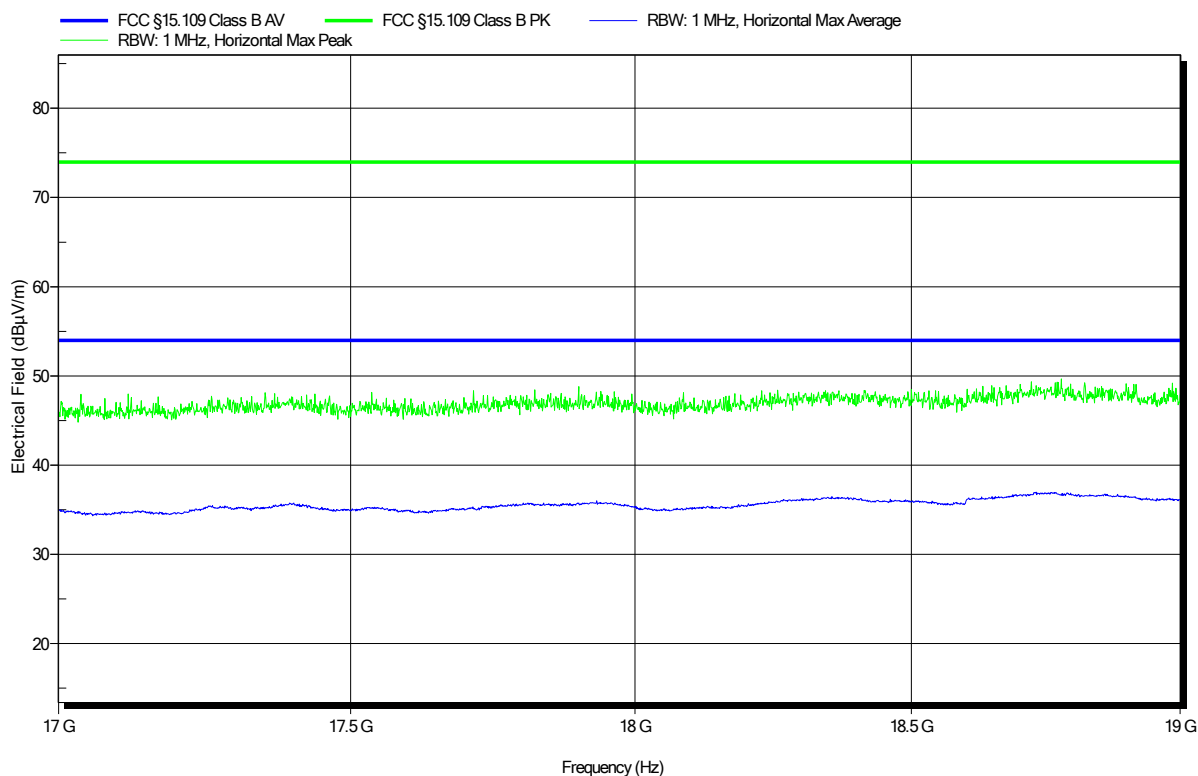

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM2220
 Test Sample ID: 29576
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWS2220


Index 36

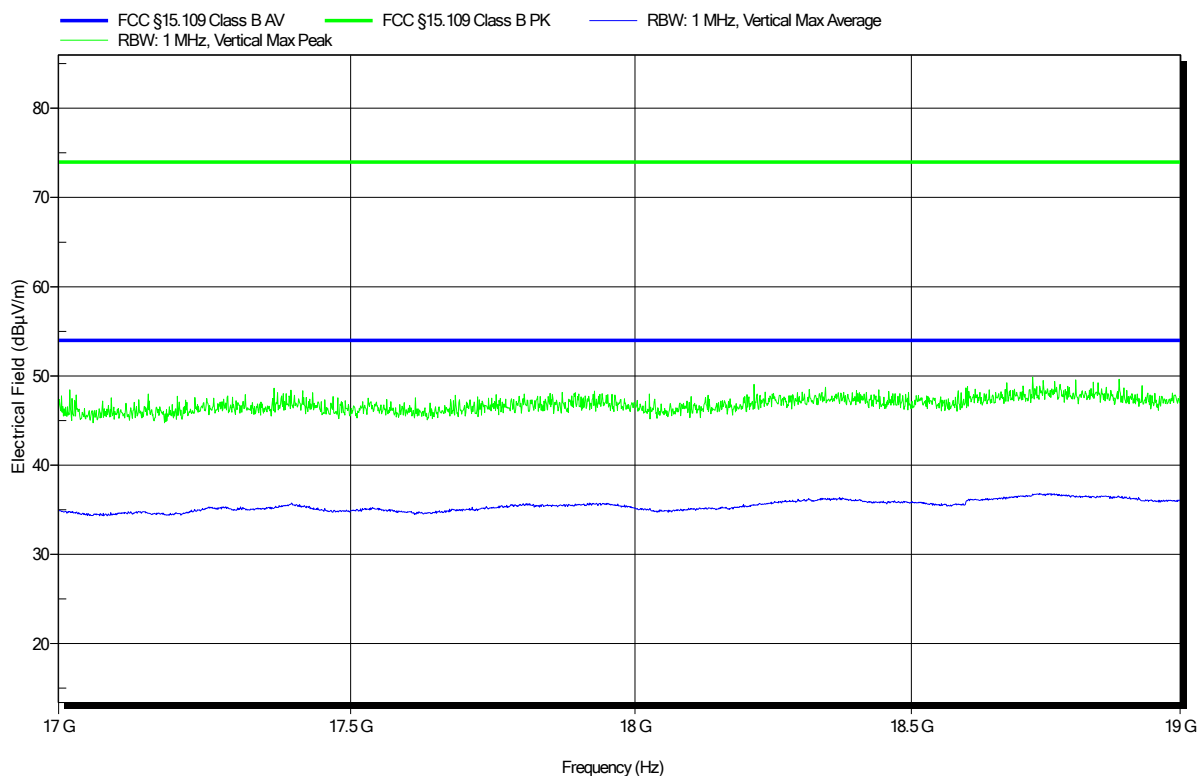

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220


Index 9

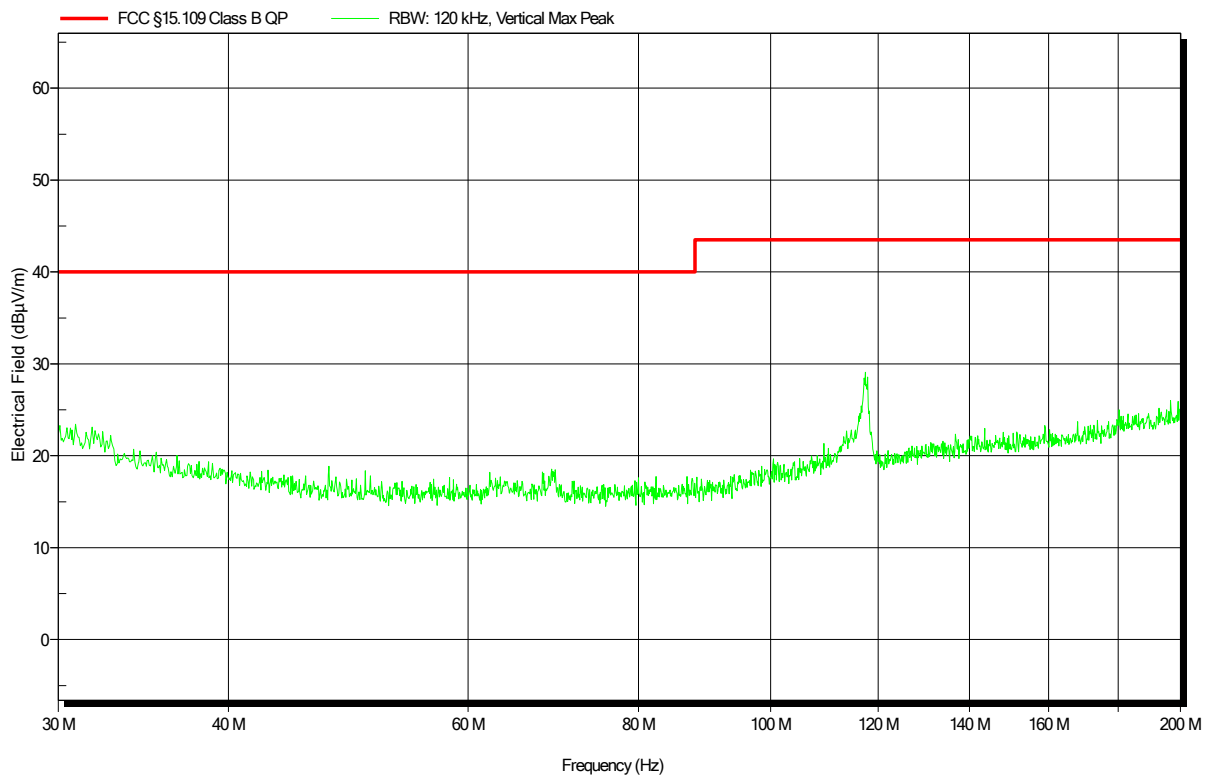

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220


Index 10

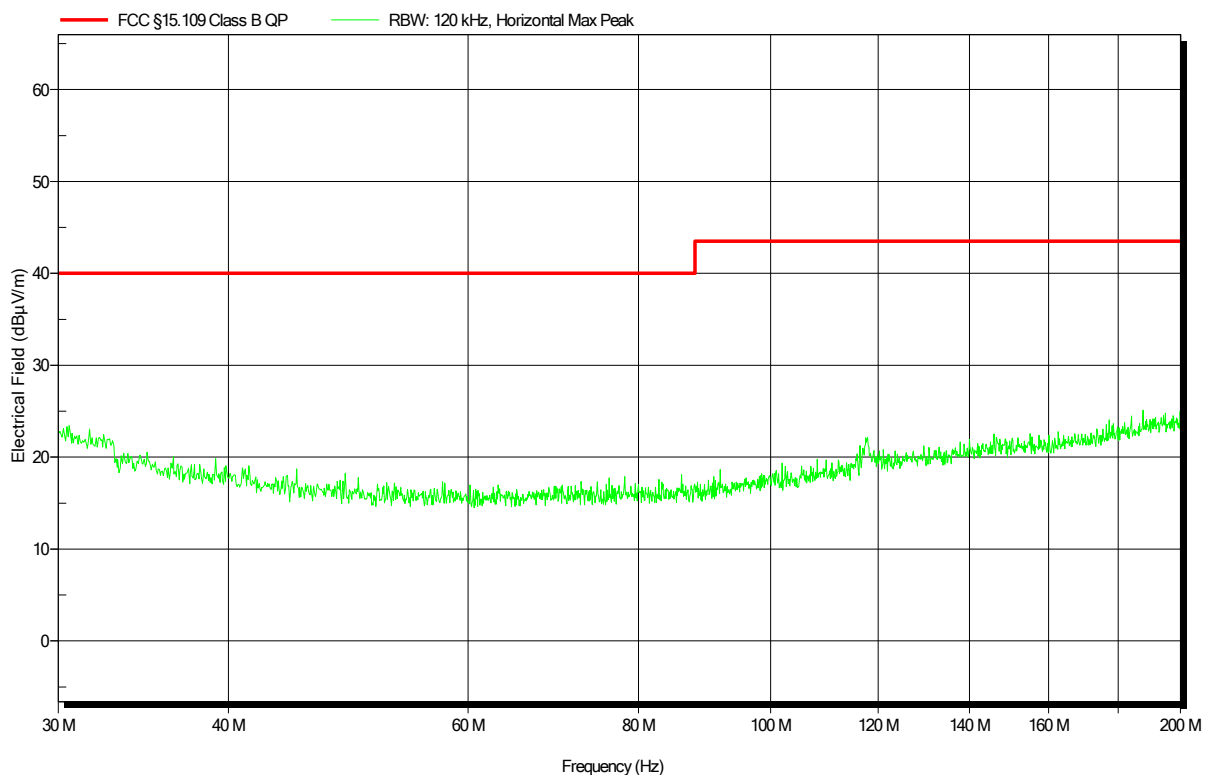

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220

Index 11

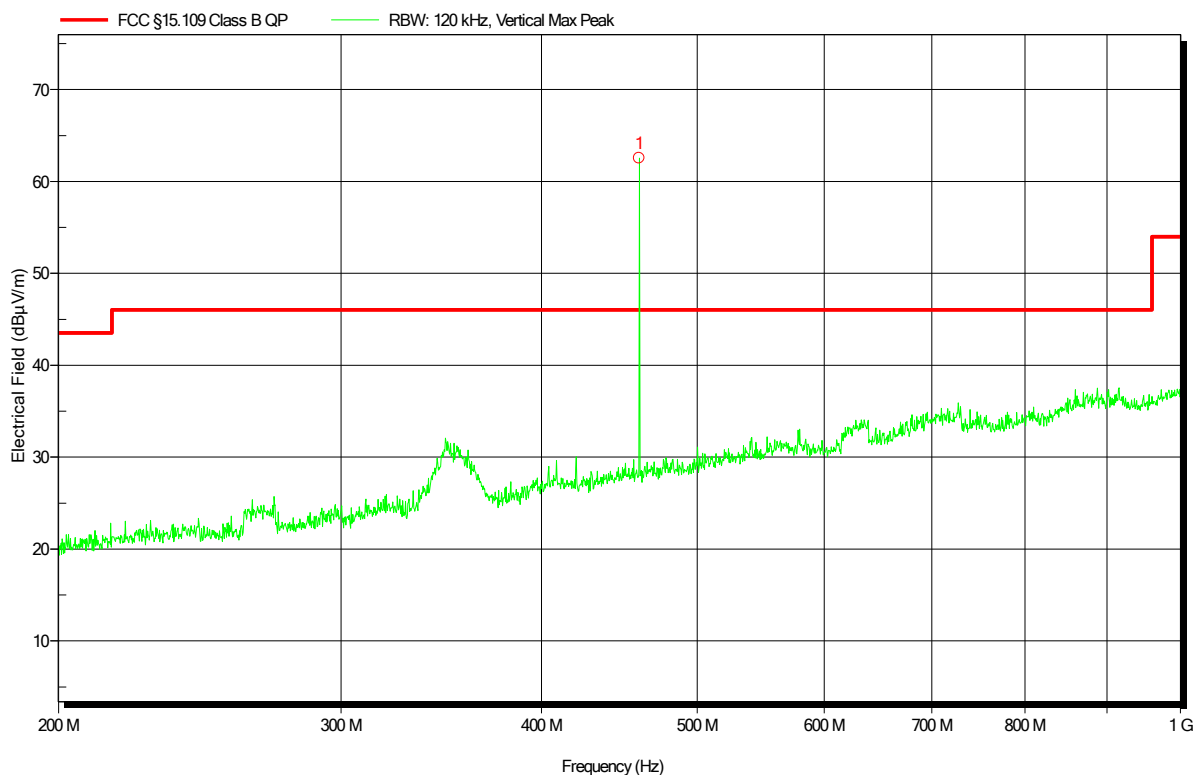


Peak Number	Frequency	Angle	Height
1	460.1 MHz	460MHz carrier	

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220

Index 12

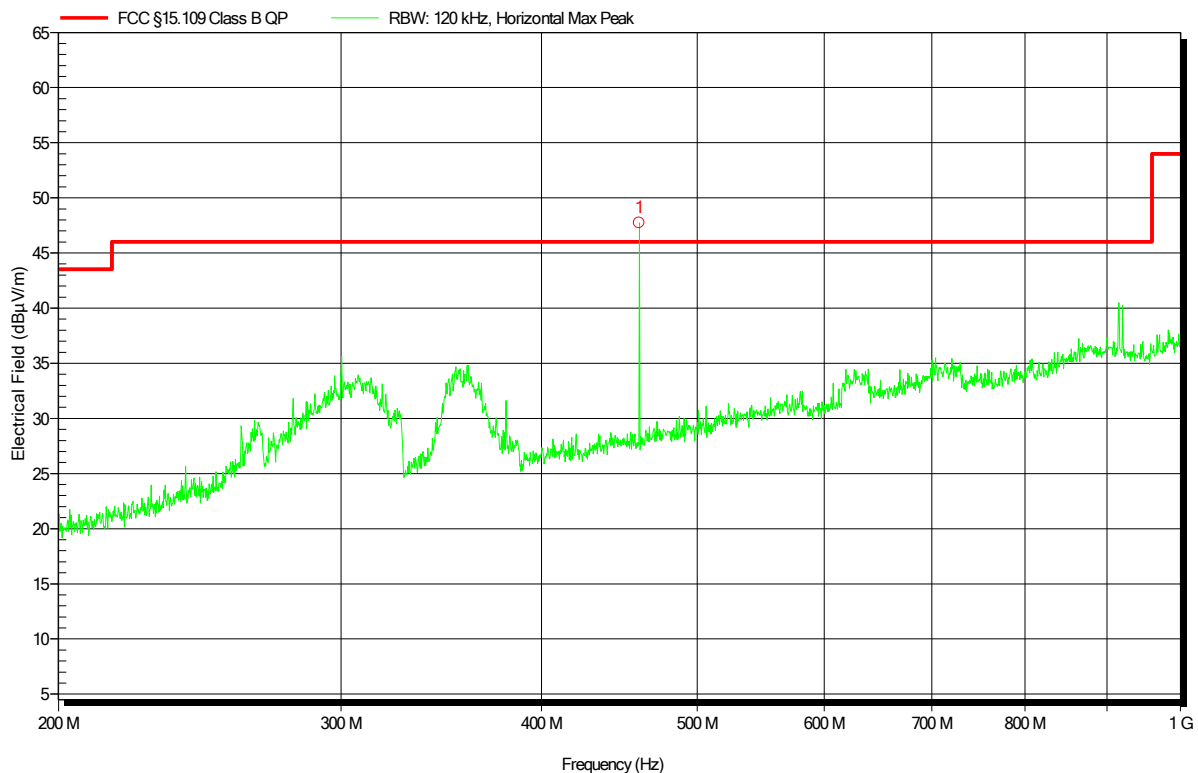


Peak Number	Frequency	Angle	Height
1	460.1 MHz	460MHz carrier	

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220

Index 27

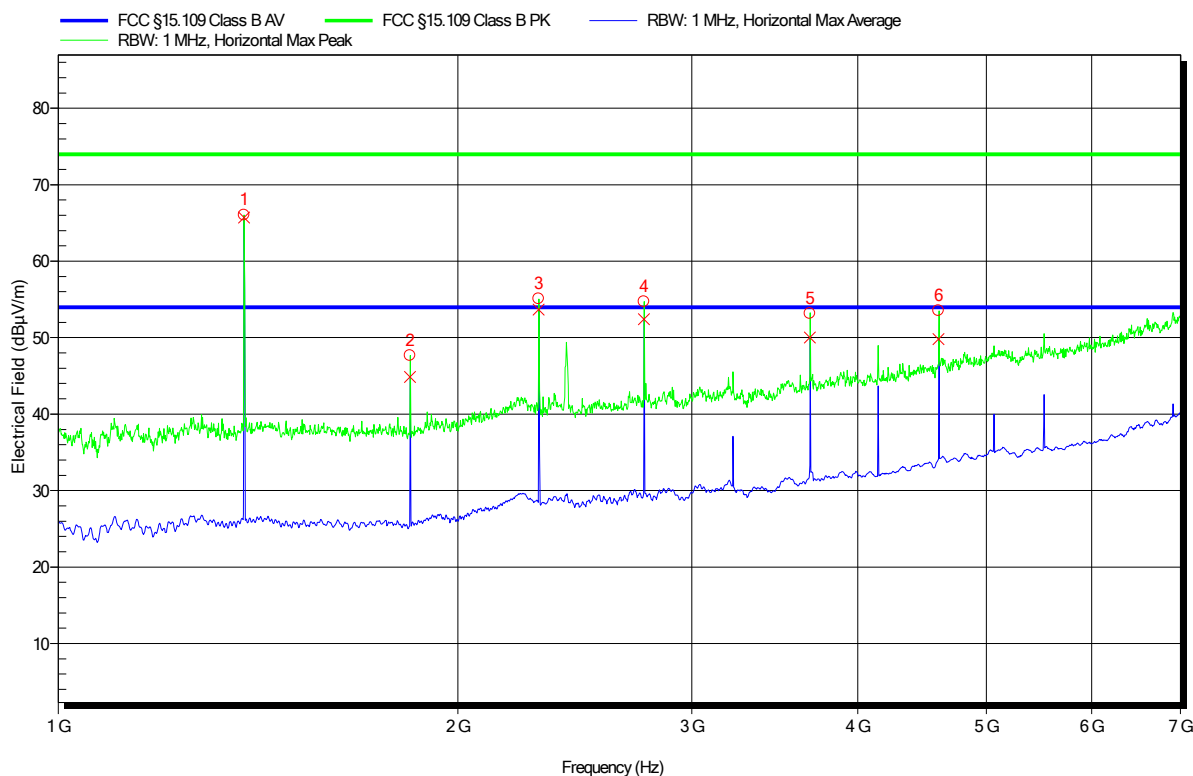


Test Report No.: G0M-2002-8859-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220

Index 28

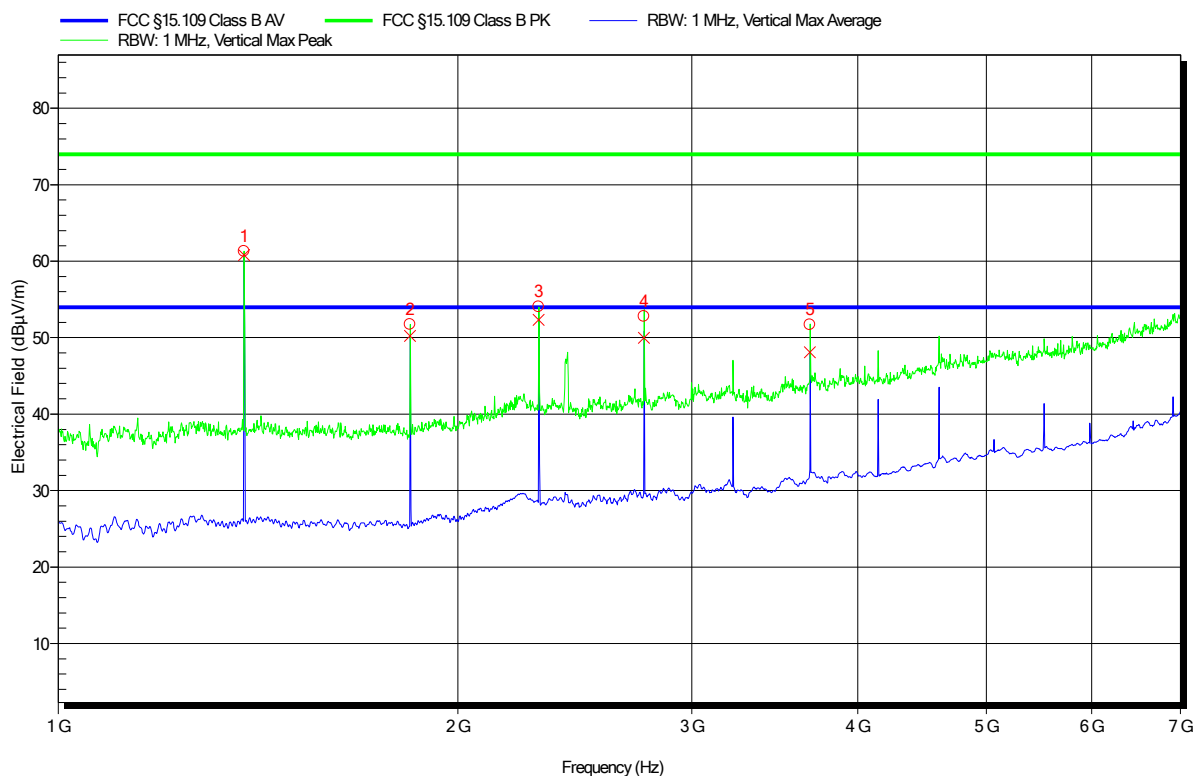


Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.381 GHz	61.29 dBμV/m	3 rd harmonic of radio carrier				
2	1.841 GHz	51.72 dBμV/m	4 th harmonic of radio carrier				
3	2.301 GHz	54.03 dBμV/m	5 th harmonic of radio carrier				
4	2.761 GHz	52.8 dBμV/m	6 th harmonic of radio carrier				
5	3.681 GHz	51.71 dBμV/m	8 th harmonic of radio carrier				

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220


Index 25

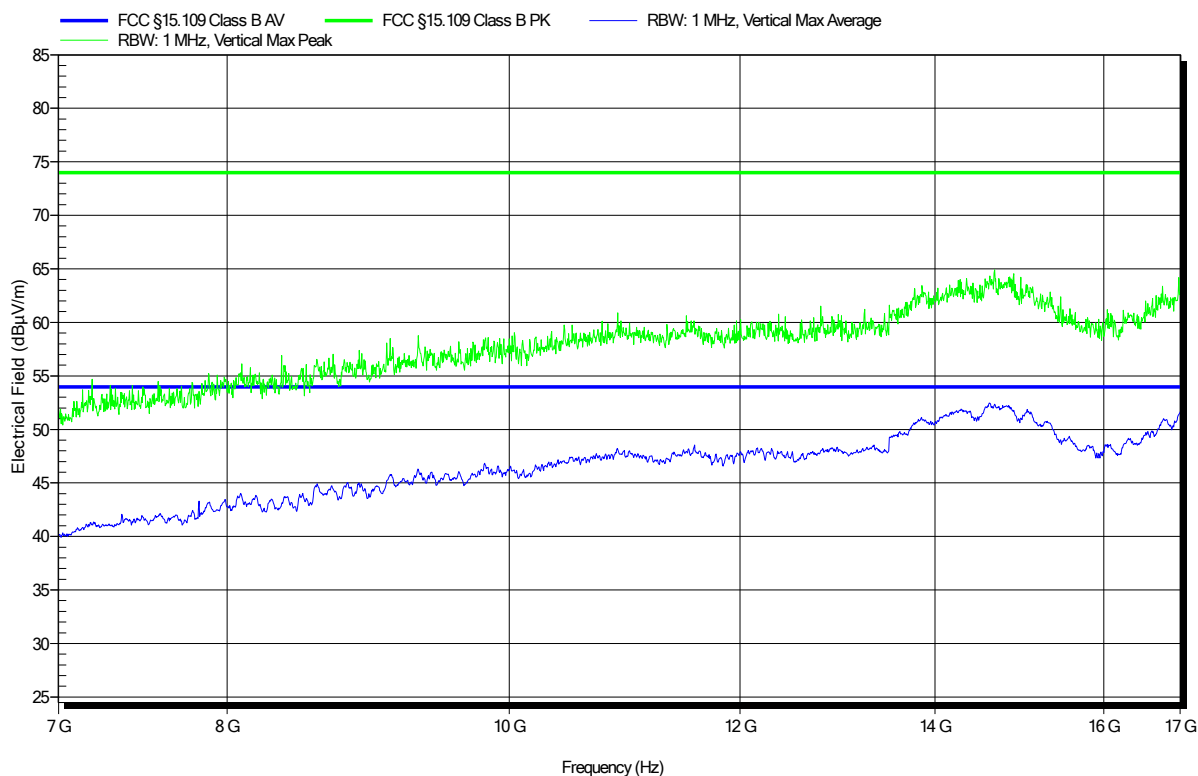

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220


Index 26

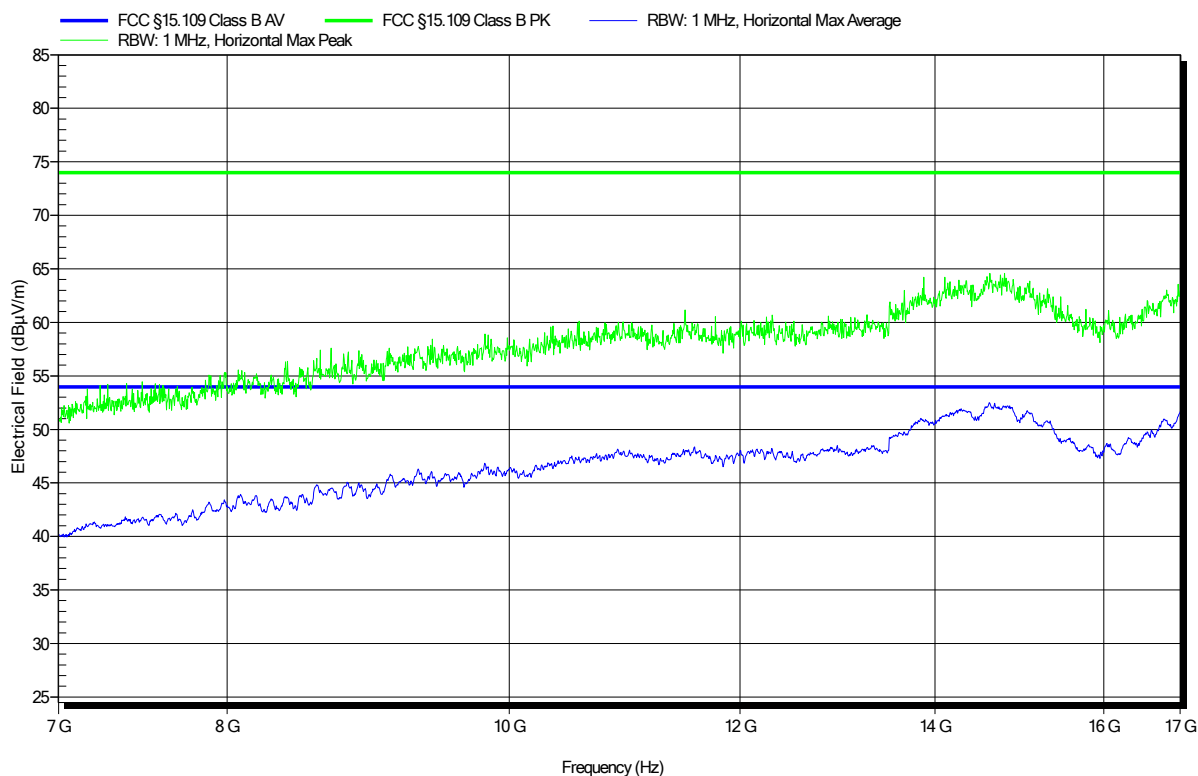

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Vertical
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220


Index 23

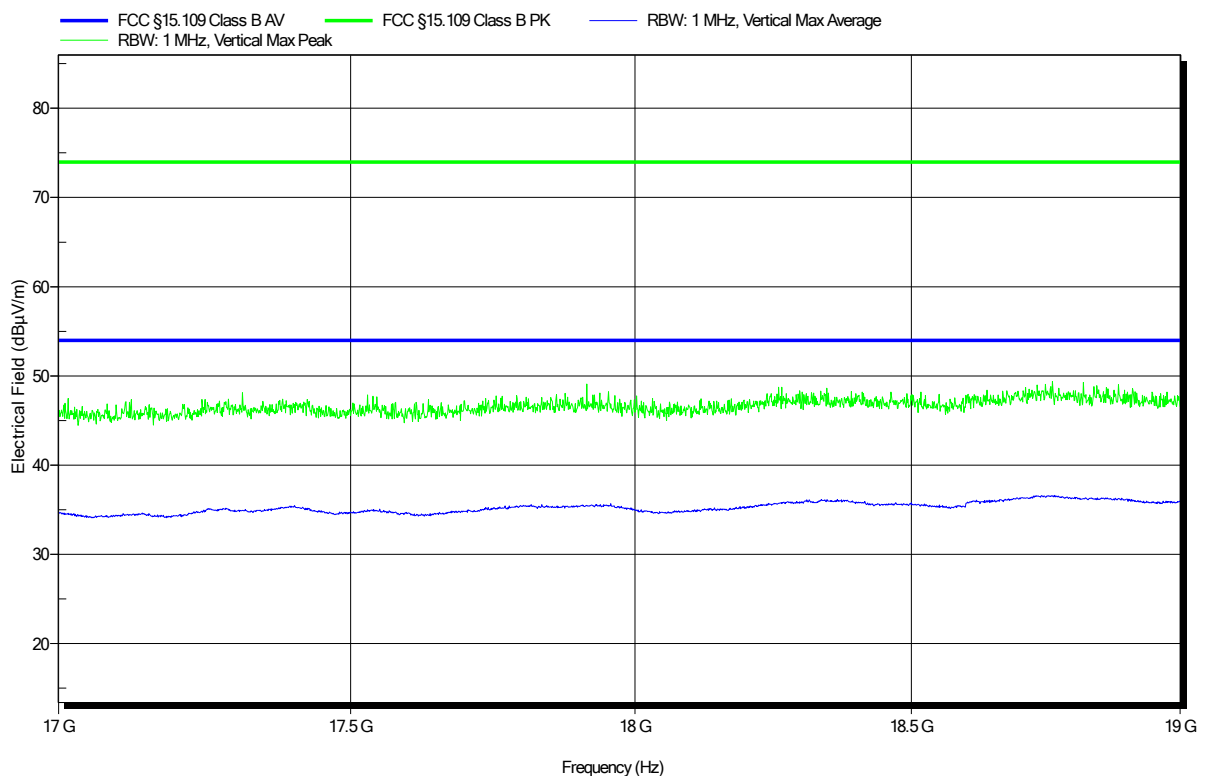

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Horizontal
 Measurement Distance: 3m
 Mode: 1
 Note 1: KWM3220


Index 24

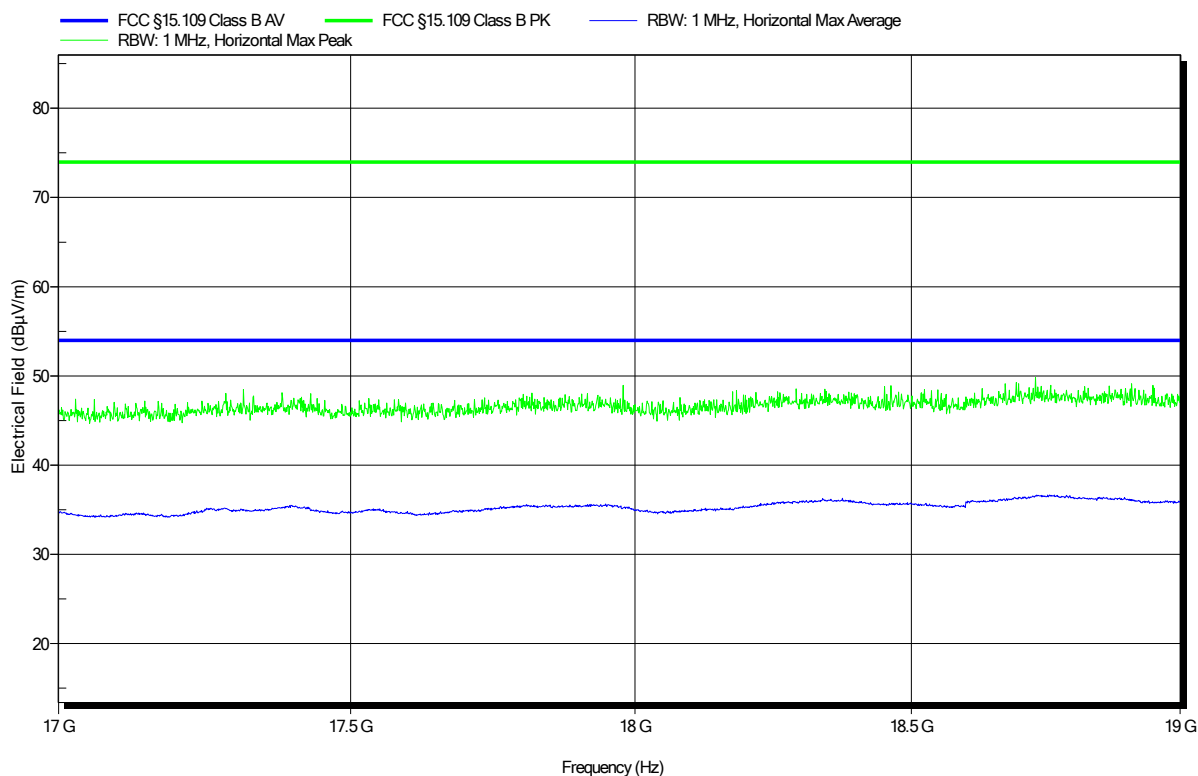

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220


Index 15

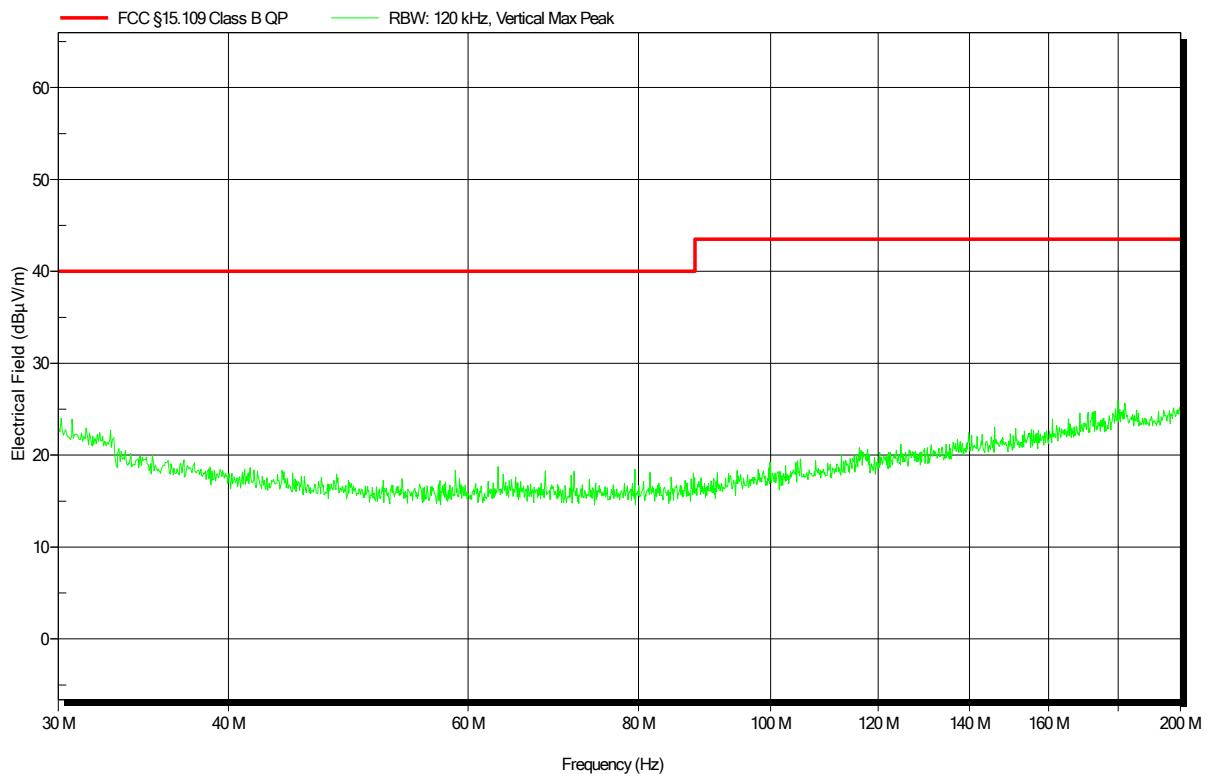

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220


Index 24

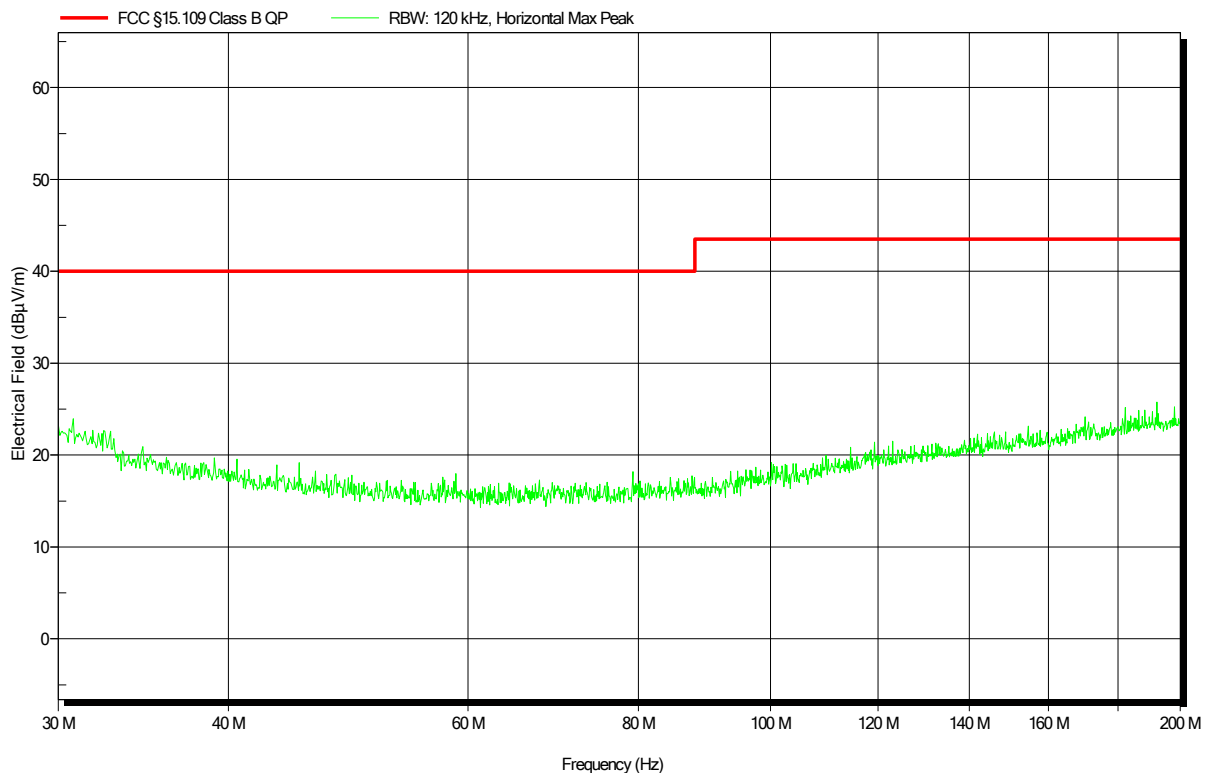

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220

Index 13

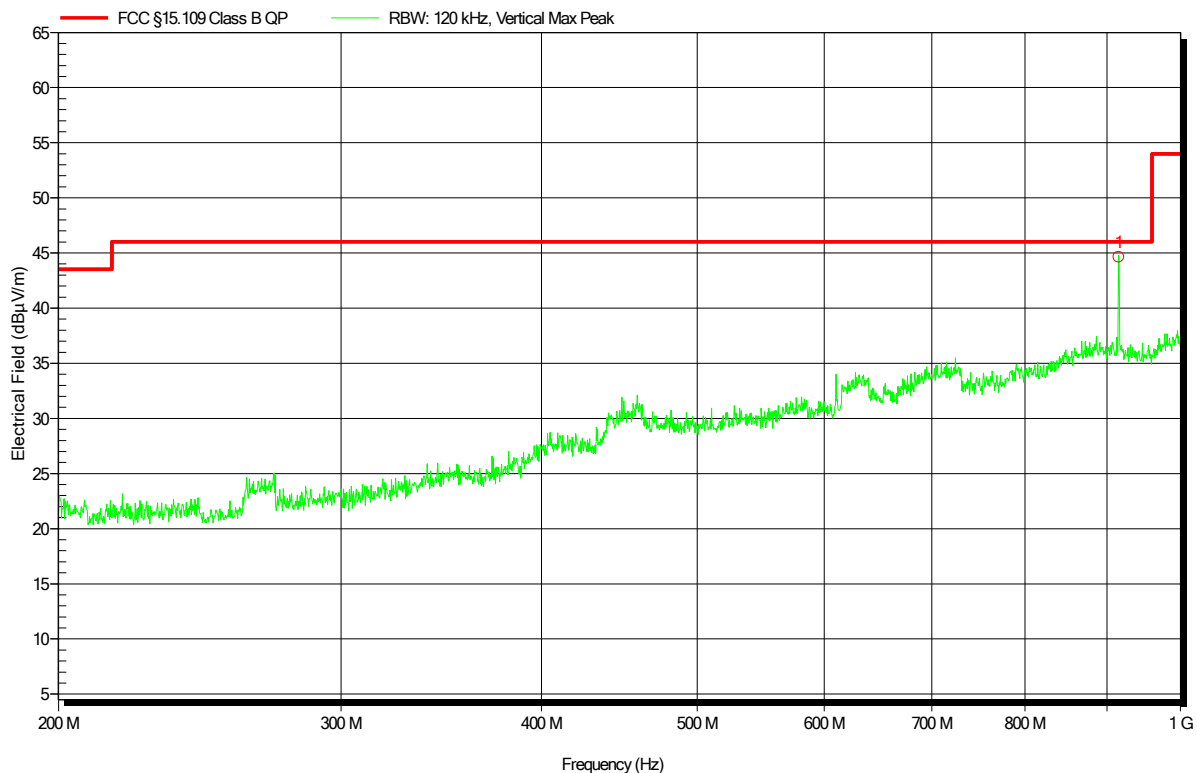


Peak Number	Frequency	Angle	Height
1	915.2 MHz	915MHz carrier	

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220

Index 14

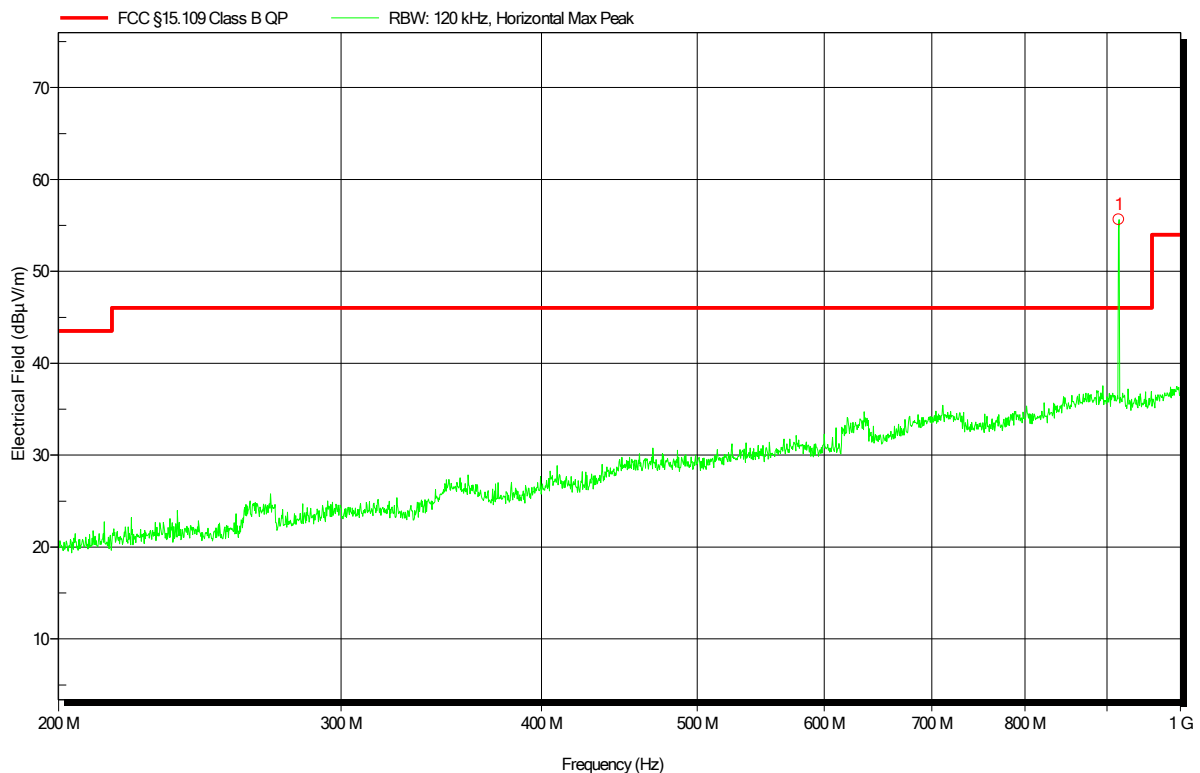


Peak Number	Frequency	Angle	Height
1	915.2 MHz	915MHz carrier	

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220


Index 16

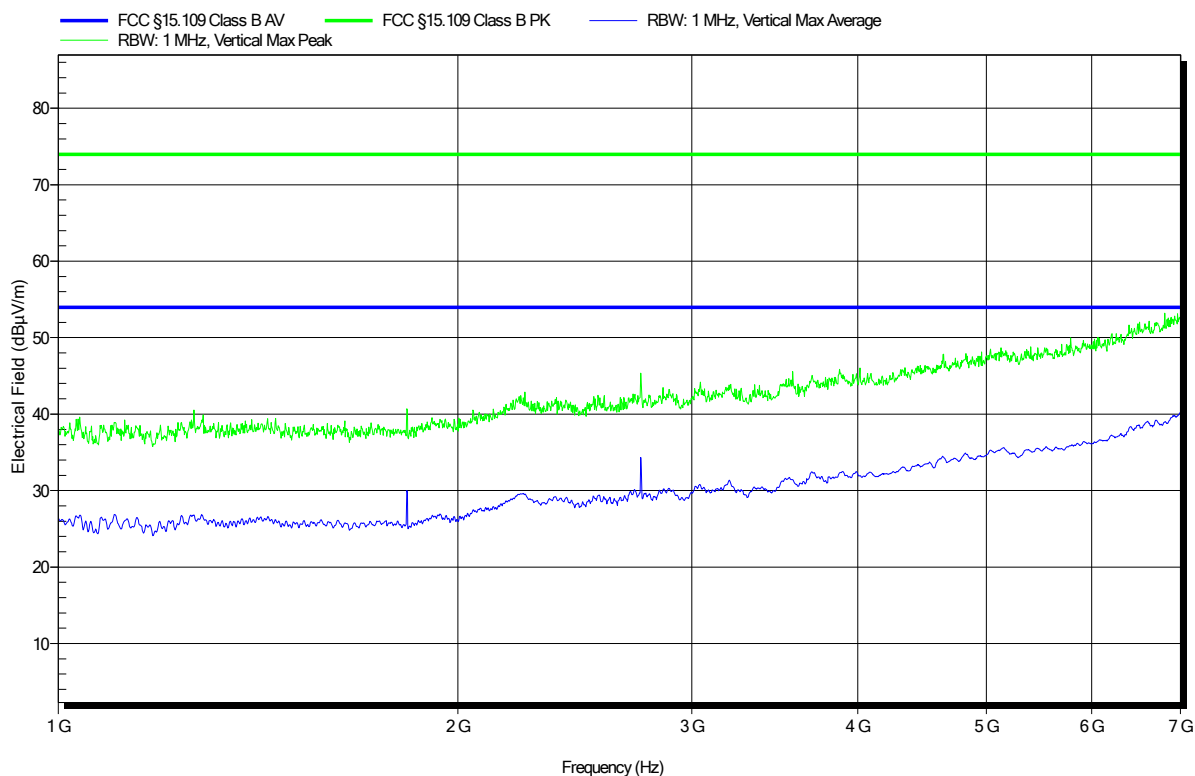

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220


Index 17

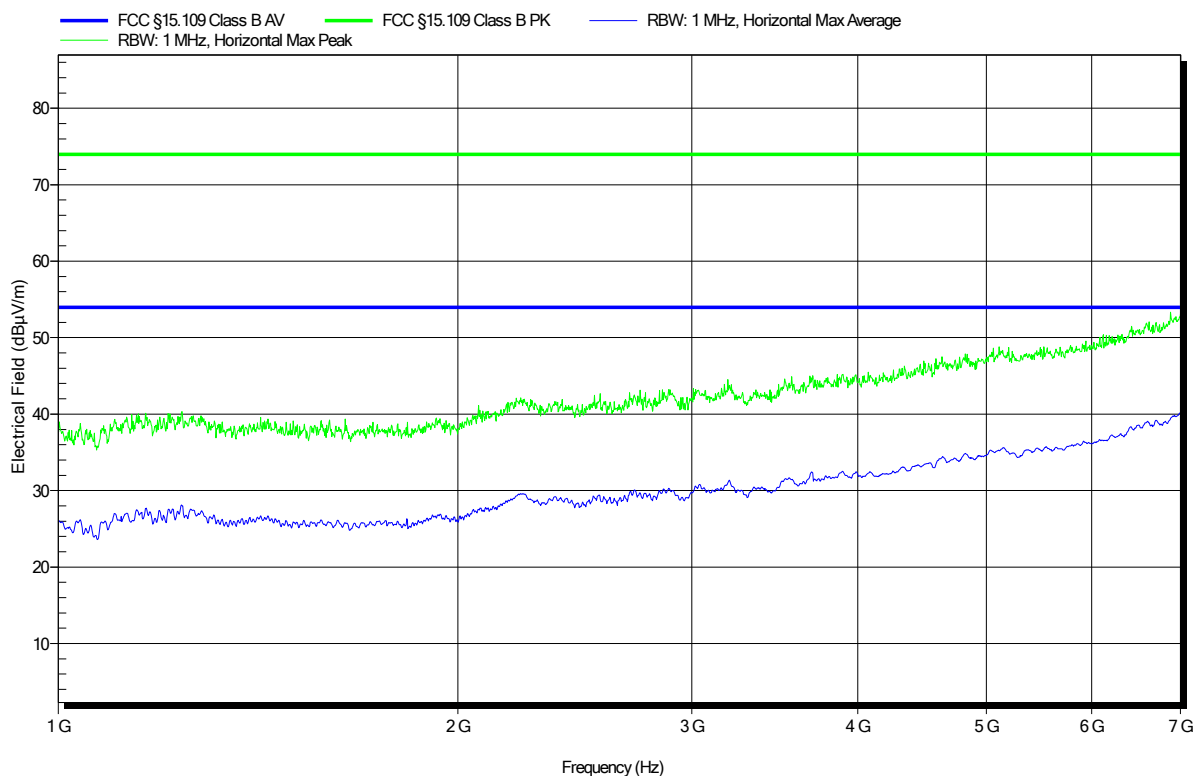

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220


Index 18

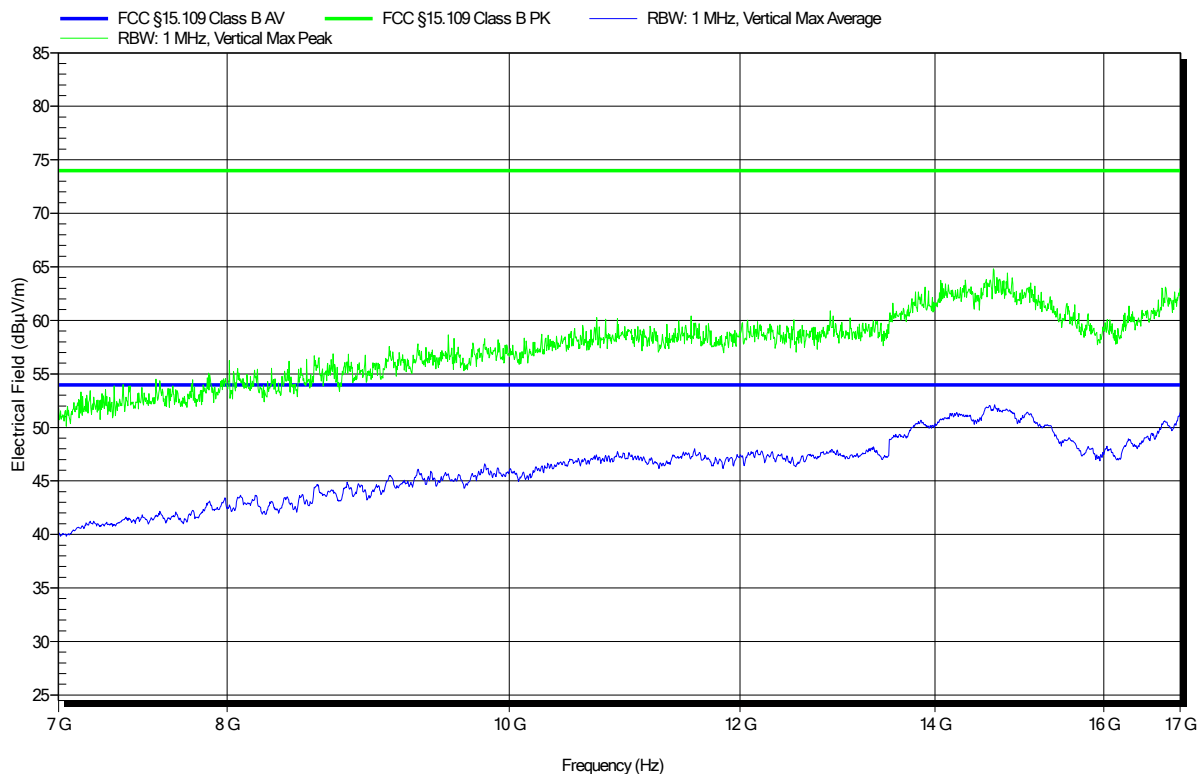

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220


Index 19

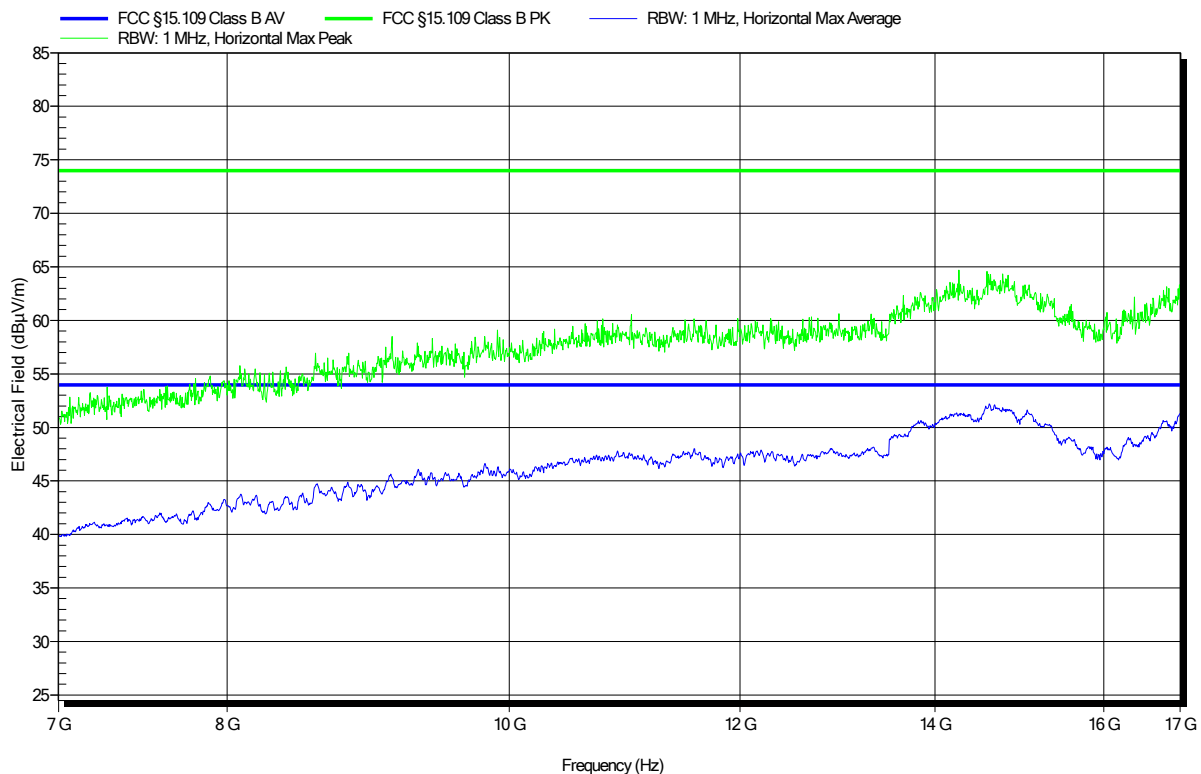

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Vertical
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220

Index 21

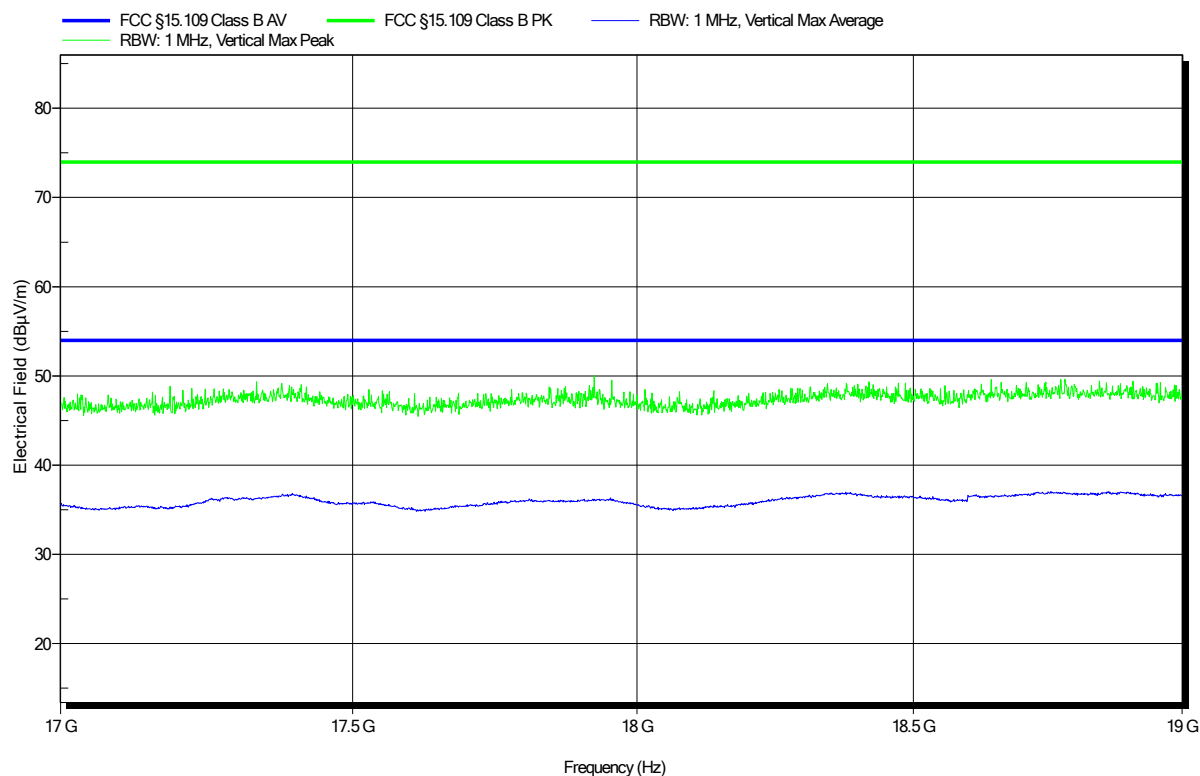

Radiated emissions according to FCC part 15B

Project Number: G0M-2002-8859
 Applicant: Kamstrup A/S
 Model Description: Ultrasonic water meter
 Model: KWM3220
 Test Sample ID: 29580
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Handrik
 Test Date: 2020-06-26
 Operating Conditions: ambient temperature: 22°C
 power input: 3.6V DC
 Antenna: Configurable Antenna, Horizontal
 Measurement Distance: 3m
 Mode: 2
 Note 1: KWM3220

Index 22

