



# RF TEST REPORT

**Applicant** FOCAL JMLab

**FCC ID** OV3-FH21041

**Product** DIVA UTOPIA

**Brand** FOCAL

**Model** DIVA UTOPIA

**Report No.** R2410A1479-R1

**Issue Date** November 8, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

---

*Prepared by: Xu Ying*

*Approved by: Xu Kai*

---

**Eurofins TA Technology (Shanghai) Co., Ltd.**

*Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*

---

## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the Test Report.....	4
1.2. Test Facility.....	4
1.3. Testing Location.....	4
2. General Description of Equipment Under Test.....	5
2.1. Applicant and Manufacturer Information .....	5
2.2. General Information .....	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	8
5.1. Unwanted Emission .....	8
5.2. Conducted Emission.....	22
6. Main Test Instruments.....	25
ANNEX A: The EUT Appearance.....	26
ANNEX B: Test Setup Photos.....	27

## Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Unwanted Emissions	15.247(d), 15.205, 15.209	PASS
2	Conducted Emissions	15.207	PASS
Date of Testing: October 17, 2024 ~ October 18, 2024 and November 1, 2024			
Date of Sample Received: June 17, 2024			
Note: All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

**This report only tested Unwanted Emissions (Wi-Fi 2.4G 802.11b CH1/802.11g CH1/802.11n CH11; Bluetooth LE 2M CH0) and Conducted Emissions based on the worst case of the original report.**

**Other test items refer to the Module report (Report No.: INE-AT/FG-21/146 for Wi-Fi 2.4G; INE-AT/FG-21/145 for Bluetooth LE, FCC ID: 2AJYB-ST1955, Grant date: 08/19/2021).**

## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test Facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <https://www.eurofins.com/electrical-and-electronics>  
E-mail: Kain.Xu@cpt.eurofinscn.com

## 2. General Description of Equipment Under Test

### 2.1. Applicant and Manufacturer Information

Applicant	FOCAL JMLab
Applicant address	108 Avenue De l'Avenir, ZI Molina la Chazotte, 42350 LA TALAUDIERE, FRANCE
Manufacturer	FOCAL JMLab
Manufacturer address	108 Avenue De l'Avenir, ZI Molina la Chazotte, 42350 LA TALAUDIERE, FRANCE

### 2.2. General Information

EUT Description	
Model	DIVA UTOPIA
Lab internal SN	R2410A1479/S01
Hardware Version	R1
Software Version	0.0.0.9862
Power Supply	AC power supply
Antenna Type	PCB Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	3.0 dBi
Additional Beamforming Gain	NA
Operating Frequency Range(s)	802.11b/g/n(HT20)/ax(HE20): 2412 ~ 2462 MHz Bluetooth LE V5.3: 2402 ~2480 MHz
Modulation Type	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDM Bluetooth LE: GFSK

Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2023) Radio Frequency Devices**

**ANSI C63.10-2013**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth (Low Energy)	1Mbps; 2Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ax HE20	MCS0

Band	Data Rate	
	SISO	MIMO
802.11b	1Mbps	--
802.11g	6Mbps	--
802.11n HT20	MCS0	MCS8
802.11ax HE20	MCS0	MCS0

## 5. Test Case Results

### 5.1. Unwanted Emission

#### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

#### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO




c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set

for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
  - 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
  - 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.

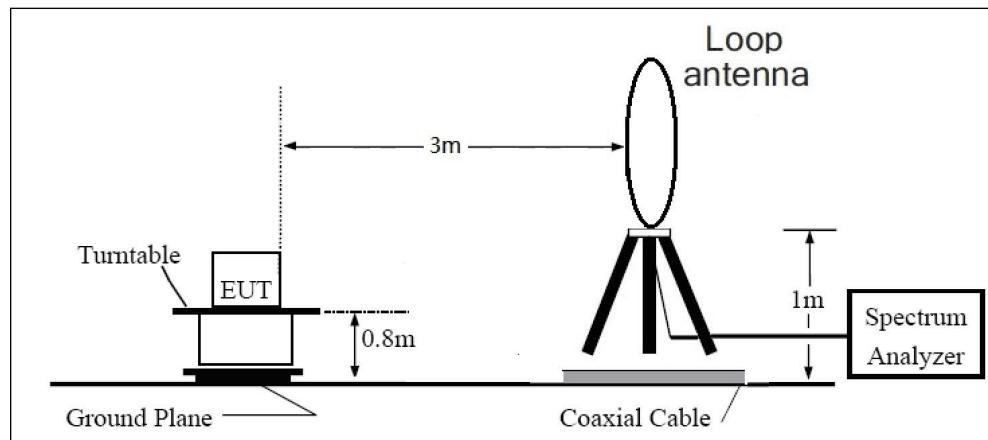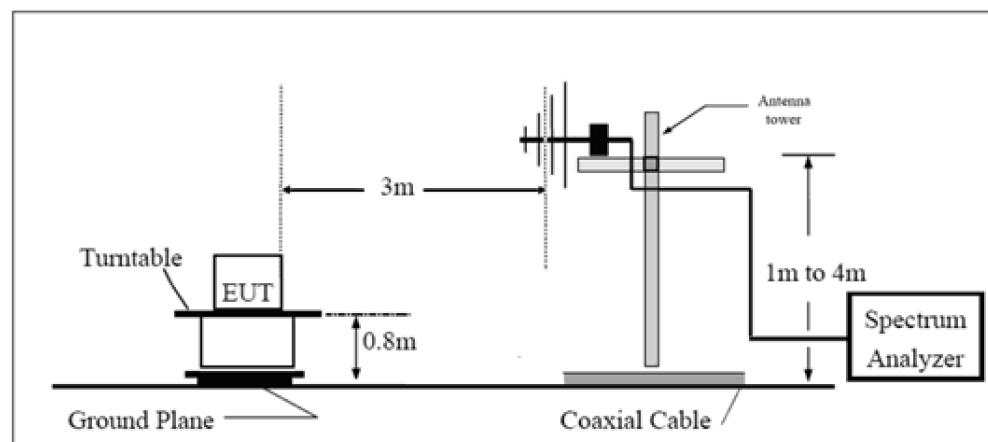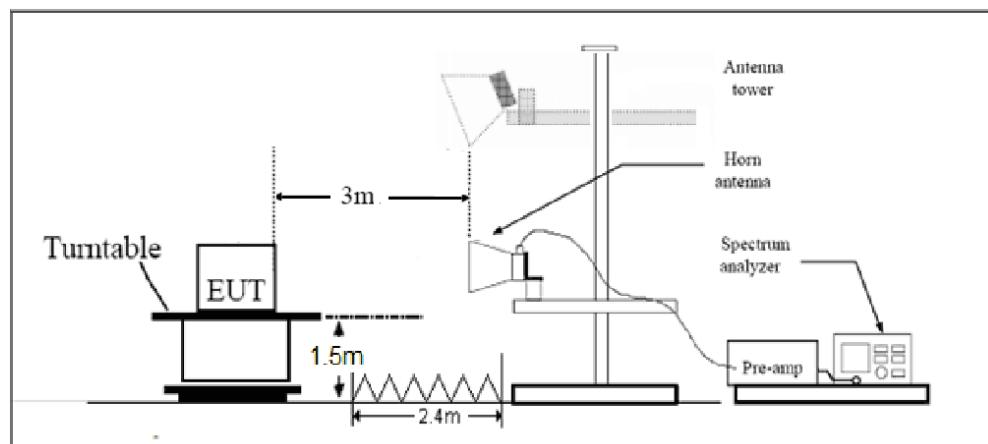**Test Setup**
**9KHz~ 30MHz**

**30MHz~ 1GHz**

**Above 1GHz**


Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength( $\mu$ V/m)	Field strength(dB $\mu$ V/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dB $\mu$ V/m

Average Limit=54 dB $\mu$ V/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

**Test Results:**

The following graphs display the maximum values of horizontal and vertical by software.


Blue trace uses the peak detection, Green trace uses the average detection.

A symbol (dB $\mu$ V/m) in the test plot below means (dB $\mu$ V/m)

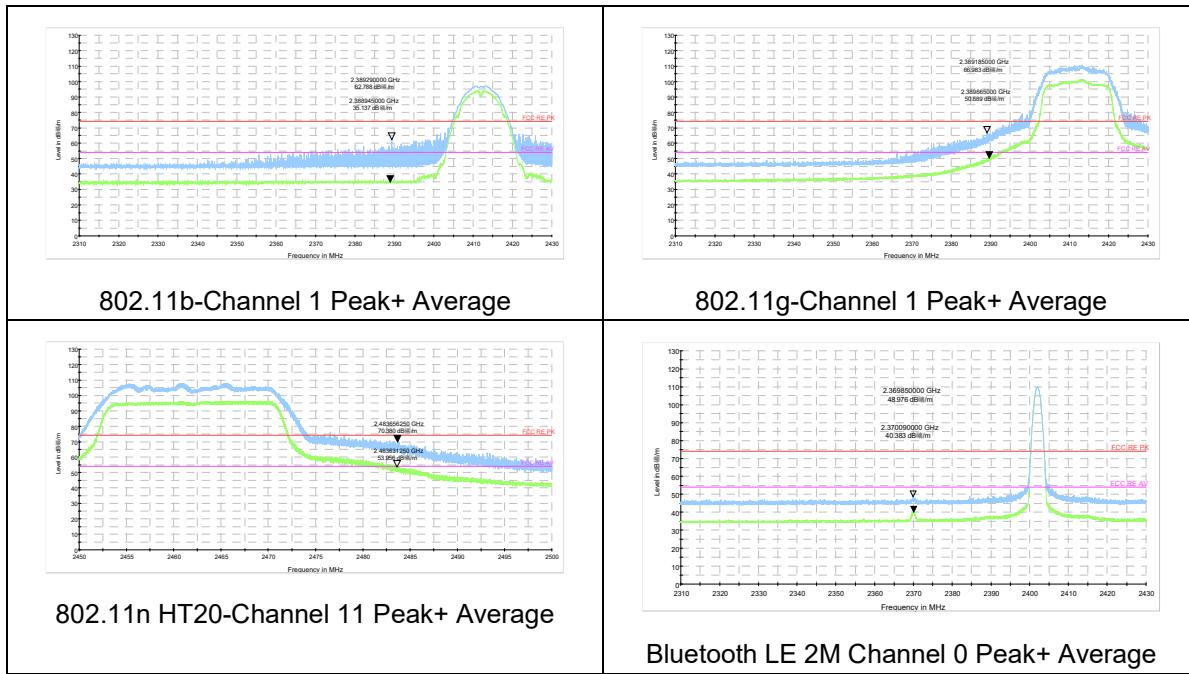


**Result of RE**
**Test result**

The following graphs display the maximum values of horizontal and vertical by software.  
 For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.  
 A symbol (dB $\mu$ V/m) in the test plot below means (dB $\mu$ V/m)

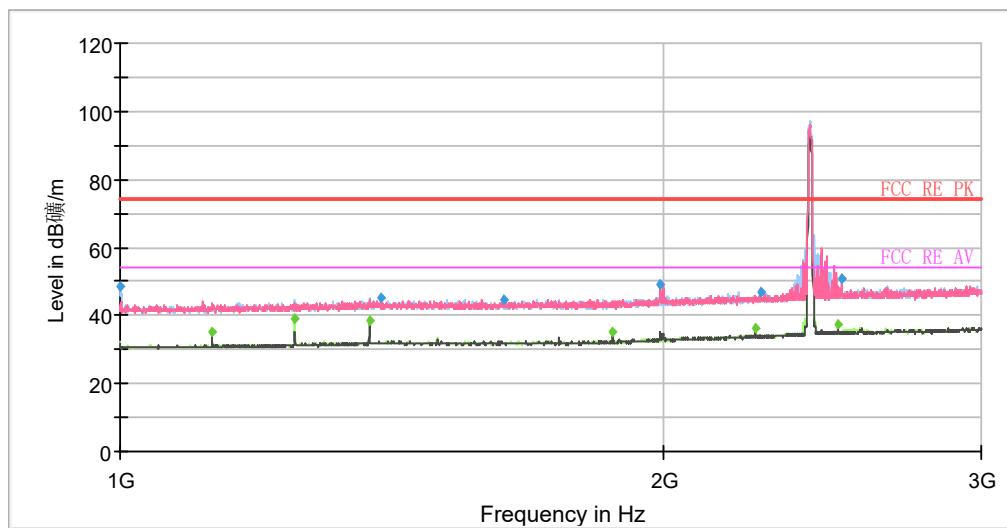**Continuous TX mode:**
**Wi-Fi 2.4G**
**802.11b CH1**


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

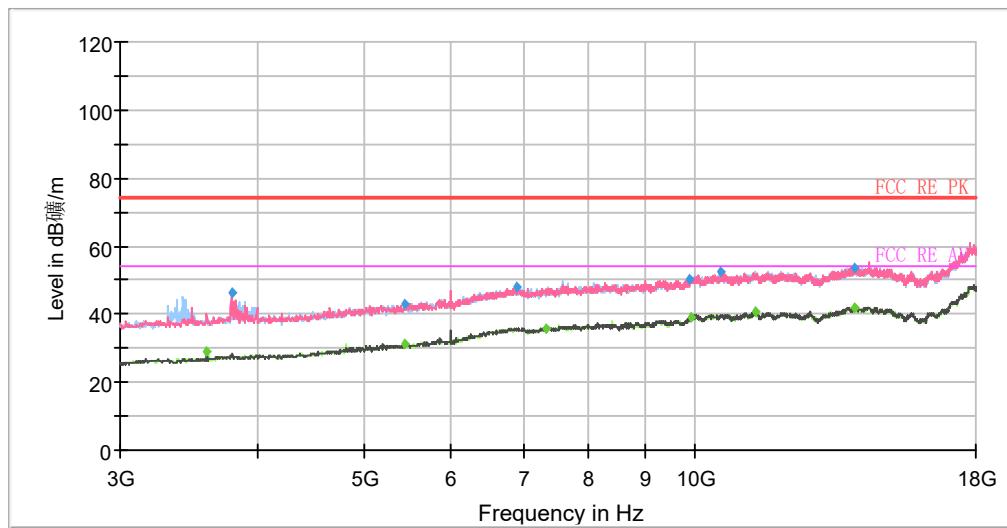


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1001.00	48.33	---	74.00	25.67	500.00	100.0	H	333.00	-6
1124.50	---	35.43	54.00	18.57	500.00	100.0	V	276.00	-5
1250.00	---	38.96	54.00	15.04	500.00	200.0	H	25.00	-4
1374.50	---	38.62	54.00	15.38	500.00	200.0	V	82.00	-4
1393.50	45.31	---	74.00	28.69	500.00	100.0	H	348.00	-3
1631.50	44.91	---	74.00	29.09	500.00	200.0	H	105.00	-3
1875.00	---	35.38	54.00	18.62	500.00	200.0	V	40.00	-2
1991.00	49.03	---	74.00	24.97	500.00	100.0	V	149.00	-1
2250.00	---	36.45	54.00	17.55	500.00	100.0	V	72.00	0
2264.50	46.74	---	74.00	27.26	500.00	100.0	V	161.00	0
2500.00	---	37.55	54.00	16.45	500.00	200.0	V	77.00	1
2509.50	51.07	---	74.00	22.93	500.00	100.0	V	240.00	1


**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**

**2. Margin = Limit -MAX Peak/ Average**

## 802.11g CH1

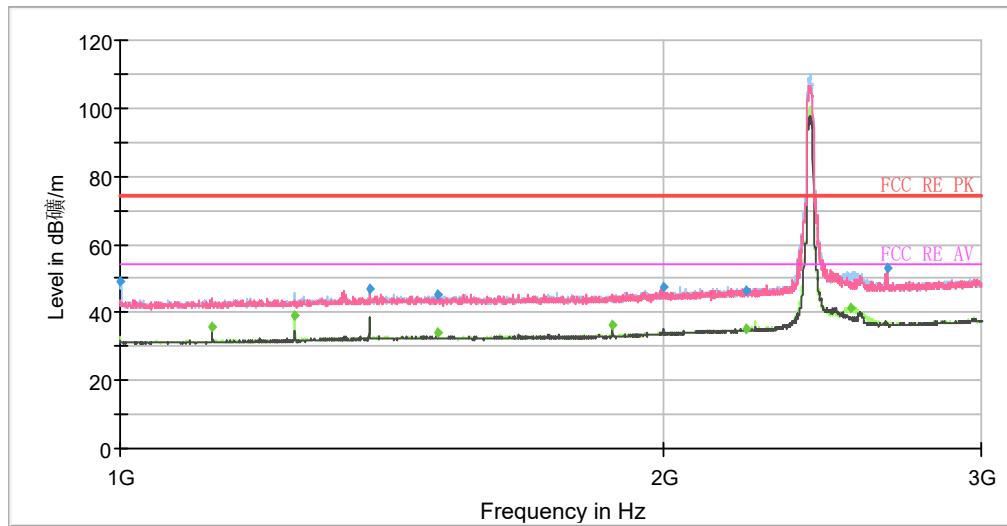

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

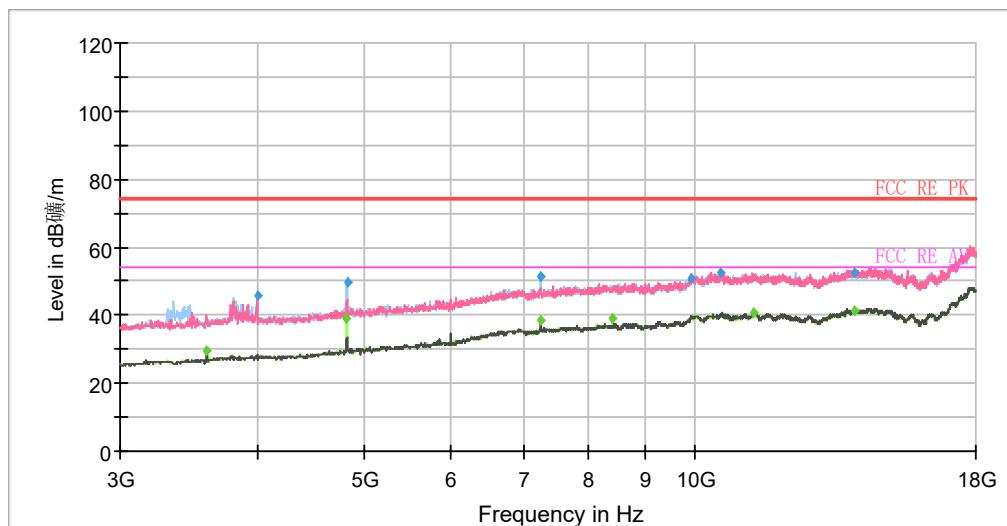


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1001.00	49.02	---	74.00	24.98	500.00	100.0	H	23.00	-6
1124.50	---	35.86	54.00	18.14	500.00	200.0	V	93.00	-5
1250.00	---	39.33	54.00	14.67	500.00	200.0	H	23.00	-4
1375.00	46.75	---	74.00	27.25	500.00	200.0	V	88.00	-4
1499.00	45.45	---	74.00	28.55	500.00	200.0	V	100.00	-3
1500.00	---	33.85	54.00	20.15	500.00	200.0	H	358.00	-3
1875.00	---	36.14	54.00	17.86	500.00	200.0	V	27.00	-2
1998.50	47.72	---	74.00	26.28	500.00	200.0	V	154.00	-1
2222.00	---	35.18	54.00	18.82	500.00	200.0	H	30.00	0
2222.50	46.27	---	74.00	27.73	500.00	100.0	H	120.00	0
2541.50	---	41.36	54.00	12.64	500.00	100.0	H	184.00	1
2661.00	53.06	---	74.00	20.94	500.00	100.0	V	357.00	2


**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**

**2. Margin = Limit -MAX Peak/ Average**

## 802.11n HT20 CH11

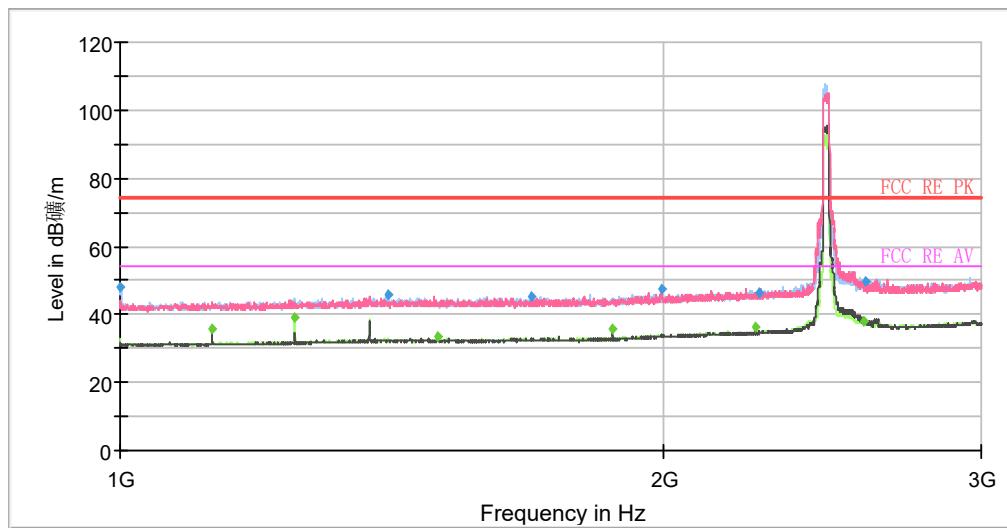

Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

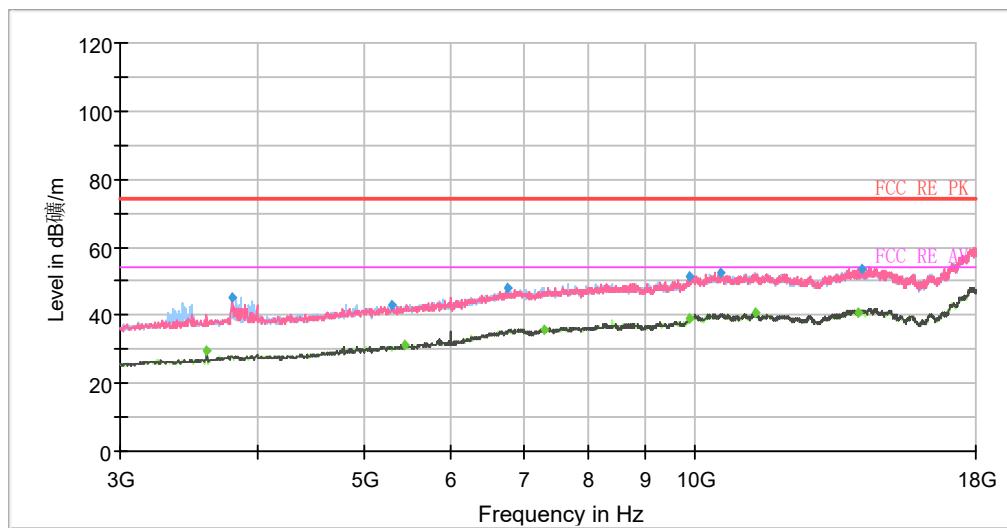


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.50	48.13	---	74.00	25.87	500.00	100.0	H	85.00	-6
1125.00	---	35.65	54.00	18.35	500.00	200.0	V	91.00	-5
1250.00	---	39.09	54.00	14.91	500.00	200.0	H	23.00	-4
1409.00	45.84	---	74.00	28.16	500.00	100.0	H	91.00	-3
1499.50	---	33.22	54.00	20.78	500.00	100.0	H	49.00	-3
1691.00	45.20	---	74.00	28.80	500.00	200.0	V	73.00	-3
1875.00	---	35.76	54.00	18.24	500.00	200.0	V	49.00	-2
1994.50	47.66	---	74.00	26.34	500.00	100.0	V	142.00	-1
2250.00	---	36.25	54.00	17.75	500.00	100.0	H	55.00	0
2262.00	46.21	---	74.00	27.79	500.00	100.0	H	85.00	0
2581.50	---	38.04	54.00	15.96	500.00	100.0	H	186.00	2
2590.00	49.91	---	74.00	24.09	500.00	100.0	H	179.00	2

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**


**2. Margin = Limit -MAX Peak/ Average**

## Bluetooth LE 2M-Channel 0

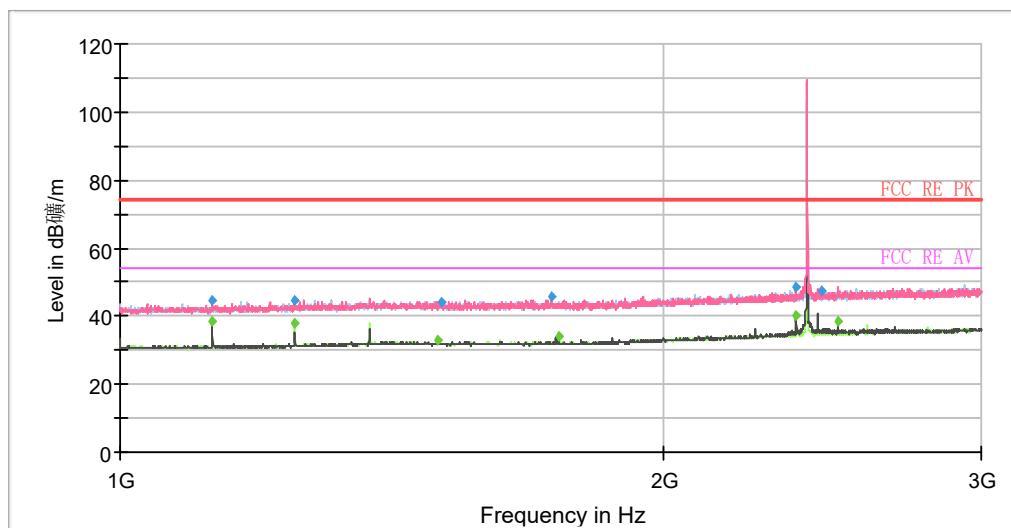

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

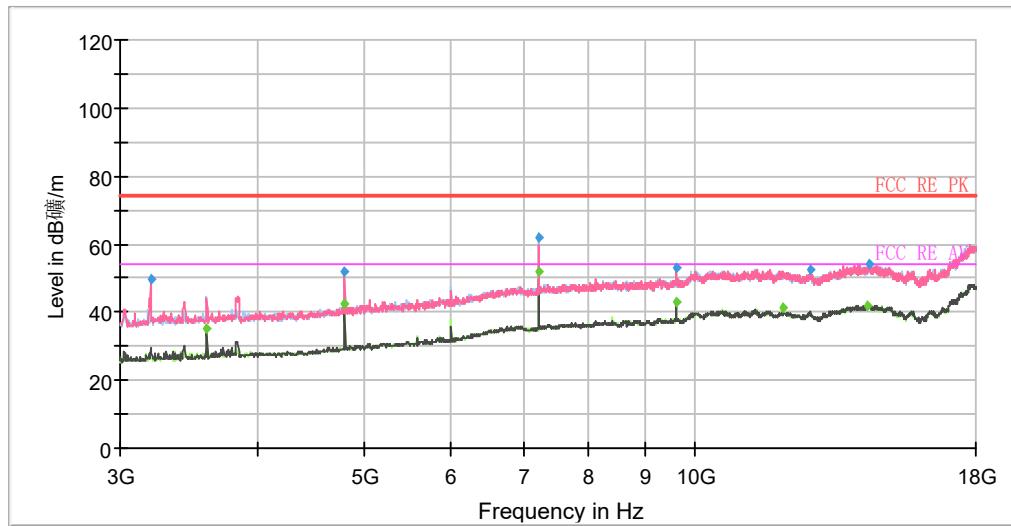

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.50	---	38.77	54.00	15.23	500.00	100.0	V	288.00	-5
1125.00	44.66	---	74.00	29.34	500.00	100.0	V	282.00	-5
1249.50	---	37.89	54.00	16.11	500.00	200.0	H	51.00	-4
1250.00	44.82	---	74.00	29.18	500.00	100.0	H	71.00	-4
1500.00	---	33.14	54.00	20.86	500.00	100.0	H	71.00	-3
1506.50	44.34	---	74.00	29.66	500.00	100.0	H	342.00	-3
1734.00	45.58	---	74.00	28.42	500.00	200.0	V	131.00	-2
1750.00	---	34.13	54.00	19.87	500.00	100.0	H	173.00	-2
2370.00	48.44	---	74.00	25.56	500.00	100.0	V	282.00	1
2370.00	---	40.37	54.00	13.63	500.00	100.0	V	282.00	1
2446.00	47.28	---	74.00	26.72	500.00	100.0	V	282.00	1
2500.00	---	38.45	54.00	15.55	500.00	100.0	V	87.00	1

**Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**

**2. Margin = Limit -MAX Peak/ Average**

## 5.2. Conducted Emission

### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

### Test Setup

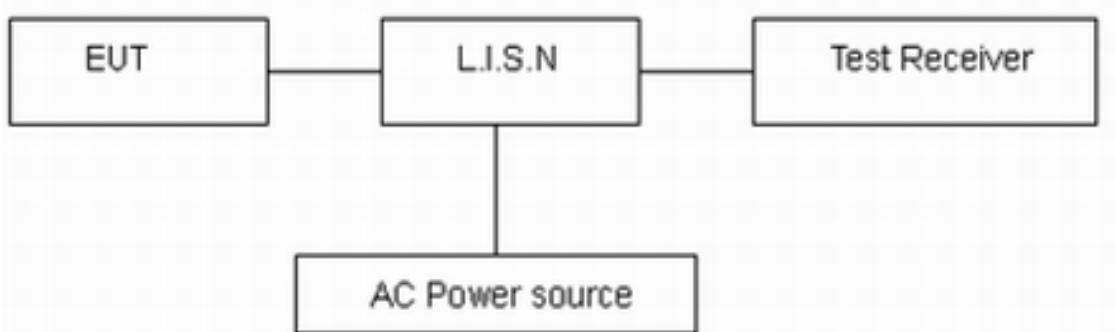

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


\*: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**


Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

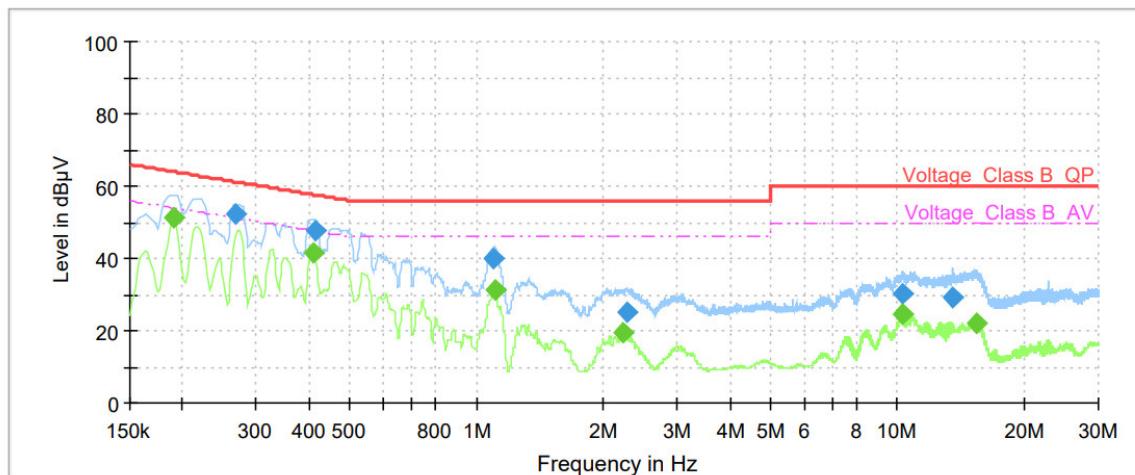

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.19	---	51.36	54.02	2.66	1000.0	9.000	L1	ON	21.1
0.27	52.47	---	61.21	8.74	1000.0	9.000	L1	ON	21.1
0.41	---	41.30	47.63	6.33	1000.0	9.000	L1	ON	21.0
0.41	47.67	---	57.58	9.91	1000.0	9.000	L1	ON	21.0
1.10	40.17	---	56.00	15.83	1000.0	9.000	L1	ON	20.2
1.11	---	31.17	46.00	14.83	1000.0	9.000	L1	ON	20.2
2.22	---	19.41	46.00	26.59	1000.0	9.000	L1	ON	19.7
2.27	25.00	---	56.00	31.00	1000.0	9.000	L1	ON	19.6
10.25	---	24.39	50.00	25.61	1000.0	9.000	L1	ON	19.6
10.33	30.01	---	60.00	29.99	1000.0	9.000	L1	ON	19.6
13.56	29.32	---	60.00	30.68	1000.0	9.000	L1	ON	19.6
15.41	---	22.31	50.00	27.69	1000.0	9.000	L1	ON	19.6

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 kHz to 30 MHz

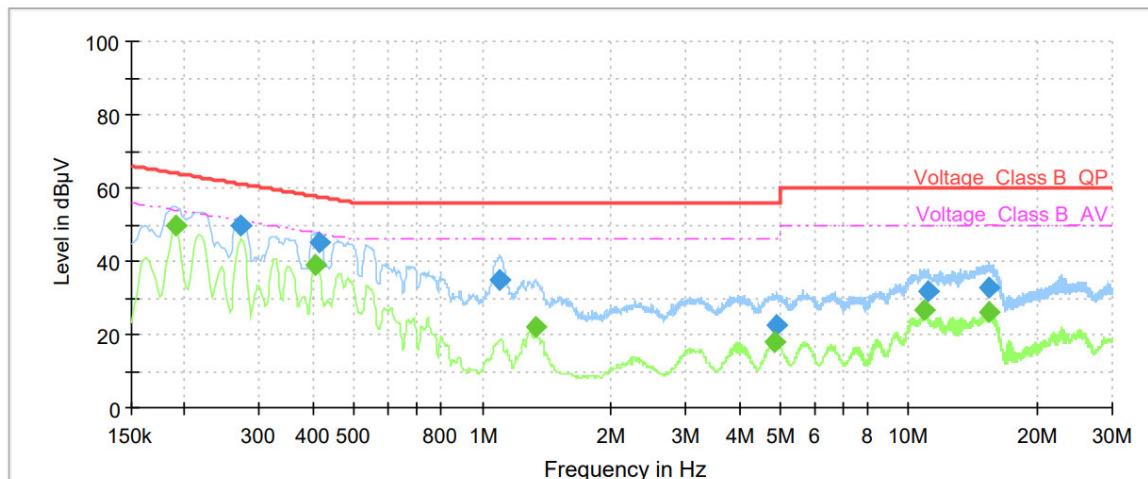

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.19	---	49.97	54.02	4.05	1000.0	9.000	N	ON	21.1
0.27	49.77	---	61.14	11.37	1000.0	9.000	N	ON	21.1
0.40	---	39.17	47.77	8.60	1000.0	9.000	N	ON	21.0
0.42	45.16	---	57.54	12.37	1000.0	9.000	N	ON	21.0
1.10	34.72	---	56.00	21.28	1000.0	9.000	N	ON	20.2
1.33	---	22.26	46.00	23.74	1000.0	9.000	N	ON	20.0
4.86	---	18.20	46.00	27.80	1000.0	9.000	N	ON	19.5
4.92	22.77	---	56.00	33.23	1000.0	9.000	N	ON	19.5
10.86	---	26.49	50.00	23.51	1000.0	9.000	N	ON	19.6
11.07	31.68	---	60.00	28.32	1000.0	9.000	N	ON	19.6
15.33	32.93	---	60.00	27.07	1000.0	9.000	N	ON	19.7
15.39	---	26.06	50.00	23.94	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Signal Analyzer	R&S	FSV40	101186	2024-05-07	2025-05-06
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Horn Antenna	ETS-Lindgren	3160-09	00102643	2024-09-24	2027-09-23
Horn Antenna	STEATITE	QSH-SL-26-4 0-K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.01	/	/
Artificial main network	R&S	ENV216	101171	2023-12-05	2025-12-04
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

## ANNEX B: Test Setup Photos

**The Test Setup Photos are submitted separately.**

\*\*\*\*\* END OF REPORT \*\*\*\*\*