

Test & Certification Center (TCC) - Dallas
FCC ID: OW3RH-47
Test Report #: 03-EM-0128.002B
7-Apr-04

Accredited Laboratory
Certificate Number: 1819-01

Ver 3.0

CFR 47 Part 2, 22, and 24 Test Report

Test Report Number: 03-EM-0128.002B

Terminal device: FCC ID: OW3RH-47, Model: N-Gage QD, Type: RH-47 HW: 0406, SW: T02.00
(Detailed information is listed in section 4).

Originator: M.Sundstrom / C.Nguyen / J. Love
Function: TCC - Dallas – EMC
Version/Status: 3.0 / Approved
Location: TCC Directories
Date: 7-Apr-04

Change History:

Version	Date	Status	Handled By	Comments
0.1	9-Dec-03	Draft	M.Sundstrom / C.Nguyen / J.Love	
0.2	16-Jan-04	Proposal	N.Walton	
0.3	19-Jan-04	Reviewed	M.Severson / M.Mobley	
1.0	20-Jan-04	Approved	A.Ewing	
1.1	21-Jan-04	Proposed / Reviewed	N. Walton	
2.0	22-Jan-04	Approved	A. Ewing	
2.1	7-Apr-04	Proposed	N. Walton	Amended to include Appendix A
3.0	7-Apr-04	Approved	A. Ewing	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Mobile Phones
6021 Connection Drive
Irving, Texas 75039
U.S.A.

Tel. 972-894-5000

Client:

Nokia Germany (GmbH)
Product Creation Center
Rensingstrasse 15
D-44807 Bochum
Germany

Tel. +49 234 984 0


Date and signatures:

7-Apr-04

For the contents:



Nerina Walton, EMC Engineer
Technical Review



Alan Ewing, General Manager
Manager Review

TABLE OF CONTENTS

1. GENERAL	4
1.1 QUALITY SYSTEM	4
1.2 LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION	4
1.3 OBJECTIVE	6
1.4 TEST SUMMARY	6
2. STANDARDS BASIS	7
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	8
3.1 ABBREVIATIONS	8
3.2 ACRONYMS	8
3.3 TERMS	8
4. EQUIPMENT-UNDER-TEST (EUT)	9
4.1 DESCRIPTION OF TESTED DEVICE(S):	9
4.2 PHOTOGRAPH OF TESTED DEVICE(S):	9
5. TEST EQUIPMENT LIST	10
6. RF POWER OUTPUT (RADIATED)	11
6.1 SETUP	11
6.2 PASS/FAIL CRITERIA	11
6.3 DETAILED TEST RESULTS	12
6.4 MEASUREMENT UNCERTAINTY	12
7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)	13
7.1 SETUP	13
7.2 PASS/FAIL CRITERIA	13
7.3 DETAILED TEST RESULTS	13
7.4 MEASUREMENT UNCERTAINTY	19
8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	20
8.1 SETUP	20
8.2 PASS/FAIL CRITERIA	20
8.3 DETAILED TEST RESULTS	20
8.4 MEASUREMENT UNCERTAINTY	26
9. FIELD STRENGTH OF SPURIOUS RADIATION	27
9.1 SETUP	27
9.2 PASS/FAIL CRITERIA	27
9.3 DETAILED TEST RESULTS	28
9.4 MEASUREMENT UNCERTAINTY	31
10. FREQUENCY STABILITY (TEMPERATURE VARIATION)	32
10.1 SETUP	32
10.2 PASS/FAIL CRITERIA	32
10.3 DETAILED TEST RESULTS	32



Test & Certification Center (TCC) - Dallas

FCC ID: OW3RH-47

Test Report #: 03-EM-0128.002B

7-Apr-04

Accredited Laboratory
Certificate Number: 1819-01

Ver 3.0

11.	FREQUENCY STABILITY (VOLTAGE VARIATION).....	33
11.1	SETUP.....	33
11.2	PASS/FAIL CRITERIA	33
11.3	DETAILED TEST RESULTS	33

APPENDIX A: TEST SET-UP PHOTOS

1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661.

1.2 List of General Information Required for Certification

This list is in accordance with FCC Rules and Regulations, CFR 47, Part 2, and to 22H, 24E, Confidentiality.

1.2.1 Sub-part 2.1033(c)(1)

Name and Address of Applicant: Nokia Germany (GmbH), Product Creation Center, Rensingstrasse 15,
D-44807 Bochum, Germany.

Manufacturer: Nokia Corporation, P.O. Box 100, FIN-00045 Nokia Group, Finland

1.2.2 Sub-part 2.1033(c)(2)

FCC ID: OW3RH-47

Model No: N-Gage QD

1.2.3 Sub-part 2.1033(c)(3)

Instruction Manual(s):
Refer to attached EXHIBITS

1.2.4 Sub-part 2.1033(c)(4)

Type of Emission: 256KGXW

1.2.5 Sub-part 2.1033(c)(5)

Frequency Range, MHz: 824.2 to 848.8
1850.2 to 1909.8

1.2.6 Sub-part 2.1033(c)(6)

Power Rating, Watts: 1.259 EDRP, Cellular GSM
0.851 EIRP, PCS GSM

☐ Switchable ☒ Variable ☐ N/A

FCC Grant Note: BC- The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

Test & Certification Center (TCC) - Dallas

FCC ID: OW3RH-47

Test Report #: 03-EM-0128.002B

7-Apr-04

Accredited Laboratory
Certificate Number: 1819-01

Ver 3.0

1.2.7 Sub-part 2.1033(c)(7)

Maximum Power Rating, Watts: 1.259

1.2.8 Sub-part 2.1033(c)(8)

Voltages & Currents in all elements in final R.F. Stage, including final transistor or solid-state device:

Collector Current, A = per manual

Collector Voltage, Vdc = per manual

Supply Voltage, Vdc = per manual

1.2.9 Sub-part 2.1033(c)(9)

Tune-up Procedure: Refer to attached EXHIBITS

1.2.10 Sub-part 2.1033(c)(10)

Circuit Diagram/Circuit Description:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Refer to attached EXHIBITS

1.2.11 Sub-part 2.1033(c)(11)

Label Information: Refer to attached EXHIBITS

1.2.12 Sub-part 2.1033(c)(12)

Photographs: Refer to attached EXHIBITS

1.2.13 Sub-part 2.1033(c)(13)

Digital Modulation Description: N/A

1.2.14 Sub-part 2.1033(c)(14)

Test and Measurement Data: FOLLOWS

1.3 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, Part 22, and Part 24.

1.4 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
RF Power Output (Radiated)	FCC Part 22.913(a) / 24.232(b)	6	Complies
Occupied Bandwidth: Transmitter Conducted Measurements	FCC Part 2.1049(c)(1), 24.238(a)(b)	7	Complies
Spurious Emissions at Antenna Terminals	FCC Part 2.1051	8	Complies
Field Strength of Spurious Radiation	FCC Part 2.1053	9	Complies
Frequency Stability (Temperature Variation)	FCC Part 2.1055(a)(1)(b), 24.235	10	Complies
Frequency Stability (Voltage Variation)	FCC Part 2.1055(d)(1)(2), 24.235	11	Complies

2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 2	Code of Federal Regulations (CFR) Title 47, Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations: Subpart J – Equipment Authorization Procedures
3	FCC: CFR 47 Part 22	Code of Federal Regulations (CFR) Title 47, Part 22 – Public Mobile Services: Subpart H – Cellular Radiotelephone Service
4	FCC: CFR 47 Part 24	Code of Federal Regulations (CFR) Title 47, Part 24 – Personal Communications Services: Subpart E – Broadband PCS
5	RSS-132	800 MHz Cellular Telephones Employing New Technologies
6	RSS-133	2 GHz Personal Communications Services, Industry Canada
7	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
8	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.

3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

dB - decibel

dBc - decibels from carrier

dBm - decibels per milliwatt (absolute measurement)

GHz - gigahertz or 1000000000 hertz

kHz - kilohertz or 1000 hertz

MHz - megahertz or 1000000 hertz

3.2 Acronyms

AMPS - Advanced Mobile Phone System

BSS - Base Station Simulator

CDMA - Code Division Multiple Access

EDRP - Effective Dipole Radiated Power

EIRP - Effective Isotropic Radiated Power

EMC - Electromagnetic Compatibility

EMI - Electromagnetic Interference

ERP - Effective Radiated Power

EUT - Equipment under Test

GSM - Global System for Mobile communications

PCS - Personal Communications Services

RF - Radio Frequency

TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
47 CFR 2.1051 / 2.1049(c)(1), 24.238(a)(b) / 2.1055(a)(1)(b), 24.235 / 2.1055(d)(1)(2), 24.235	GSM 850/1900	18-Nov-03	Operational	Phone	Type: RH-47 HW: 0406 SW: T02.00 IMEI: 001004/00/127431/6
47 CFR 2.1053 / 22.913(a), 24.232(b)	GSM 850/1900	18-Nov-03	Operational	Phone	Type: RH-47 HW: 0406 SW: T02.00 IMEI: 001004/00/127380/5
47 CFR 2.1051 / 2.1049(c)(1), 24.238(a)(b) / 2.1055(a)(1)(b), 24.235 / 2.1055(d)(1)(2), 24.235 / 2.1053 / 22.913(a), 24.232(b)	GSM 850/1900	18-Nov-03	Operational	Battery	Type: BL-6C Other: 3.7 V
47 CFR 2.1051 / 2.1049(c)(1), 24.238(a)(b) / 2.1055(a)(1)(b), 24.235 / 2.1055(d)(1)(2), 24.235 / 2.1053 / 22.913(a), 24.232(b)	GSM 850/1900	18-Nov-03	Operational	SIM	Test X-0582

4.2 Photograph of Tested Device(s):

Refer to attached EXHIBITS.

5. TEST EQUIPMENT LIST


The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
9	0001	RF Preamplifier	Agilent	HP8449B	04-Aug-04	12 months
7, 8	00367/00368	EMI Receiver	Agilent	8546A / 85460A	22-Jul-04	12 months
7, 8	N/A	6dB Attenuator	Weinshchel	Model 2	N/A	N/A
7, 8	03155	Power Splitter	HP	33120A	N/A	N/A
7, 8	03857	Base station	R & S	CMU 200	17-Jul-04	12 months
6, 9	2680	Spectrum Analyzer	Agilent	E7405A	24-Nov-04	12 months
6, 9	2664/2665	EMI Receiver	Agilent	8546A / 85460A	03-Mar-04/ 03-Mar-04	12 months
6, 9	1472	Biconilog Antenna	ETS	3142B	28-Jan-04	12 months
6, 9	2858	Horn Antenna	EMCO	3115	15-Aug-04	12 months
6, 9	0064	Horn Antenna	EMCO	3115	02-Apr-04	12 months
6, 9	2671	Signal Generator	Agilent	83630B	04-Nov-04	12 months
6, 9	2846	Turntable and Tower Controller	Sunol	SC99V	N/A	N/A
6, 9	02666	Base Station	R&S	CMU200	21-Dec-04	12 months
6	2283	Spectrum Analyzer	Agilent	8593EM	12-Jun-04	12 months
6	00147	Power Meter	Boonton	4232A	27 Aug 04	12 months
6	00163	Power Sensor	Boonton	51015	10 Aug 04	12 months.
6	02618	Tunable Dipole	Schwarzbeck	D-69250	N/A	N/A
10, 11	00837	Temperature Chamber	Tenney Environmental	TU jr.	22 Feb 04	6 months
10, 11	00627	DC Power Supply	Hewlett Packard	E3631A	N/A	N/A
10, 11	00479	Multi-Meter	Fluke	87III	16 Oct 04	12 months
10, 11	02666	Base Station	R&S	CMU200	21-Dec-04	12 months

6. RF POWER OUTPUT (RADIATED)

Specification: FCC Part 22.913(a), 24.232(b)(c)

6.1 Setup

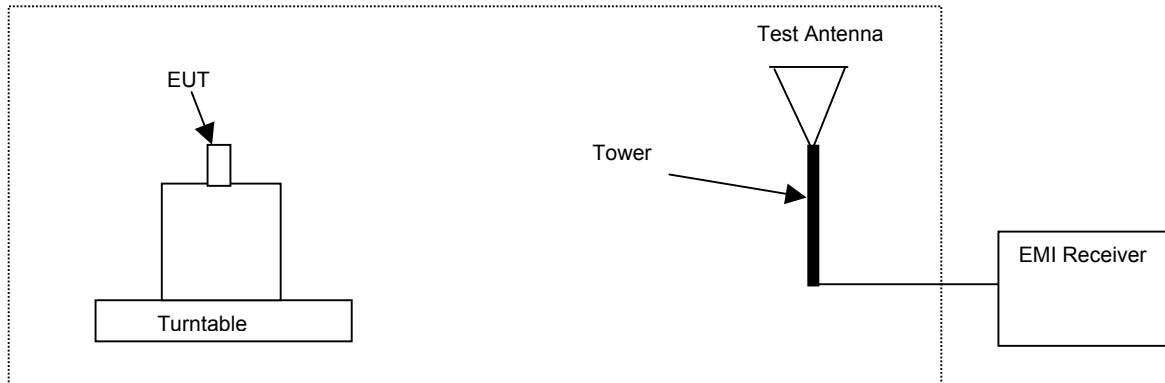

For a photo of the test set-up that was used, please refer to Section 1 of Appendix A.

6.2 Pass/Fail Criteria

Band	FCC Limit (dBm)
Cellular	38.5 (EDRP)
PCS	33.0 (EIRP)

6.3 Detailed Test Results

Test Technician / Engineer	J. Love
Date of Measurement	11-Nov-03
Temperature	23 - 24 °C
Humidity	37 - 47 %RH
Test Result	Complies with FCC Part 22.913(a) and FCC Part 24.232(b)

Note: measurements were performed with 3MHz RBW/VBW.

Cellular Band, GSM 850

Channel	Freq Max (MHz)	EDRP EMI (mW)	EDRP EMI (dBm)	Pol.
128	824.3	1096.5	30.4	V
190	836.6	1047.1	30.2	V
251	848.8	1259.0	31.0	V

PCS Band, GSM 1900

Channel	Freq Max (MHz)	EIRP EMI (mW)	EIRP EMI (dBm)	Pol.
512	1850.2	851.1	29.3	V
661	1880.0	812.8	29.1	V
810	1909.7	724.4	28.6	V

6.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 2.4dB for 800 to 2000 MHz.

7. OCCUPIED BANDWIDTH (TRANSMITTER CONDUCTED MEASUREMENTS)

Specification: FCC Part 2.1049(c)(1), 24.238(a)(b)

7.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call.

For a photo of the test set-up that was used, please refer to Section 2 of Appendix A.

7.2 Pass/Fail Criteria

Occupied Bandwidth, Out of Band

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular 800, Low Channel	< 824	-13
Cellular 800, High Channel	> 849	-13
PCS 1900, Low Channel	< 1850	-13
PCS 1900, High Channel	> 1910	-13

Occupied Bandwidth, In Band


No pass/fail, these plots are used to determine the emission designators.

7.3 Detailed Test Results

Test Technician / Engineer	M. Sundstrom / J. Love
Date of Measurement	19-Nov-03 / 14-Jan-04
Temperature	22 - 23°C
Humidity	26 - 58 %RH
Test Result	Complies with FCC Part 2.1049(c)(1), 24.238(a)(b)


Cellular Band, GSM 850, Channel 128

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

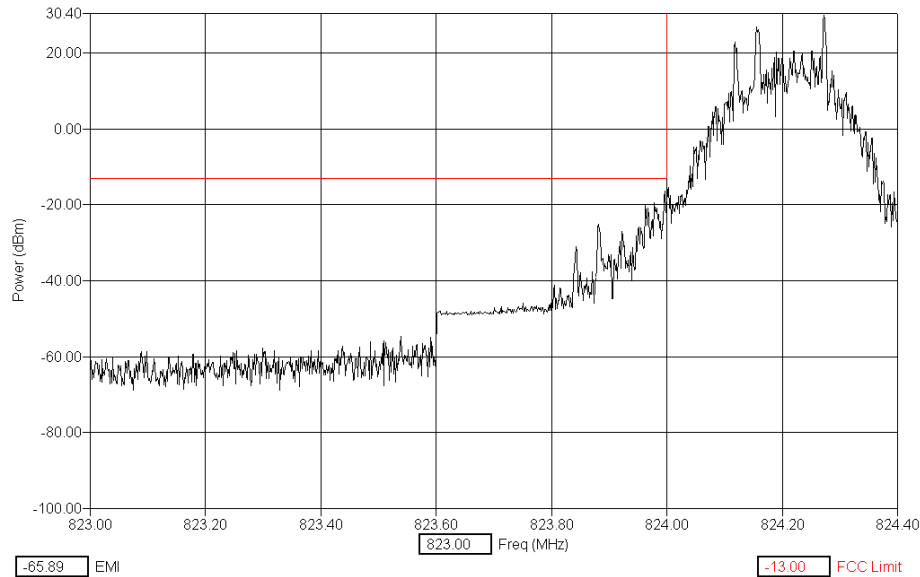


Cellular Band, GPRS 2+2, GSM 850, Channel 128

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

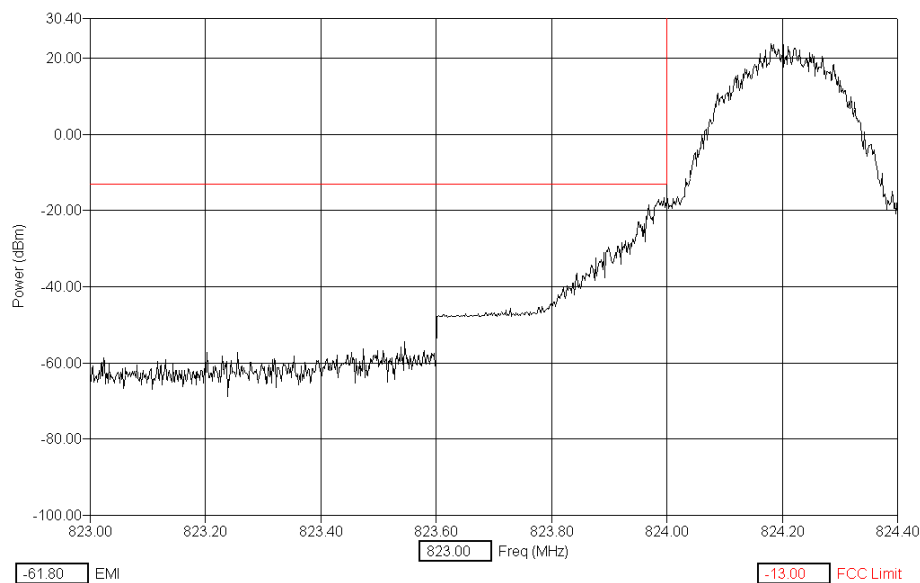


Cellular Band, GSM 850, Channel 251

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

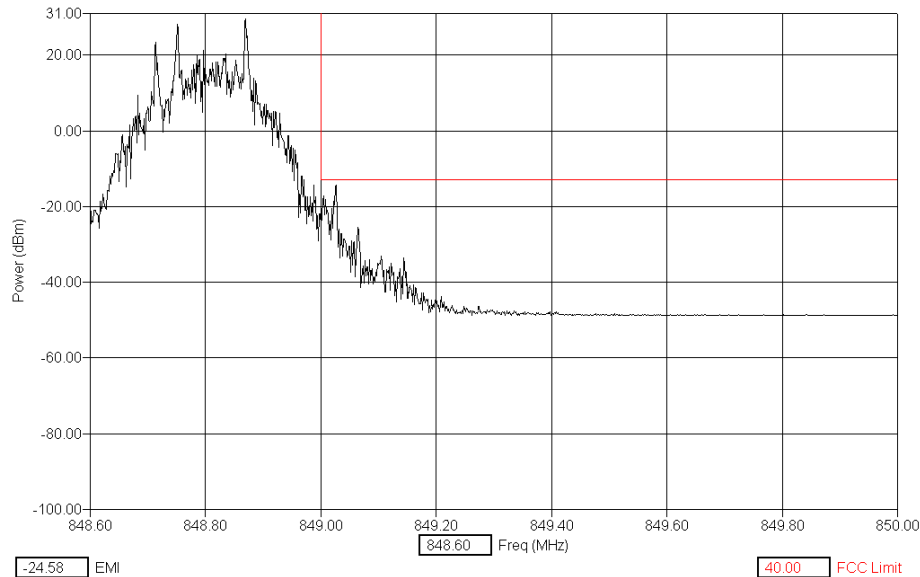


Cellular Band, GPRS 2+2, GSM 850, Channel 251

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

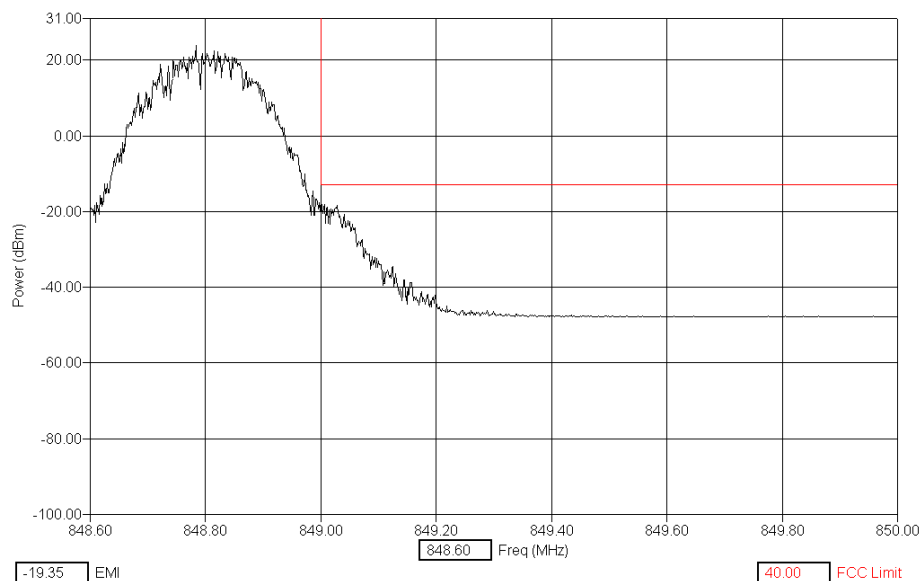


PCS Band, GSM 1900, Channel 512

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

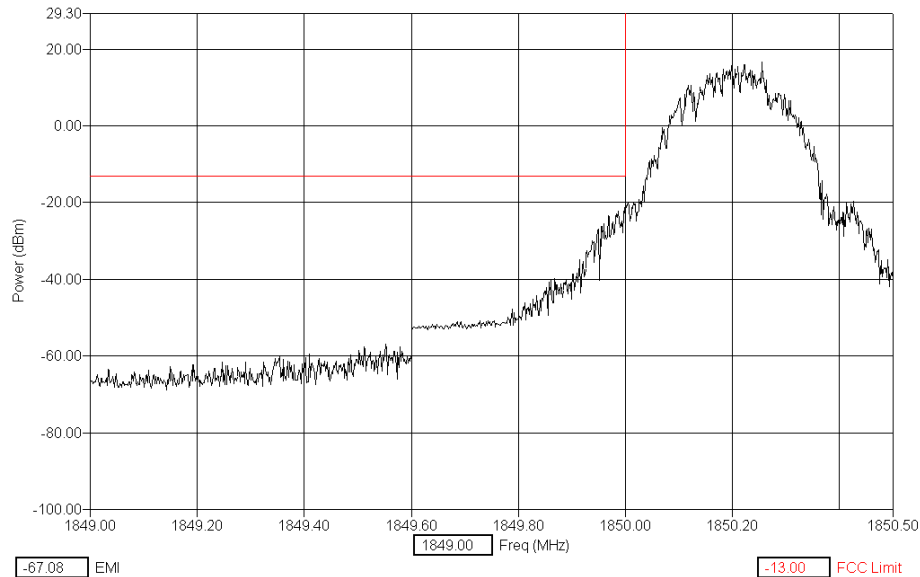


PCS Band, GPRS 2+2, GSM 1900, Channel 512

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

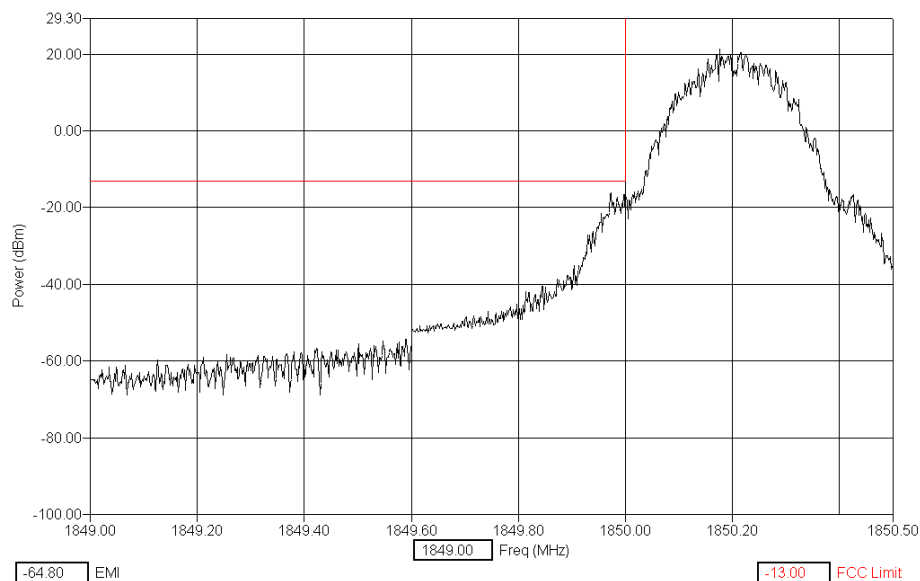


PCS Band. GSM 1900, Channel 810

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

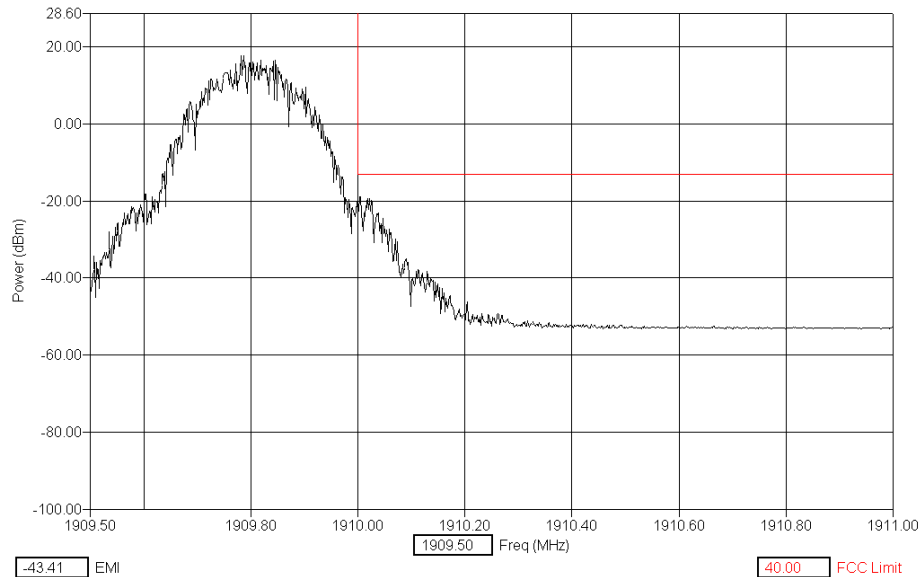


PCS Band, GPRS 2+2, GSM 1900, Channel 810

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

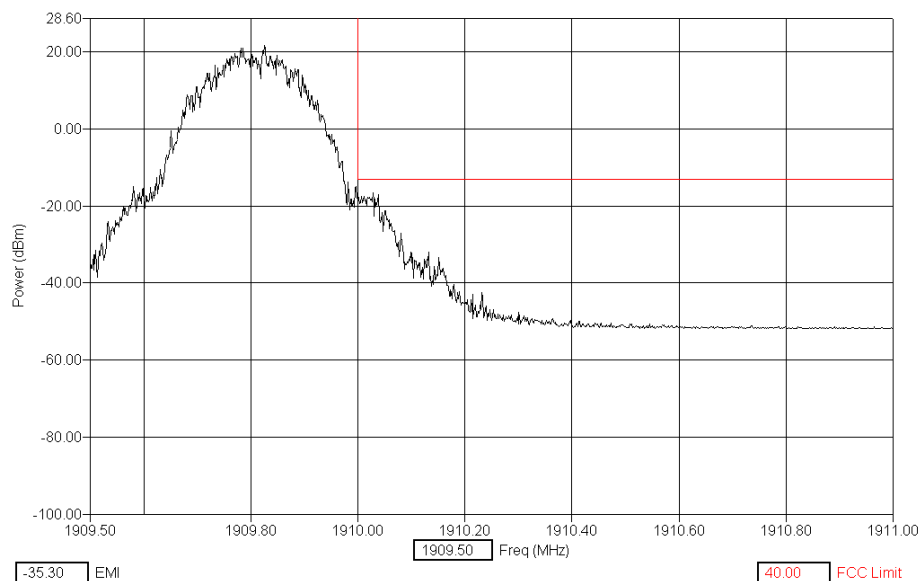


Occupied Bandwidth, In Band; Cellular, GSM 850, Channel 190

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

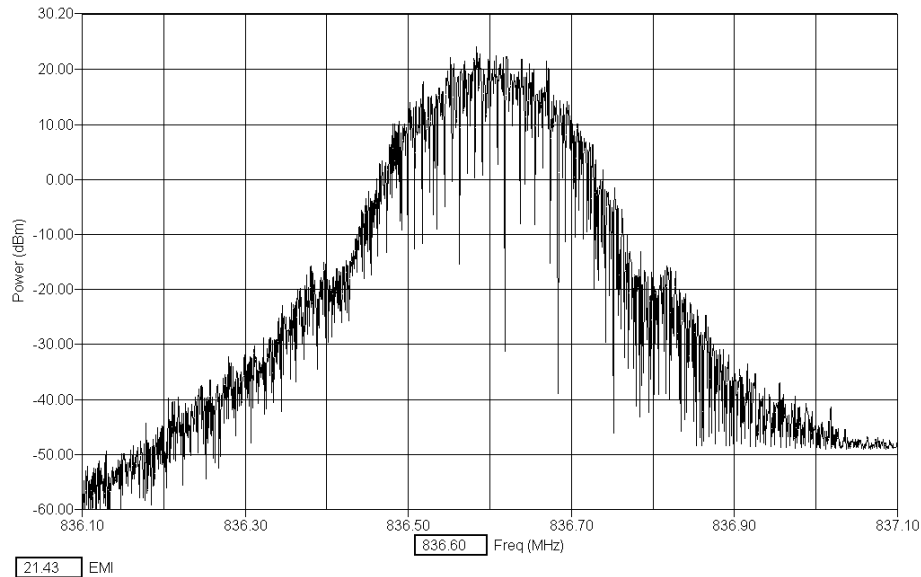


Occupied Bandwidth, In Band; Cellular, GPRS 2+2, GSM 850, Channel 190

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

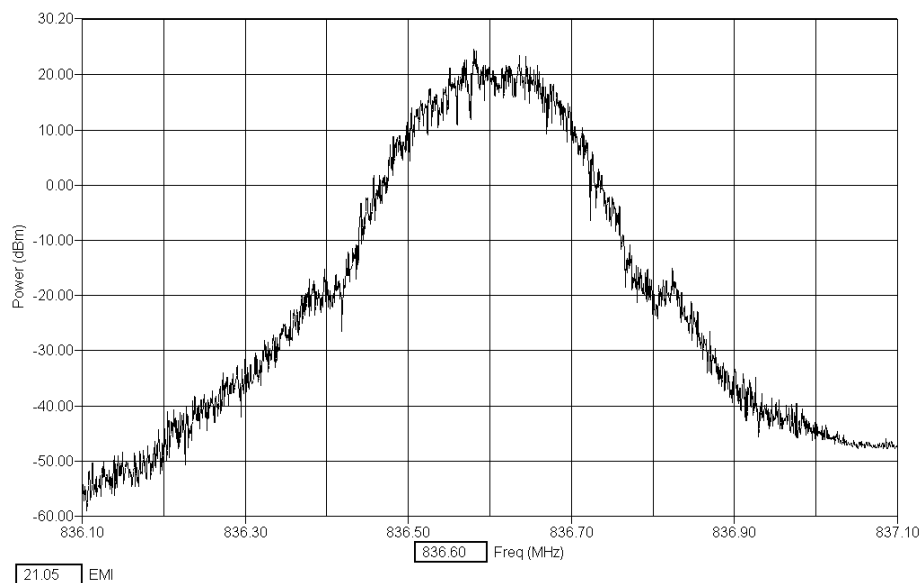


Occupied Bandwidth, In Band; PCS, GSM 1900, Channel 661

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

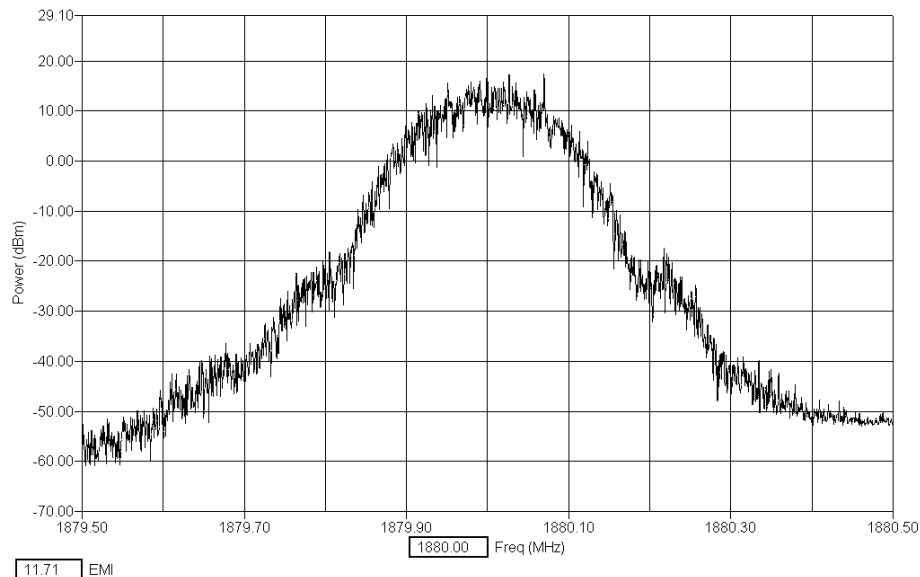

Occupied Bandwidth, In Band; PCS, GPRS 2+2, GSM 1900, Channel 661

3 kHz RBW/VBW, 100ms Sweep Time, ref to power level

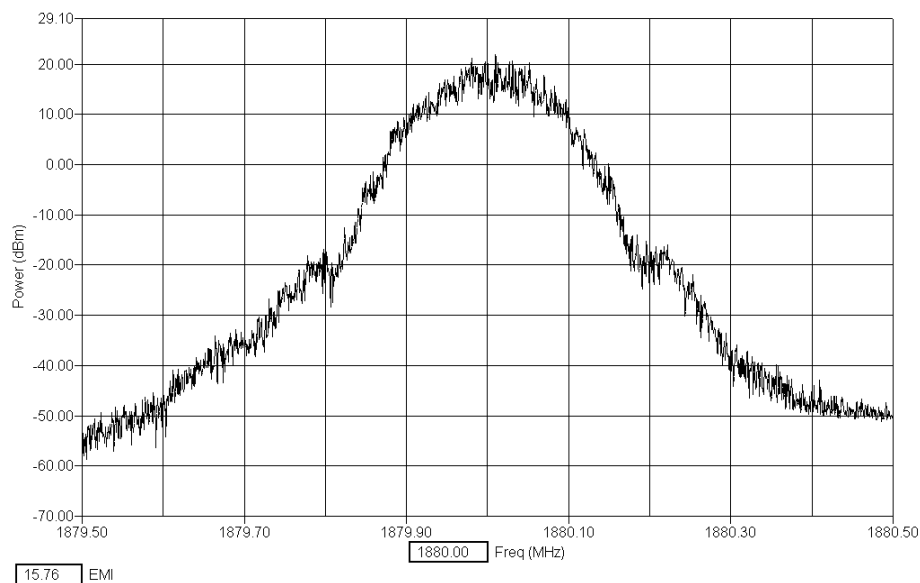

7.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

8. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Specification: FCC Part 2.1051

8.1 Setup

Testing was performed with the EUT connected to a 6dB attenuator, 6dB splitter, filter bank and then to the EMI receiver. The base station simulator was connected to the other port of the splitter to establish a call. Filters were introduced to reduce or eliminate spurious emission, which could be generated internally in the EMI receiver.

For a photo of the test set-up that was used, please refer to Section 3 of Appendix A.

8.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limits (dBm)
Cellular / PCS	30 – 20000 *	-13

* Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

8.3 Detailed Test Results

Test Technician / Engineer	M. Sundstrom
Date of Measurement	21 November - 05 December 2003
Temperature	22-24°C
Humidity	27.5-43 %RH
Test Result	Complies with FCC Part 2.1051

Note 1: EMI (dBm) = trace (dBuV) + cable loss (dB) + filter loss (dB).

Note 2: measurements were performed with 3MHz RBW/VBW.

Cellular Band, GSM 850, Channel 128

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
1648.67	-39.93	0.78	2.24	-36.92	-13.00
2472.11	-46.88	1.03	3.00	-42.85	-13.00
3295.81	-47.07	1.24	3.26	-42.57	-13.00
4119.90	-48.39	1.57	3.39	-43.43	-13.00
4942.95	-49.83	1.78	3.49	-44.56	-13.00
5769.73	-49.96	1.96	3.74	-44.26	-13.00
6593.55	-48.35	2.03	3.97	-42.34	-13.00
7418.19	-45.96	2.07	4.17	-39.72	-13.00
8244.74	-47.86	2.23	4.37	-41.25	-13.00

Cellular Band, GPRS 2+2, GSM 850, Channel 128

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
1648.77	-38.89	0.78	2.24	-35.88	-13.00
2473.88	-46.28	1.03	3.00	-42.25	-13.00
3299.18	-46.77	1.24	3.26	-42.27	-13.00
4118.89	-48.58	1.57	3.39	-43.62	-13.00
4947.40	-49.80	1.78	3.49	-44.52	-13.00
5767.30	-48.94	1.96	3.74	-43.24	-13.00
6593.92	-50.26	2.03	3.97	-44.26	-13.00
7418.89	-46.25	2.07	4.17	-40.00	-13.00
8242.60	-47.09	2.23	4.37	-40.49	-13.00

Cellular Band, GSM 850, Channel 190

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
1673.93	-42.10	0.79	2.29	-39.02	-13.00
1674.02	-41.52	0.79	2.29	-38.44	-13.00
2510.01	-41.23	1.05	3.00	-37.17	-13.00
2510.34	-41.16	1.06	3.00	-37.10	-13.00
3348.55	-48.50	1.27	3.26	-43.97	-13.00
4181.51	-48.75	1.59	3.40	-43.76	-13.00
5021.40	-50.24	1.80	3.51	-44.94	-13.00
5856.98	-49.77	1.97	3.77	-44.03	-13.00
6695.53	-49.56	2.04	4.00	-43.52	-13.00
7532.31	-45.40	2.08	4.20	-39.12	-13.00
8365.49	-46.16	2.30	4.40	-39.46	-13.00

Cellular Band, GPRS 2+2, GSM 850, Channel 190

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
1673.44	-41.94	0.79	2.29	-38.87	-13.00
1674.29	-40.68	0.79	2.29	-37.60	-13.00
2509.13	-42.56	1.05	3.00	-38.50	-13.00
2509.53	-43.19	1.06	3.00	-39.13	-13.00
3343.43	-47.19	1.27	3.26	-42.65	-13.00
4183.42	-48.97	1.59	3.40	-43.99	-13.00
5020.99	-50.17	1.80	3.51	-44.87	-13.00
5854.55	-50.13	1.97	3.77	-44.39	-13.00
6691.94	-50.35	2.04	4.00	-44.32	-13.00
7531.78	-46.54	2.08	4.20	-40.26	-13.00
8367.99	-47.44	2.30	4.40	-40.74	-13.00

Cellular Band, GSM 850, Channel 251

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
1697.69	-40.66	0.76	2.24	-37.65	-13.00
1698.34	-41.00	0.76	2.24	-37.99	-13.00
2547.34	-45.70	1.03	3.01	-41.66	-13.00
3395.34	-47.32	1.38	3.27	-42.66	-13.00
4245.56	-49.11	1.61	3.40	-44.10	-13.00
5090.56	-49.32	1.81	3.53	-43.97	-13.00
5942.57	-49.08	1.99	3.79	-43.30	-13.00
6790.16	-46.87	2.04	4.02	-40.81	-13.00
7641.81	-45.23	2.08	4.22	-38.92	-13.00
8485.80	-46.38	2.37	4.43	-39.58	-13.00

Cellular Band, GPRS 2+2, GSM 850, Channel 251

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
1697.06	-41.28	0.76	2.24	-38.27	-13.00
1698.12	-40.71	0.76	2.24	-37.70	-13.00
2546.92	-46.37	1.03	3.01	-42.33	-13.00
3396.40	-46.55	1.38	3.27	-41.89	-13.00
4242.22	-48.49	1.61	3.40	-43.48	-13.00
5095.29	-48.01	1.81	3.53	-42.67	-13.00
5942.65	-50.43	1.99	3.79	-44.65	-13.00
6792.68	-45.16	2.04	4.02	-39.09	-13.00
7641.87	-45.83	2.08	4.22	-39.52	-13.00
8490.53	-47.09	2.37	4.43	-40.29	-13.00

PCS Band, GSM 1900, Channel 512

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
3700.53	-46.09	1.50	3.32	-41.27	-13.00
3797.98	-48.19	1.34	3.34	-43.51	-13.00
5553.59	-48.12	1.91	3.68	-42.53	-13.00
7402.92	-44.89	2.07	4.17	-38.64	-13.00
9251.81	-45.05	2.75	4.63	-37.68	-13.00
11102.25	-47.11	3.19	5.24	-38.69	-13.00
12954.08	-46.20	3.25	5.88	-37.06	-13.00
14803.40	-42.95	3.25	6.44	-33.26	-13.00
16651.88	-44.93	3.42	7.36	-34.16	-13.00
18499.56	-45.00	4.01	8.25	-32.73	-13.00

PCS Band, GPRS 2+2, GSM 1900, Channel 512

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
3702.11	-47.14	1.50	3.32	-42.32	-13.00
3799.53	-48.68	1.34	3.34	-44.00	-13.00
5550.54	-49.54	1.91	3.68	-43.95	-13.00
7401.73	-44.53	2.07	4.17	-38.28	-13.00
9250.49	-46.72	2.75	4.63	-39.35	-13.00
11103.90	-45.80	3.19	5.24	-37.38	-13.00
12951.37	-45.86	3.25	5.88	-36.73	-13.00
14802.90	-43.66	3.25	6.44	-33.96	-13.00
16652.88	-44.34	3.42	7.36	-33.56	-13.00
18504.42	-44.35	4.01	8.25	-32.08	-13.00

PCS Band, GSM 1900, Channel 661

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
3757.11	-46.86	1.51	3.33	-42.02	-13.00
3759.47	-47.24	1.57	3.33	-42.34	-13.00
5640.21	-48.27	1.93	3.71	-42.63	-13.00
7521.63	-45.90	2.08	4.19	-39.62	-13.00
9402.67	-45.02	2.82	4.66	-37.54	-13.00
11278.22	-46.28	3.20	5.30	-37.78	-13.00
13159.39	-46.40	3.25	5.95	-37.19	-13.00
15042.78	-44.55	3.25	6.52	-34.78	-13.00
16918.35	-43.64	3.49	7.49	-32.66	-13.00
18799.88	-45.13	4.16	8.40	-32.56	-13.00

PCS Band, GPRS 2+2, GSM 1900, Channel 661

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
3702.11	-47.14	1.50	3.32	-42.32	-13.00
3799.53	-48.68	1.34	3.34	-44.00	-13.00
5550.54	-49.54	1.91	3.68	-43.95	-13.00
7401.73	-44.53	2.07	4.17	-38.28	-13.00
9250.49	-46.72	2.75	4.63	-39.35	-13.00
11103.90	-45.80	3.19	5.24	-37.38	-13.00
12951.37	-45.86	3.25	5.88	-36.73	-13.00
14802.90	-43.66	3.25	6.44	-33.96	-13.00
16652.88	-44.34	3.42	7.36	-33.56	-13.00
18504.42	-44.35	4.01	8.25	-32.08	-13.00

PCS Band, GSM 1900, Channel 810

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
3703.51	-49.75	1.49	3.32	-44.94	-13.00
3819.81	-47.75	1.39	3.34	-43.02	-13.00
5729.49	-45.86	1.95	3.73	-40.18	-13.00
7639.57	-45.51	2.08	4.22	-39.20	-13.00
9547.23	-46.75	2.89	4.70	-39.16	-13.00
11458.64	-46.27	3.21	5.37	-37.69	-13.00
13368.40	-43.53	3.25	6.02	-34.26	-13.00
15279.42	-44.68	3.25	6.65	-34.78	-13.00
17190.75	-45.09	3.55	7.62	-33.91	-13.00
19098.38	-44.73	4.31	8.55	-31.87	-13.00

PCS Band, GPRS 2+2, GSM 1900, Channel 810

Freq (Max) (MHz)	(PK) Trace (dBm)	Cable (dB)	Filter (dB)	(PK) EMI (dBm)	FCC Limit (dBm)
3703.99	-49.63	1.49	3.32	-44.82	-13.00
3820.08	-47.06	1.39	3.34	-42.33	-13.00
5730.57	-46.27	1.95	3.73	-40.59	-13.00
7639.35	-44.73	2.08	4.22	-38.43	-13.00
9547.95	-46.92	2.89	4.70	-39.33	-13.00
11461.04	-47.37	3.21	5.37	-38.79	-13.00
13366.09	-43.28	3.25	6.02	-34.02	-13.00
15279.63	-43.48	3.25	6.65	-33.58	-13.00
17185.35	-44.55	3.55	7.62	-33.37	-13.00
19099.14	-44.47	4.31	8.55	-31.61	-13.00

8.4 Measurement Uncertainty


The measurement uncertainty for this test is +/- 3.7dB for 100kHz - 1000MHz and +/- 5.3dB for 1 - 20GHz.

9. FIELD STRENGTH OF SPURIOUS RADIATION

Specification: FCC Part 2.1053

9.1 Setup

Test equipment set-up.

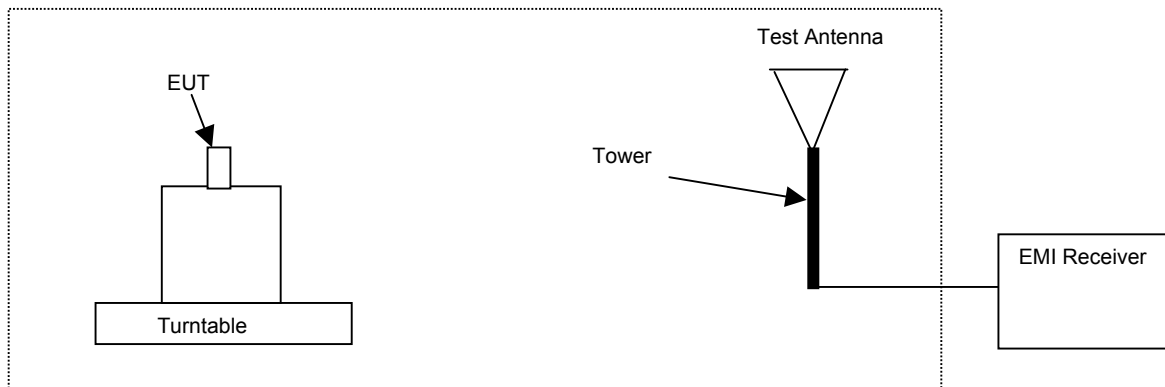

For a photo of the test set-up that was used, please refer to Section 4 of Appendix A.

9.2 Pass/Fail Criteria

Band	Frequency Range (MHz)	FCC Limit (dBm)
Cellular / PCS	30 – 20000*	-13

- Frequency to be investigated up to the 10th harmonic of the highest clock or frequency used.

Substitution method according to ANSI/TIA/EIA 603-1 was used for final measurements.

9.3 Detailed Test Results

Test Technician / Engineer	C. Nguyen
Date of Measurement	26-Nov-03
Temperature	23 to 24 °C
Humidity	27 to 40 %RH
Test Result	Complies with FCC Part 2.1053

Note: 30MHz to 1GHz were performed with 1MHz RBW/VBW; 1GHz to 3GHz were performed with 1MHz RBW/VBW; 3GHz to 6GHz were performed with 3MHz RBW/VBW; 6GHz to 18GHz were performed with 1MHz RBW/VBW.

Cellular Band, GSM 850, Channel 190

EDRP Value for Channel 190: 30.2 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
1673.2	-41.8	-72.0	-13.0	H
1673.2	-45.1	-75.3	-13.0	V
2509.8	-38.1	-68.3	-13.0	H
2509.8	-40.3	-70.5	-13.0	V
3346.4	-31.4	-61.6	-13.0	H
3346.4	-30.7	-60.9	-13.0	V
4183.0	-28.1	-58.3	-13.0	H
4183.0	-27.9	-58.1	-13.0	V
5019.6	-25.3	-55.5	-13.0	H
5019.6	-25.6	-55.8	-13.0	V
5856.2	-22.2	-52.4	-13.0	H
5856.2	-21.7	-51.9	-13.0	V
6692.8	-42.6	-72.8	-13.0	H
6692.8	-42.7	-72.9	-13.0	V
7529.4	-39.7	-69.9	-13.0	H
7529.4	-39.9	-70.1	-13.0	V
8366.0	-38.6	-68.8	-13.0	H
8366.0	-40.2	-70.4	-13.0	V

Cellular Band, GPRS 2+2, GSM 850, Channel 190

EDRP Value for Channel 190: 30.2 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
1673.2	-32.8	-63.0	-13.0	H
1673.2	-34.7	-64.9	-13.0	V
2509.8	-28.8	-59.0	-13.0	H
2509.8	-31.2	-61.4	-13.0	V
3346.4	-31.0	-61.2	-13.0	H
3346.4	-31.2	-61.4	-13.0	V
4183.0	-29.2	-59.4	-13.0	H
4183.0	-29.6	-59.8	-13.0	V
5019.6	-27.2	-57.4	-13.0	H
5019.6	-27.5	-57.7	-13.0	V
5856.2	-32.0	-62.2	-13.0	H
5856.2	-32.0	-62.2	-13.0	V
6692.8	-43.0	-73.2	-13.0	H
6692.8	-43.0	-73.2	-13.0	V
7529.4	-37.0	-67.2	-13.0	H
7529.4	-37.0	-67.2	-13.0	V
8366.0	-36.0	-66.2	-13.0	H
8366.0	-36.0	-66.2	-13.0	V

PCS Band, GSM 1900, Channel 661

EIRP Value for Channel 661: 29.1 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
3760.0	-32.3	-61.4	-13.0	H
3760.0	-32.7	-61.8	-13.0	V
5640.0	-28.1	-57.2	-13.0	H
5640.0	-30.2	-59.3	-13.0	V
7520.0	-39.9	-69.0	-13.0	H
7520.0	-39.6	-68.7	-13.0	V
9400.0	-38.0	-67.1	-13.0	H
9400.0	-37.3	-66.4	-13.0	V
11280.0	-35.7	-64.8	-13.0	H
11280.0	-36.4	-65.5	-13.0	V
13160.0	-31.8	-60.9	-13.0	H
13160.0	-32.0	-61.1	-13.0	V
15040.0	-29.5	-58.6	-13.0	H
15040.0	-29.0	-58.1	-13.0	V
16920.0	-28.2	-57.3	-13.0	H
16920.0	-28.0	-57.1	-13.0	V

PCS Band, GPRS 2+2, GSM 1900, Channel 661

EIRP Value for Channel 661: 29.1 dBm

Freq Max (MHz)	(PK) EMI (dBm)	dBc	FCC Limit (dBm)	Pol.
3760.0	-31.1	-60.2	-13.0	H
3760.0	-35.1	-64.2	-13.0	V
5640.0	-29.6	-58.7	-13.0	H
5640.0	-29.6	-58.7	-13.0	V
7520.0	-40.0	-69.1	-13.0	H
7520.0	-40.0	-69.1	-13.0	V
9400.0	-34.0	-63.1	-13.0	H
9400.0	-34.0	-63.1	-13.0	V
11280.0	-34.0	-63.1	-13.0	H
11280.0	-33.0	-62.1	-13.0	V
13160.0	-32.0	-61.1	-13.0	H
13160.0	-30.0	-59.1	-13.0	V
15040.0	-28.0	-57.1	-13.0	H
15040.0	-29.0	-58.1	-13.0	V
16920.0	-24.0	-53.1	-13.0	H
16920.0	-24.0	-53.1	-13.0	V

9.4 Measurement Uncertainty

The measurement uncertainty for this test is +/- 5.2dB for 30-300MHz; +/- 5.2dB for 300-1000MHz, +/- 5.6dB for 1-6GHz and +/-6.8 for 6-18GHz.

10. FREQUENCY STABILITY (TEMPERATURE VARIATION)

Specification: FCC Part 2.1055(a)(1)(b), 24.235

10.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

10.2 Pass/Fail Criteria

Not Applicable

10.3 Detailed Test Results

Test Technician / Engineer	J. Love / M. Sundstrom
Date of Measurement	10 December 2003
Temperature	22-26 °C
Humidity	28-33 %RH
Test Result	Tested in accordance with 2.1055(a)(1)(b), 24.235 at maximum power setting.

GSM 850, Call Mode, Channel 190

Temp. (°C)	Change (Hz)
-30	-24
-20	-25
-10	-24
0	28
10	30
20	32
30	28
40	39
50	32

GSM 1900, Call Mode, Channel 661

Temp. (°C)	Change (Hz)
-30	-37
-20	-43
-10	-25
0	-35
10	45
20	46
30	53
40	56
50	65

11. FREQUENCY STABILITY (VOLTAGE VARIATION)

Specification: FCC Part 2.1055(d)(1)(2), 24.235

11.1 Setup

The EUT was connected to the base station simulator to measure the RF power output.

11.2 Pass/Fail Criteria

Not Applicable

11.3 Detailed Test Results

Test Technician / Engineer	M. Sundstrom
Date of Measurement	11 December 2003
Temperature	22-24 °C
Humidity	28-32 %RH
Test Result	Tested in accordance with 2.1055(d)(1)(2), 24.235 at maximum power setting.

GSM 850, Call Mode, Channel 190

% of STV	Voltage	Change (Hz)
Min	3.5 V	27
Nominal	3.8 V	26
Max	4.2 V	25

GSM 1900, Call Mode, Channel 661

% of STV	Voltage	Change (Hz)
Min	3.5 V	42
Nominal	3.8 V	50
Max	4.2 V	47