



Report on the Testing of the

Barrett Communications Pty. Ltd.

Barrett 4050 HF SDR 4050ip



America

In accordance with:
FCC Part 90 Subpart I and Part 87 Subpart D

Add value.
Inspire trust.

Prepared for: Barrett Communications Pty. Ltd.
47 Discovery Drive
Bibra Lake, Western Australia 6163 Australia

COMMERCIAL-IN-CONFIDENCE

Document Number: AT72191371.1C1

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Jean-Charles, Thierry	Team Lead TÜV SUD America Inc.	Authorized Signatory	09/01/2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation Designation Number US1233
FCC Test Site Registration Number 967699
Innovation, Science, and Economic Development Canada Lab Code 23932

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the standards listed above.

 A2LA Cert. No. 2955.09	DISCLAIMER AND COPYRIGHT This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.
	ACCREDITATION Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.



Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	4
1.4	Product Information	5
1.5	Deviations from the Standard.....	7
1.6	EUT Modification Record	7
1.7	Test Location.....	7
2	Test Details	8
2.1	Radiated Spurious Emissions	8
2.2	Test Equipment Used.....	14
3	Diagram of Test Set-ups	15
4	Accreditation, Disclaimers and Copyright.....	16



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Table 1.1-1 – Modification Record

Issue	Description of Change	Date of Issue
0	First Issue	08/24/2023
1	Second Issue – Updated Model Number & Client Email ID	09/01/2023

1.2 Introduction

The purpose of this report is to verify the compliance of the Barrett Communications model Barrett 4050 HF SDR, with Part 87 Subpart D and 90 Subpart I of the FCC's Code of Federal Regulations for the tests documented herein.

Applicant	Barrett Communications Pty. Ltd.
Manufacturer	Barrett Communications Pty.Ltd.
Applicant's Email Address	dave.archer@motorolasolutions.com
Model Number	4050ip and 4050se
Serial Number	405013689
FCC ID	OW4-4050IP
Hardware Version(s)	Micro – A9, PA – A11, Rear Interface – A11, Control Head – A15
Software Version(s)	1.9.5
Number of Samples Tested	1
Test Specification/Issue/Date	US Code of Federal Regulation (CFR): Title 47, Part 90:Private Land Mobile Services - 2023 US Code of Federal Regulation (CFR): Title 47, Part 87:Aviation Services - 2023
Order Number	72191371
Date of Receipt of EUT	06/30/2023
Start of Test	07/10/2023
Finish of Test	08/08/2023
Related Document(s)	ANSI C63.26: American National Standard of Compliance Testing of Transmitters Used in Licensed Radio Services - December 2015 US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures - 2023



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 87 Subpart D and 90 Subpart I is shown below.

Table 1.3-1: Test Result Summary

Test Parameter	Test Plan (Yes/No)	Test Result	FCC Rule Part	Test Report Page No
Radiated Spurious Emissions	Yes	Pass	2.1053, 90.210, 87.139	8



1.4 Product Information

1.4.1 Technical Description

The equipment under test was the Barrett 4050 Transceiver is an SDR based HF SSB transceiver with a frequency range of 1.5 to 30 MHz in transmit and 250kHz – 30 MHz in receive. Designed to operate in the most arduous environments, as encountered in portable, off-road vehicles, vessels, and aircraft environments. It has two variants 4050ip which has an ethernet port and 4050se without an ethernet port.

Note: Testing was performed on the 4050ip model to show compliance of both variants.

A full description and detailed product specification details are available from the manufacturer.



Figure 1.4.1-1 –Front view of the EUT



Figure 1.4.1-2 – Test setup of EUT with ancillaries

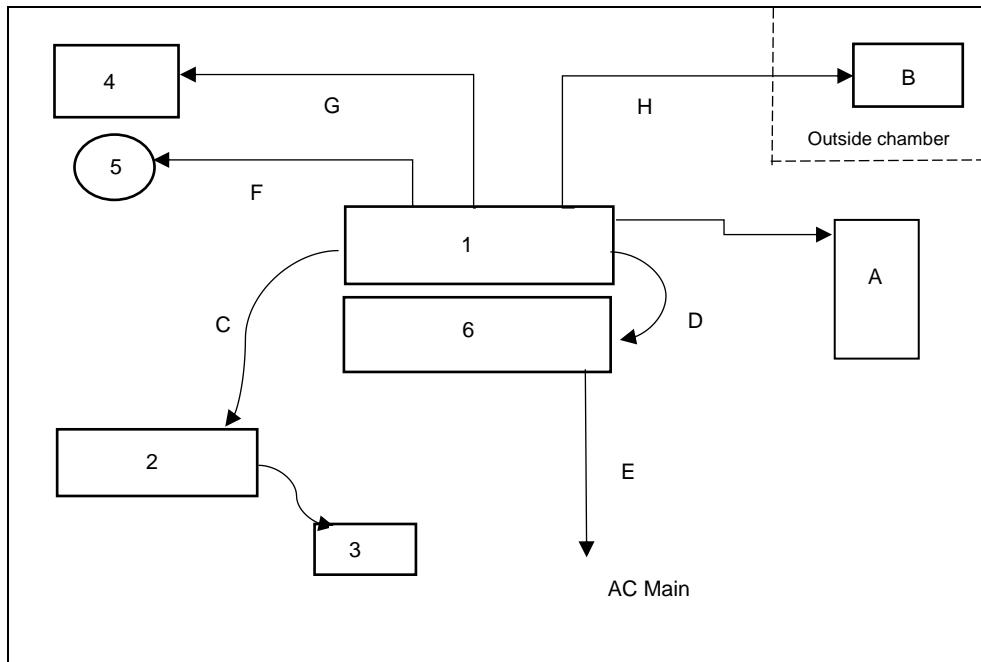


Figure 1.4.1-3 – Test Setup Block Diagram

Table 1.4.1-1: Primary Equipment Descriptions

Item	Equipment Type / Description	Manufacturer
1	Barrett 4050 HF SDR Transceiver	Barrett Communications
2	Remote Front panel	Barrett Communications
3	BCA40010: Hand microphone and clip with channel up/down buttons	Barrett Communications
4	BCA40015: Barrett Loudspeaker	Barrett Communications
5	BCA40009: GPS/ESU Receiver	Barrett Communications
6	BCA402201: 4022 Mains power supply 24V for 4050	Barrett Communications

Table 1.4.1-2: Support Equipment and cable Descriptions

Item	Equipment Type / Description	Manufacturer
A	AX-500-30; 50 ohm load termination	Electro Impulse Laboratory, Inc
B	Laptop for modulation configuration	Lenovo
C	BCA40005: Remote head interface cable for 4050 - 6m	Barrett Communications
D	SA-42020: 4050 transceivers to 4022 power supply cable	Barrett Communications
E	SA-00020 IEC Mains Cord	Barrett Communications
F	Antenna cable	Barrett Communications
G	Speaker cable	Barrett Communications
H	25 pin auxiliary connector to RS-232 cable	Barrett Communications



1.4.2 Modes of Operation

The tested mode of operation and configuration during the assessment is listed below.

CFR Title 47 Rule Part	Configuration	Frequency Band of Operation (MHz)	Test Frequency (MHz)	Power (W)	Mode
87 & 90	Remote Front Panel	1.5 – 30	Low: 1.6 Middle: 15.8 High: 29.8	150	H3E(AM) & J3E(USB)

Note: Testing was performed on three (Low, Mid & High) frequencies as declared by the manufacturer.

Power Setting used: 150W.

1.4.3 Monitoring of Performance

The following performance attributes were monitored:

Radiated Spurious Emissions of the Transmitter

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test program. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	Initial State		

The equipment was tested as provided without any modifications.

1.7 Test Location

TÜV SÜD conducted the following tests at our Alpharetta, GA test laboratory.

Test Name	Name of Engineer(s)	Accreditation
Operating Voltage 24VDC		
Radiated Spurious Emissions	Bhagyashree Chaudhary	A2LA

Office address:

TÜV SÜD America
5945 Cabot Parkway, Suite 100
Alpharetta, GA 30005, USA



2 Test Details

2.1 Radiated Spurious Emissions

2.1.1 Specification Reference

FCC Sections: 90.210(a)(b) & 87.139(c)

2.1.2 Equipment Under Test and Modification State

No modifications were needed to comply to the test requirements.

2.1.3 Date of Test

07/10/2023 – 08/08/2023

2.1.4 Test Method

The equipment under test is placed in the Semi- Anechoic Chamber on a RF transparent table at the turntable center. For each spurious emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360° and the maximum reading on the spectrum analyzer is recorded. This was repeated for both horizontal and vertical polarizations of the receive antenna.

For frequencies below 150 kHz, peak measurements were made using a resolution bandwidth RBW of 300 Hz and a video bandwidth VBW of 1 kHz and frequencies between 150 kHz and 30MHz, peak measurements were made using a resolution bandwidth RBW of 10 kHz and a video bandwidth VBW of 30 kHz. For frequencies between 30 MHz and 1000 MHz, peak measurements were made using a resolution bandwidth RBW of 100 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements were made with RBW of 1 MHz and VBW of 3 MHz

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. Which is equivalent to -13 dBm. So, each identified emission was measured and compared to the ERP licensed limit of -13 dBm which calculates to 84.4 dBuV/m at a 3-meter test distance.

Measurements up to 500 MHz were done using Tile7 (Version 7.7.2.4) automated software. Reported level is the actual level with all the correction factors factored in.

2.1.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C and relative humidity range of 30% to 60%.

Ambient Temperature 22.3 °C

Relative Humidity 53.8 %



2.1.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.

Table 2.1.6-1: Field Strength of Spurious Emissions - H3E (AM)

Frequency (MHz)	Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarity (H/V)	Results (Pass/FAIL)
LCH - 1.6 MHz					
0.2499975	65.07	84.4	19.3	Co-Axial	PASS
13.41982	43.08	84.4	41.3	Co-Axial	PASS
263.99	47.1	84.4	37.3	H	PASS
350.024	44.7	84.4	39.6	H	PASS
36.16	51.7	84.4	32.7	V	PASS
43.514	49.9	84.4	34.5	V	PASS
53.903	47	84.4	37.4	V	PASS
MCH - 15.8 MHz					
0.0499746	71.98	84.4	12.4	Co-Axial	PASS
0.08796	64.51	84.4	19.9	Co-Axial	PASS
0.2499975	67.05	84.4	17.3	Co-Axial	PASS
0.570885	59.36	84.4	25.0	Co-Axial	PASS
47.39	41.9	84.4	42.5	H	PASS
63.207	42.3	84.4	42.1	H	PASS
78.998	41.3	84.4	43	H	PASS
110.605	40.8	84.4	43.6	H	PASS
142.213	51.5	84.4	32.9	H	PASS
34.628	52	84.4	32.4	V	PASS
47.39	49.6	84.4	34.8	V	PASS
63.207	45.3	84.4	39.1	V	PASS
78.998	48.4	84.4	35.9	V	PASS
142.213	55.8	84.4	28.5	V	PASS
HCH - 29.8 MHz					
0.2470125	62.70	84.4	21.7	Co-Axial	PASS
89.408	55.8	84.4	28.6	H	PASS
119.206	48.6	84.4	35.8	H	PASS
149.004	53.6	84.4	30.7	H	PASS
178.802	44.7	84.4	39.7	H	PASS



208.6	50.4	84.4	34	H	PASS
268.219	52.4	84.4	32	H	PASS
89.408	63.8	84.4	20.5	V	PASS
119.207	45.9	84.4	38.5	V	PASS
149.004	49.7	84.4	34.7	V	PASS
178.8	47.8	84.4	36.6	V	PASS
208.6	49.4	84.4	35	V	PASS
268.2	47	84.4	37.3	V	PASS

Table 2.1.6-2: Field Strength of Spurious Emissions - J3E (USB)

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarity (H/V)	Results (Pass/FAIL)
LCH - 1.6 MHz					
0.2470125	64.56	84.4	19.8	Co-Axial	PASS
6.778	36.42	84.4	48.0	Co-Axial	PASS
11.24	26.85	84.4	57.5	Co-Axial	PASS
13.6019	33.67	84.4	50.7	Co-Axial	PASS
26.60904	34.93	84.4	49.4	Co-Axial	PASS
264.013	48.2	84.4	36.2	H	PASS
350.023	44.9	84.4	39.5	H	PASS
43.796	52.3	84.4	32.1	V	PASS
53.898	47.9	84.4	36.5	V	PASS
264.013	46.8	84.4	37.6	V	PASS
MCH - 15.8 MHz					
0.2499975	67.23	84.4	17.2	Co-Axial	PASS
26.48815	34.69	84.4	49.7	Co-Axial	PASS
47.4	42.8	84.4	41.5	H	PASS
63.207	41.8	84.4	42.6	H	PASS
78.998	41.6	84.4	42.7	H	PASS
110.606	43.6	84.4	40.7	H	PASS
142.213	53.4	84.4	30.9	H	PASS
47.4	51.4	84.4	33	V	PASS
63.206	45.9	84.4	38.5	V	PASS
78.998	49	84.4	35.4	V	PASS
142.213	56.6	84.4	27.7	V	PASS
173.821	48.6	84.4	35.7	V	PASS
HCH - 29.8 MHz					
0.2470125	63.77	84.4	20.6	Co-Axial	PASS
89.409	56.9	84.4	27.5	H	PASS
119.206	48.7	84.4	35.7	H	PASS



149	52.7	84.4	31.6	H	PASS
178.802	45.6	84.4	38.8	H	PASS
208.6	50.9	84.4	33.5	H	PASS
268.219	52.4	84.4	32	H	PASS
89.408	64.4	84.4	20	V	PASS
119.206	44.7	84.4	39.6	V	PASS
149.004	50.8	84.4	33.6	V	PASS
178.802	47.5	84.4	36.8	V	PASS
208.6	49.4	84.4	35	V	PASS
268.216	48.2	84.4	36.2	V	PASS

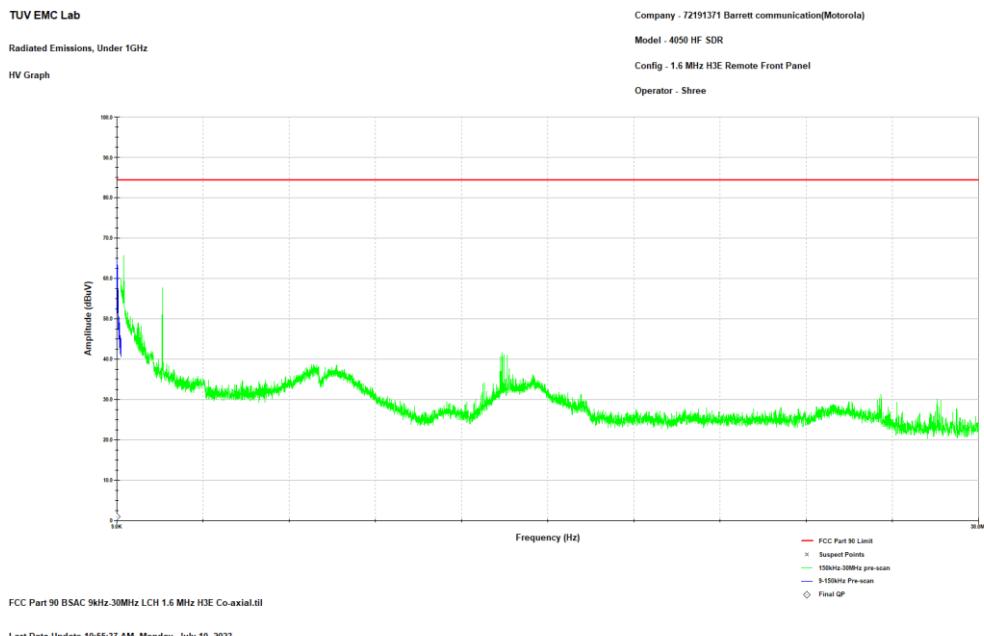


Figure 2.1.6-1: Reference Plot for Field Strength of Spurious Emissions – 9 kHz – 30 MHz –H3E - LCH



TUV EMC Lab

Radiated Emissions, Under 1GHz

HV Graph

Company - 72191371 Barrett Communication (Motorola)

Model - 4050 HF SDR

Config - Remote front panel 1.6 MHz H3E

Operator - Shree

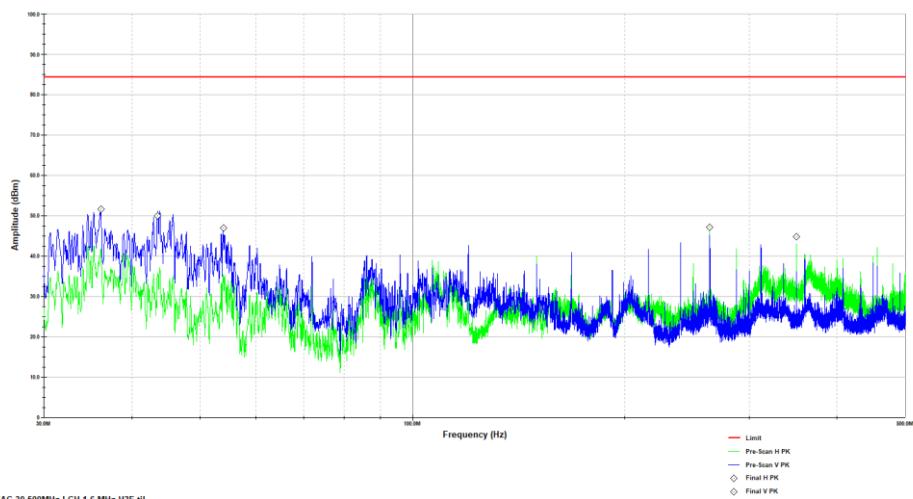


Figure 2.1.6-2: Reference Plot for Field Strength of Spurious Emissions – 30 MHz – 500 MHz – H3E-LCH

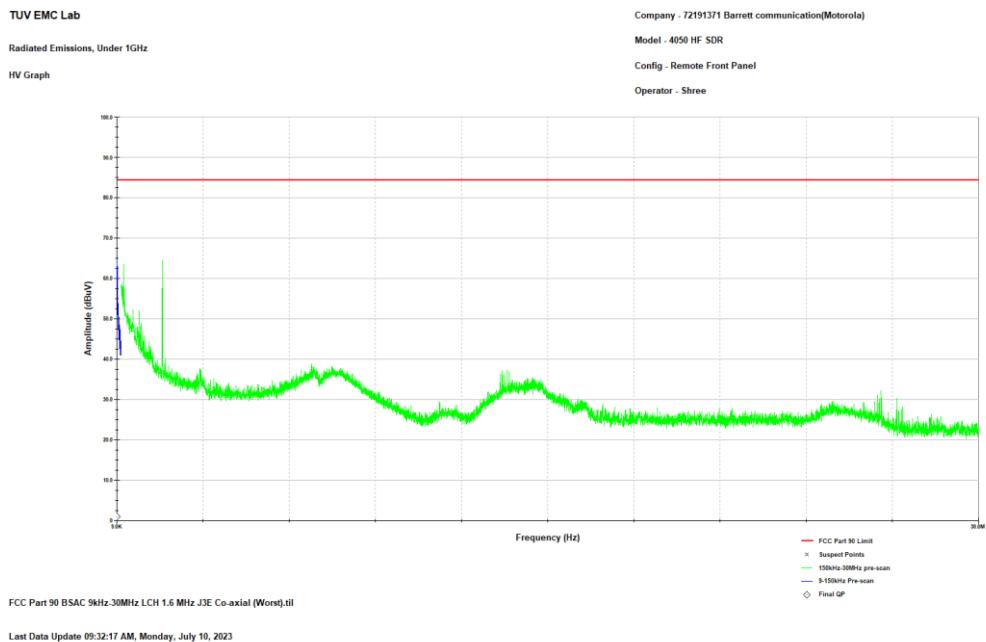


Figure 2.1.6-3: Reference Plot for Field Strength of Spurious Emissions – 9 kHz – 30 MHz – J3E - LCH

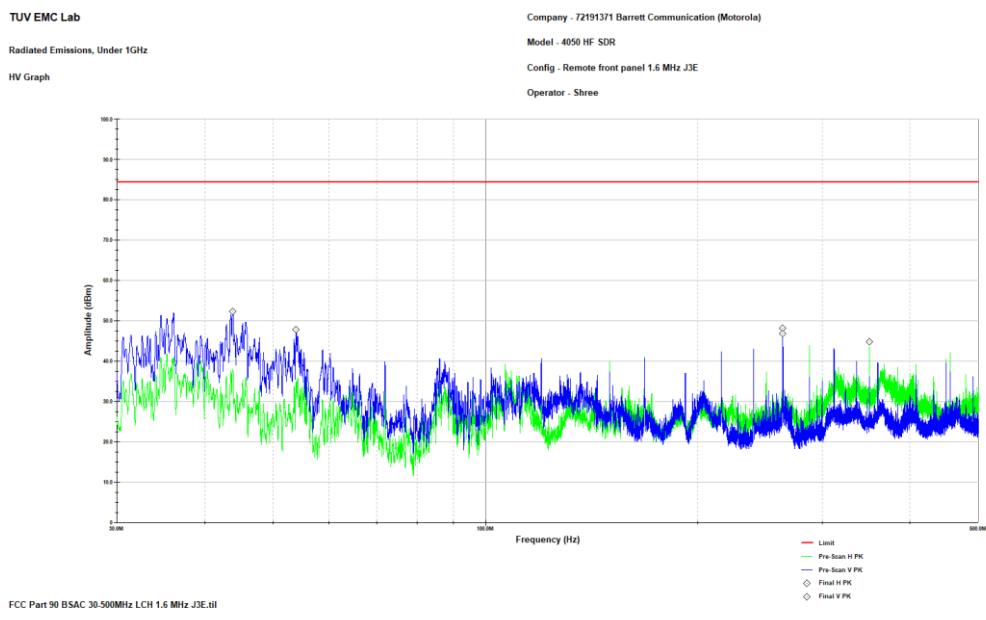


Figure 2.1.6-4: Reference Plot for Field Strength of Spurious Emissions – 30 MHz – 500 MHz – J3E- LCH



2.2 Test Equipment Used

Table 2.2-1 –Equipment List

Asset ID	Manufacturer	Model	Equipment Type	Serial Number	Last Calibration Date	Calibration Due Date
628	EMCO	6502	Active Loop Antenna 10kHz-30MHz	9407-2877	06/20/2023	06/20/2024
852	Teseq	CBL6112D	BiLog Antenna	51617	11/01/2022	11/01/2024
889	Com Power	PAM 103	Pre-amplifier	18020215	09/27/2022	09/27/2023
22	Teledyne Storm Microwave	90-195-456	BSAC Cable	N/A	10/07/2022	10/07/2023
20	Teledyne Storm Microwave	R-90-195-036	BSAC Cable	N/A	07/13/2023	07/13/2024
21	Teledyne Storm Microwave	R-90-195-072	BSAC Cable	N/A	07/13/2023	07/13/2024
882	Rohde & Schwarz	ESW44	ESW44 EMI TEST RECEIVER	101961	06/21/2023	06/21/2024

N/A – Not Applicable

3 Diagram of Test Set-ups

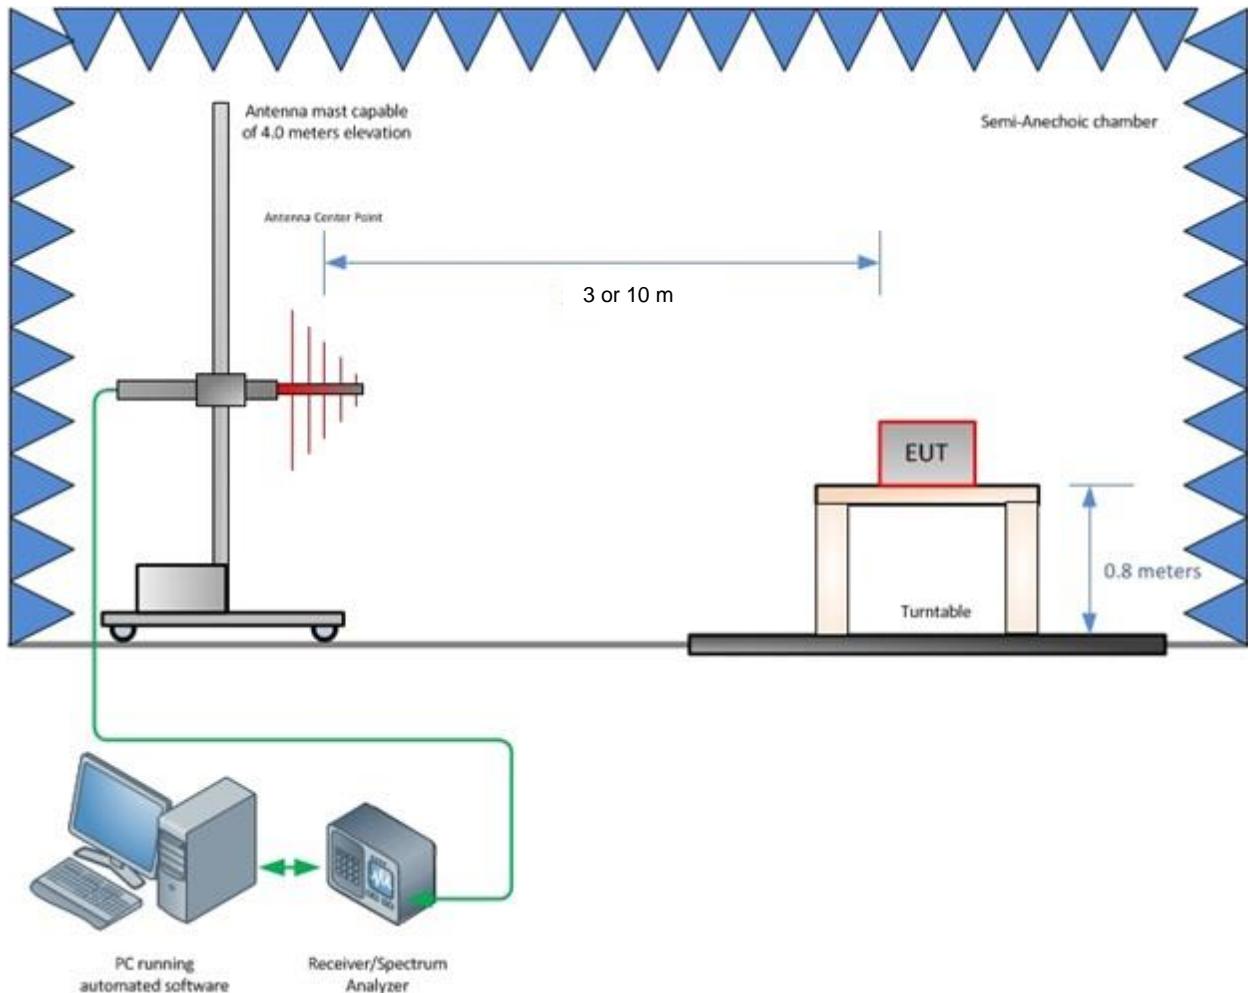


Figure 3-1 – Radiated Emissions Test Setup up to 1 GHz



4 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

STATEMENT OF MEASUREMENT UNCERTAINTY – Emissions

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 4-1: Estimation of Measurement Uncertainty

Parameter	U_{lab}
Radiated Emissions $\leq 1 \text{ GHz}$	$\pm 5.814 \text{ dB}$
Radiated Emissions $> 1 \text{ GHz}$	$\pm 4.318 \text{ dB}$

TEST EQUIPMENT

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated to meet test method standard requirements and/or manufacturer's specifications.



END REPORT