



Engineering and Testing for EMC and Safety Compliance

TYPE CERTIFICATION REPORT

M/A-COM, Inc.
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Daryl Popowitch
Phone: (434) 455-9527
E-Mail: Popowitchda@tycoelectronics.com

MODEL: M7100^{IP} UHF-L Mobile Radio
378-430 MHz

FCC ID: OWDTR-0020-E

March 8, 2004

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 2001	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 2001	RADIO FREQUENCY DEVICES - §15.109: RADIATED EMISSIONS LIMITS
PART 90: 2001	PRIVATE LAND MOBILE RADIO SERVICES
ANSI C63.4-2003	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA603- 2002	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA 603-1-2002	ADDENDUM TO ANSI/TIA/EIA 603-2002
ANSI/TIA/EIA -102.CAAA; 2002	DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS
RSS-119; Issue 6; 2000	LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS 27.41 TO 960.0 MHz

Frequency Range	Maximum Measured Output Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
378-430 MHz	54.0	1.5	16K0F3E (Voice)
378-430 MHz	54.0	1.5	11K0F3E (Voice)
378-430 MHz	54.0	1.5	8K6F1D (2 level NB 9600) measured
378-430 MHz	54.0	1.5	8K6F1E (2 level NB 9600) measured
378-430 MHz	54.0	1.5	5K3F1D (2 level NB 4800) measured
378-430 MHz	54.0	1.5	5K3F1E (2 level NB 4800) measured
378-430 MHz	54.0	1.5	10K7F1D (2 level WB 9600) measured
378-430 MHz	54.0	1.5	10K7F1E (2 level WB 9600) measured
378-430 MHz	54.0	1.5	7K9F1D (4 Level) measured
378-430 MHz	54.0	1.5	7K9F1E (4 Level) measured

REPORT PREPARED BY TEST ENGINEER: DAN BIGGS

Document Number: 2003146 / QRTL03-964A

This report may be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc.

TABLE OF CONTENTS

1	GENERAL INFORMATION	6
1.1	TEST FACILITY	6
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	6
2	CONFORMANCE STATEMENT	7
3	TESTED SYSTEM DETAILS	8
3.1	CONFIGURATIONS OF TEST SYSTEM.....	9
4	FCC RULES AND REGULATIONS PART 2 §2.1033(C)(8) VOLTAGES AND CURRENTS THROUGH THE FINAL AMPLIFYING STAGE ..	10
5	FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED	11
5.1	TEST PROCEDURE	11
5.2	TEST DATA	11
6	FCC RULES AND REGULATIONS PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS	12
6.1	TEST PROCEDURE	12
6.2	TEST DATA	12
7	FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION	16
7.1	TEST PROCEDURE	16
7.2	TEST DATA	16
	CFR 47 PART 90.210 REQUIREMENTS	16
8	FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH	18
8.1	TEST PROCEDURE	18
8.2	TEST DATA	18
9	FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY	24
9.1	TEST PROCEDURE	24
9.2	TEST DATA	25
	FREQUENCY STABILITY/TEMPERATURE VARIATION	25
	FREQUENCY STABILITY/VOLTAGE VARIATION	27
10	FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE	29
10.1	TEST PROCEDURE	29
10.2	TEST DATA	29
11	FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER	31
11.1	TEST PROCEDURE	31
11.2	TEST DATA	31
12	FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING.....	33
12.1	TEST PROCEDURE	33
12.2	TEST DATA	33
13	FCC RULES AND REGULATIONS PART 90 §90.214: TRANSIENT FREQUENCY BEHAVIOR	37
13.1	TEST PROCEDURE	37
13.2	TEST DATA	37
14	FCC RULES AND REGULATIONS PART 2 §2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH	41
15	CONCLUSION	41
16	FCC PART 2 §2.1046 (A): RF POWER OUTPUT: RADIATED	42
16.1	RF POWER OUTPUT: RADIATED TEST PROCEDURE	42
16.2	RF POWER OUTPUT: §2.1046 RADIATED TEST DATA	42
16.3	TEST EQUIPMENT.....	43
17	FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION	44
17.1	TEST PROCEDURE	44
17.2	TEST DATA	44
	CFR 47 PART 90.210 REQUIREMENTS	44

TABLE OF TABLES

TABLE 3-1:	EQUIPMENT UNDER TEST (EUT)	8
TABLE 5-1:	RF POWER OUTPUT (HIGH POWER): CARRIER OUTPUT POWER (UNMODULATED).....	11
TABLE 5-2:	RF POWER OUTPUT (RATED POWER)	11
TABLE 5-3:	TEST EQUIPMENT USED FOR TESTING RF POWER OUTPUT - CONDUCTED	11
TABLE 6-1:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 378 MHz – HIGH POWER.....	13
TABLE 6-2:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 378 MHz – LOW POWER	13
TABLE 6-3:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 404 MHz – HIGH POWER.....	14
TABLE 6-4:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 404 MHz – LOW POWER	14
TABLE 6-5:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 430 MHz – HIGH POWER.....	15
TABLE 6-6:	CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 430 MHz – LOW POWER	15
TABLE 6-7:	TEST EQUIPMENT USED FOR TESTING CONDUCTED SPURIOUS EMISSIONS.....	15
TABLE 7-1:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 404 MHz; NARROW BAND, HIGH POWER	16
TABLE 7-2:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 404 MHz; NARROW BAND, LOW POWER.....	17
TABLE 7-3:	TEST EQUIPMENT USED FOR TESTING FIELD STRENGTH OF SPURIOUS RADIATION.....	17
TABLE 8-1:	TEST EQUIPMENT USED FOR TESTING OCCUPIED BANDWIDTH.....	23
TABLE 9-1:	TEMPERATURE FREQUENCY STABILITY CHANNEL 2, 404.000 MHz	25
TABLE 9-2:	TEST EQUIPMENT USED FOR TESTING FREQUENCY STABILITY/TEMPERATURE	26
TABLE 9-3:	FREQUENCY STABILITY/VOLTAGE VARIATION CHANNEL 2, 404.000 MHz	27
TABLE 9-4:	TEST EQUIPMENT USED FOR TESTING FREQUENCY STABILITY/VOLTAGE	28
TABLE 10-1:	TEST EQUIPMENT USED FOR TESTING AUDIO FREQUENCY RESPONSE	30
TABLE 11-1:	TEST EQUIPMENT USED FOR TESTING AUDIO LOW PASS FILTER RESPONSE.....	32
TABLE 12-1:	TEST EQUIPMENT USED FOR TESTING MODULATION LIMITING.....	36
TABLE 13-1:	TEST EQUIPMENT USED FOR TESTING TRANSIENT FREQUENCY BEHAVIOR	40
TABLE 16-1:	RADIATED CARRIER OUTPUT POWER (WHIP/COIL ANTENNA ON MOTORCYCLE MOUNT).....	42
TABLE 16-2:	TEST EQUIPMENT	43
TABLE 17-1:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 413 MHz; NARROW BAND, HIGH POWER	44
TABLE 17-2:	FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 430 MHz; NARROW BAND, HIGH POWER	45
TABLE 17-3:	TEST EQUIPMENT USED FOR TESTING FIELD STRENGTH OF SPURIOUS RADIATION	45

TABLE OF PLOTS

PLOT 8-1:	OCCUPIED BANDWIDTH; WIDE BAND; AUDIO MODULATION: 2,500 Hz	18
PLOT 8-2:	OCCUPIED BANDWIDTH; NARROW BAND; AUDIO MODULATION: 2,500 Hz	19
PLOT 8-3:	99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; WIDE BAND; 9600 BAUD.....	20
PLOT 8-4:	99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 9600 BAUD	21
PLOT 8-5:	99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 4800 BAUD	22
PLOT 8-6:	99% OCCUPIED BANDWIDTH - C4FM; NARROW BAND; 4800 BAUD	23
PLOT 9-1:	TEMPERATURE FREQUENCY STABILITY	25
PLOT 9-2:	VOLTAGE FREQUENCY STABILITY.....	27
PLOT 10-1:	MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE	29
PLOT 11-1:	MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER	31
PLOT 12-1:	MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; POSITIVE PEAK.....	33
PLOT 12-2:	MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; NEGATIVE PEAK	34
PLOT 12-3:	MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; POSITIVE PEAK	35
PLOT 12-4:	MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; NEGATIVE PEAK	36
PLOT 13-1:	TRANSIENT FREQUENCY BEHAVIOR – 404 MHz; HIGH POWER; WIDE BAND; CARRIER ON TIME	37
PLOT 13-2:	TRANSIENT FREQUENCY BEHAVIOR – 404 MHz; HIGH POWER; WIDE BAND; CARRIER OFF TIME	38
PLOT 13-3:	TRANSIENT FREQUENCY BEHAVIOR – 404 MHz; HIGH POWER; NARROW BAND; CARRIER ON TIME	39
PLOT 13-4:	TRANSIENT FREQUENCY BEHAVIOR – 404 MHz; HIGH POWER; NARROW BAND; CARRIER OFF TIME.....	40

TABLE OF FIGURES

FIGURE 1:	MOTORCYCLE OPTION CONFIGURATION	9
FIGURE 2:	STANDARD CONFIGURATION	9

TABLE OF APPENDICES

APPENDIX A:	TEST DATA FOR ADDITIONAL ANTENNAS - MOTORCYCLE OPTION	42
APPENDIX B:	FCC PART 1.1307, 1.1310, 2.1091, 2.1093: RF EXPOSURE	46
APPENDIX C:	CONFIDENTIALITY REQUEST	47
APPENDIX D:	OPERATIONAL DESCRIPTION	48
APPENDIX E:	LABEL INFORMATION	49
APPENDIX F:	PARTS LIST	51
APPENDIX G:	SCHEMATICS	52
APPENDIX H:	BLOCK DIAGRAM	53
APPENDIX I:	MANUALS	54
APPENDIX J:	TEST CONFIGURATION PHOTOGRAPHS	55
APPENDIX K:	EXTERNAL PHOTOGRAPHS	56
APPENDIX L:	INTERNAL PHOTOGRAPHS	59

TABLE OF PHOTOGRAPHS

PHOTOGRAPH 1:	FCC ID LABEL	49
PHOTOGRAPH 2:	LABEL PLACEMENT ON EUT'S END	50
PHOTOGRAPH 3:	RADIATED EMISSIONS – STANDARD CONFIGURATION	55
PHOTOGRAPH 4:	RADIATED EMISSIONS – MOTORCYCLE CONFIGURATION	55
PHOTOGRAPH 5:	TOP VIEW	56
PHOTOGRAPH 6:	BOTTOM VIEW	57
PHOTOGRAPH 7:	REAR VIEW	58
PHOTOGRAPH 8:	TOP COVER REMOVED	59
PHOTOGRAPH 9:	BOTTOM COVER REMOVED	60
PHOTOGRAPH 10:	BOTTOM COVER AND INNER SHIELD REMOVED	61
PHOTOGRAPH 11:	AUDIO LOGIC BOARD COMPONENT SIDE, COMPLETE VIEW	62
PHOTOGRAPH 12:	AUDIO LOGIC COMPONENT SIDE, LEFT SIDE	63
PHOTOGRAPH 13:	AUDIO LOGIC COMPONENT SIDE, RIGHT SIDE	64
PHOTOGRAPH 14:	AUDIO LOGIC BOARD SOLDER SIDE, COMPLETE VIEW	65
PHOTOGRAPH 15:	AUDIO LOGIC SOLDER SIDE, LEFT SIDE	66
PHOTOGRAPH 16:	AUDIO LOGIC SOLDER SIDE, RIGHT SIDE	67
PHOTOGRAPH 17:	TOP COVER AND INNER SHIELD REMOVED	68
PHOTOGRAPH 18:	TRX SYN BOARD COMPONENT SIDE, COMPLETE VIEW	69
PHOTOGRAPH 19:	TRX SYN BOARD COMPONENT SIDE, LOWER LEFT	70
PHOTOGRAPH 20:	TRX SYN BOARD COMPONENT SIDE, LOWER RIGHT	71
PHOTOGRAPH 21:	TRX SYN BOARD COMPONENT SIDE, UPPER LEFT	72
PHOTOGRAPH 22:	TRX SYN BOARD COMPONENT SIDE, UPPER RIGHT	73
PHOTOGRAPH 23:	TRX SYN BOARD SOLDER SIDE, COMPLETE VIEW	74
PHOTOGRAPH 24:	TRX SYN BOARD SOLDER SIDE, LOWER LEFT	75
PHOTOGRAPH 25:	TRX SYN BOARD SOLDER SIDE, LOWER RIGHT	76
PHOTOGRAPH 26:	TRX SYN BOARD SOLDER SIDE, UPPER LEFT	77
PHOTOGRAPH 27:	TRX SYN BOARD SOLDER SIDE, UPPER RIGHT	78

1 GENERAL INFORMATION

The following Type Certification Report is prepared on behalf of **M/A-COM, Inc.** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **M7100[®] UHF-L Mobile Radio; FCC ID: OWDTR-0020-E**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47, Industry Canada RSS-119, and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application report.

2 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 15: 1999	§15.109: RADIATED EMISSIONS LIMITS
PART 90: 1998	PRIVATE LAND MOBILE RADIO SERVICES
ANSI C63.4-2003	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA603- 2002	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA 603-1-2002	ADDENDUM TO ANSI/TIA/EIA 603-1992
ANSI/TIA/EIA -102.CAAA; 2002	DIGITAL C4FM/CQPSK TRANSCEIVER MEASUREMENT METHODS
RSS-119; Issue 6; 2000	LAND MOBILE AND FIXED RADIO TRANSMITTERS AND RECEIVERS 27.41 TO 960.0 MHz

Frequency Range	Maximum Measured Output Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
378-430 MHz	54.0	1.5	16K0F3E (Voice)
378-430 MHz	54.0	1.5	11K0F3E (Voice)
378-430 MHz	54.0	1.5	8K6F1D (2 level NB 9600) measured
378-430 MHz	54.0	1.5	8K6F1E (2 level NB 9600) measured
378-430 MHz	54.0	1.5	5K3F1D (2 level NB 4800) measured
378-430 MHz	54.0	1.5	5K3F1E (2 level NB 4800) measured
378-430 MHz	54.0	1.5	10K7F1D (2 level WB 9600) measured
378-430 MHz	54.0	1.5	10K7F1E (2 level WB 9600) measured
378-430 MHz	54.0	1.5	7K9F1D (4 Level) measured
378-430 MHz	54.0	1.5	7K9F1E (4 Level) measured

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the above standards for certification methodology.

Signature: *Rick B. McMurray*

Date: March 8, 2004

Typed/Printed Name: Rick McMurray

Position: Vice President of Operations

Signature: *Daniel W. Biggs*

Date: March 8, 2004

Typed/Printed Name: Daniel W. Biggs

Position: Test Engineer

3 TESTED SYSTEM DETAILS

The test sample was received on XXX, 2003. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

TABLE 3-1: EQUIPMENT UNDER TEST (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
UHF Mobile Radio	M/A-COM, INC.	M7100 ^{IP}	ET1ULL19UA	OWDTR-0020-E	15392
Control Head	M/A-COM, INC.		KRY1011632/13		
Control Head	M/A-COM, INC.		KRY1011632/14		
Motorcycle Kit	M/A-COM, INC.		188D6803		15557
Antenna	M/A-COM, INC.	Coil/Whip	LE-OM406BK/TNC		
Antenna	M/A-COM, INC.	Coil/Whip	LE-OM420BK/TNC		
Microphone	M/A-COM, INC.		MC101616V1		
Power Cable	M/A-COM, INC.	802622P1	19B802622P1		
¼ Wave Roof Mount Antenna	M/A-COM, INC.	D2AN1R	19B209568P6		
Control Cable	M/A-COM, INC.		19B802554P23		
Speaker	M/A-COM, INC.		LS102824V1		

3.1 CONFIGURATIONS OF TEST SYSTEM

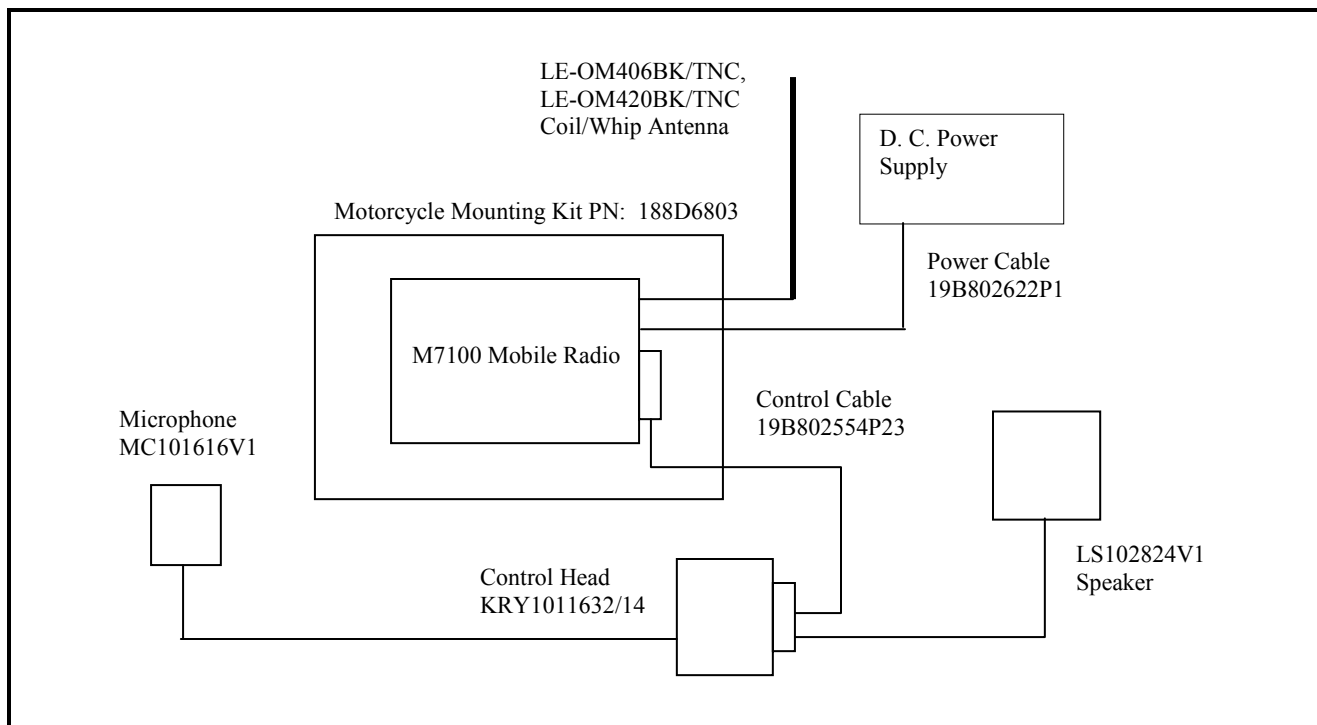


FIGURE 1: MOTORCYCLE OPTION CONFIGURATION

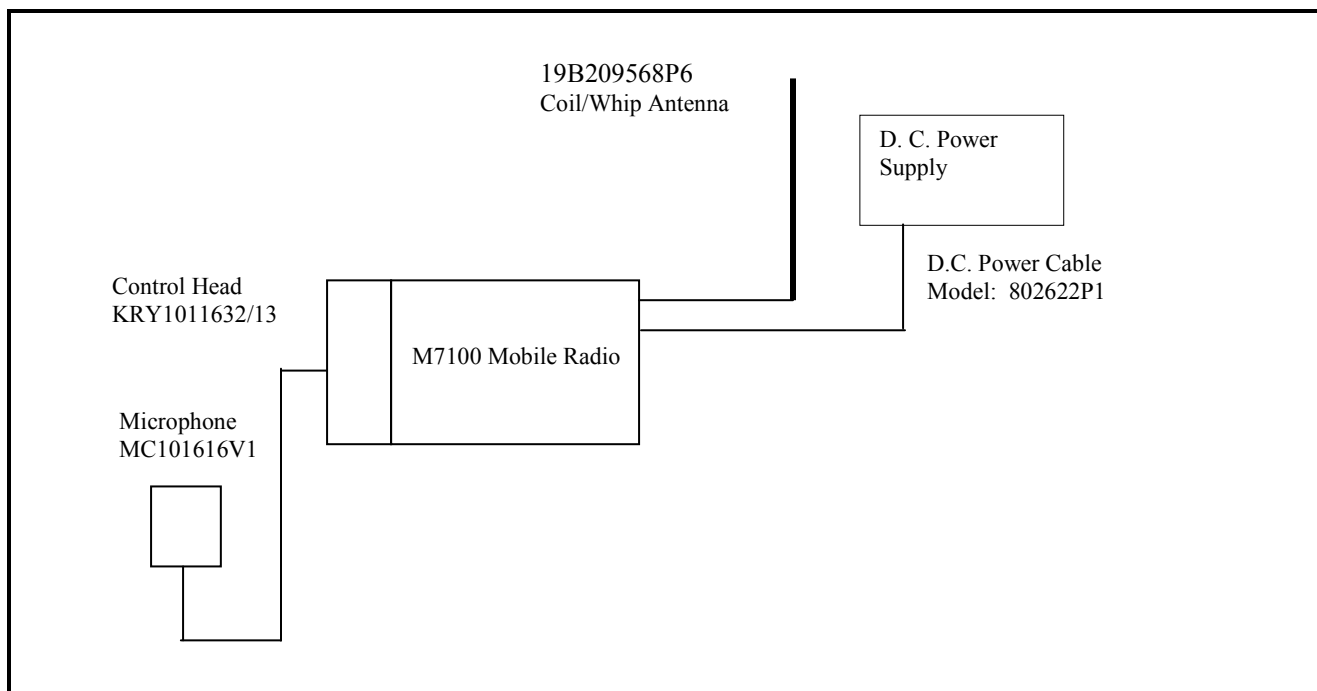


FIGURE 2: STANDARD CONFIGURATION

4 FCC RULES AND REGULATIONS PART 2 §2.1033(C)(8) VOLTAGES AND CURRENTS THROUGH THE FINAL AMPLIFYING STAGE

Nominal DC Voltage: 13.8 VAC

Current: 10.5 AMPS

5 FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF POWER OUTPUT: CONDUCTED

5.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50Ω load impedance.

5.2 TEST DATA

The following channels (in MHz) were tested: 378, 404, and 430.

TABLE 5-1: RF POWER OUTPUT (HIGH POWER): CARRIER OUTPUT POWER (UNMODULATED)

Channel	Frequency (MHz)	RF Power Measured (Watt)*
1 (High Power)	378	54.0
2 (High Power)	404	53.6
3 (High Power)	430	53.5
1 (Low Power)	378	8.2
2 (Low Power)	404	8.2
3 (Low Power)	430	8.3

* Measurement accuracy: +/- .02 dB (logarithmic mode)

TABLE 5-2: RF POWER OUTPUT (RATED POWER)

Rated Power (W)
50

TABLE 5-3: TEST EQUIPMENT USED FOR TESTING RF POWER OUTPUT - CONDUCTED

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901184/901186	Agilent	E4416A/E9323A	Power Meter / Sensor	GB41050573/US420.52510380	07/30/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 15, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

6 FCC RULES AND REGULATIONS PART 2 §2.1051: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

6.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

The transmitter is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600-bps

6.2 TEST DATA

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc

Limits: Mask D (dBm): $P(\text{dBm}) - (50 + 10 \times \text{LOG } P(W))$

The following channels (in MHz) were investigated: 378, 404, and 430. The worse case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 6-1: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 378 MHZ – HIGH POWER

(378 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 54.0 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
756	84.5	67.3	-17.2
1134	89.9	67.3	-22.5
1512	108.7	67.3	-41.4
1890	95.2	67.3	-27.9
2268	102.4	67.3	-35.0
2646	105.0	67.3	-37.7
3024	97.0	67.3	-29.7
3402	68.0	67.3	-0.7
3780	82.7	67.3	-15.4

TABLE 6-2: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 378 MHZ – LOW POWER

(378 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 8.2 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
756	90.7	59.2	-31.5
1134	97.0	59.2	-37.8
1512	102.8	59.2	-43.6
1890	103.2	59.2	-44.0
2268	104.2	59.2	-45.0
2646	101.2	59.2	-42.0
3024	105.7	59.2	-46.5
3402	104.0	59.2	-44.8
3780	104.2	59.2	-45.0

TABLE 6-3: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 404 MHZ – HIGH POWER

(404 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 53.6 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
808	85.3	67.3	-18.0
1212	92.5	67.3	-25.2
1616	88.1	67.3	-20.8
2020	101.5	67.3	-34.2
2424	107.8	67.3	-40.5
2828	97.6	67.3	-30.3
3232	85.8	67.3	-18.5
3636	78.6	67.3	-11.3
4040	80.0	67.3	-12.7
808	82.5	67.3	-15.2

TABLE 6-4: CONDUCTED SPURIOUS EMISSIONS CHANNEL 1 – 404 MHZ – LOW POWER

(404 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 8.2 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
808	92.3	59.1	-33.2
1212	96.2	59.1	-37.0
1616	97.8	59.1	-38.7
2020	99.3	59.1	-40.2
2424	100.8	59.1	-41.7
2828	98.3	59.1	-39.2
3232	94.8	59.1	-35.7
3636	97.7	59.1	-38.5
4040	82.8	59.1	-23.7

TABLE 6-5: CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 430 MHZ – HIGH POWER

(430 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 53.5 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
860	85.6	67.30	-18.3
1290	88.6	67.30	-21.3
1720	101.3	67.30	-34.0
2150	100.3	67.30	-33.0
2580	101.5	67.30	-34.2
3010	94.3	67.30	-27.0
3440	79.0	67.30	-11.7
3870	88.0	67.30	-20.7
4300	94.0	67.30	-26.7
860	104.1	67.30	-36.8

TABLE 6-6: CONDUCTED SPURIOUS EMISSIONS CHANNEL 2 – 430 MHZ –LOW POWER

(430 MHz); 12.5 kHz channel spacing; Mask D; Conducted power = 8.3 W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
860	93.4	59.2	-34.2
1290	95.7	59.2	-36.5
1720	101.7	59.2	-42.5
2150	99.0	59.2	-39.8
2580	99.4	59.2	-40.2
3010	98.4	59.2	-39.2
3440	95.9	59.2	-36.7
3870	96.4	59.2	-37.2
4300	95.2	59.2	-36.0
860	97.5	59.2	-38.3

TABLE 6-7: TEST EQUIPMENT USED FOR TESTING CONDUCTED SPURIOUS EMISSIONS

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901215	Hewlett Packard	8596EM (9 kHz - 12.8 GHz)	EMC Analyzer	3826A00144	08/27/04
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	08/06/04
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	09/09/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 15, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

7 FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION

7.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600-bps

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator and the gain of the antenna was further corrected to a half wave dipole.

7.2 TEST DATA

CFR 47 PART 90.210 REQUIREMENTS

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 7-1: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 404 MHZ; NARROW BAND, HIGH POWER

Limit = $50 + 10 \log P = 67.29 \text{ dBc}$
Conducted Power = 47.29 dBm = 53.6 W

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
808.000	67.4	-45.5	0.4	-1.3	94.5	-27.2
1212.000	49.6	-54.7	0.4	1.9	100.5	-33.2
1616.000	34.7	-66.7	0.5	4.7	109.8	-42.5
2020.000	27.1	-51.3	0.6	4.9	94.3	-27.0
2424.000	26.9	-54.7	0.6	5.1	97.5	-30.2
2828.000	25.4	-52.9	0.7	5.9	95.0	-27.7
3232.000	26.9	-54.0	0.8	6.1	96.0	-28.7
3636.000	24.4	-55.4	0.8	5.9	97.6	-30.3
4040.000	26.2	-42.8	1.8	6.0	85.9	-18.7
4444.000	26.9	-43.3	0.9	6.9	84.6	-17.3

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

TABLE 7-2: FIELD STRENGTH OF SPURIOUS RADIATION CHANNEL 2 – 404 MHZ; NARROW BAND, LOW POWER

Limit = $50 + 10 \log P = 59.2 \text{ dBc}$
Conducted Power = $39.2 \text{ dBm} = 8.3 \text{ W}$

Frequency (MHz)	Spectrum Analyzer Level (dBuV)	Signal Generator Level (dBm)	Cable Loss* (dB)	Antenna Gain (dBd)	Corrected Signal Generator Level (dBc)	Margin (dB)
808.000	54.6	-58.3	0.4	-1.3	99.2	-40.1
1212.000	36.9	-67.4	0.4	1.9	105.1	-45.9
1616.000	31.7	-69.7	0.5	4.7	104.7	-45.5
2020.000	26.7	-51.7	0.6	4.9	86.6	-27.5
2424.000	26.7	-54.9	0.6	5.1	89.6	-30.4
2828.000	25.4	-52.9	0.7	5.9	86.9	-27.8
3232.000	26.8	-54.1	0.8	6.1	88.0	-28.8
3636.000	24.8	-55.0	0.8	5.9	89.1	-29.9
4040.000	26.4	-42.6	1.8	6.0	77.6	-18.5
4444.000	25.4	-44.8	0.9	6.9	78.0	-18.8

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the $\frac{1}{2}$ wave dipole antenna.

TABLE 7-3: TEST EQUIPMENT USED FOR TESTING FIELD STRENGTH OF SPURIOUS RADIATION

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901053	Schaffner-Chase	CBL6112	Antenna (25 MHz – 2 GHz)	2648	07/03/04
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1 - 26.5 GHz)	3008A00505	N/A
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	07/15/04
900917	Hewlett Packard	8648C	Synthesized Signal Generator (9 kHz - 3200 MHz)	3537A01741	05/02/04
900928	Hewlett Packard	HP 83752A	Synthesized Sweeper (.01 – 20 GHz)	3610A00866	08/05/04

TEST PERSONNEL:

DANIEL BIGGS		OCTOBER 16, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

8 FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH

OCCUPIED BANDWIDTH - COMPLIANCE WITH THE EMISSION MASKS

8.1 TEST PROCEDURE


ANSI/TIA/EIA-603-1992, section 2.2.11 and TIA/EIA-102.CAAA-1999 section 2.2.5

Device with audio modulation: Transmitter was modulated with a 2,500 Hz sine wave at an input level of 16 dB greater than that required to produce 50% of rated system deviation at 1,000 Hz.


Device with digital modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600-bps

8.2 TEST DATA


PLOT 8-1: OCCUPIED BANDWIDTH; WIDE BAND; AUDIO MODULATION: 2,500 HZ

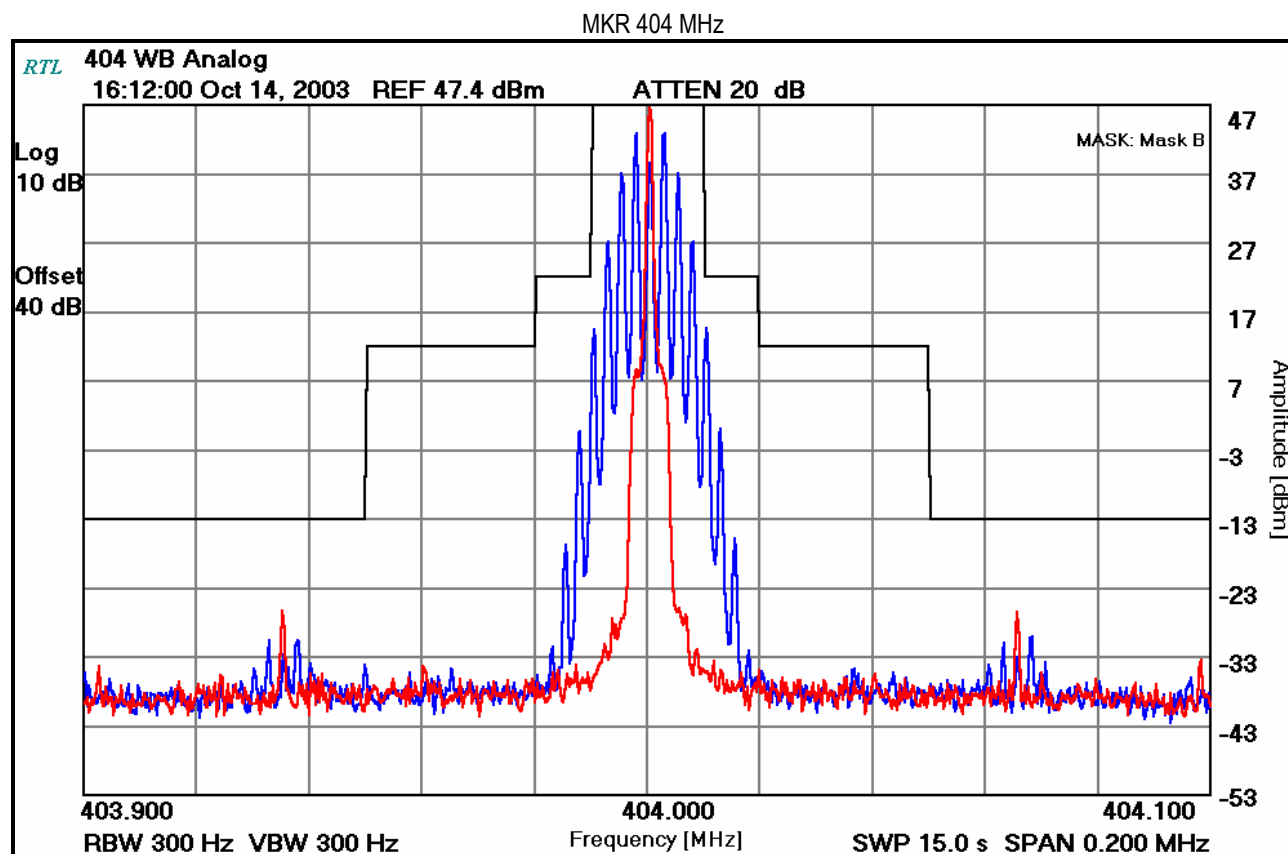


PLOT 8-2: OCCUPIED BANDWIDTH; NARROW BAND; AUDIO MODULATION: 2,500 HZ

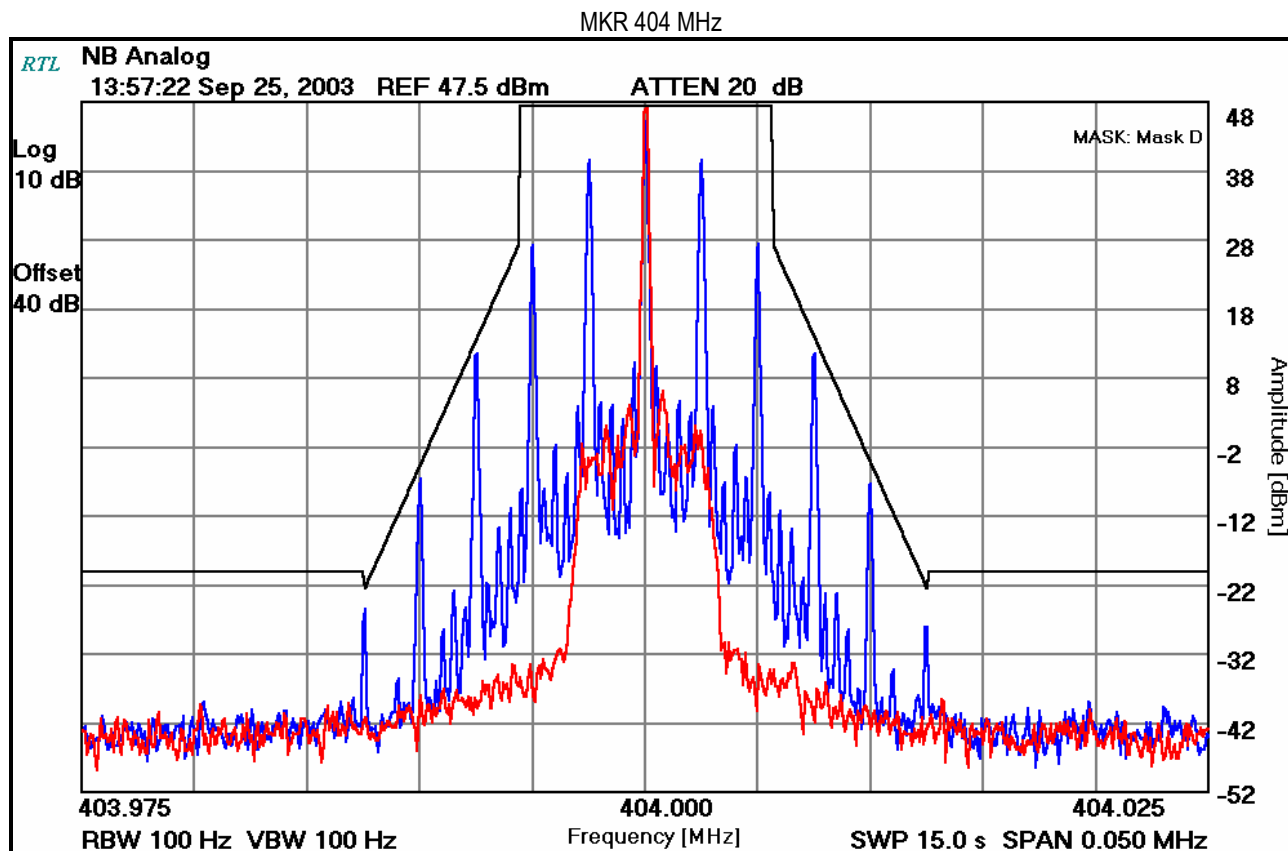


PLOT 8-3: 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; WIDE BAND; 9600 BAUD

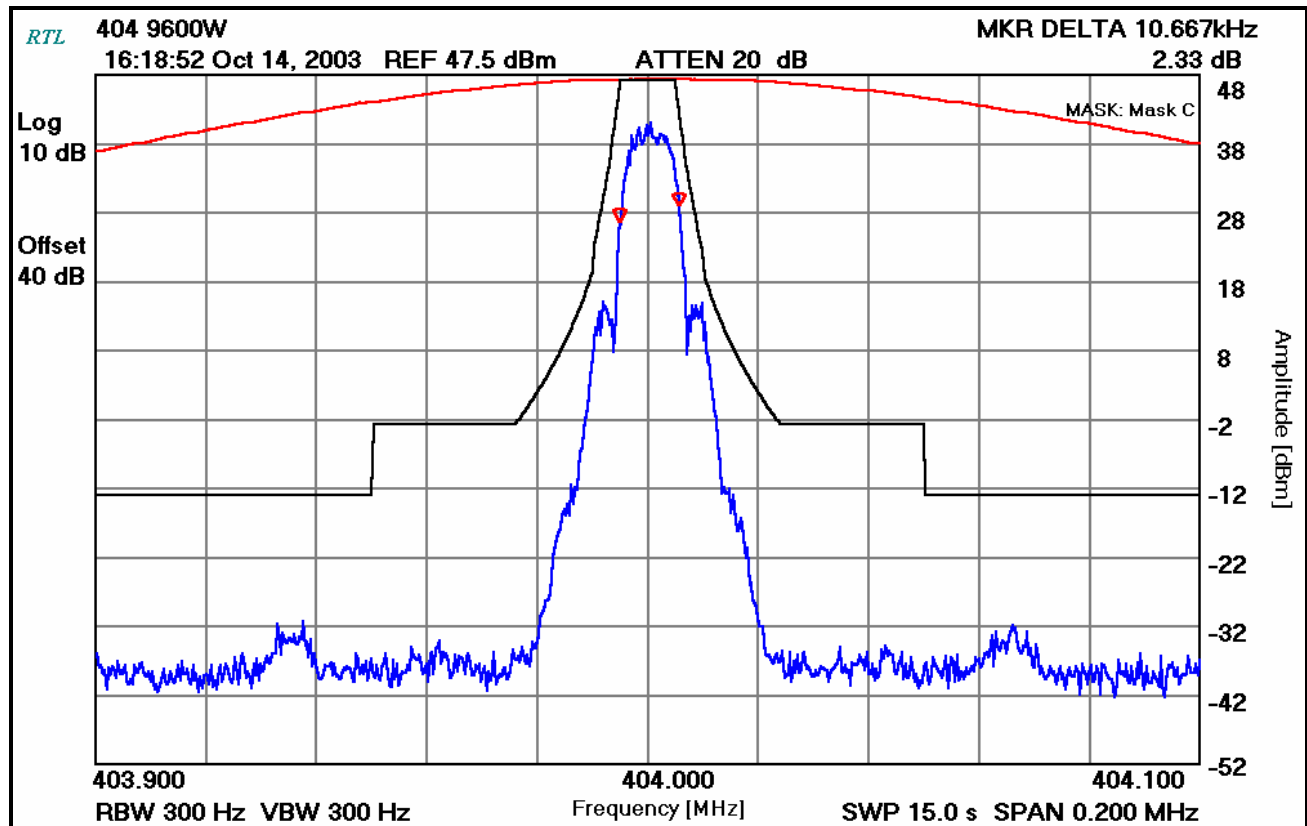

PLOT 8-4: 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 9600 BAUD

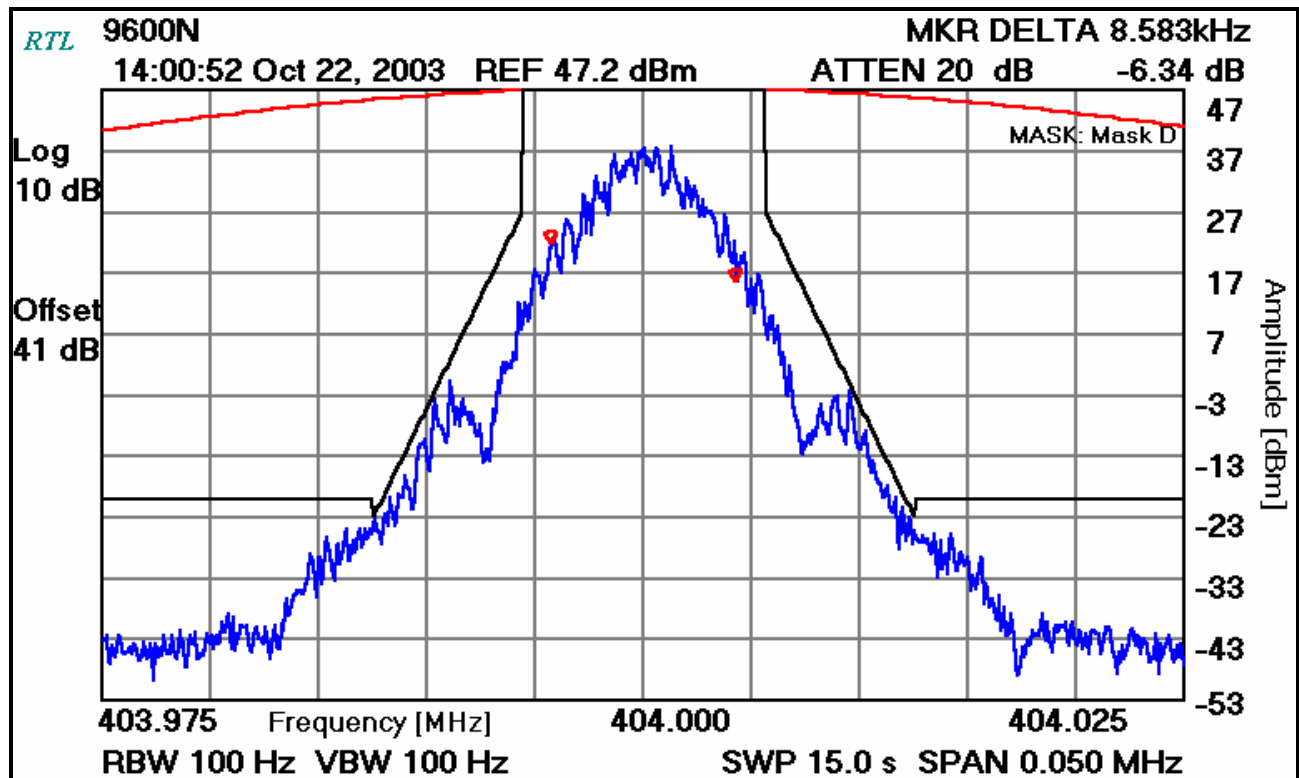

PLOT 8-5: 99% OCCUPIED BANDWIDTH - 2 LEVEL DIGITAL; NARROW BAND; 4800 BAUD

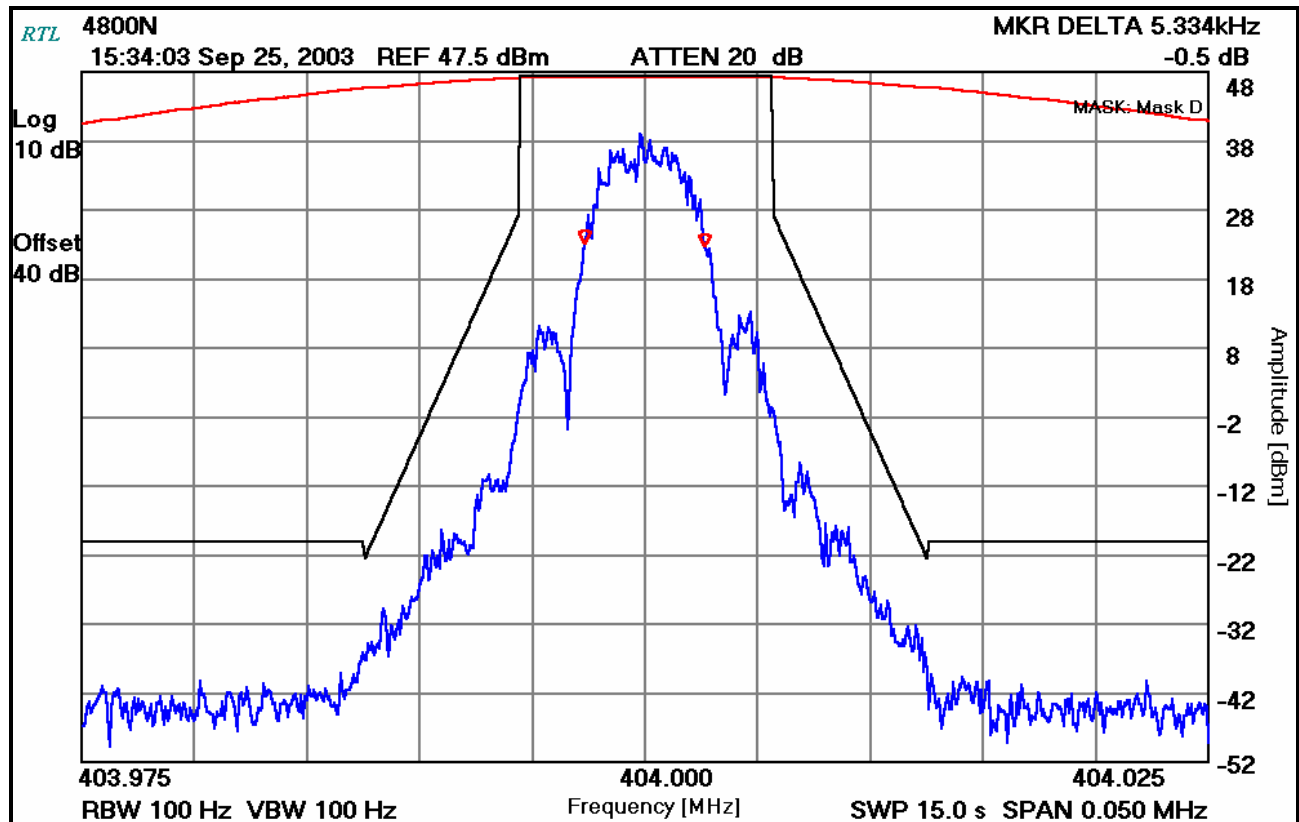

PLOT 8-6: 99% OCCUPIED BANDWIDTH - C4FM; NARROW BAND; 4800 BAUD

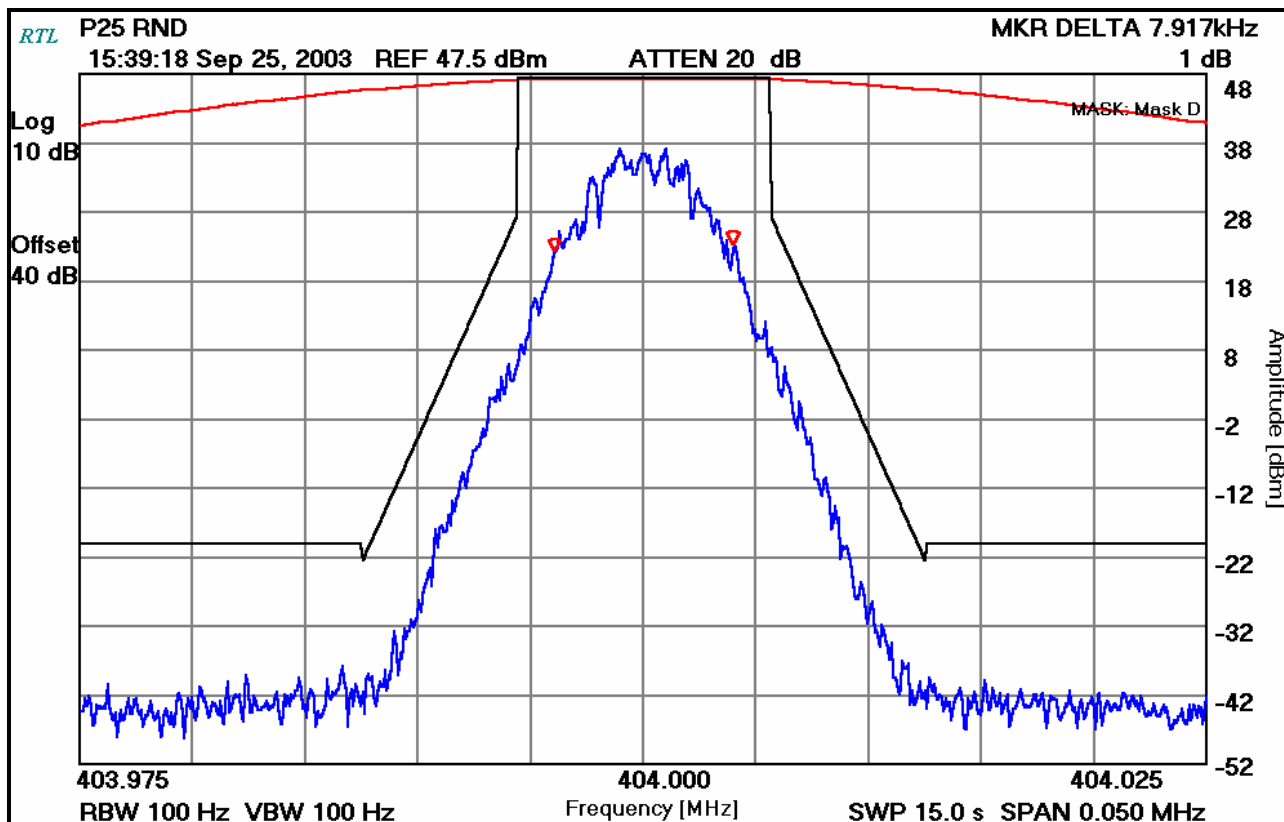


TABLE 8-1: TEST EQUIPMENT USED FOR TESTING OCCUPIED BANDWIDTH

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	07/15/04
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 25, 2003 & OCTOBER 14, 22
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATES OF TEST

9 FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY

9.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied +/-15% nominal input voltage.

The worst-case test data are shown below in Table 9-1 and Table 9-3.

9.2 TEST DATA

FREQUENCY STABILITY/TEMPERATURE VARIATION

Limit is 1.5 ppm for a base station device with a 12.5 kHz channel bandwidth. Worst-case deviation was found to be 1.1 ppm at -30°C.

PLOT 9-1: TEMPERATURE FREQUENCY STABILITY

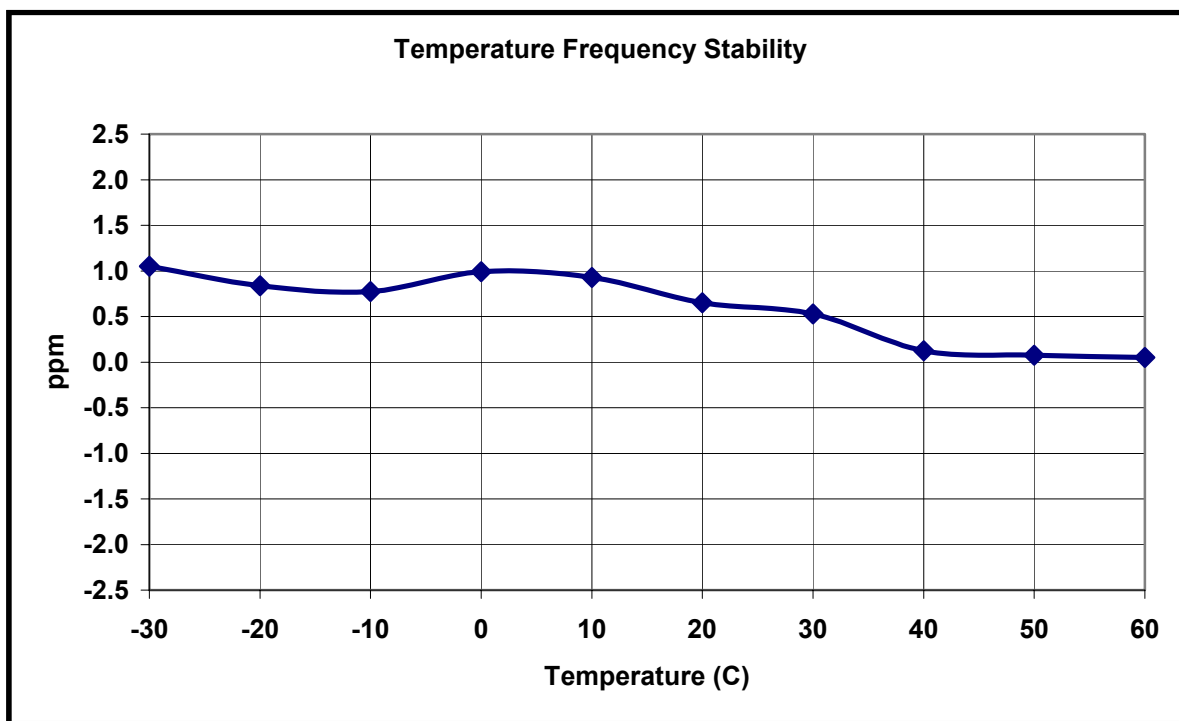



TABLE 9-1: TEMPERATURE FREQUENCY STABILITY CHANNEL 2, 404.000 MHZ

Temperature (C)	Measured Frequency (MHz)	ppm
-30	404.000425	1.1
-20	404.000338	0.8
-10	404.000313	0.8
0	404.000400	1.0
10	404.000375	0.9
20	404.000263	0.7
30	404.000213	0.5
40	404.000050	0.1
50	404.000030	0.1
60	404.000020	0.0

TABLE 9-2: TEST EQUIPMENT USED FOR TESTING FREQUENCY STABILITY/TEMPERATURE

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	12/16/03
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 16, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

FREQUENCY STABILITY/VOLTAGE VARIATION

PLOT 9-2: VOLTAGE FREQUENCY STABILITY

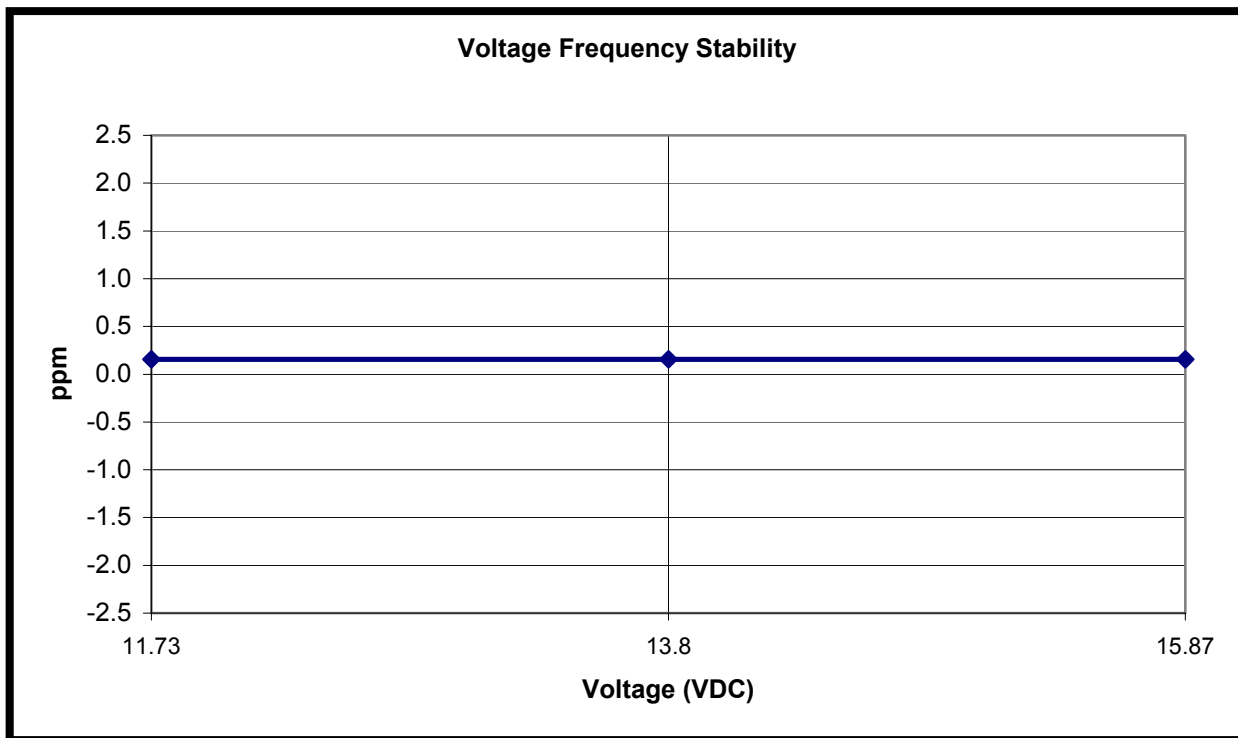


TABLE 9-3: FREQUENCY STABILITY/VOLTAGE VARIATION CHANNEL 2, 404.000 MHZ

Voltage (VDC)	Measured Frequency (MHz)	ppm
11.73	404.000063	0.2
13.8	404.000063	0.2
15.87	404.000063	0.2

TABLE 9-4: TEST EQUIPMENT USED FOR TESTING FREQUENCY STABILITY/VOLTAGE

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	07/15/04
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 16, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

10 FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE

10.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

$$\text{Audio Frequency Response} = 20 \text{ LOG } (\text{DEVfreq}/\text{DEVref})$$

10.2 TEST DATA

**PLOT 10-1: MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE
{12.5 KHZ CHANNEL BANDWIDTH}**

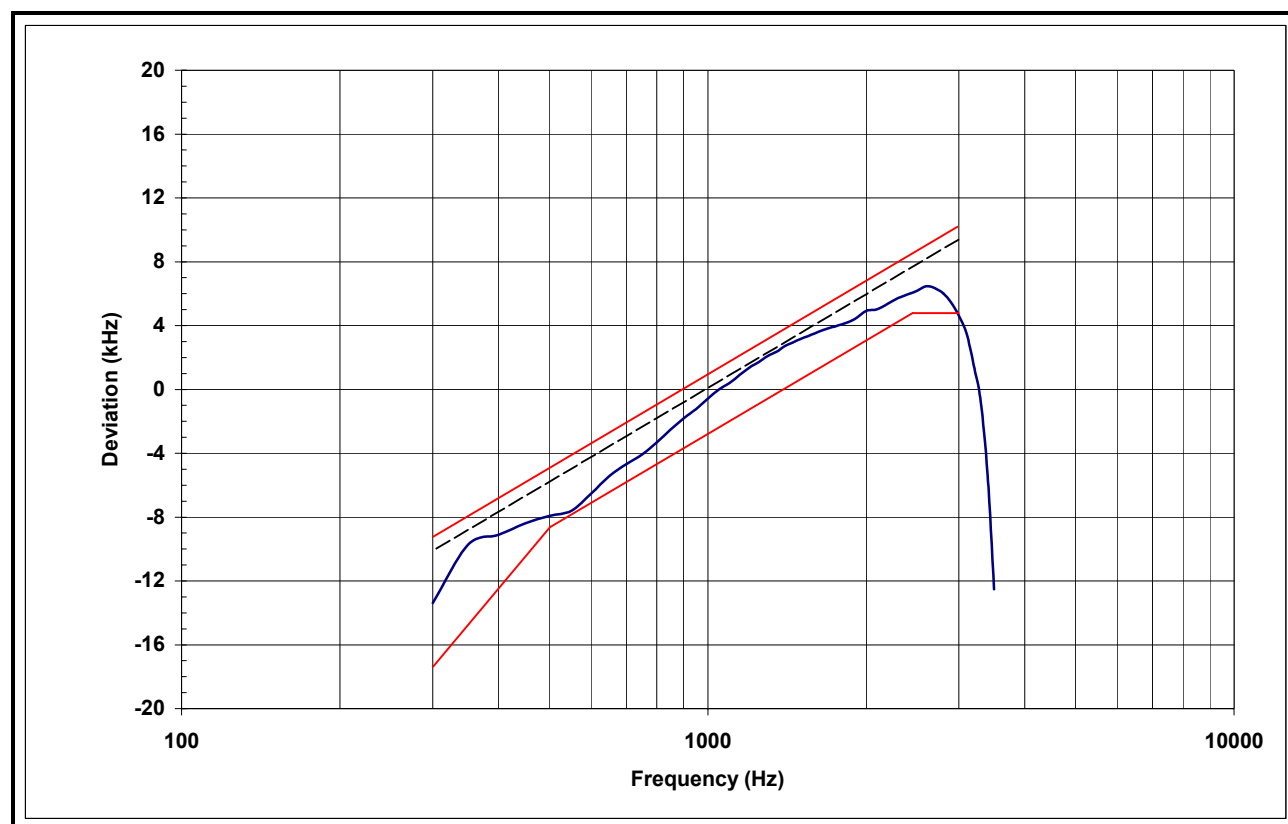


TABLE 10-1: TEST EQUIPMENT USED FOR TESTING AUDIO FREQUENCY RESPONSE

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	08/06/04
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	09/09/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 18, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

11 FCC PART 2 §2.1047 (A): MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER

11.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

11.2 TEST DATA

PLOT 11-1: MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER

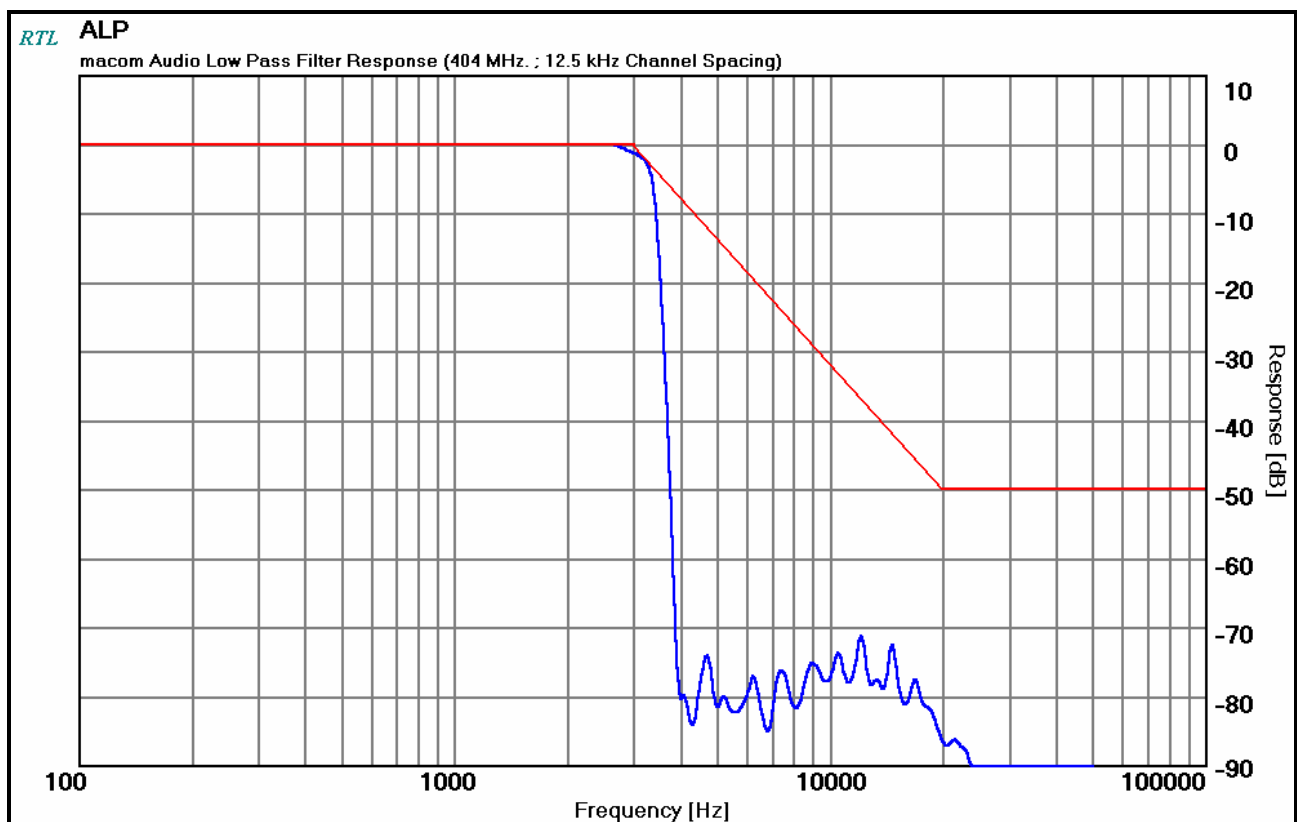


TABLE 11-1: TEST EQUIPMENT USED FOR TESTING AUDIO LOW PASS FILTER RESPONSE

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	08/06/04
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	09/09/04

TEST PERSONNEL:

DANIEL BIGGS		SEPTEMBER 29, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

12 FCC RULES AND REGULATIONS PART 2 §2.1047 (B): MODULATION CHARACTERISTICS - MODULATION LIMITING


12.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.3


The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level as a reference (0 dB) the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

12.2 TEST DATA


PLOT 12-1: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; POSITIVE PEAK

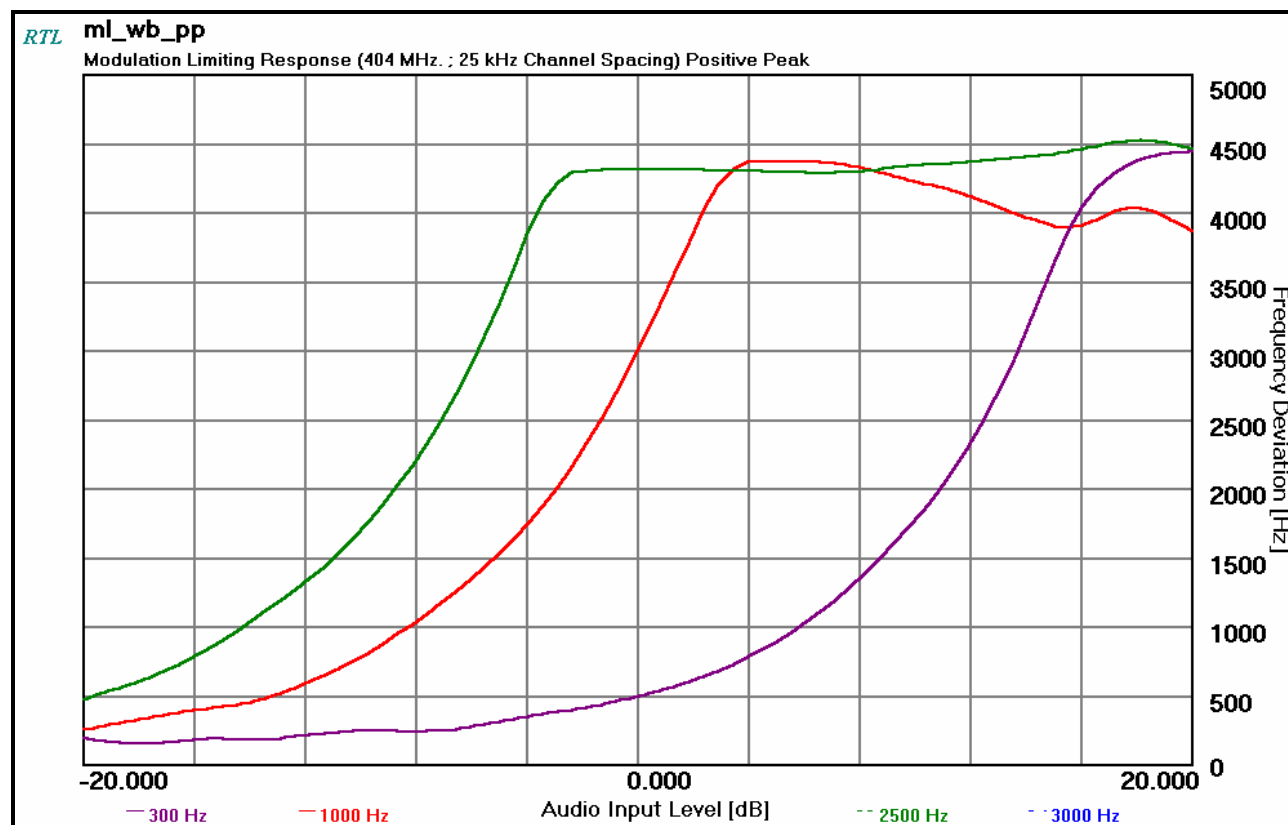

PLOT 12-2: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND; NEGATIVE PEAK

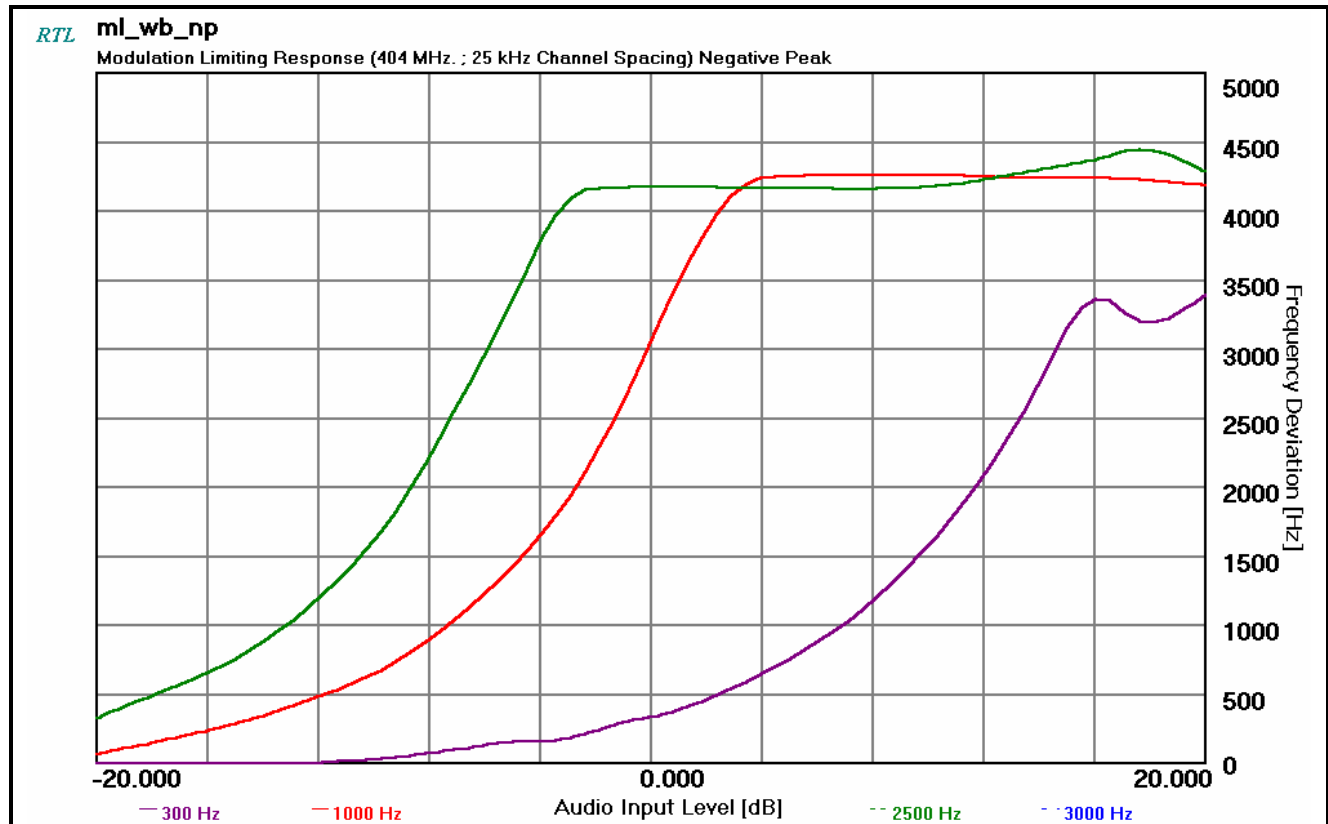

PLOT 12-3: MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; POSITIVE PEAK

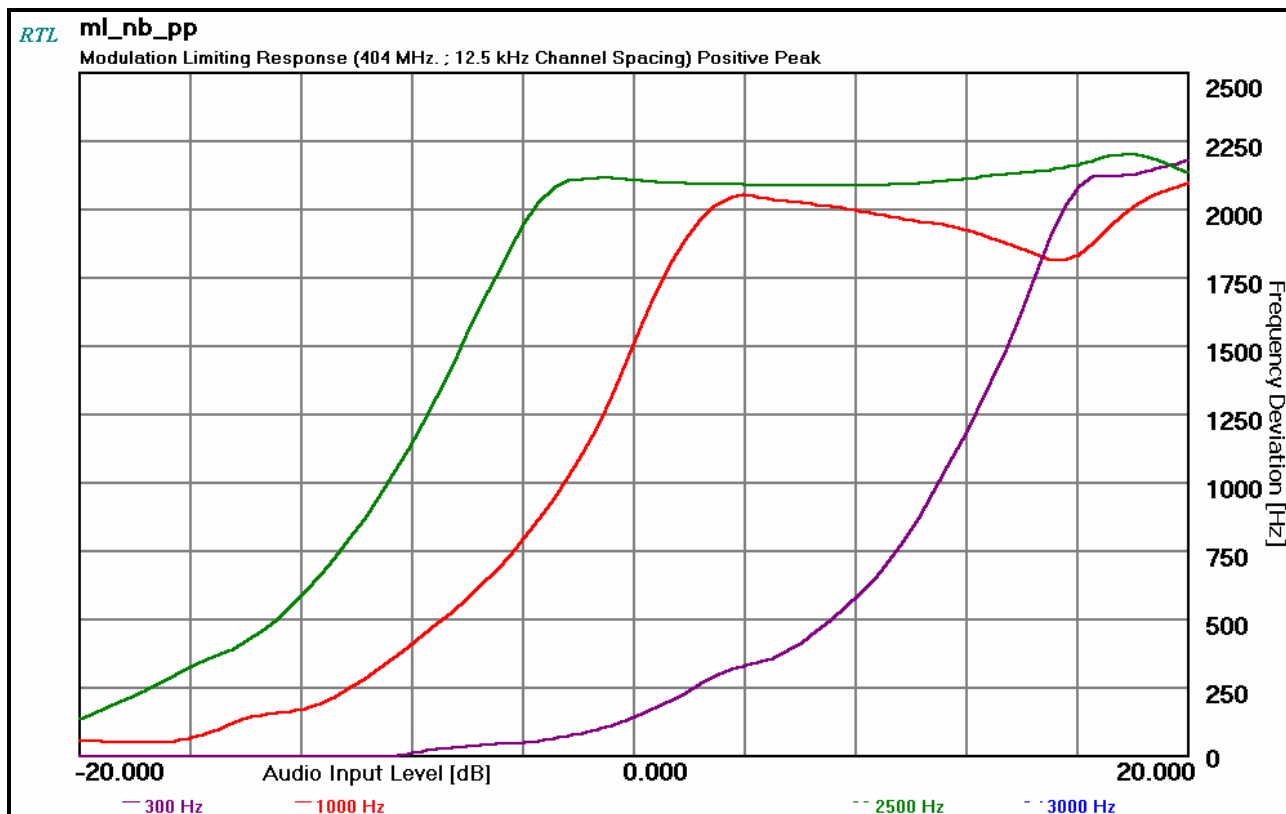

PLOT 12-4: MODULATION CHARACTERISTICS – MODULATION LIMITING: NARROW BAND; NEGATIVE PEAK

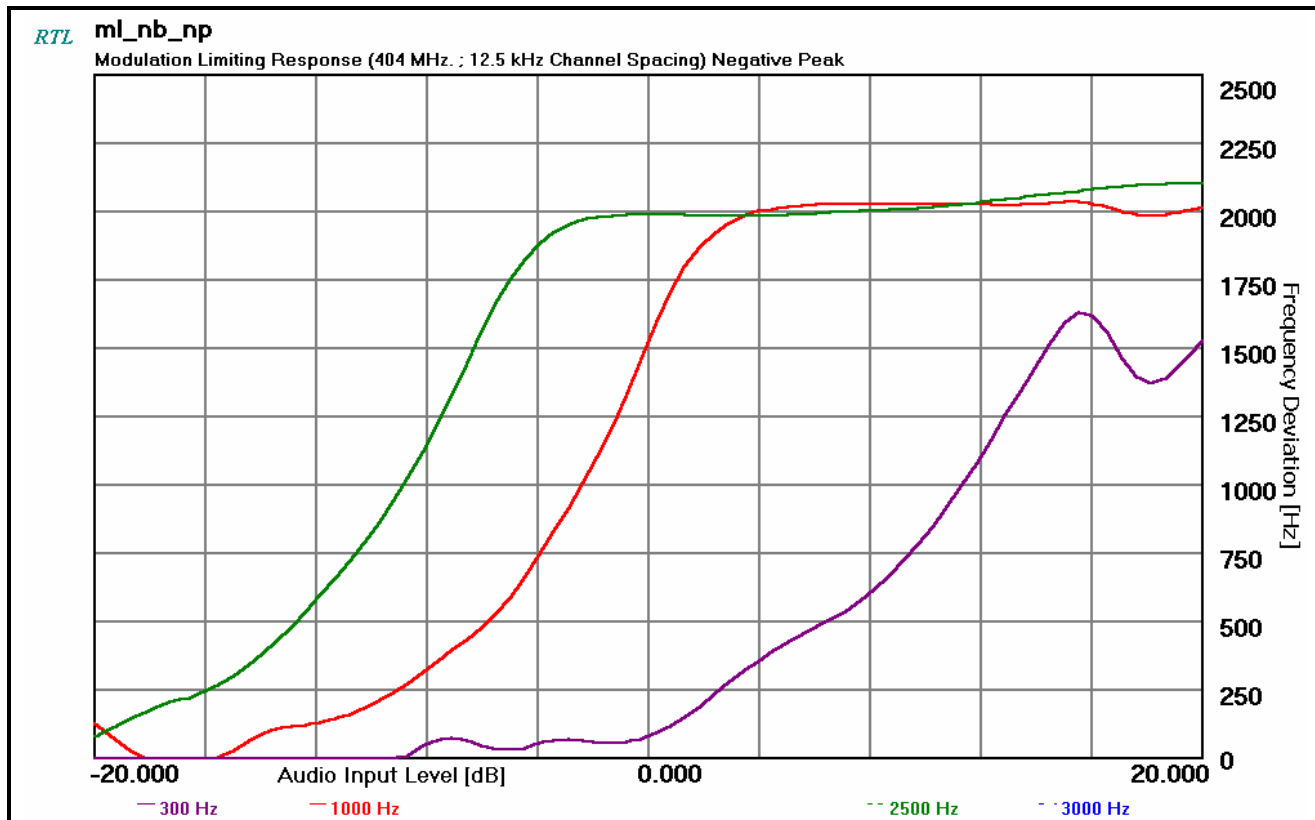


TABLE 12-1: TEST EQUIPMENT USED FOR TESTING MODULATION LIMITING

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	08/06/04
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892	09/09/04

TEST PERSONNEL:

DANIEL BIGGS	<i>Daniel Biggs</i>	SEPTEMBER 22, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST


13 FCC RULES AND REGULATIONS PART 90 §90.214: TRANSIENT FREQUENCY BEHAVIOR

13.1 TEST PROCEDURE


ANSI/TIA/EIA-603-1992, section 2.2.3

13.2 TEST DATA


PLOT 13-1: TRANSIENT FREQUENCY BEHAVIOR – 404 MHZ; HIGH POWER; WIDE BAND; CARRIER ON TIME

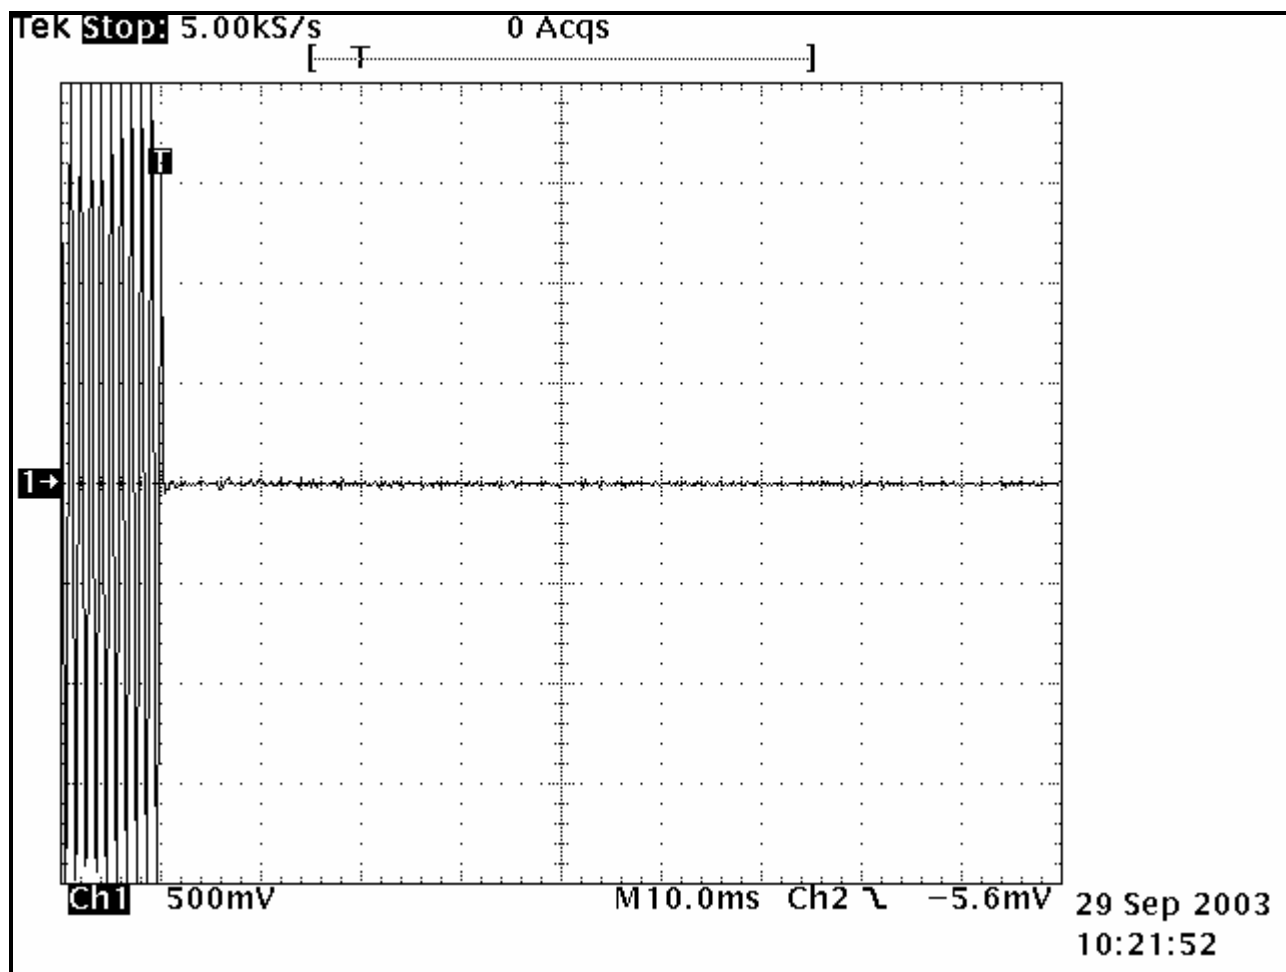

PLOT 13-2: TRANSIENT FREQUENCY BEHAVIOR – 404 MHZ; HIGH POWER; WIDE BAND; CARRIER OFF TIME

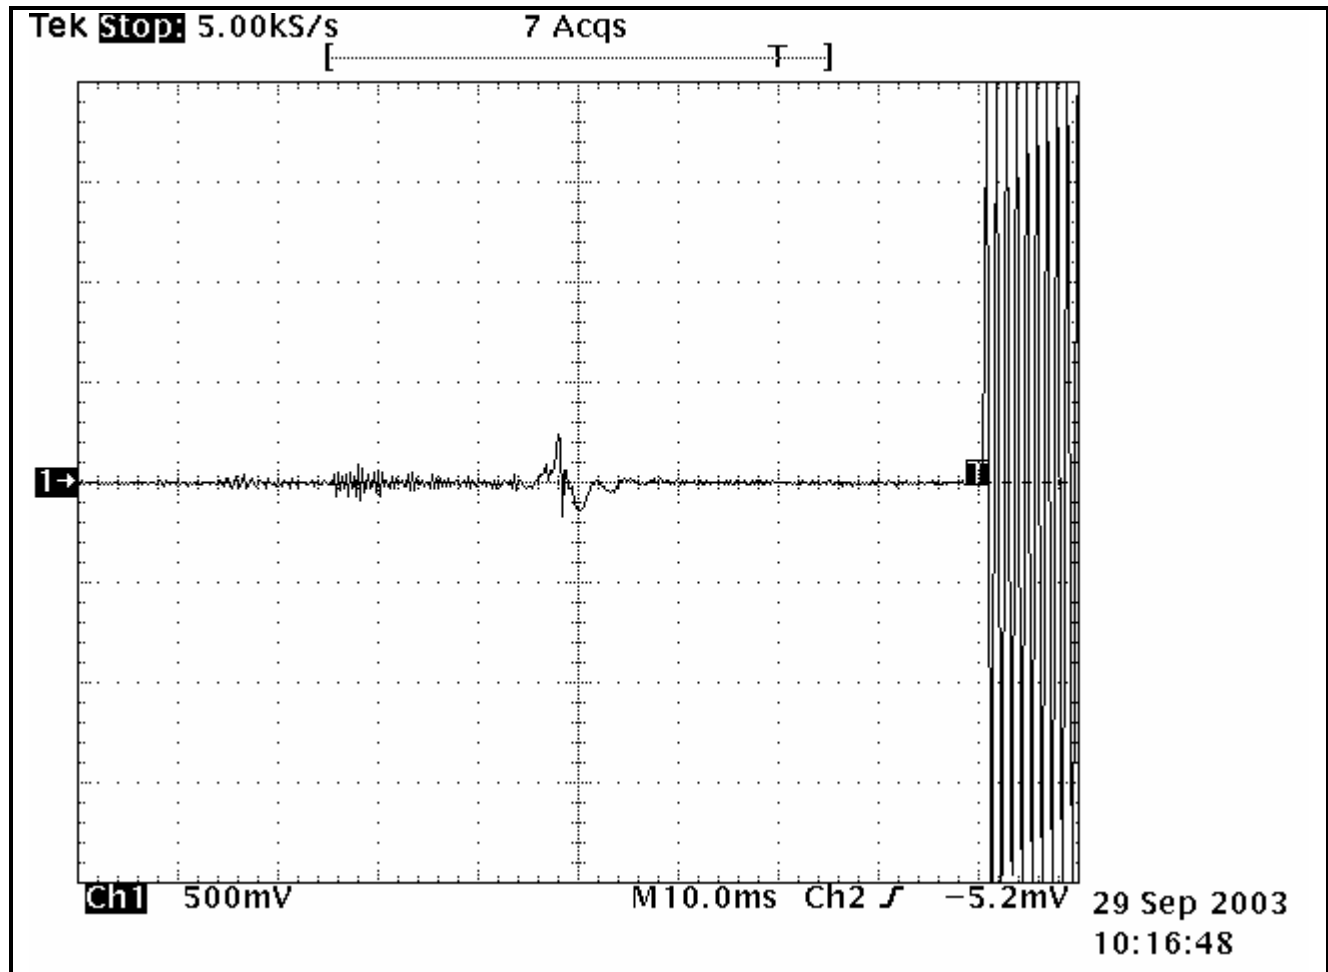

PLOT 13-3: TRANSIENT FREQUENCY BEHAVIOR – 404 MHZ; HIGH POWER; NARROW BAND; CARRIER ON TIME

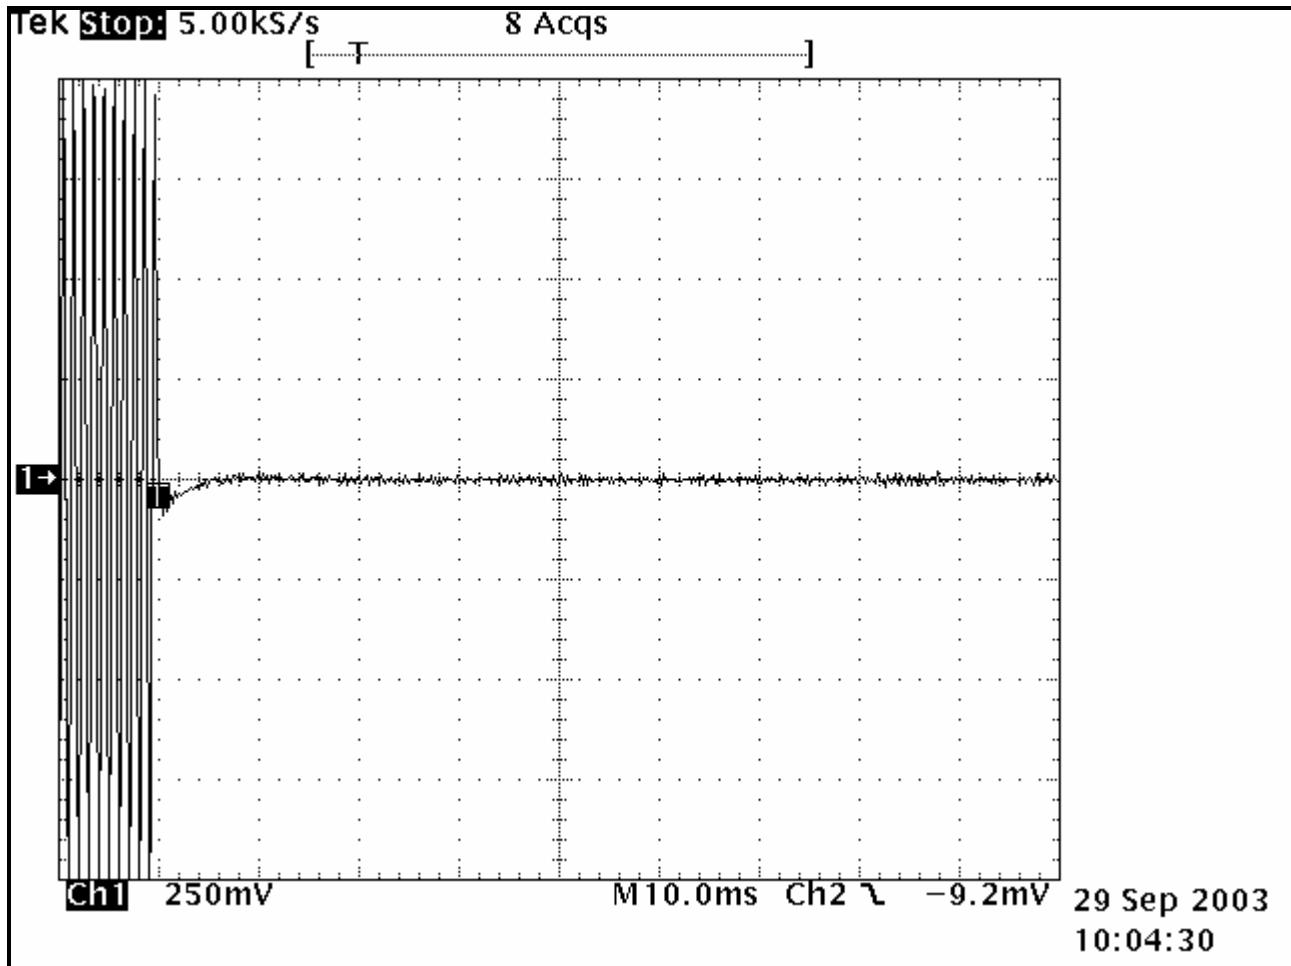

PLOT 13-4: TRANSIENT FREQUENCY BEHAVIOR – 404 MHZ; HIGH POWER; NARROW BAND; CARRIER OFF TIME

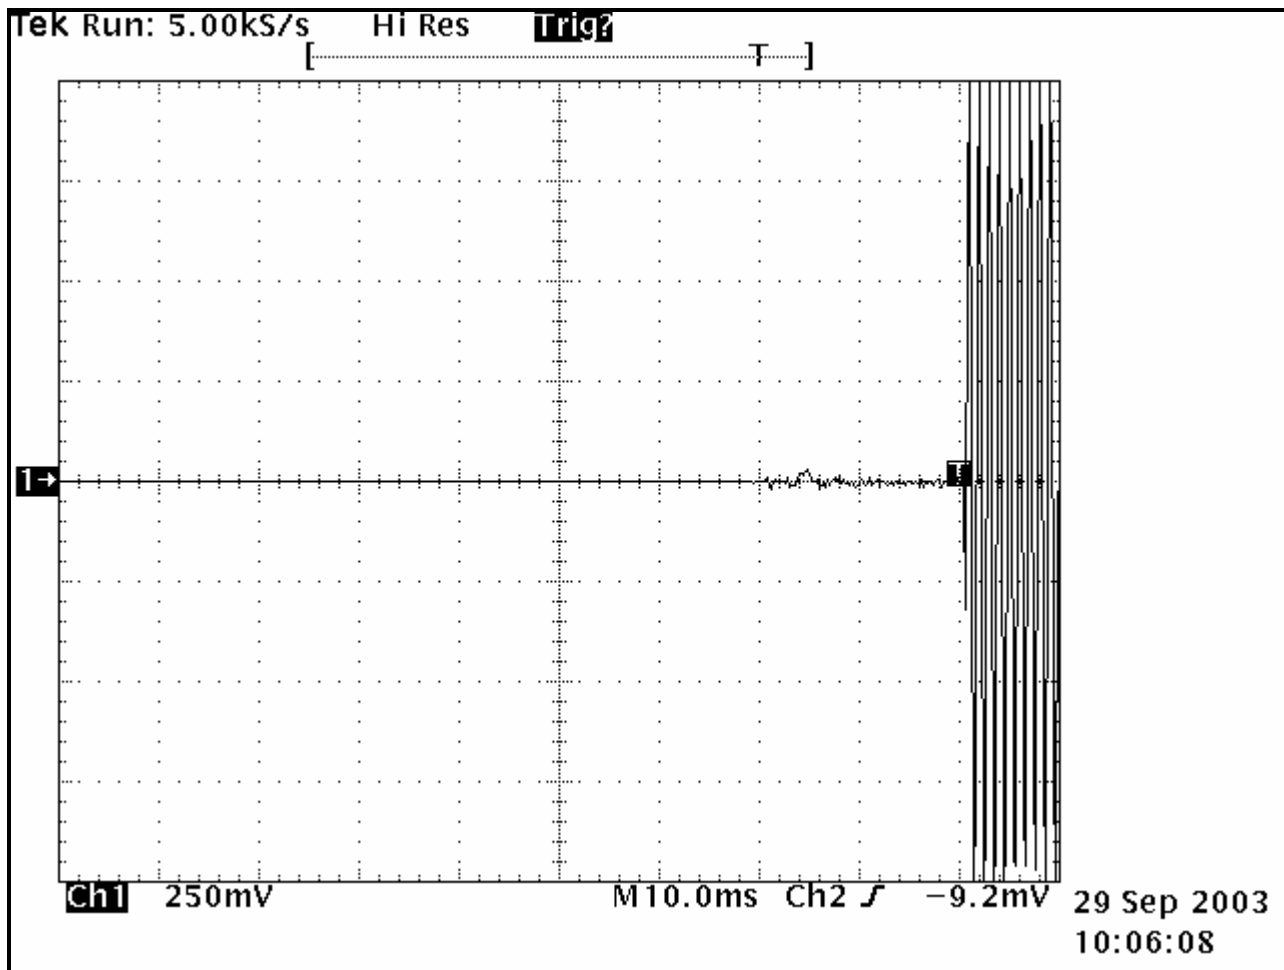


TABLE 13-1: TEST EQUIPMENT USED FOR TESTING TRANSIENT FREQUENCY BEHAVIOR

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
900917	Hewlett Packard	8648C	Signal Generator	3537A01741	05/02/04
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	06/18/04
900561	Tektronix	TDS540B	Oscilloscope	B020129	02/19/04
900352	Werlatone	C1795	Directional Coupler	4989	N/A

TEST PERSONNEL:

DANIEL BIGGS	<i>Daniel Biggs</i>	SEPTEMBER 29, 2003
TEST TECHNICIAN/ENGINEER	SIGNATURE	DATE OF TEST

14 FCC RULES AND REGULATIONS PART 2 §2.202: NECESSARY BANDWIDTH AND EMISSION BANDWIDTH

Type of Emission: F3E, F1D, F1E

Necessary Bandwidth and Emission Bandwidth:

Voice – 25 kHz channel separation

Calculation:

Max modulation(M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 16.0 \text{ kHz}$

Emission designator: 16K0F3E

Voice – 12.5 kHz channel separation

Calculation:

Max modulation(M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2xM + 2xDK = 11.0 \text{ kHz}$

Emission designator: 11K0F3E

Digital voice and data – 25 kHz separation

9600 Baud

Measurement: 99.0% Occupied Bandwidth

$B_n = 10.667 \text{ kHz}$

Emission designator: 10K7F1D, 10K7F1E

Digital voice and data – 12.5 kHz separation

9600 Baud

Measurement: 99.0% Occupied Bandwidth

$B_n = 8.583 \text{ kHz}$

Emission designator: 8K6F1D, 8K6F1E

Digital voice and data – 12.5 kHz separation

4800 Baud

Measurement: 99.0% Occupied Bandwidth

$B_n = 5.334 \text{ kHz}$

Emission designator: 5K3F1D, 5K3F1E

C4FM –

Measurement: 99.0% Occupied Bandwidth

$B_n = 7.917 \text{ kHz}$

Emission designator: 7K9F1D, 7K9F1E

15 CONCLUSION

The data in this measurement report shows that the **M/A-COM, Inc. Model M7100^{IP} UHF-L; FCC ID: OWDTR-0020-E** complies with all the requirements of Parts 90, 15 and 2 of the FCC Rules, and Industry Canada RSS-119, Issue 6, 2000.