



Engineering Solutions & Electromagnetic Compatibility Services

Class II Permissive Change Report

**Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501**

Model: M7100 VHF Mobile Radio (136-174 MHz)

FCC ID: OWDTR-0035-E

October 30, 2013

Standards Referenced for this Report	
Part 2: 2012	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 22: 2012	Public Portable Services
TIA-102.CCAA August 2011	Two-Slot Time Division Multiple Access Transceiver Measurement Methods
TIA-102.CCAB October 2011	Two - Slot Time Division Multiple Access Transceiver Performance Recommendations
TIA-EIA-603-C August 2004	Land Portable FM or PM Communications Equipment – Measurement and Performance Standards

FCC Rule Parts	Frequency Range (MHz)	Rated Transmit Power (W) Conducted	Frequency Tolerance (ppm)	Emission Designator
22, 80	136-174	51.52	5.0	16K0F3E (Voice)
22, 80, 90	136-174	51.52	5.0	11K0F3E (Voice)
22, 80	136-174	51.52	2.0	14K2F1D (2 level WB)
22, 80	136-174	51.52	2.0	14K2F1E (2 level WB)
22, 80, 90	136-174	51.52	2.0	9K90F1D (2 level NB 9600)
22, 80, 90	136-174	51.52	2.0	9K90F1E (2 level NB 9600)
22, 80, 90	136-174	51.52	2.0	7K10F1D (2 level NB 4800)
22, 80, 90	136-174	51.52	2.0	7K10F1E (2 level NB 4800)
22, 80, 90	136-174	51.52	2.0	8K40F1D (P25)
22, 80, 90	136-174	51.52	2.0	8K40F1E (P25)

Report Prepared by Test Engineer: Daniel W. Baltzell

Document Number: 2013229

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	4
2	General Information	4
2.1	Test Facility	4
2.2	Related Submittal(s)/Grant(s)	4
2.3	Grant Notes	4
2.4	Tested System Details	5
3	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted	7
3.1	Test Procedure	7
3.2	Test Data	7
4	FCC 2.1051: Conducted Spurious Emissions	8
4.1	Test Procedure	8
4.2	Test Data	8
5	FCC 2.1049(c)(1); 22.359(b): Emission Limitations	9
5.1	Test Procedure	9
5.2	Test Data	10
6	FCC 2.1053(a): Field Strength of Spurious Radiation; 22.359: Emissions Limitations	29
6.1	Test Procedure	29
6.2	Test Data	29
7	Conclusion	31

Table of Tables

Table 2-1:	Equipment under Test (EUT)	5
Table 2-2:	Support Equipment.....	5
Table 3-1:	RF Power Output (High Power): Carrier Output Power (Unmodulated).....	7
Table 3-2:	Test Equipment Used for Testing RF Power Output - Conducted	7
Table 4-1:	Test Equipment Used for Testing Spurious Emissions	8
Table 5-1:	Test Equipment Used for Testing Occupied Bandwidth	28
Table 6-1:	Field Strength of Spurious Radiation – 152.015 MHz.....	29
Table 6-2:	Field Strength of Spurious Radiation – 158.71 MHz.....	30
Table 6-3:	Test Equipment Used for Testing Field Strength of Spurious Radiation.....	30

Table of Plots

Plot 5-1:	Occupied Bandwidth – NB Analog	10
Plot 5-2:	Occupied Bandwidth – WB Analog	11
Plot 5-3:	Occupied Bandwidth – 2 Level WB 9600 FSK.....	12
Plot 5-4:	Occupied Bandwidth – 2 Level NB 9600 FSK.....	13
Plot 5-5:	Occupied Bandwidth – 2 Level NB 4800 FSK.....	14
Plot 5-6:	Occupied Bandwidth – P25	15
Plot 5-7:	Occupied Bandwidth – 152.015 MHz; Mask; NB Analog Voice	16
Plot 5-8:	Occupied Bandwidth – 158.710 MHz; Mask; NB Analog Voice	17
Plot 5-9:	Occupied Bandwidth – 152.015 MHz; Mask; WB Analog Voice	18
Plot 5-10:	Occupied Bandwidth – 158.710 MHz; Mask; WB Analog Voice	19
Plot 5-11:	Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 4800 FSK	20
Plot 5-12:	Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 4800 FSK	21
Plot 5-13:	Occupied Bandwidth – 152.015 MHz; Mask; P25.....	22
Plot 5-14:	Occupied Bandwidth – 158.710 MHz; Mask; P25.....	23
Plot 5-15:	Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 9600 FSK	24
Plot 5-16:	Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 9600 FSK	25
Plot 5-17:	Occupied Bandwidth – 152.015 MHz; Mask; 2 Level WB 9600 FSK.....	26
Plot 5-18:	Occupied Bandwidth – 158.710 MHz; Mask; 2 Level WB 9600 FSK.....	27

Table of Figures

Figure 2-1:	Configuration of Tested System	6
-------------	--------------------------------------	---

Table of Appendixes

Appendix A:	Description of Change	32
Appendix B:	Agency Authorization Letter.....	33
Appendix C:	Extended Frequency Attestation Letter.....	34
Appendix D:	Test Configuration Photographs	35

Table of Photographs

Photograph 1:	Radiated Emissions (Front View)	35
Photograph 2:	Radiated Emissions (Rear View)	36

1 Test Result Summary

Test	FCC Reference	Result
RF Power Output	2.1046(a), 22.659	Complies
Spurious Emissions at Antenna Terminals	2.1046(a), 22.359	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 22.359(b)	Complies

2 General Information

The following Class II Permissive Change Report is prepared on behalf of Harris Corporation. in accordance with the Federal Communications Commission rules and regulations. The Equipment Under Test (EUT) was the M7100 VHF Mobile Radio, FCC ID: OWDTR-0035-E.

The purpose of this Class 2 Permissive Change is to add Part 22 operations.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2 and Part 22. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia, 20170. This site has been fully described in a report submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

The original FCC grant was issued March 21, 2005; permissive change grants were issued December 12, 2006 and September 17, 2007.

2.3 Grant Notes

The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

2.4 Tested System Details

The test sample was received on September 27, 2013. The identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test are listed below.


Table 2-1: Equipment under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	Cable Description	RTL Bar Code
M7100 Transceiver	Harris Corporation.	M7100	N/A	OWDTR-0035-E	0.5m unshielded power	21311

Table 2-2: Support Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	Cable Description	RTL Bar Code
Control Head	Harris Corporation.	KRY101 1632/14	RP85498 REV R4B	N/A	1.5 m unshielded I/O	21308

Figure 2-1: Configuration of Tested System

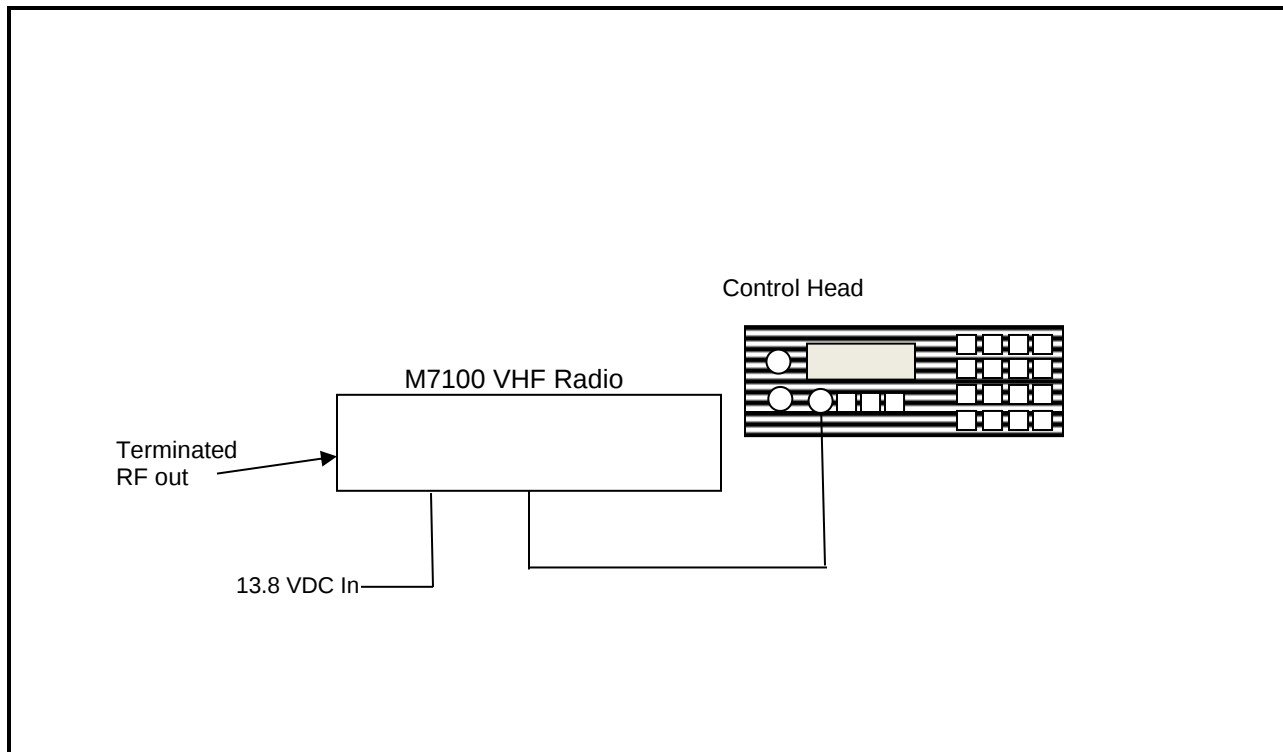

3 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted

3.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.1

The EUT was connected with a power sensor/meter through an appropriate 50 ohm attenuator.
Attenuator loss was accounted for.

3.2 Test Data

Table 3-1: RF Power Output (High Power): Carrier Output Power (Unmodulated)

Channel	Frequency (MHz)	RF Power Measured (Watt)*
1 (High Power)	136.0125	59.2
2 (High Power)	152.0150	60.3
3 (High Power)	154.0125	60.3
4 (High Power)	158.7100	59.3
5 (High Power)	173.0125	60.0

* Measurement accuracy: +/- .02 dB (logarithmic mode)

Table 3-2: Test Equipment Used for Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
901291	Pasternack	PE7031-20	300W Attenuator, DC – 1 GHz, 20 dB	NA	3/25/16
901536	Weinschel Corp.	48-40-34 DC-18GHz	Attenuator, 100W 40dB	BK5883	12/14/13

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

October 29, 2013
Date of Test

4 FCC 2.1051: Conducted Spurious Emissions

4.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.7, TIA-102.CCAB October 2011, section 3.2.7

The transmitter was interfaced with a spectrum analyzer through an appropriate 50 ohm attenuator. The transmitter was operated at maximum power. Attenuator losses were accounted for.

4.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10x f_c .

Per FCC 2.1051, the magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

No spurious emissions were found to be within 20 dB of the limit; therefore, no data is reported.

Table 4-1: Test Equipment Used for Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
901291	Pasternack	PE7031-20	300W Attenuator, DC - 1 GHz, 20 dB	NA	3/25/16
901536	Weinschel Corp.	48-40-34 DC-18GHz	Attenuator, 100W 40dB	BK5883	12/14/13

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

October 29, 2013
Date of Test

5 FCC 2.1049(c)(1); 22.359(b): Emission Limitations

5.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.11, TIA-102.CCAA August 2011, section 2.2.5, TIA-102.CCAB October 2011, section 3.2.5


The transmitter was interfaced with a spectrum analyzer through an appropriate 50 ohm attenuator and a notch filter. The transmitter was operated at maximum power. Attenuator losses were accounted for.

§22.359(a) *Out of band emissions*: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


(b) *Measurement procedure*: In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2 Test Data


Plot 5-1: Occupied Bandwidth – NB Analog

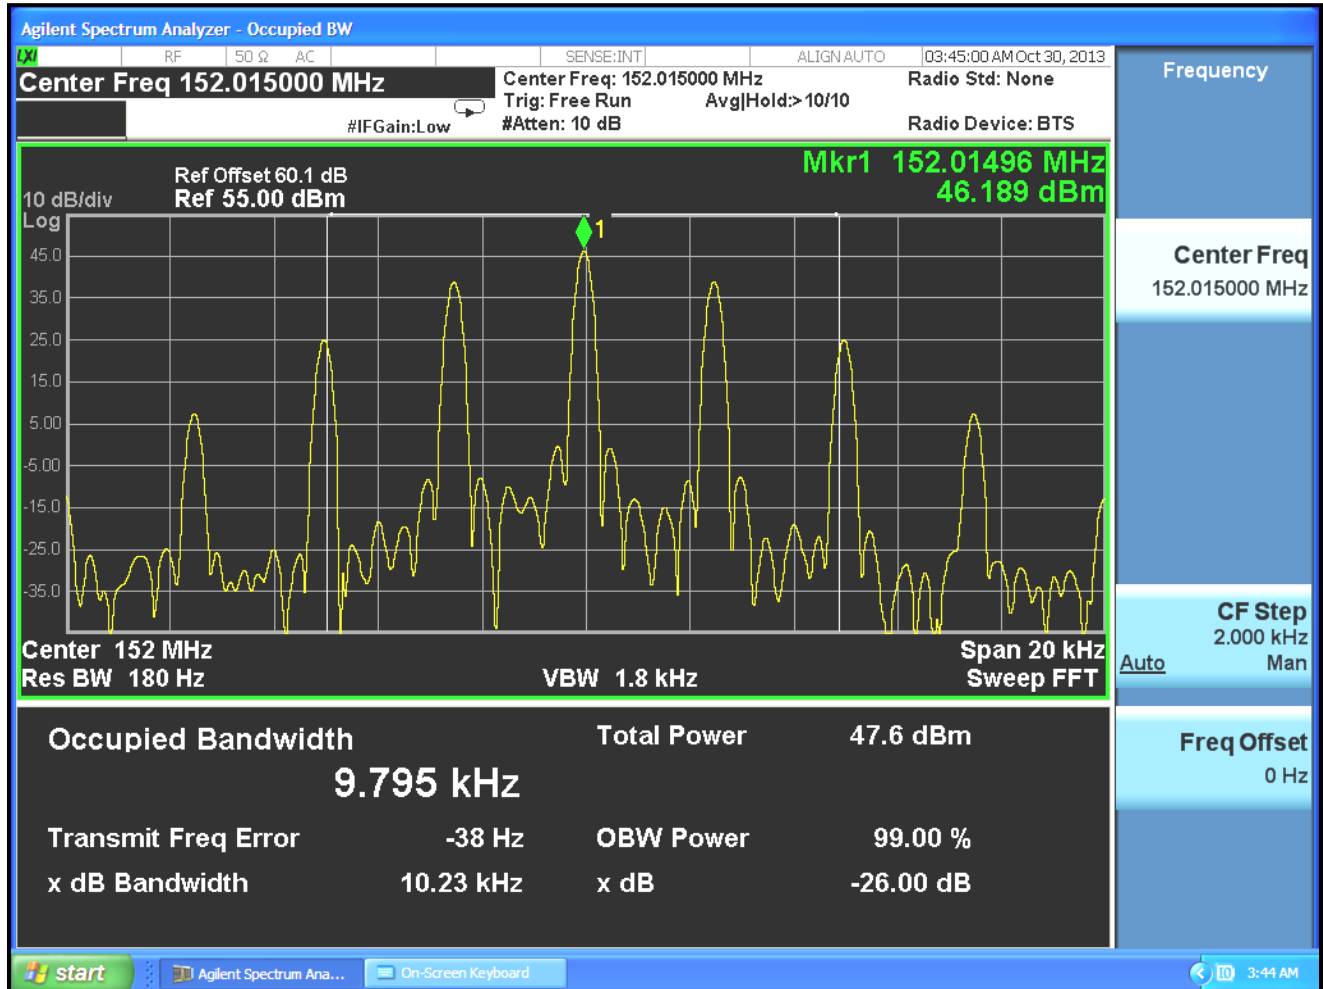


Plot 5-2: Occupied Bandwidth – WB Analog

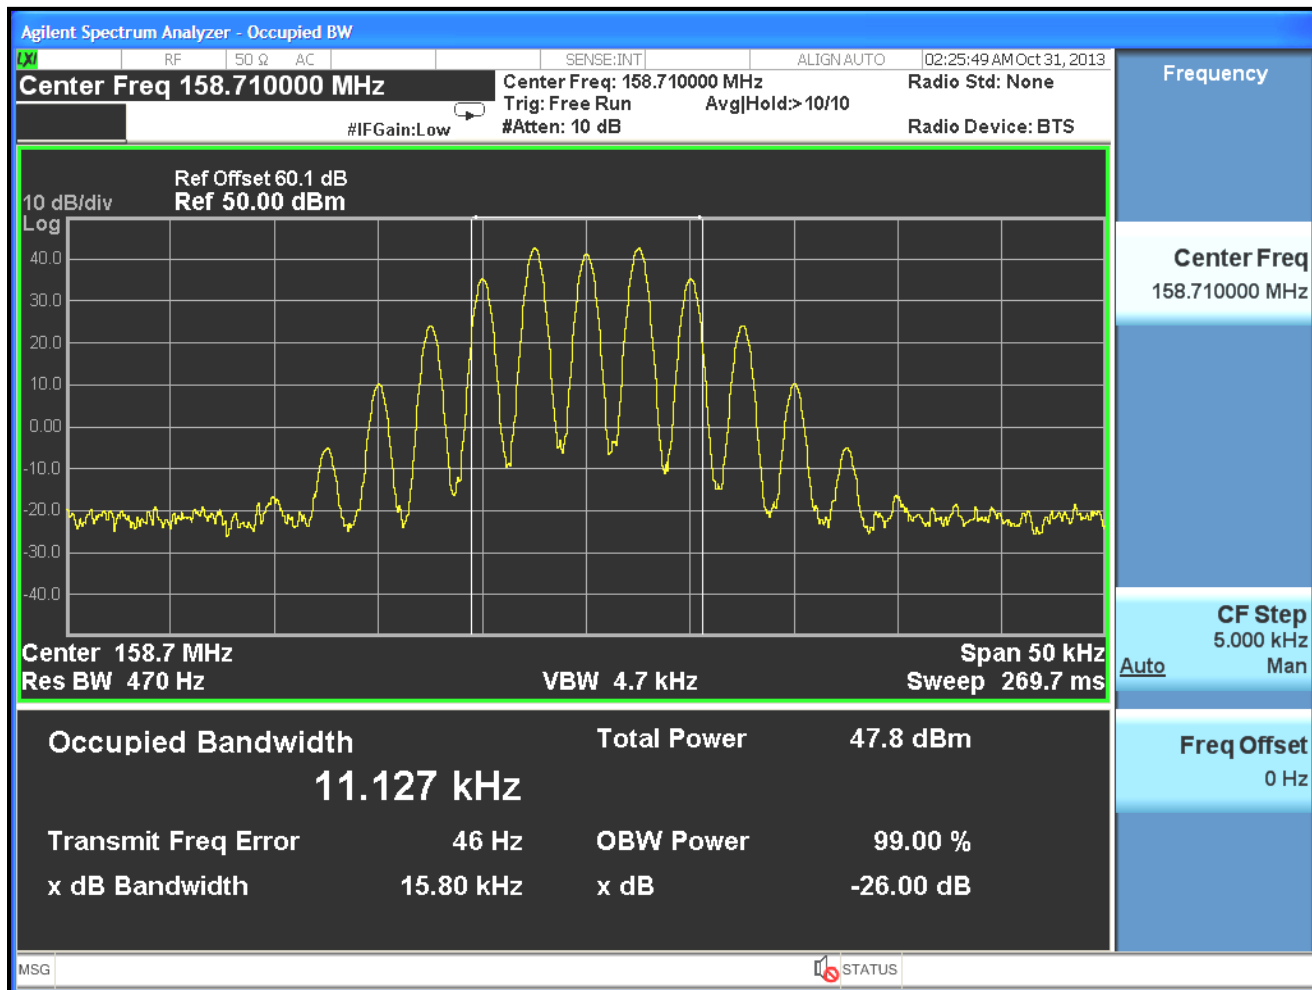


Plot 5-3: Occupied Bandwidth – 2 Level WB 9600 FSK

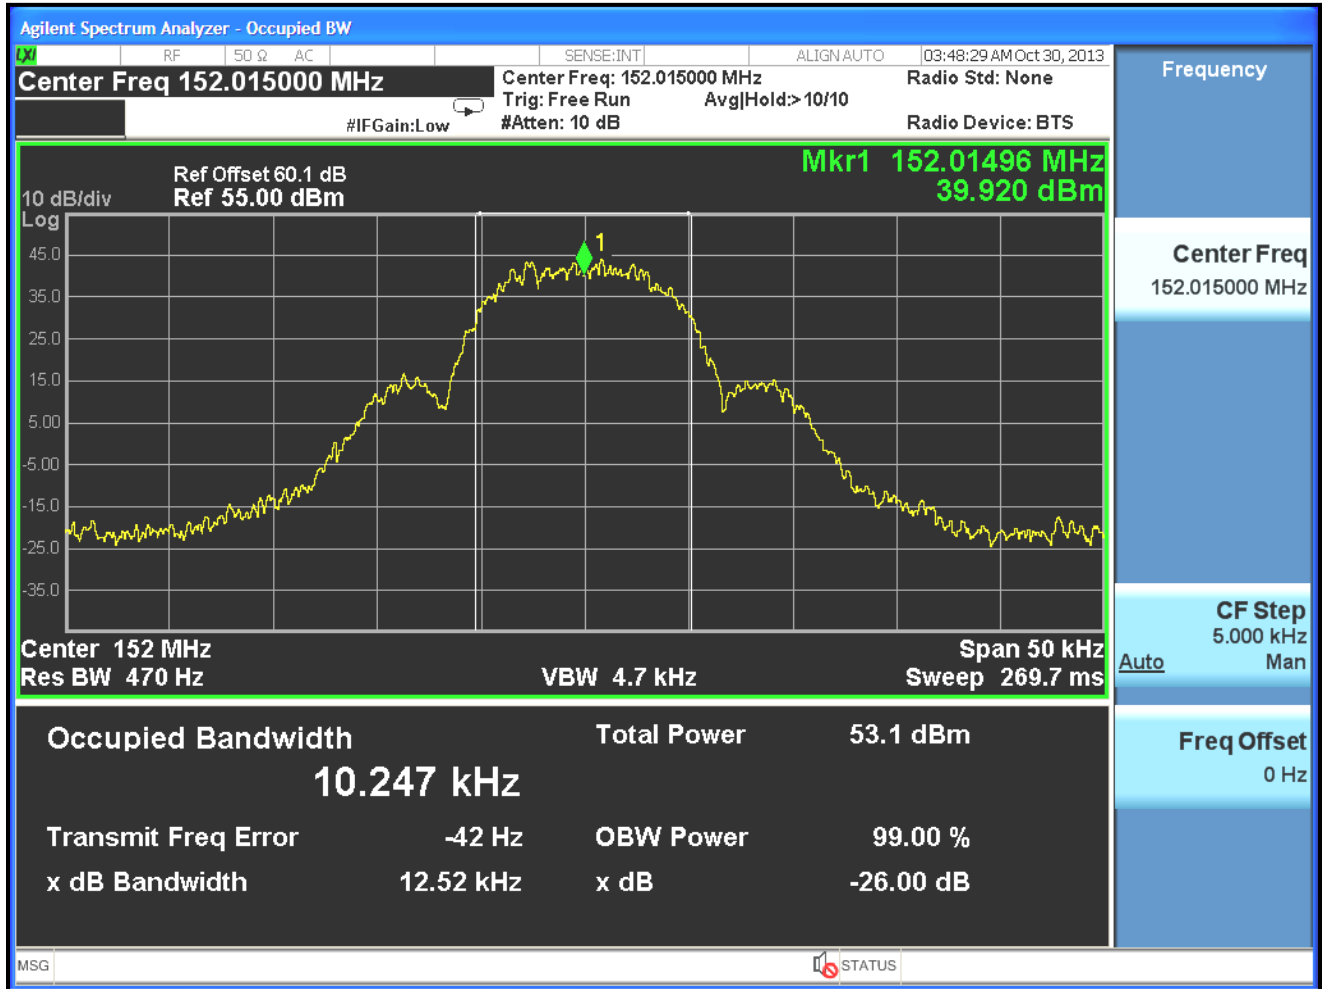


Plot 5-4: Occupied Bandwidth – 2 Level NB 9600 FSK

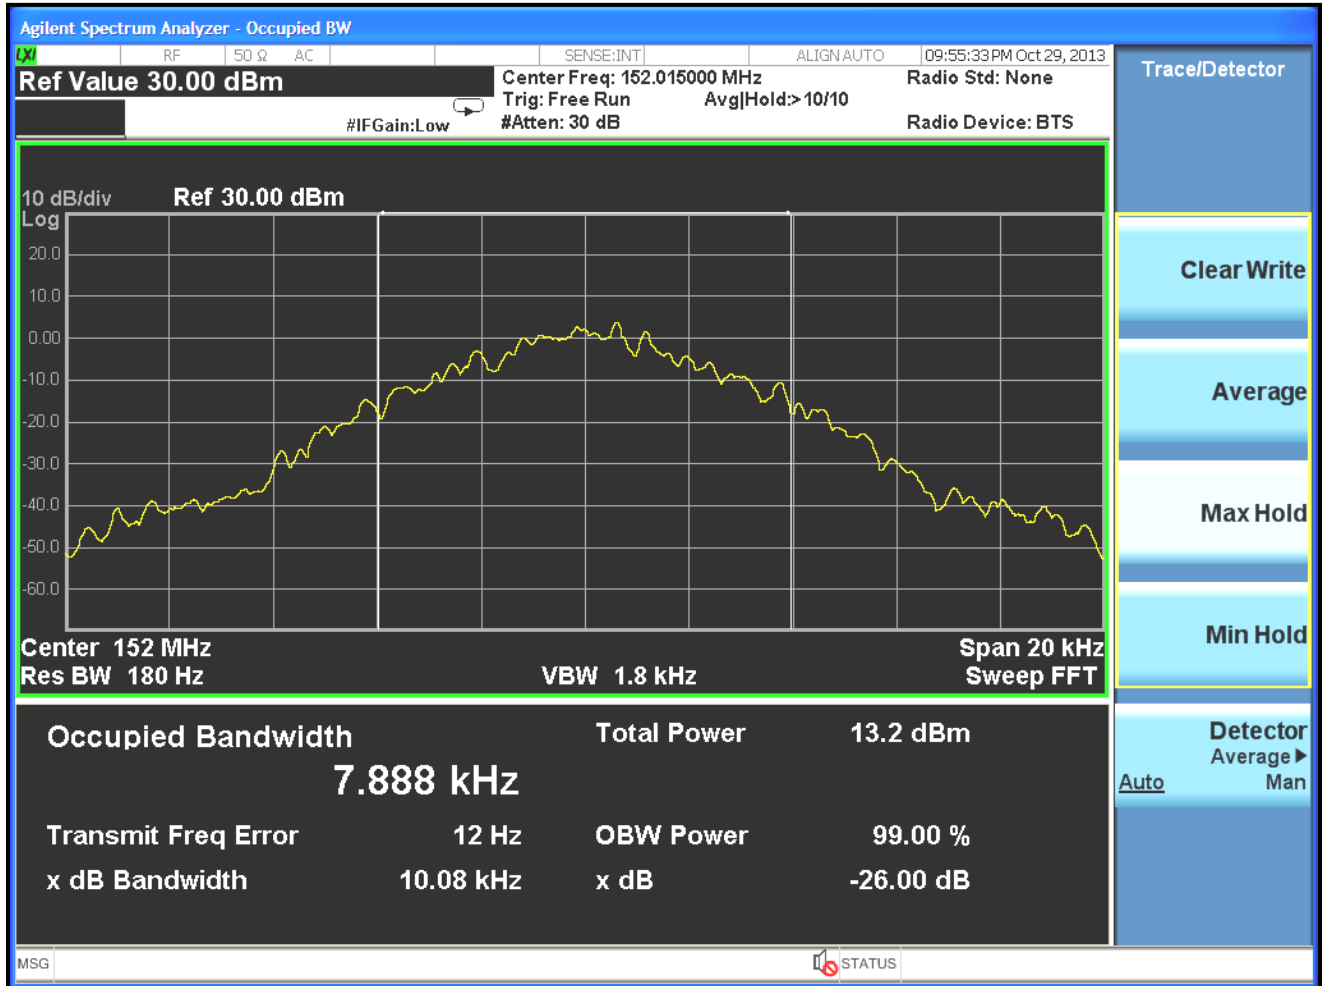


Plot 5-5: Occupied Bandwidth – 2 Level NB 4800 FSK

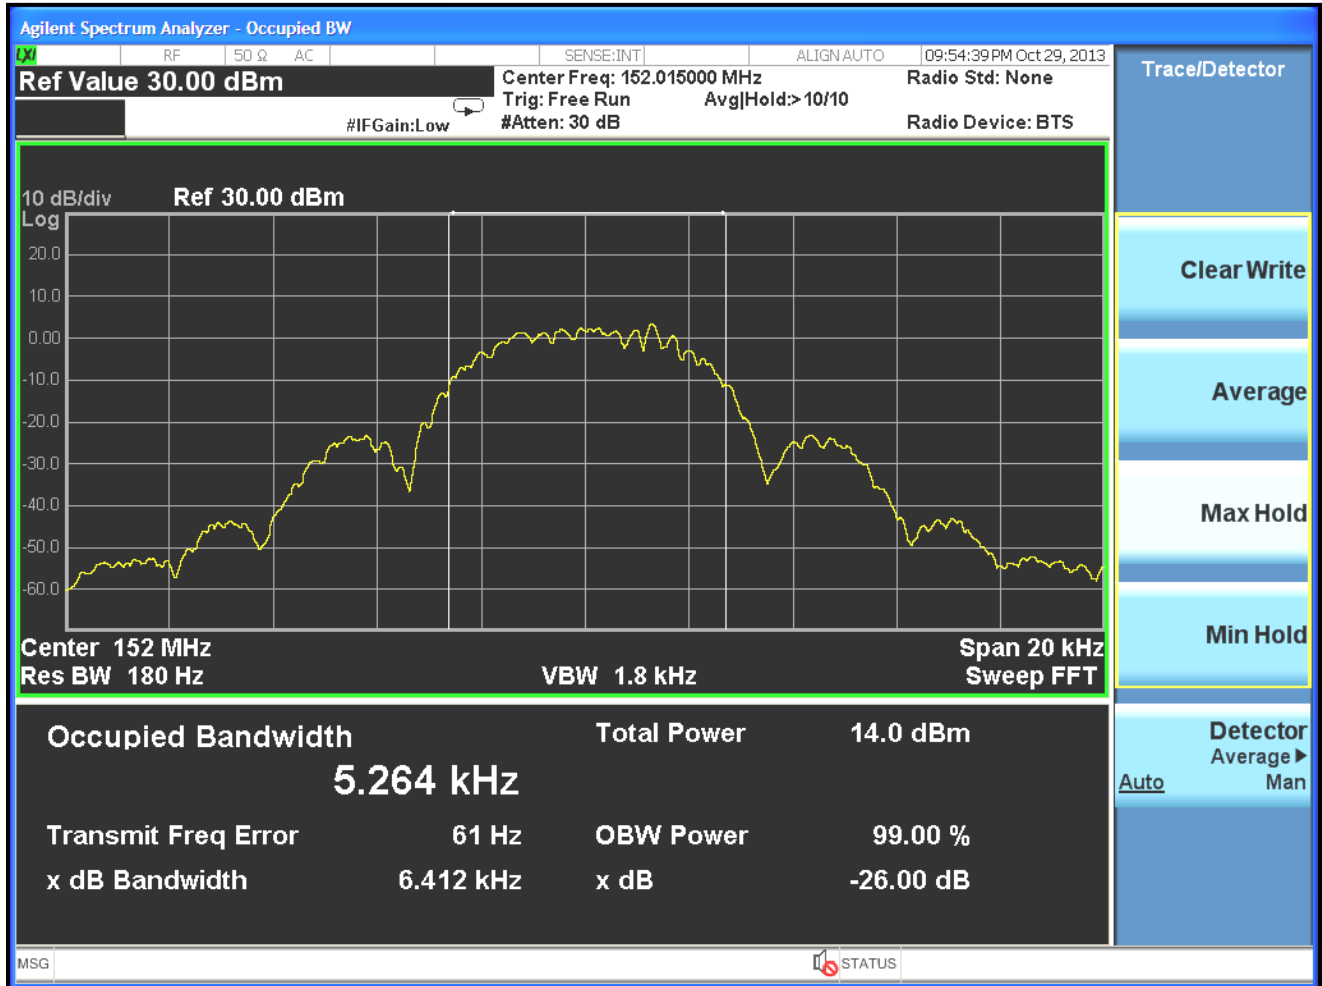


Plot 5-6: Occupied Bandwidth – P25

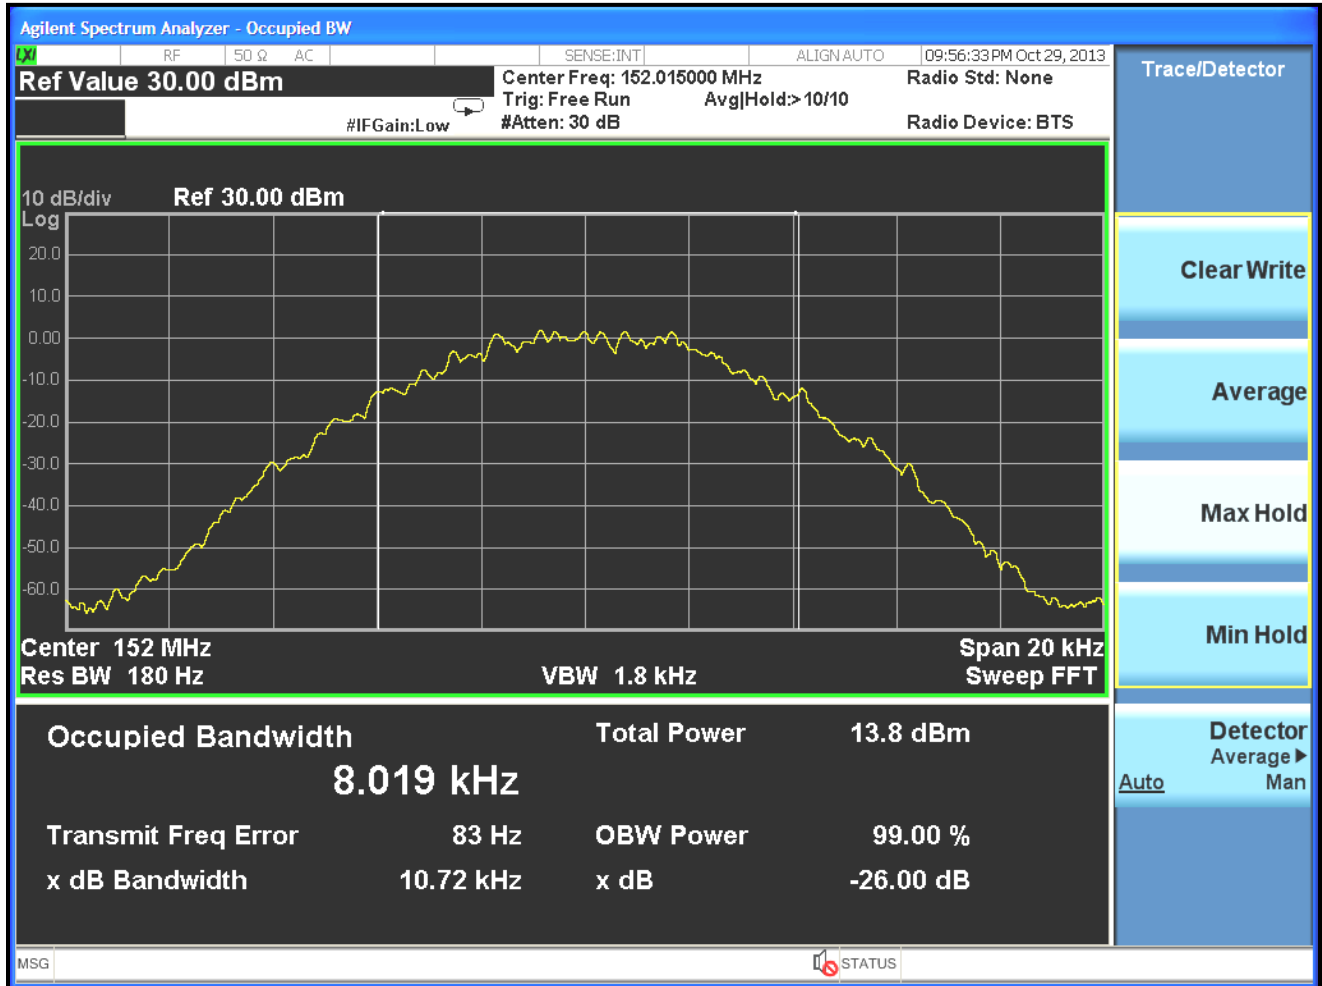


Plot 5-7: Occupied Bandwidth – 152.015 MHz; Mask; NB Analog Voice

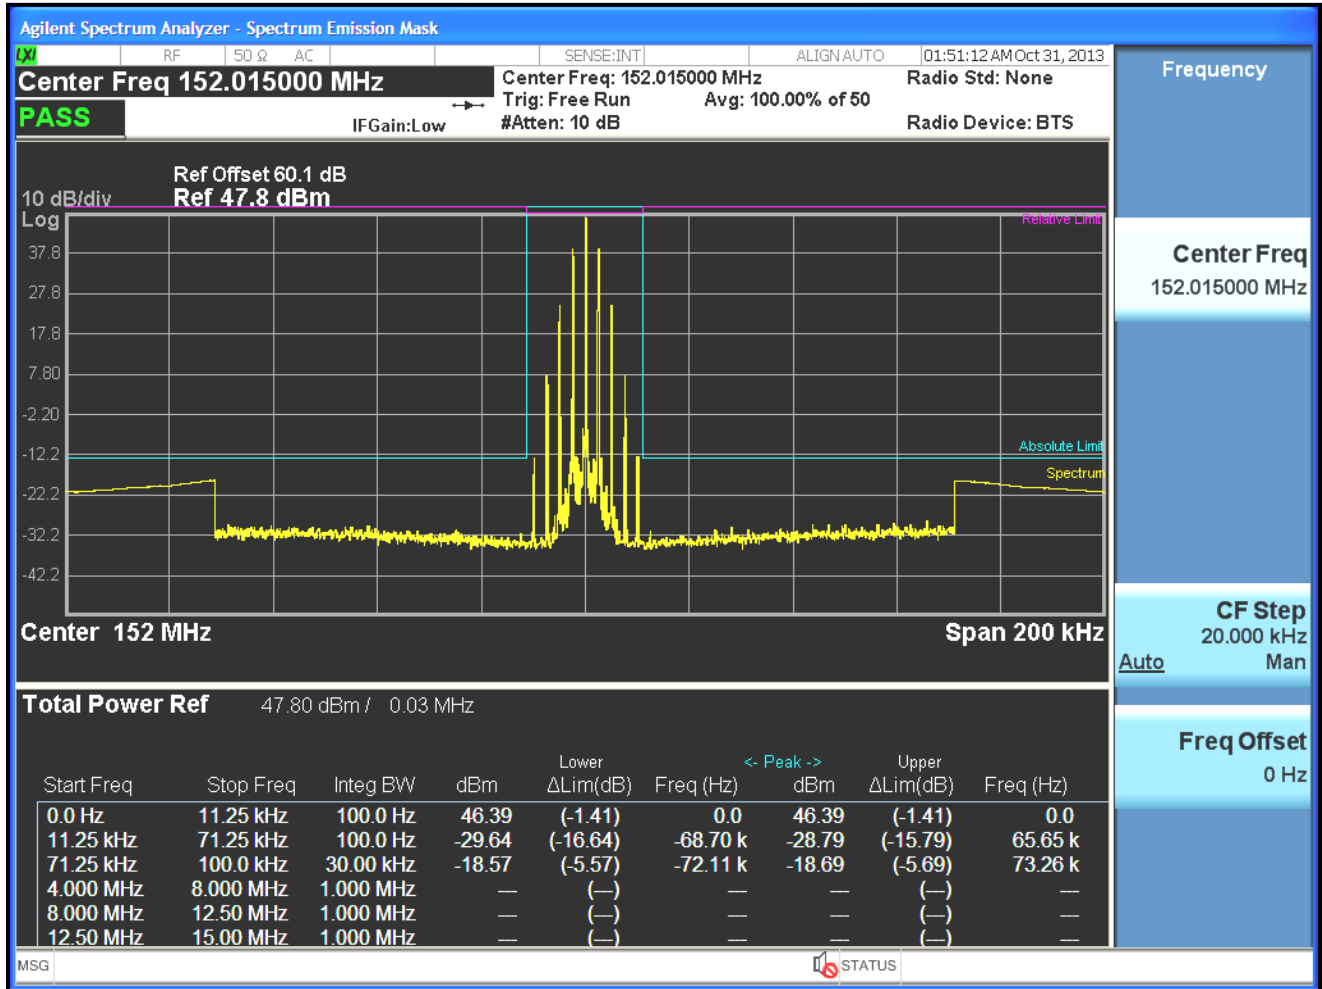


Plot 5-8: Occupied Bandwidth – 158.710 MHz; Mask; NB Analog Voice

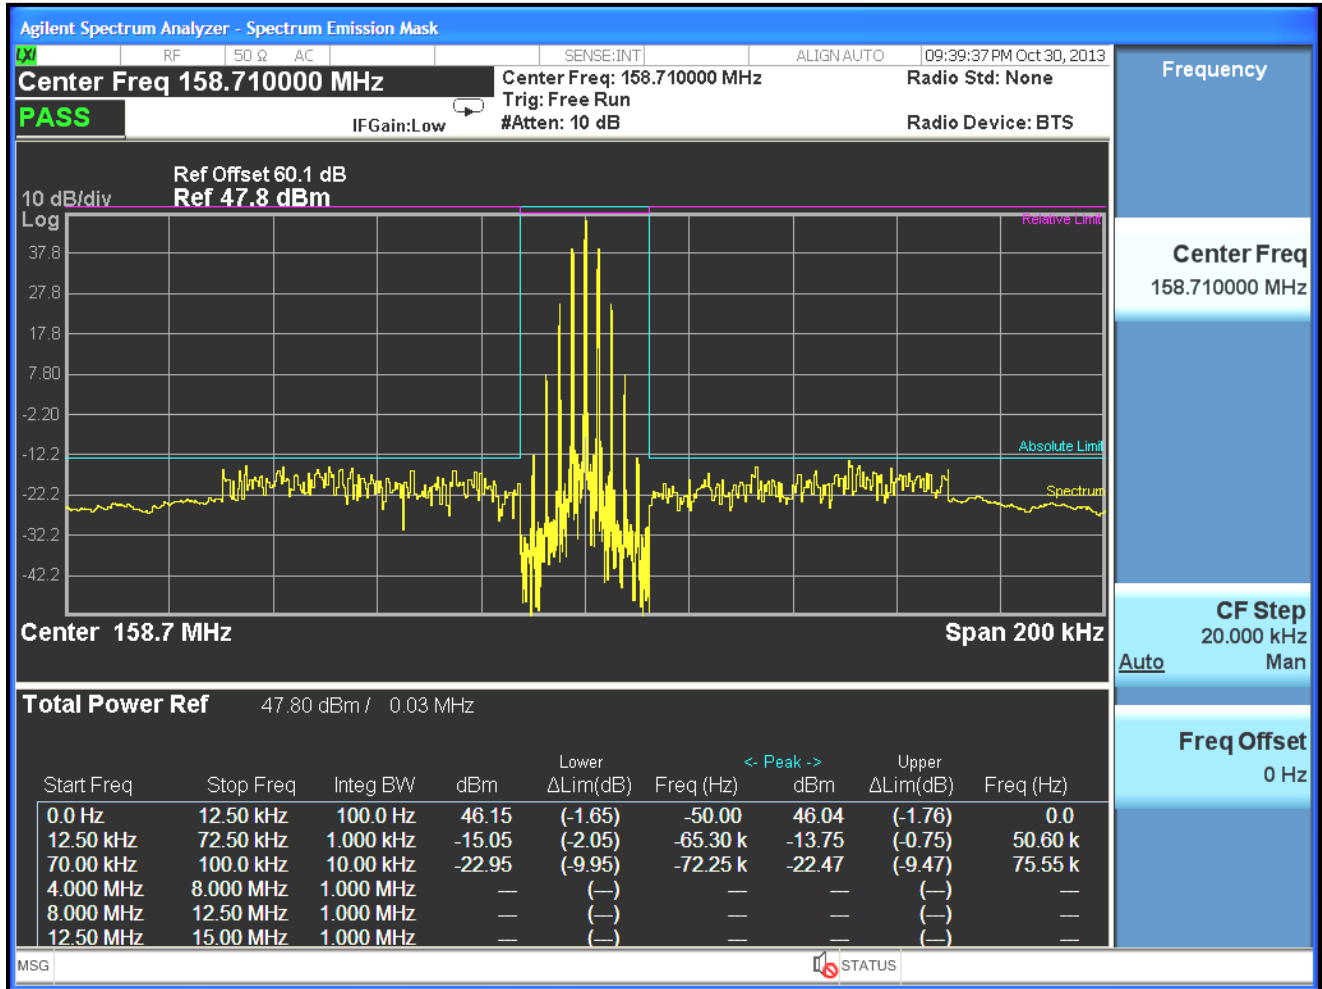


Plot 5-9: Occupied Bandwidth – 152.015 MHz; Mask; WB Analog Voice

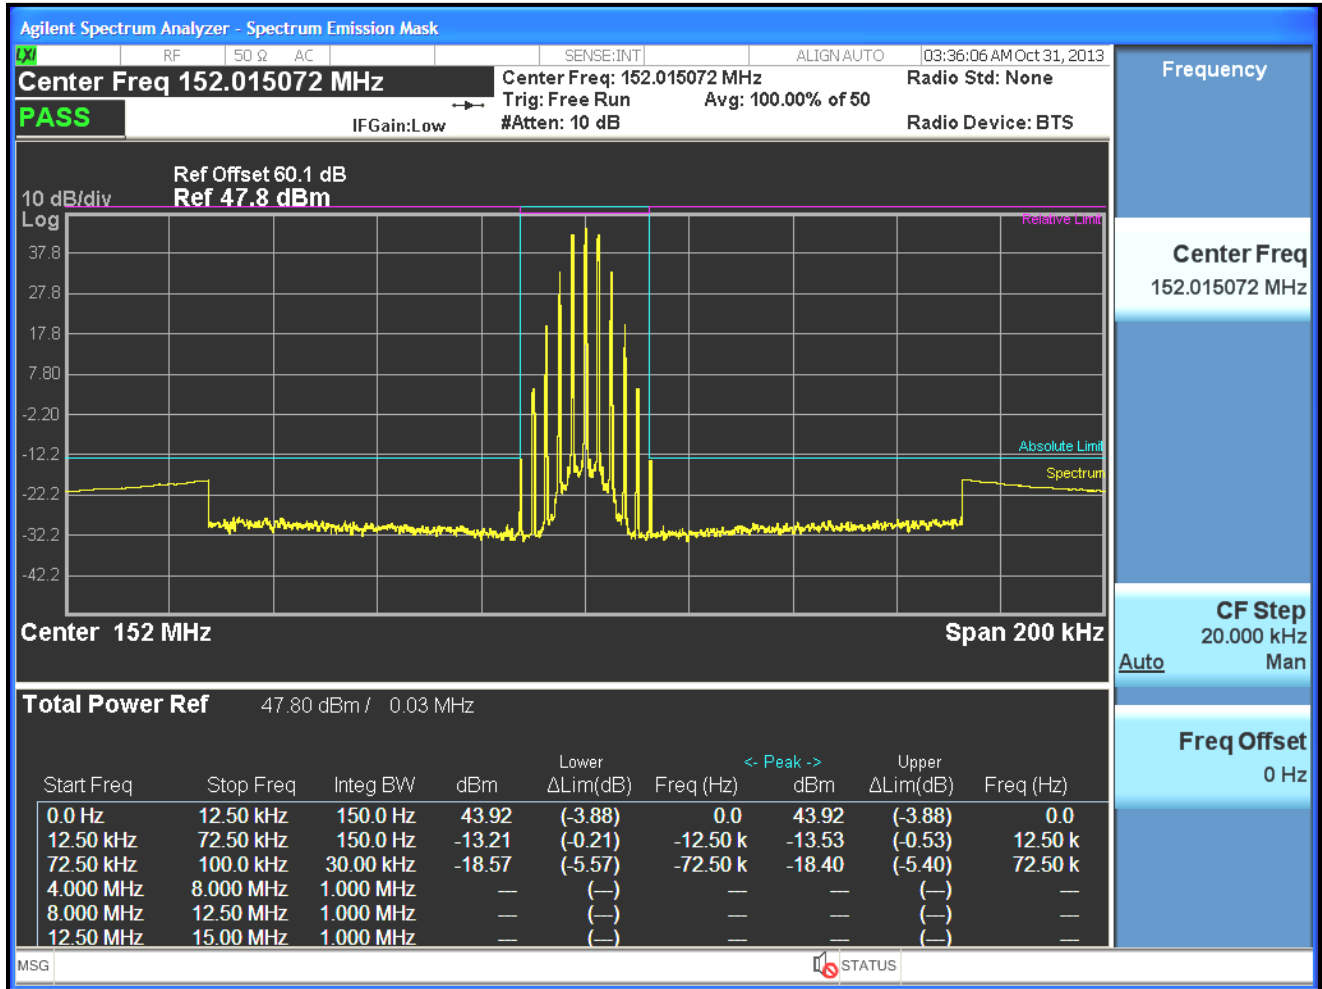


Plot 5-10: Occupied Bandwidth – 158.710 MHz; Mask; WB Analog Voice

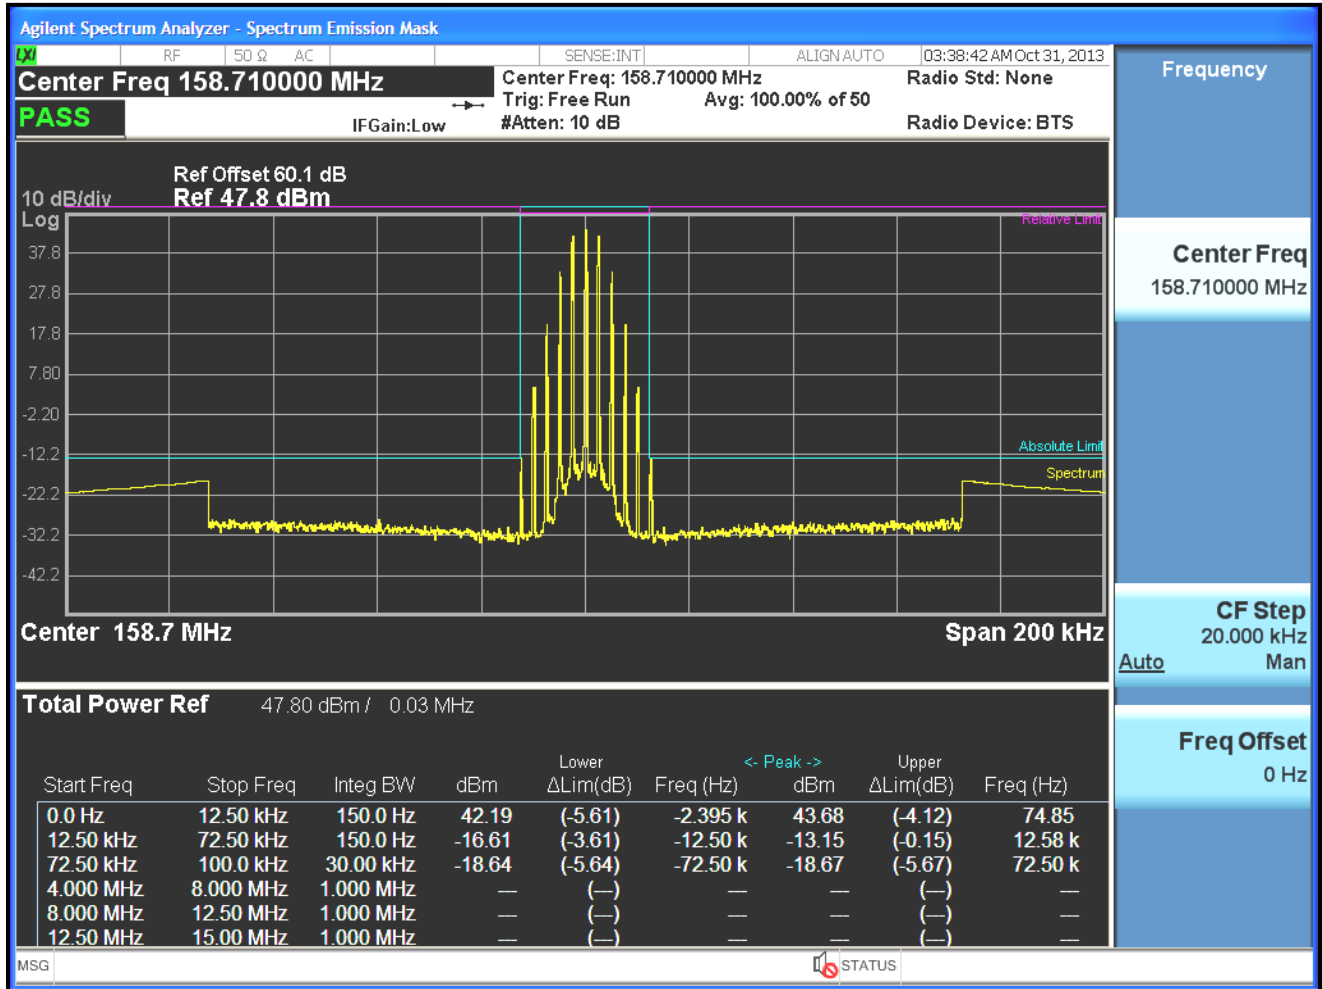


Plot 5-11: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 4800 FSK

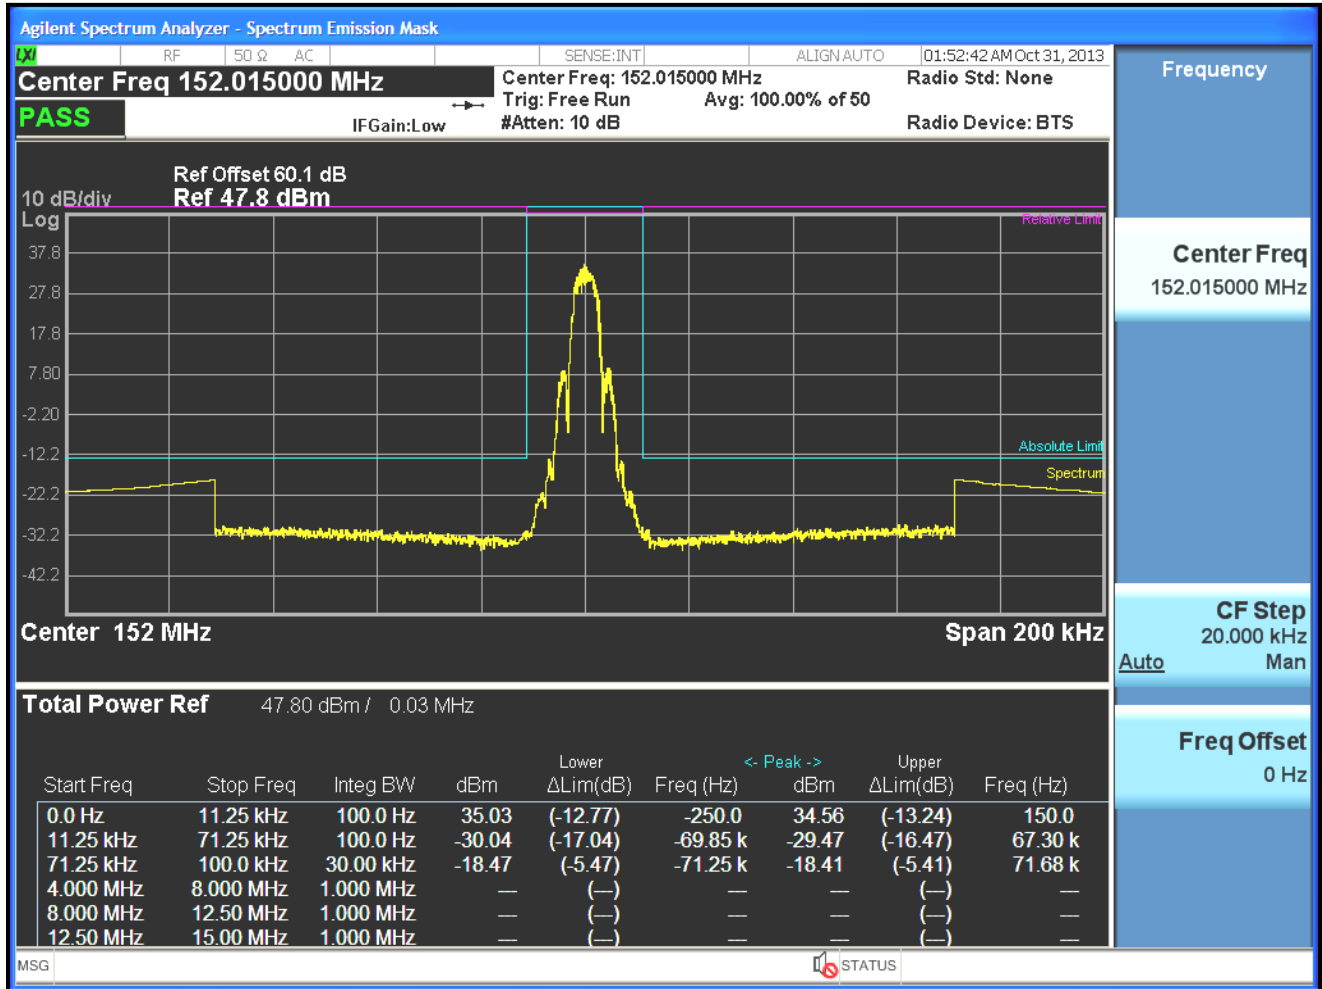


Plot 5-12: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 4800 FSK

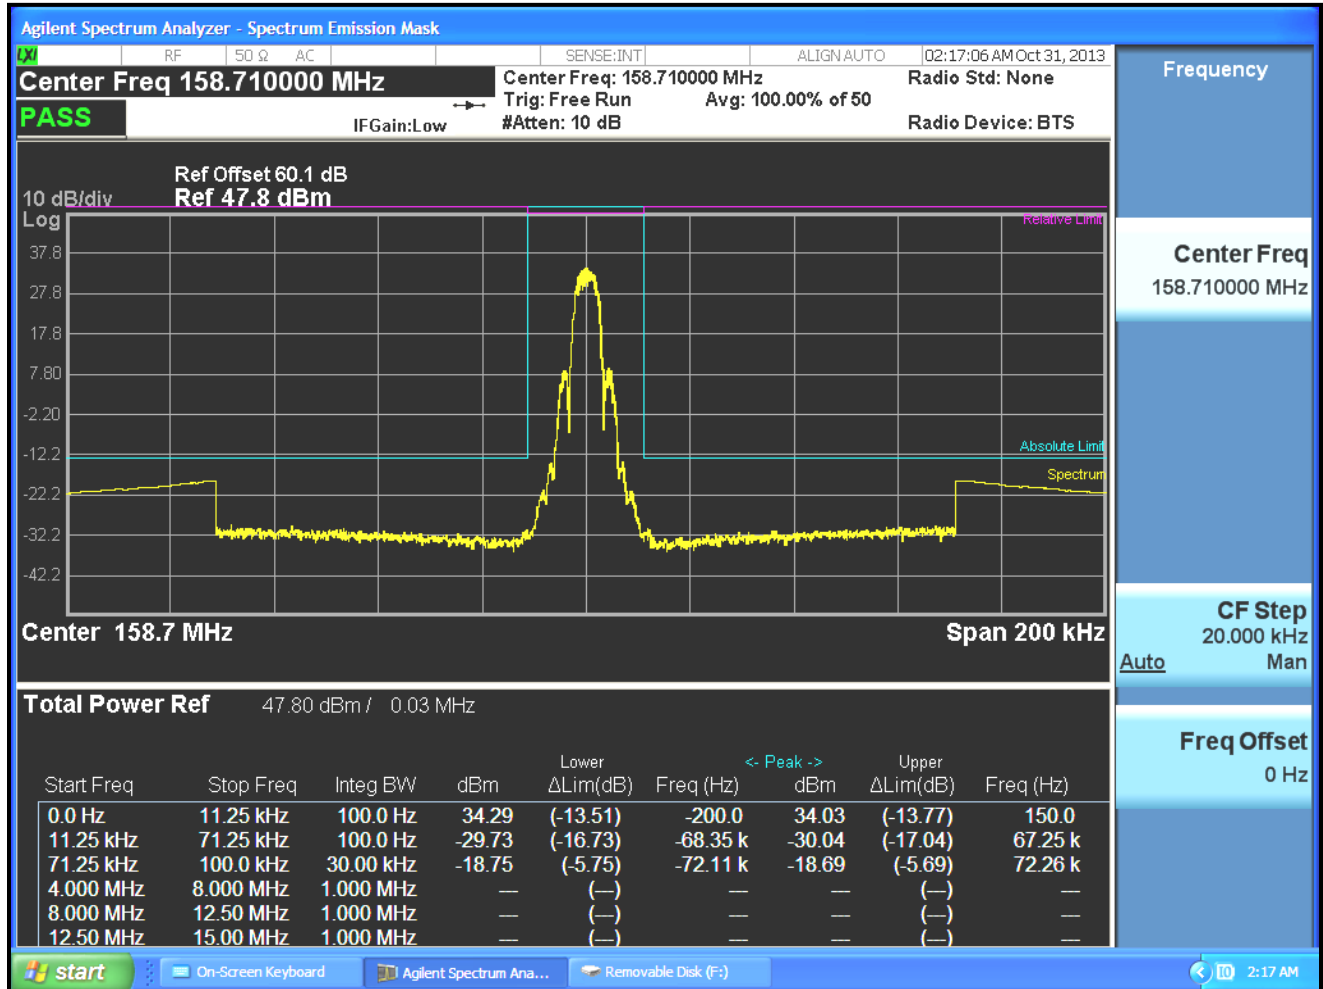


Plot 5-13: Occupied Bandwidth – 152.015 MHz; Mask; P25

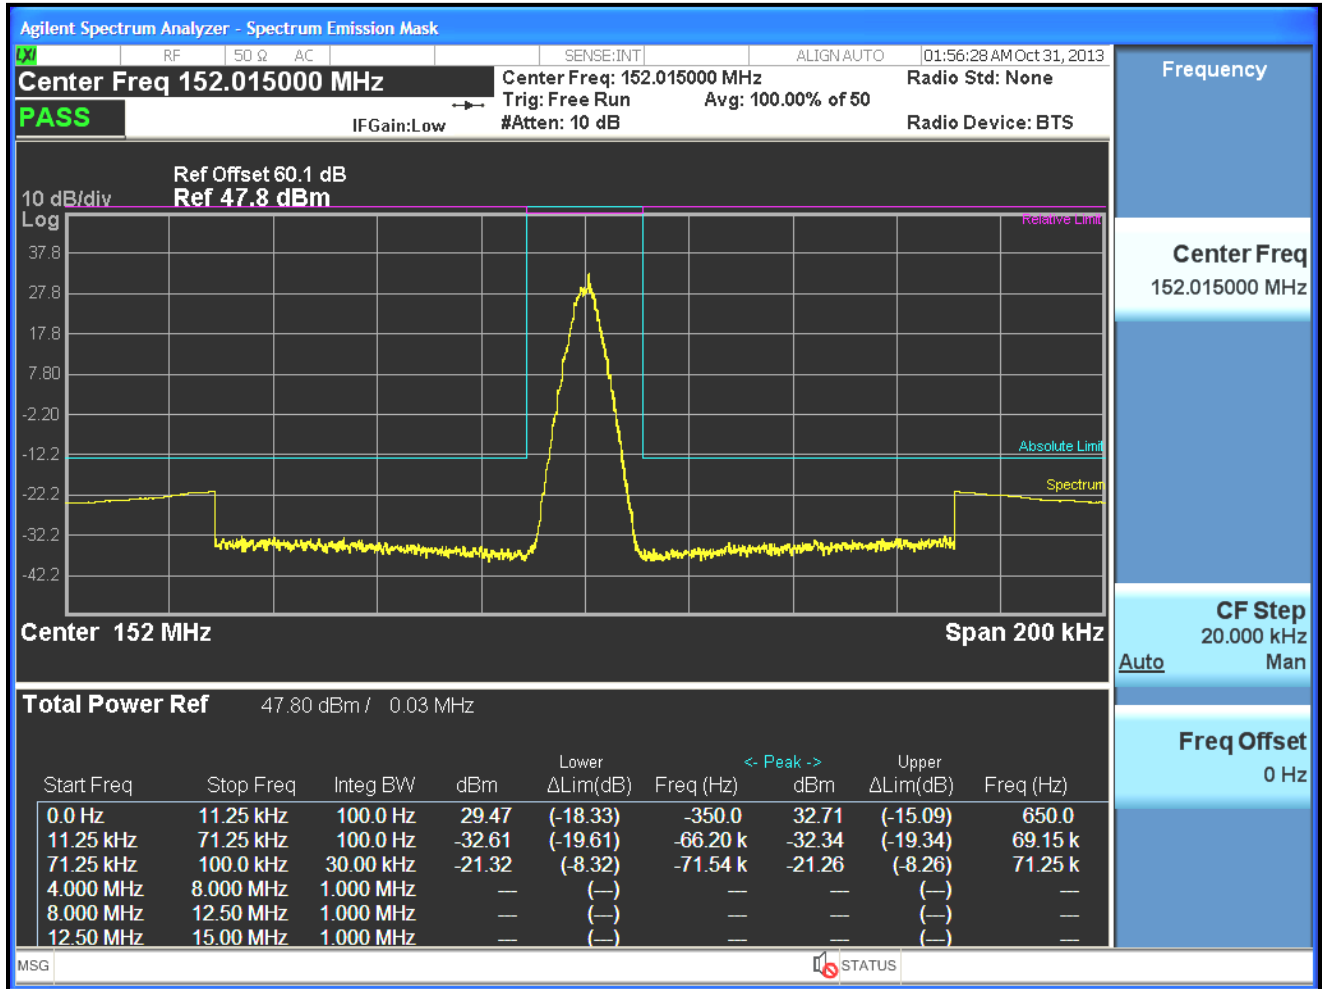


Plot 5-14: Occupied Bandwidth – 158.710 MHz; Mask; P25

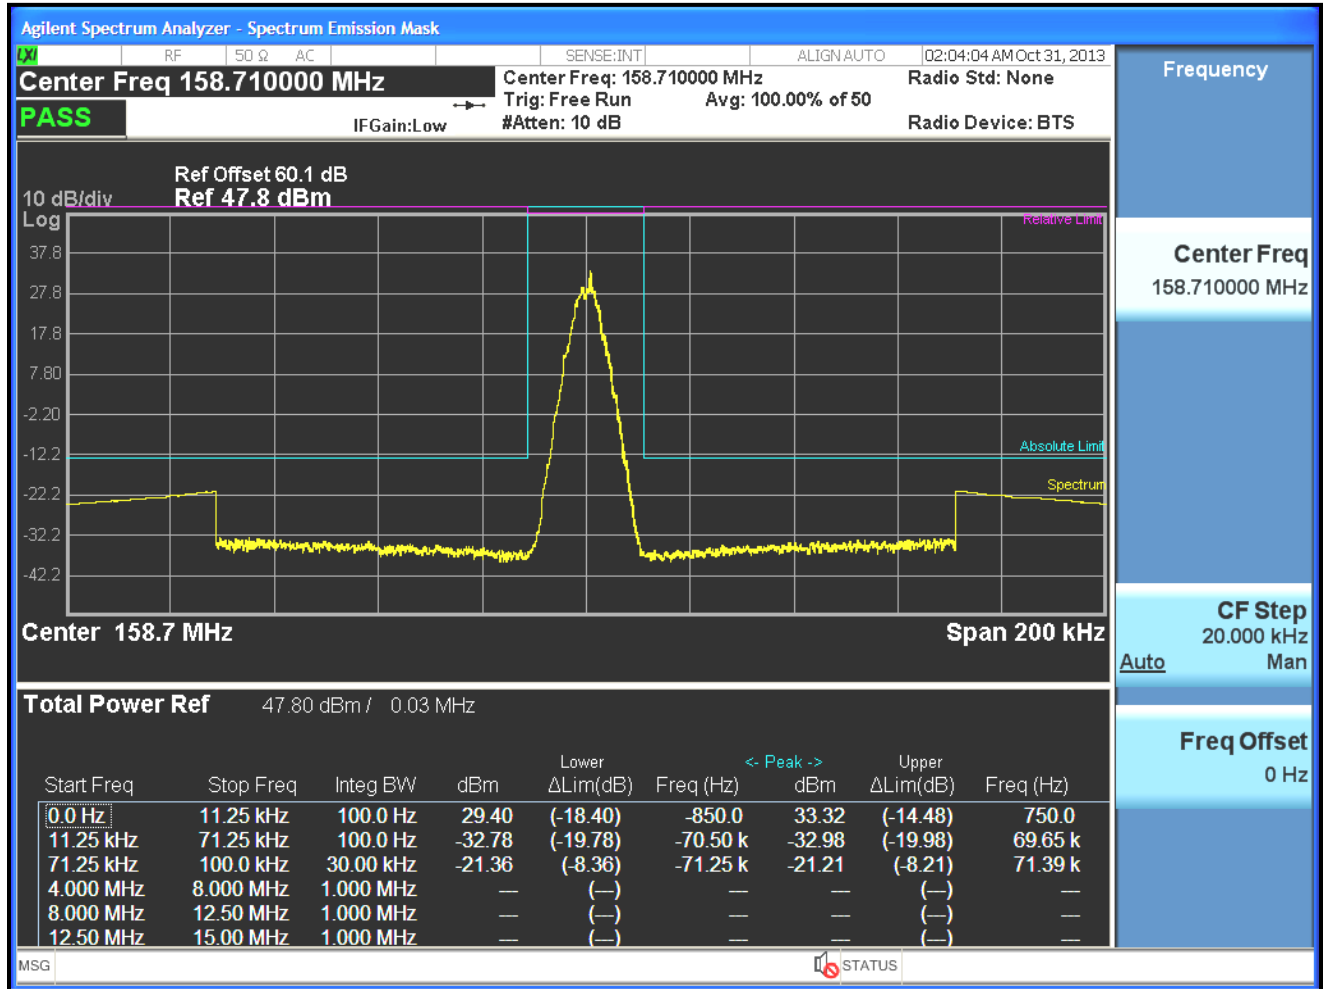


Plot 5-15: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 9600 FSK

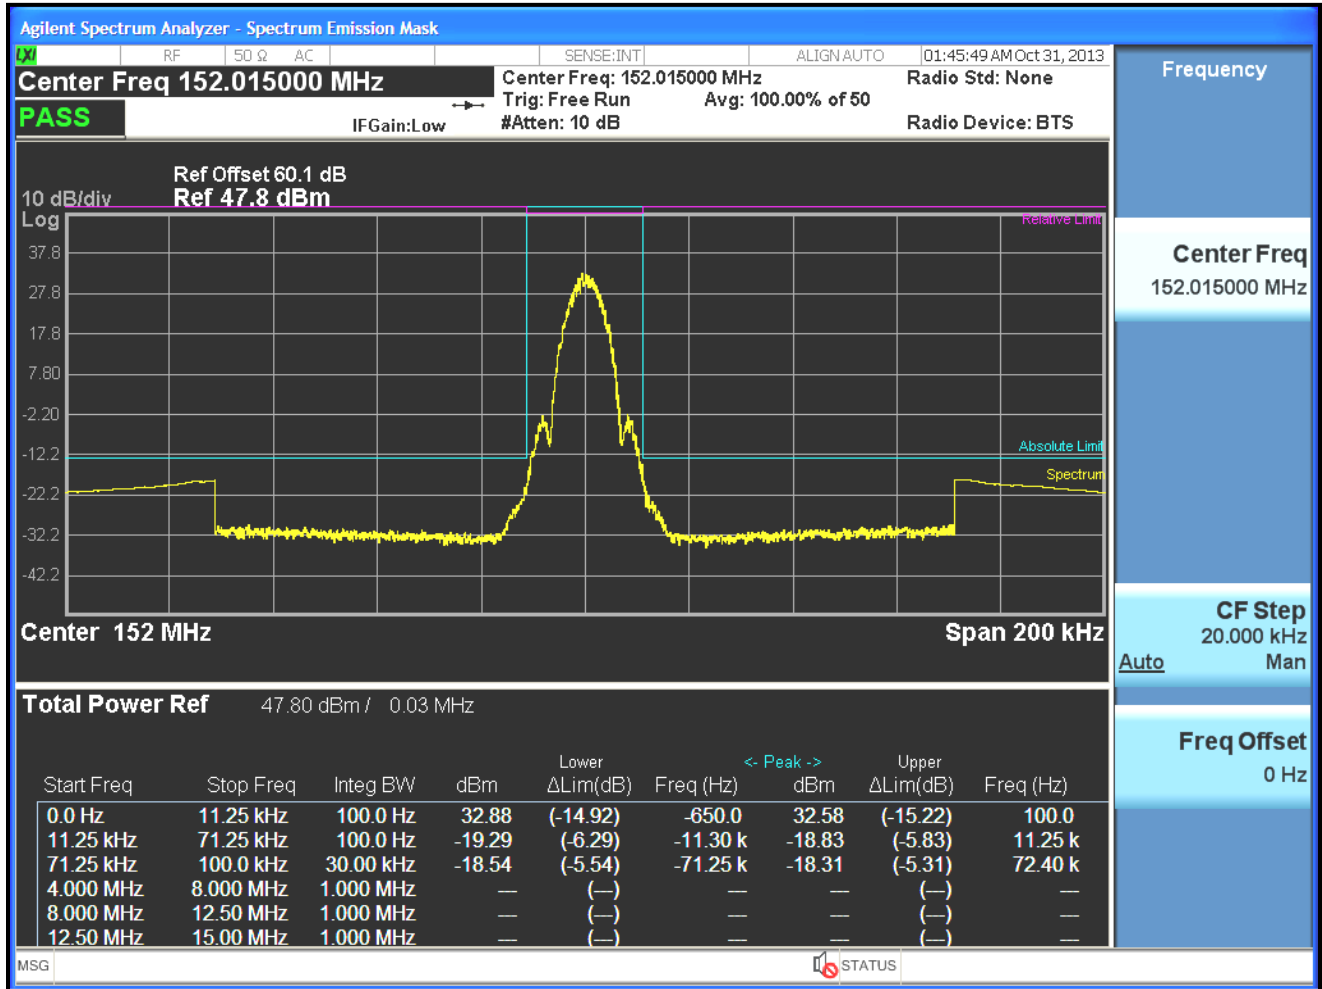


Plot 5-16: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 9600 FSK

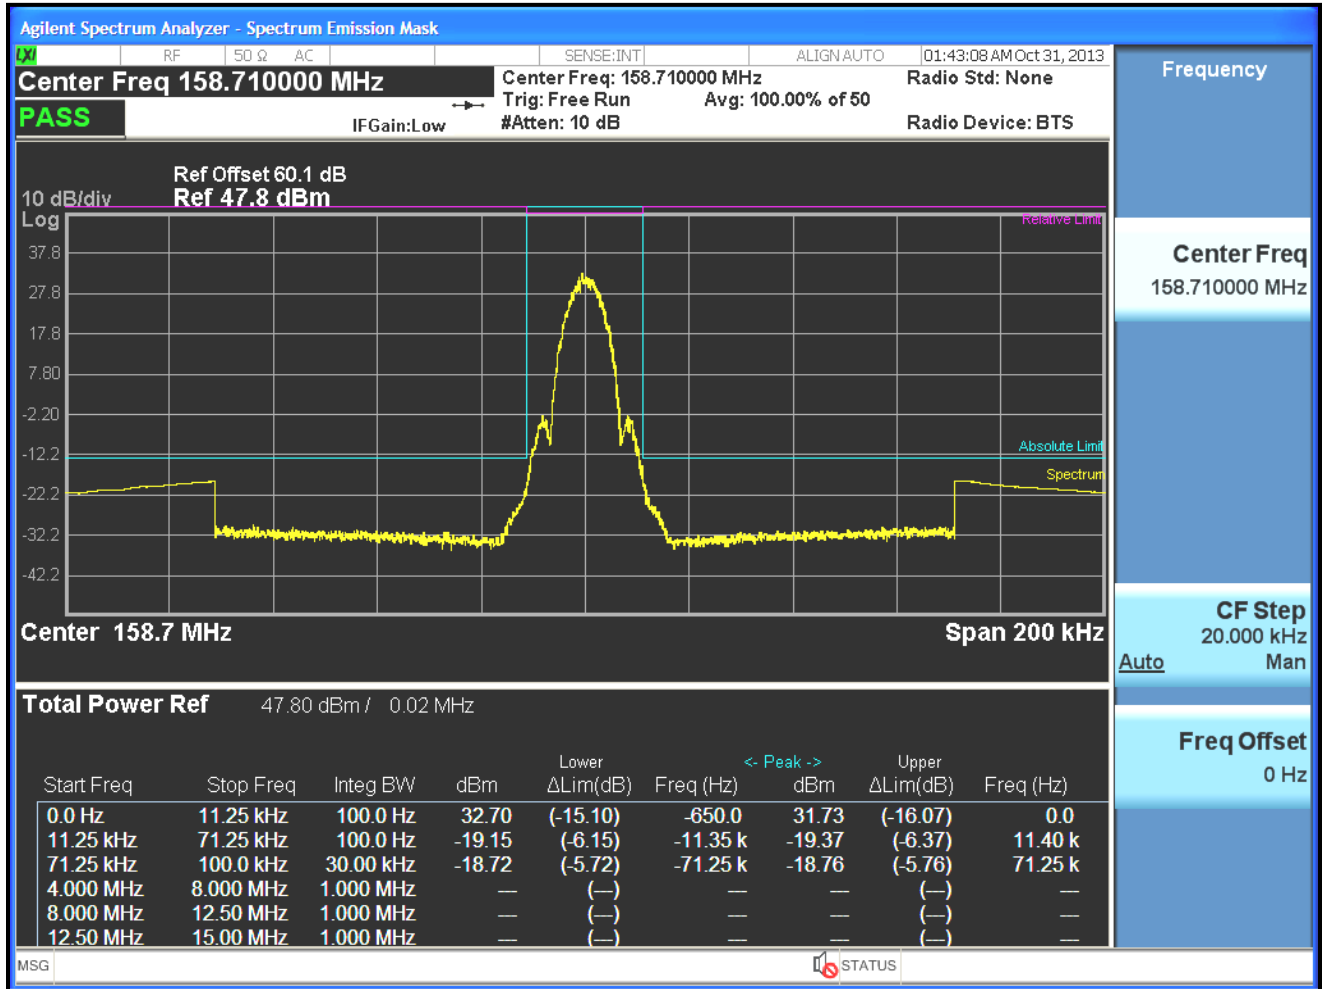

Plot 5-17: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level WB 9600 FSK

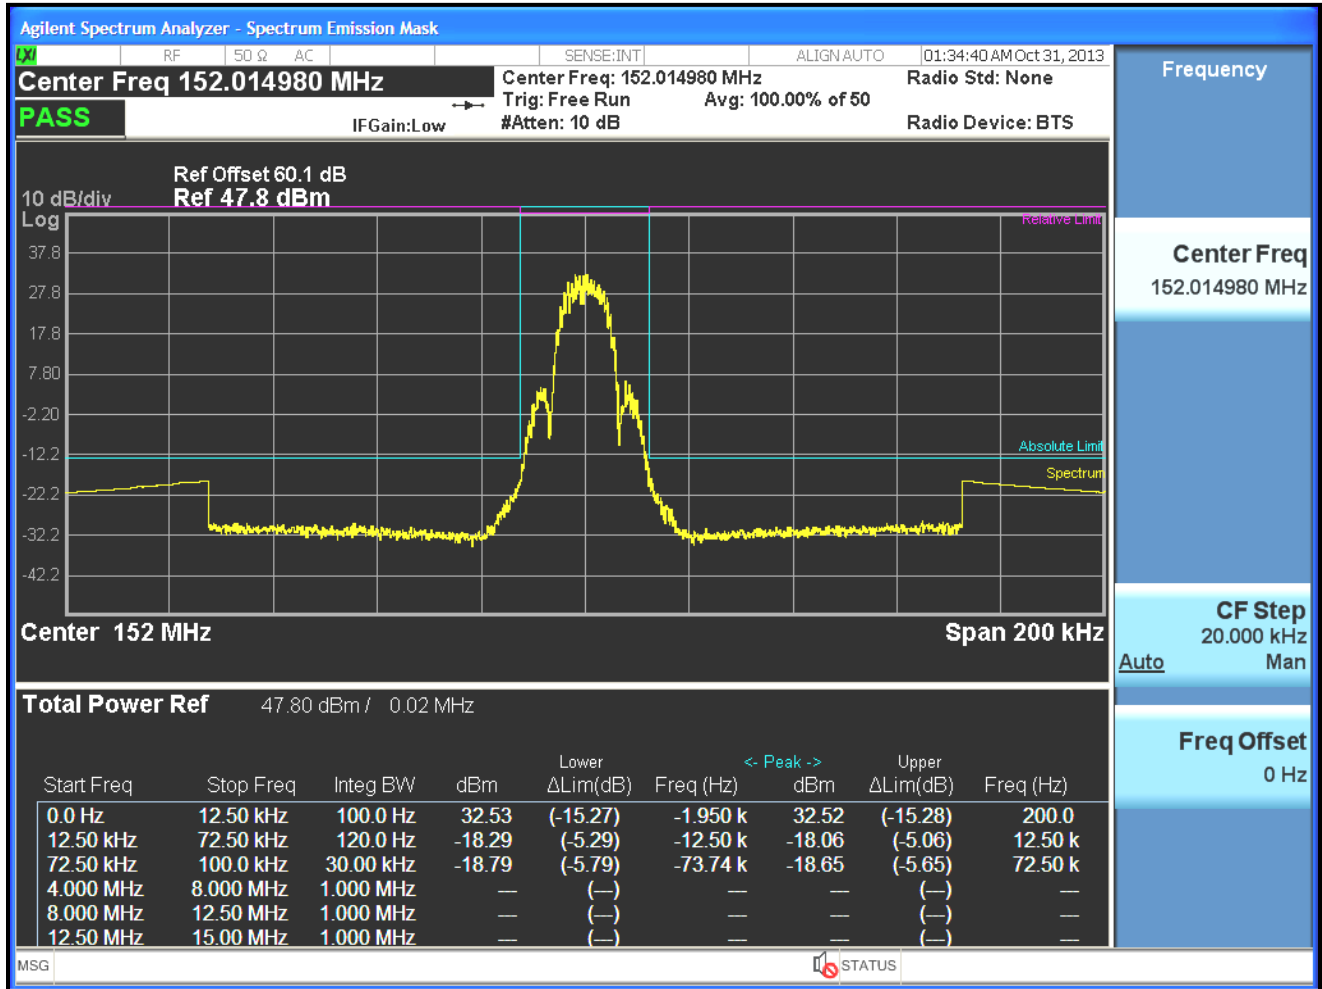

Plot 5-18: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level WB 9600 FSK

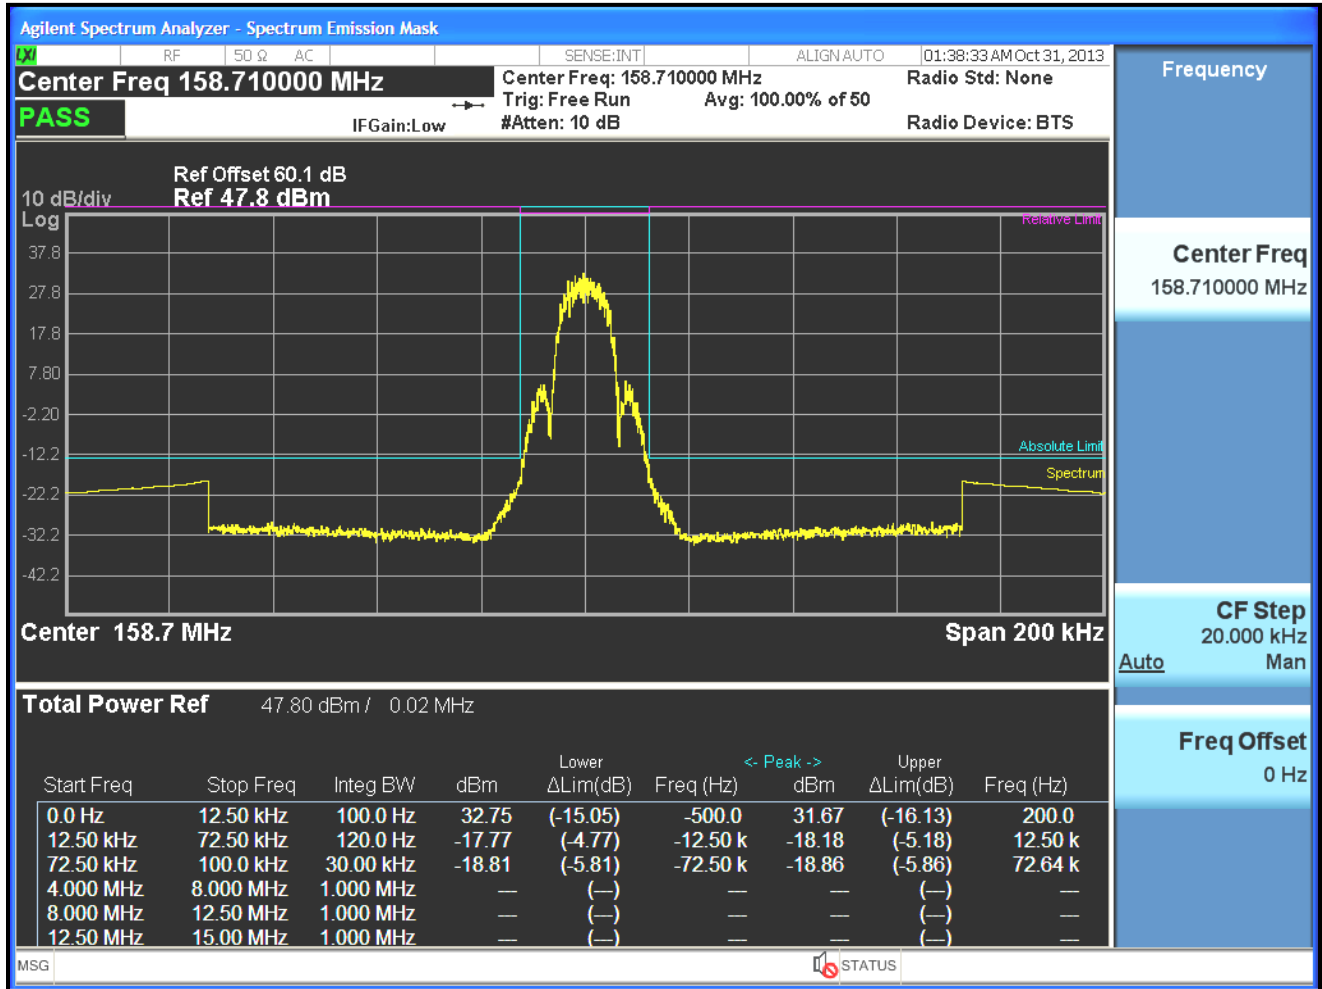

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>


Client: Harris Corporation
Model: M7100 VHF Mobile Radio
Standard: FCC Part 22
FCC ID: OWDTR-0035-E
Report #: 2013229

Table 5-1: Test Equipment Used for Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
901291	Pasternack	PE7031-20	300W Attenuator, DC - 1 GHz, 20 dB	NA	3/25/16
901536	Weinschel Corp.	48-40-34 DC-18GHz	Attenuator, 100W 40dB	BK5883	12/14/13

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

October 30, 2013
Date of Test

6 FCC 2.1053(a): Field Strength of Spurious Radiation; 22.359: Emissions Limitations

6.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 ohm load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

where: P_d is the dipole equivalent power; P_g is the generator output power into the substitution antenna

6.2 Test Data

Limit = 43 + 10 Log (P) dB or 70 dB, whichever is greater. The worst case emissions test data are shown

The EUT transmitting at high power was determined to be the worst case emissions level and is reported in the following tables.

Table 6-1: Field Strength of Spurious Radiation – 152.015 MHz

60.8 dBc = Limit

Frequency (MHz)	Measured Level (dBuv)	Signal Gen. Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Level (dBc)	Margin (dB)
304.030	54.0	-70.3	0.1	1.4	116.8	-56.0
456.045	58.9	-63.5	0.1	1.7	109.7	-48.9
608.060	56.2	-62.9	0.2	1.3	109.6	-48.8
760.075	53.0	-62.9	0.2	0.9	110.0	-49.2
912.090	53.6	-66.1	0.3	0.9	113.3	-52.5
1064.105	55.4	-61.0	0.2	3.0	106.0	-45.2
1216.120	47.9	-68.1	0.2	3.3	112.8	-52.0
1368.135	49.6	-66.0	0.2	4.6	109.4	-48.6
1520.150	45.9	-71.8	0.2	5.6	114.2	-53.4

Table 6-2: Field Strength of Spurious Radiation – 158.71 MHz

60.7 dBc = Limit


Frequency (MHz)	Measured Level (dBuv)	Signal Gen. Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Level (dBc)	Margin (dB)
317.420	61.5	-63.0	0.1	1.5	109.3	-48.6
476.130	57.8	-66.2	0.1	1.6	112.4	-51.7
634.840	52.6	-68.4	0.2	1.3	115.0	-54.3
793.550	54.8	-62.1	0.2	0.7	109.4	-48.6
952.260	54.2	-62.5	0.3	1.2	109.3	-48.6
1110.970	48.2	-68.1	0.2	2.9	113.1	-52.4
1269.680	50.6	-65.2	0.2	3.9	109.3	-48.5
1428.390	44.6	-73.4	0.2	4.9	116.4	-55.7
1587.100	46.3	-68.7	0.3	6.6	110.1	-49.4

Table 6-3: Test Equipment Used for Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	1/31/14
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz - 26.5 GHz)	MY51250846	4/16/14
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40dB (30 MHz – 2 GHz)	1006	8/20/14
901158	Compliance Design, Inc.	Roberts Dipole Antenna	Adjustable Elements Dipole (25 - 1000 MHz Antennas)	00401	3/6/14
901262	ETS	3160-9	Double ridged Guide Antenna (1 - 18 GHz)	6748	5/11/14
900928	Hewlett Packard	83752A	Synthesized Sweeper (0.01 - 20 GHz)	3610A00866	3/20/15
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/14
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/14
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/14

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

October 31, 2013
Date of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: M7100 VHF Mobile Radio
Standard: FCC Part 22
FCC ID: OWDTR-0035-E
Report #: 2013229

7 Conclusion

The data in this measurement report shows that the **Harris Corporation**. Model **M7100 VHF Mobile Radio**, **FCC ID: OWDTR-0035-E**, complies with all the applicable requirements of FCC Parts 22 and 2.