



Certification Report for M/A-COM MASTRIII UHF Base Station

FCC Part 90 & RSS-119

Document Number: KP000952-CR-RAD-01-01

Release Date: December 21, 2004

Prepared for: M/A-COM, Inc.
221 Jefferson Ridge Parkway
Lynchburg, Virginia
U.S.A., 24501

Author: Denis Lalonde
Radio Compliance Discipline Leader

Solectron EMS Canada Inc.
21 Richardson Side Road,
Kanata, Ontario, K2K 2C1
<http://www.solectrontechnicalctr.com/>

© Copyright Solectron EMS Canada Inc. December 21, 2004

The master of this document is stored on an electronic database and is “write-protected” and may be altered only by authorized persons at Solectron EMS Canada Inc. Viewing of the master document electronically ensures access to the current issue. Any hard copies must be regarded as uncontrolled copies.




Solectron EMS Canada Inc. accepts no liability for the content of this document except when it is reproduced in its entirety by a method acceptable to Solectron EMS Canada Inc.

Release Control Record

This document is based on CEI document template KG000347-TR-EMC-03.

Release no.	Reason for change	Date released
01	Original Release	December 21, 2004

Approvals

Function	Name	Job title	Signature
Document Release Approval	Simon Richardson	Project Manager	 DEC 22 2004
Author	Denis Lalonde	Radio Compliance Discipline Leader	 Dec. 21, 2004
Technical Reviewer	Jacques Rollin	EMC Advisor	 - Dec 21, 2004

Accreditations

Soletron EMS Canada test facilities are accredited by the Standards Council of Canada (SCC) in accordance with the scope of accreditation outlined at the following web site <http://www.scc.ca/scopes/reg126-eng-s.pdf>. [1]. The SCC is a member of the APLAC [16] and ILAC [17] organizations which, through mutual recognition arrangements, provide accreditation of test facilities in the member countries.



The Soletron Design and Engineering 10-meter Ambient Free Chamber (AFC) complies with the Industry Canada (IC) requirements for Test Facilities and Test Methods [18] under reference file number 4180. Through IC MRAs, EMC measurements are accepted in the following countries: USA, Australia, Singapore, Chinese Taipei (Taiwan), and the Republic of Korea. Further information can be found at the IC Certification and Engineering Bureau web site <http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/Home> under the "conformity assessment bodies" link.

The VCCI [15] lab registration numbers associated with our test facilities are: R-1641, C-1749, C-1750, T-148, and T-149.

Soletron EMS Canada is ISO 9001:2000 and ISO-IEC 17025 certified and its processes are documented in the Soletron EMS Canada Quality Manual [2] and Lab Operations Manual [3].

Table of Contents

RELEASE CONTROL RECORD.....	2
APPROVALS	2
ACCREDITATIONS	2
TABLE OF CONTENTS.....	3
LIST OF FIGURES	6
LIST OF TABLES	7
1. EXECUTIVE SUMMARY.....	9
2. COMPLIANCE SUMMARY.....	10
3. EQUIPMENT UNDER TEST (EUT)	11
3.1 PRODUCT FUNCTIONAL DESCRIPTION	11
3.2 MANUFACTURER INFORMATION.....	11
3.3 TRANSMITTER SPECIFICATIONS	11
3.4 SYSTEM COMPONENTS	12
3.5 SUPPORT EQUIPMENT	13
3.6 SYSTEM SET-UP AND TEST CONFIGURATIONS	13
3.7 EUT INTERFACES AND CABLES	14
3.8 SYSTEM MODIFICATIONS	14
4. GENERAL TEST CONDITIONS	15
4.1 TEST FACILITY	15
4.2 MEASUREMENT INSTRUMENTATION.....	15
5. DETAILED TEST RESULTS.....	16
5.1 RF POWER	16
5.1.1 Test Specification	16
5.1.1.1 Limits	16
5.1.2 Test Facility Information.....	16
5.1.3 Test Procedure	16
5.1.4 Test Results.....	16
5.1.5 Test Conclusion	17
5.1.6 Test Equipment List.....	17
5.2 CONDUCTED SPURIOUS EMISSIONS	17
5.2.1 Test Specification	17
5.2.1.1 Limits	17
5.2.2 Test Facility Information.....	18
5.2.3 Test Procedure	18
5.2.4 Test Results.....	18

5.2.5	Test Conclusion	18
5.2.6	Test Equipment List.....	18
5.3	EMISSION MASK.....	19
5.3.1	Test Specification	19
5.3.1.1	Limits	19
5.3.2	Test Facility Information.....	20
5.3.3	Test Procedure	20
5.3.4	Test Results.....	20
5.3.5	Test Conclusion	21
5.3.6	Test Equipment List.....	21
5.4	FIELD STRENGTH OF SPURIOUS EMISSIONS	21
5.4.1	Test Specification	21
5.4.1.1	Limits	22
5.4.2	Test Facility Information.....	22
5.4.3	Test Procedure	22
5.4.4	Test Results.....	23
5.4.5	Test Conclusion	24
5.4.6	Test Equipment List.....	24
5.5	FREQUENCY STABILITY.....	25
5.5.1	Test Specification	25
5.5.1.1	Limits	25
5.5.2	Test Facility Information.....	25
5.5.3	Test Procedure	25
5.5.4	Test Results.....	26
5.5.5	Test Conclusion	26
5.5.6	Test Equipment List.....	26
5.6	TRANSIENT FREQUENCY BEHAVIOR	27
5.6.1	Test Specification	27
5.6.1.1	Limits	27
5.6.2	Test Facility Information.....	28
5.6.3	Test Procedure	28
5.6.4	Test Results.....	28
5.6.5	Test Conclusion	28
5.6.6	Test Equipment List.....	28
5.7	AUDIO FREQUENCY RESPONSE.....	29
5.7.1	Test Specification	29
5.7.1.1	Limits	29
5.7.2	Test Facility Information.....	29
5.7.3	Test Procedure	30
5.7.4	Test Results.....	30
5.7.5	Test Conclusion	30
5.7.6	Test Equipment List.....	30

5.8	AUDIO LOW PASS FILTER RESPONSE.....	31
5.8.1	Test Specification	31
5.8.1.1	Limits	31
5.8.2	Test Facility Information.....	31
5.8.3	Test Procedure	32
5.8.4	Test Results.....	32
5.8.5	Test Conclusion	32
5.8.6	Test Equipment List.....	32
5.9	MODULATION LIMITING.....	33
5.9.1	Test Specification	33
5.9.1.1	Limits	33
5.9.2	Test Facility Information.....	33
5.9.3	Test Procedure	34
5.9.4	Test Results.....	34
5.9.5	Test Conclusion	36
5.9.6	Test Equipment List.....	36
5.10	OCCUPIED BANDWIDTH.....	37
5.10.1	Test Specification	37
5.10.2	Test Facility Information.....	37
5.10.3	Test Procedure	37
5.10.4	Test Results.....	38
5.10.5	Test Equipment List.....	39
5.11	RECEIVE ANTENNA PORT CONDUCTED EMISSIONS	39
5.11.1	Test Specification	39
5.11.1.1	Limits	39
5.11.2	Test Facility Information.....	39
5.11.3	Test Configurations	40
5.11.4	Test Procedure	40
5.11.5	Test Results.....	41
5.11.6	Test Conclusion	41
5.11.7	Test Equipment List.....	41
6.	REFERENCES	42
7.	APPENDICES	44
7.1	APPENDIX A: GLOSSARY	44
7.2	APPENDIX B: TEST SET-UP PHOTOGRAPHS	45
7.3	APPENDIX C: CONDUCTED SPURIOUS EMISSIONS PLOTS	46
7.4	APPENDIX D: EMISSION MASK PLOTS.....	50
7.5	APPENDIX E: FIELD STRENGTH OF SPURIOUS EMISSIONS PLOTS.....	53
7.6	APPENDIX F: TRANSIENT FREQUENCY BEHAVIOR PLOTS	61
7.7	APPENDIX G: OCCUPIED BANDWIDTH PLOTS.....	63
7.8	APPENDIX H: CONDUCTED RECEIVER EMISSIONS PLOTS	66

List of Figures

FIGURE 3-1 PRODUCT DESCRIPTION.....	11
FIGURE 3-2: MODULE CONFIGURATION.....	13
FIGURE 3-3: SYSTEM CONFIGURATION	14
FIGURE 5-1: AUDIO FREQUENCY RESPONSE RESULTS	30
FIGURE 5-2 AUDIO LOW PASS FILTER RESPONSE.....	32
FIGURE 5-3 MODULATION LIMITING, POSITIVE PEAK (25 KHZ CHANNEL)	34
FIGURE 5-4 MODULATION LIMITING, NEGATIVE PEAK (25 KHZ CHANNEL)	35
FIGURE 5-5 MODULATION LIMITING, POSITIVE PEAK (12.5 KHZ CHANNEL)	35
FIGURE 5-6 MODULATION LIMITING, NEGATIVE PEAK (12.5 KHZ CHANNEL)	36
FIGURE 5-7: RX ANTENNA PORT TEST METHOD	40
FIGURE 7-1: M/A-COM MASTRIII UHF BASE STATION RADIATED EMISSIONS SET-UP.....	45
FIGURE 7-2: TX AT 403.025 MHz, 100 W POWER, 30 MHz TO 800 MHz	46
FIGURE 7-3: TX AT 403.025 MHz, 100 W POWER, 800 MHz TO 5.12 GHz.....	46
FIGURE 7-4: TX AT 403.025 MHz , 10 W POWER, 30 MHz TO 800 MHz	47
FIGURE 7-5: TX AT 403.025 MHz , 10 W POWER, 800 MHz TO 5.12 GHz.....	47
FIGURE 7-6: TX AT 449.975 MHz, 100 W POWER, 30 MHz TO 800 MHz	48
FIGURE 7-7: TX AT 449.975 MHz, 100 W POWER, 800 MHz TO 5.12 GHz.....	48
FIGURE 7-8: TX AT 449.975 MHz , 10 W POWER, 30 MHz TO 800 MHz	49
FIGURE 7-9: TX AT 449.975 MHz , 10 W POWER, 800 MHz TO 5.12 GHz.....	49
FIGURE 7-10: 2500 HZ AUDIO SIGNAL WIDEBAND, 425.025 MHz	50
FIGURE 7-11: 2500 HZ AUDIO SIGNAL NARROWBAND, 425.025 MHz.....	50
FIGURE 7-12: 2 LEVEL 9600 BAUD SIGNAL WITH +/- 3 KHZ DEVIATION, 425.025 MHz.....	51
FIGURE 7-13: 2 LEVEL 9600 BAUD SIGNAL WITH +/- 1.9 KHZ DEVIATION, 425.025 MHz.....	51
FIGURE 7-14: C4FM / 9600 BITS/SECOND SIGNAL, 425.025 MHz	52
FIGURE 7-15: C4FM / 4800 BITS/SECOND SIGNAL, 425.025 MHz	52
FIGURE 7-16: FIELD STRENGTH WITH 100 W TX, 30 MHz TO 1 GHz (Tx AT 403.025 MHz)	53
FIGURE 7-17: FIELD STRENGTH WITH 100 W TX, 1 GHz TO 5.12 GHz, LOW FREQUENCY SPLIT (Tx AT 403.025 MHz)	54
FIGURE 7-18: FIELD STRENGTH WITH 10 W TX, 30 MHz TO 1 GHz (Tx AT 403.025 MHz)	55
FIGURE 7-19: FIELD STRENGTH WITH 10 W TX, 1 GHz TO 5.12 GHz, (Tx AT 403.025 MHz)	56
FIGURE 7-20: FIELD STRENGTH WITH 100 W TX, 30 MHz TO 1 GHz (Tx AT 449.975 MHz)	57
FIGURE 7-21: FIELD STRENGTH WITH 100 W TX, 1 GHz TO 5.12 GHz, (Tx AT 449.975 MHz) ...	58

FIGURE 7-22: FIELD STRENGTH WITH 10 W TX, 30 MHz TO 1 GHz (TX AT 449.975 MHz)	59
FIGURE 7-23: FIELD STRENGTH WITH 10 W TX, 1 GHz TO 5.12 GHz, (TX AT 449.975 MHz)	60
FIGURE 7-24 TRANSIENT FREQUENCY BEHAVIOR, TX AT 425.025 MHz, WIDEBAND, TRANSMITTER ON	61
FIGURE 7-25 TRANSIENT FREQUENCY BEHAVIOR, TX AT 425.025 MHz, WIDEBAND, TRANSMITTER OFF	61
FIGURE 7-26 TRANSIENT FREQUENCY BEHAVIOR, TX AT 425.025 MHz, NARROWBAND, TRANSMITTER ON	62
FIGURE 7-27 TRANSIENT FREQUENCY BEHAVIOR, TX AT 425.025 MHz, NARROWBAND, TRANSMITTER OFF	62
FIGURE 7-28: 2500 HZ AUDIO SIGNAL WIDEBAND, 425.025 MHz	63
FIGURE 7-29: 2500 HZ AUDIO SIGNAL NARROWBAND, 425.025 MHz	63
FIGURE 7-30: 2 LEVEL 9600 BAUD SIGNAL WITH +/- 3 KHz DEVIATION, 425.025 MHz	64
FIGURE 7-31: 2 LEVEL 9600 BAUD SIGNAL WITH +/- 1.9 KHz DEVIATION, 425.025 MHz	64
FIGURE 7-32: C4FM / 9600 BITS/SEC SIGNAL, 425.025 MHz	65
FIGURE 7-33: C4FM / 4800 BITS/SEC SIGNAL, 425.025 MHz	65
FIGURE 7-34: RX AT 423.975 MHz, 30 MHz TO 1GHz	66
FIGURE 7-35: RX AT 423.975 MHz, 1 GHz TO 2.56 GHz	66

List of Tables

TABLE 2-1: COMPLIANCE RESULTS SUMMARY	10
TABLE 3-1: TRANSMITTER SPECIFICATIONS	12
TABLE 3-2: MASTRIII UHF BTS COMPONENTS	12
TABLE 3-3: SUPPORT EQUIPMENT	13
TABLE 3-4: SYSTEM CABLES	14
TABLE 5-1: RF POWER REQUIREMENTS	16
TABLE 5-2: RF POWER LIMIT	16
TABLE 5-3: RF POWER LEVELS	17
TABLE 5-4: TEST EQUIPMENT USED FOR RF POWER	17
TABLE 5-5: CONDUCTED SPURIOUS EMISSIONS REQUIREMENT	17
TABLE 5-6: CONDUCTED SPURIOUS EMISSION LIMIT	18
TABLE 5-7: CONDUCTED SPURIOUS EMISSIONS	18
TABLE 5-8: TEST EQUIPMENT USED FOR CONDUCTED SPURIOUS EMISSIONS	19
TABLE 5-9: EMISSION MASK REQUIREMENT	19
TABLE 5-10: EMISSION MASK LIMITS	19

TABLE 5-11: EMISSION MASK RESULTS.....	21
TABLE 5-12: TEST EQUIPMENT USED FOR EMISSION MASK	21
TABLE 5-13: FIELD STRENGTH OF SPURIOUS EMISSIONS REQUIREMENT	21
TABLE 5-14: FIELD STRENGTH OF SPURIOUS EMISSIONS LIMIT	22
TABLE 5-15: FIELD STRENGTH OF SPURIOUS EMISSIONS	23
TABLE 5-16: TEST EQUIPMENT USED FOR FIELD STRENGTH OF SPURIOUS EMISSIONS.....	24
TABLE 5-17: FREQUENCY STABILITY REQUIREMENT	25
TABLE 5-18: FREQUENCY STABILITY LIMITS	25
TABLE 5-19: FREQUENCY STABILITY RESULTS (425.025 MHz)	26
TABLE 5-20: TEST EQUIPMENT USED FOR FREQUENCY STABILITY	26
TABLE 5-21: TRANSIENT FREQUENCY BEHAVIOR REQUIREMENT	27
TABLE 5-22: TRANSIENT FREQUENCY BEHAVIOR LIMIT	27
TABLE 5-23: TRANSIENT FREQUENCY BEHAVIOR TEST RESULTS	28
TABLE 5-24: TEST EQUIPMENT USED FOR TRANSIENT FREQUENCY BEHAVIOR MEASUREMENT ...	29
TABLE 5-25: FREQUENCY RESPONSE REQUIREMENT	29
TABLE 5-26: FREQUENCY RESPONSE LIMIT	29
TABLE 5-27: TEST EQUIPMENT USED FOR FREQUENCY RESPONSE MEASUREMENT	31
TABLE 5-28: AUDIO LOW PASS FILTER RESPONSE REQUIREMENT.....	31
TABLE 5-29: AUDIO LOW PASS FILTER RESPONSE LIMIT	31
TABLE 5-30: TEST EQUIPMENT USED FOR AUDIO LOW PASS FILTER RESPONSE MEASUREMENT ..	33
TABLE 5-31: MODULATION LIMITING REQUIREMENT	33
TABLE 5-32: MODULATION LIMITING LIMIT	33
TABLE 5-33: TEST EQUIPMENT USED FOR AUDIO LOW PASS FILTER RESPONSE MEASUREMENT ..	36
TABLE 5-34: OCCUPIED BANDWIDTH.....	37
TABLE 5-35: OCCUPIED BANDWIDTH VALUES (425.025 MHz)	38
TABLE 5-36: TEST EQUIPMENT USED FOR OCCUPIED BANDWIDTH.....	39
TABLE 5-37: RECEIVE PORT CONDUCTED EMISSIONS REQUIREMENT	39
TABLE 5-38: RECEIVE ANTENNA PORT CONDUCTED EMISSIONS LIMITS	39
TABLE 5-39: TEST EQUIPMENT USED FOR CONDUCTED SPURIOUS EMISSIONS	41

1. Executive Summary

This test report documents the measurements performed on the M/A-COM MASTRIII UHF Base Station as part of an Original Equipment Certification for the FCC Part 90, and Industry Canada RSS-119 certifications.

On the basis of measurements performed between November and December 2004, the M/A-COM MASTRIII UHF Base Station is verified to be compliant with FCC Part 90, and Industry Canada RSS-119 requirements. The test data included in this report apply to the product titled above manufactured by M/A-COM, Inc.

The frequency of the band of operation is 403 to 450 MHz.

The FCCID of the new equipment is OWDTR-0038-E.

The Industry Canada certification number is 3636B-0038.

A detailed summary of compliance results is found in Table 2-1: Compliance Results Summary on page 10.

2. Compliance Summary

This section summarizes all the measurements performed on M/A-COM MASTRIII UHF Base Station and its compliance to FCC Part 90, and Industry Canada RSS-119.

Table 2-1: Compliance Results Summary

Product Summary					
Product Name:	M/A-COM MASTRIII UHF Base Station	Project Manager:	Simon Richardson		
Product Code:	TR-0038	Measurements by :	Denis Lalonde		
Product Status:		Date:	December 13, 2004		
Test Cases					
Performed	Description	Specification	Test Results		Notes
			Pass	Fail	
■	RF Power	FCC Part 90.205 and 2.1046 RSS-119 sect. 5.4	■	□	
■	Conducted Spurious Emissions	FCC Part 90.210 & 2.1051 RSS-119 sect. 6.3	■	□	
■	Emission Mask	FCC Part 90.210 & 2.1049 RSS-119 sect. 6.4	■	□	
■	Field Strength of Spurious Emissions	FCC Part 90.210 & 2.1053	■	□	
■	Frequency Stability	FCC Part 90.213 and 2.1055 RSS-119 sect. 7	■	□	
■	Audio Frequency Response	FCC 2.1047	■	□	
■	Audio Low Pass Filter	FCC 2.1047 RSS-119 sect. 6.6	■	□	
■	Modulation Limiting	FCC 2.1047	■	□	
■	Occupied Bandwidth	FCC 2.202 RSP 100 sect. 7.2	■	□	
■	Transient Frequency Behavior	FCC 90.214 RSS-119 sect. 6.5	■	□	
□	RF Exposure	FCC 1.1310 RSS-119 sect. 9.0	□	□	To be evaluated during licensing of equipment
■	Conducted Emissions Rx port	RSS-119 sect. 8 FCC 15.111	■	□	

3. Equipment Under Test (EUT)

3.1 Product Functional Description


The product trade name of the unit tested is “M/A-COM MASTRIII UHF Base Station”.

Figure 3-1 provides a brief description of the tested product.

Figure 3-1 Product Description



The MASTR III P25 digital Base Station, built on the tradition of the popular MASTR series of repeaters, is an industry leader in interoperability, performance, and reliability. The MASTR III P25 provides secure digital communications for mission critical applications. The station is capable of both conventional Project 25 digital communications and conventional analog communications for maximum flexibility. The addition of a SitePro Controller provides the capability of delivering Internet Protocol (IP) data and voice to a M/A-COM P25^{IP} network.



3.2 Manufacturer Information

Company Name	M/A-COM, Inc.
Mailing Address	221 Jefferson Ridge Parkway, Lynchburg, Virginia, U.S.A., 24501
Product Name	M/A-COM MASTRIII UHF Base Station

3.3 Transmitter Specifications

Table 3-1 lists the specifications of the transmitter under test. Operation over the full frequency band of operation is achieved through the use of 2 different sets of transmitter/receiver synthesizers and receive front end modules. The only differences between modules of different frequency bands are the values of passive tuning components.

Table 3-1: Transmitter Specifications

	Fundamental Characteristics
Tx power	10 to 100 W
Tx frequency	Configuration 1: 403 to 430 MHz Configuration 2: 425 to 450 MHz
Channel spacing	6.25, 12.5, or 25 kHz

3.4 System Components

The system tested consists of the units shown in Table 3-2. The capability to operate over all the frequency bands identified in Table 3-1 was achieved by selecting a Tx Synthesizer, Rx Synthesizer, Rx Front End, and Power Amplifier modules which are dedicated for their respective frequency band.

Table 3-2: MASTRIII UHF BTS Components

Component	Model	Serial Number
MASTRIII shelf	SXGPNX	9861756
Tx Synthesizer module	EA101685V11	SLR 0438 0994
	EA101685V12	SLR 0438 1501
Rx Synthesizer module	EA101684V12	SLR 0438 1507
	EA101684V13	SLR 0438 0985
Rx Front End module	19D902782G11 (403 – 430 MHz)	06BD5P
	19D902782G7 (425 – 450 MHz)	06B6A2
IF module	EA101401V1	SLR 03150255
System module	19D902590G6	SLR 0251 2492
DSP module	EA101800V1	SLR 0446 2337
Power module	19D902589G2	CKA 01390368
Power supply	PS103010V120	QG12659
SitePro shelf SSI Controller board Analog board	EA101209V1 R1B	SLR 02190892
	CB101869V1/R1A	NR
	CB101069V2 P3A	
	CB10170V1 R6A	
RF Power Amplifier	EA101292V21	09430362
10 MHZ Frequency Ref.	Brandywine Com. QFS-102	7661

NR: not required, the SitePro has a serial number

3.5 Support Equipment

The support equipment used for operation and monitoring of the EUT is described in Table 3-3.


Table 3-3: Support Equipment

Description	Model Number
DELL Optiplex	GXpro
IBM Thinkpad PC	600E

3.6 System Set-up and Test Configurations


The system configuration used for all test cases is presented in Figure 3-2 and Figure 3-3.

Figure 3-2: Module Configuration

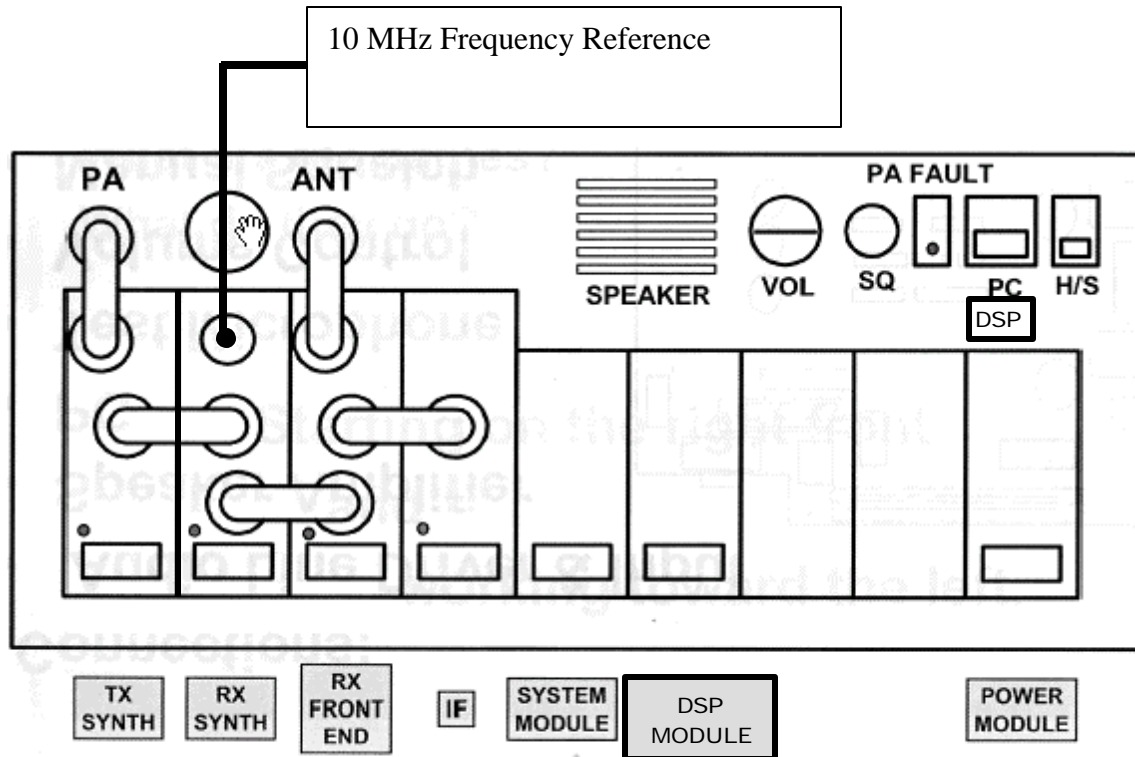

The 10 MHz frequency reference is only used to meet the 0.5 ppm frequency stability requirements for radios with 6.25 kHz bandwidth. Base stations with 12.5 kHz and 25 kHz bandwidths use the internal frequency reference of the Rx Synthesizer.

Figure 3-3: System Configuration

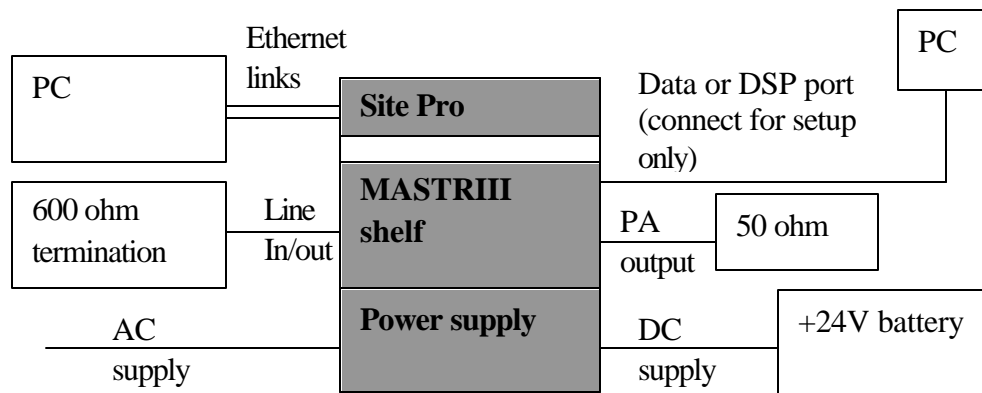

A photograph of the test setup used in this test report is presented in Appendix B: Test Set-up Photographs, on page 45.

3.7 EUT Interfaces and Cables

The system contains the following interfaces, as shown in Table 3-4.

Table 3-4: System Cables

Interface Type	EUT Connection	Description	Type	Length	Qty
AC Mains	AC power supply	3 wire AC cord	unshielded	6 feet	1
DC Mains (only on the new version of the supply)	Battery connector of power supply	2 wire battery cable	unshielded	6 feet	1
Ethernet link	SitePro Ethernet 0 and 1 ports	Category 5 twisted pairs	unshielded	50 feet	2
Telephone line in/out	MASTRIII shelf	2 twisted pair	unshielded	6 feet	1

3.8 System Modifications

No modifications were required to pass the requirements.

4. General Test Conditions

4.1 Test Facility

Radiated emissions testing was performed in a 10-meter Ambient Free Chamber (AFC) located at 21 Richardson Side road, Kanata, Ontario, Canada. The AFC consists of a shielded room lined with ferrite tiles and anechoic material.

These test facilities are accredited by the Standards Council of Canada (SCC) [1]. Through a Mutual Recognition Agreement (MRA) between the National Voluntary Laboratory Accreditation Program (NVLAP) and SCC, the accreditation status of the AFC facility is valid for the U.S.

4.2 Measurement Instrumentation

The measurement instrumentation conforms to ANSI C63.2 [5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5. Detailed Test Results

5.1 RF Power

5.1.1 Test Specification

The system was tested to the requirements listed in Table 5-1:

Table 5-1: RF Power Requirements

Requirement	Part / Section
FCC	90.205, 2.1046
RSS-119	5.4

5.1.1.1 Limits

The system was tested to the rated power of the EUT, listed in Table 5-2.

Table 5-2: RF Power limit

Configuration	Frequency	Rated Power
1	403 to 430 MHz	10 to 100 W (40 to 50 dBm)
2	425 to 450 MHz	10 to 100 W (40 to 50 dBm)

5.1.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1
Date tested: November 17, 2004
Tested by: Denis Lalonde

5.1.3 Test Procedure

The output of the power amplifier was connected to a power meter using a calibrated RF attenuator and cable.

The unmodulated RF signal was set at the bottom, middle, and top of the frequency band. The lowest and highest possible power levels were evaluated. Each of the 2 Tx/Rx Synthesizers were tested.

5.1.4 Test Results

Test results are shown in Table 5-3.

Table 5-3: RF Power Levels

Channel (MHz)	Low Power (dBm)	Hi Power (dBm)
403.025 (low split synth.)	40.1	50.0
425.025 (low split synth.)	40.1	50.0
425.025 (high split synth.)	40.1	50.0
449.975 (high split synth.)	40.1	50.0

5.1.5 Test Conclusion

The test results met the requirement.

5.1.6 Test Equipment List

Table 5-4: Test Equipment Used for RF Power

Category	Manufacture	Model Number	Description	Serial Number	Cal. Due
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22 April 2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	25 Oct. 2005
Power meter	Anritsu	M2438A	Power meter	SSG012588	27 April 2005
Power sensor	Anritsu	M2424A	Power sensor	SSG012587	27 April 2005

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.2 Conducted Spurious Emissions

5.2.1 Test Specification

The system was tested to the limits of the requirements listed in Table 5-5:

Table 5-5: Conducted Spurious Emissions Requirement

Requirement	Part / Section
FCC	90.210, 2.1051
RSS-119	6.3

5.2.1.1 Limits

The following specification levels are applicable to this test:

Table 5-6: Conducted Spurious Emission Limit

Frequency Range (MHz)	Limit (dBm)
30 to 4500	-20 dBm

The limit is calculated in section 5.4.

5.2.2 Test Facility Information

Location: Solelectron Design and Engineering Lab 1
Date tested: December 9, 2004
Tested by: Denis Lalonde

5.2.3 Test Procedure

Conducted spurious emissions were measured at the bottom and top of the frequency band. Two sets of synthesizers were tested at their maximum (100 W) and minimum power levels (10 W). The transmitter was modulated with a C4FM digital signal with 4800 bits/sec bit rate.

The measurement was separated in 2 frequency bands;

1. 30 MHz to 800 MHz: the power amplifier output is connected to the spectrum analyzer through a 10 dB and a 20 dB attenuator.
2. 800 MHz to 5.12 GHz: the power amplifier output is connected to the spectrum analyzer through a 20 dB and a 2 GHz to 800 MHz high-pass filter.

5.2.4 Test Results

The test result are shown in Table 5-7.

Table 5-7: Conducted Spurious Emissions

Configuration	Channel (MHz)	Maximum level of spurious emission (dBm)		Reference
		Hi Power	Low Power	
1	403.025	-24.3 dBm	- 33.7 dBm	Figure 7-2 to Figure 7-5
2	449.975	-24.3 dBm	-33.8 dBm	Figure 7-6 to Figure 7-9

5.2.5 Test Conclusion

The test results met the requirement.

5.2.6 Test Equipment List

Table 5-8: Test Equipment used for Conducted Spurious Emissions

Category	Manufacture	Model Number	Description	Serial Number	Cal. Due
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005
Spectrum analyzer	HP	8564A	40 GHz	SSG012069	28/04/2005
High Pass filter	Microwave Circuits	H8008501	800 MHz high pass	SSG012709	NR
Signal generator	HP	83732A	20 GHz	SSG012125	13/10/2005

NR: not required

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.3 Emission Mask

5.3.1 Test Specification

The system was tested to the limits of the requirements listed in Table 5-9:

Table 5-9: Emission Mask Requirement

Requirement	Part / Section
FCC	90.210, 2.1049
RSS-119	6.4

5.3.1.1 Limits

The specification levels in Table 5-10 were used.

Table 5-10: Emission Mask Limits

Channel spacing (kHz)	Modulation Type	Mask
25	Analog	Part 90 Mask B
12.5	Analog	Part 90 Mask D
25	2 level digital +/- 3 kHz	Part 90 Mask C
12.5	2 level digital +/- 1.9 kHz	Part 90 Mask D
12.5	C4FM 9600 bits/sec	Part 90 Mask D
6.25	C4FM 4800 bits/sec	Part 90 Mask E

5.3.2 Test Facility Information

Location: Solelectron Design and Engineering Lab 1
Date tested: December 9 , 2004
Tested by: Denis Lalonde

5.3.3 Test Procedure

The emission mask measurements were performed at 425.025 MHz. The system was tested at its maximum (100 W) power level. Six modulation types of the transmitted signal were setup as follows:

1. Wibeband Analog signal: the power amplifier output was modulated with a 2500 Hz signal which had a level 16 dB higher than what was required to produce a deviation of 50% of rated system deviation (+/- 5kHz) at 1 kHz.
2. Narrowband Analog signal: the power amplifier output was modulated with a 2500 Hz signal which had a level 16 dB higher than what was required to produce a deviation of 50% of rated system deviation (+/- 2.5kHz) at 1 kHz.
3. Wideband 2 level/9600 baud modulation: the power amplifier output was modulated with a 2 level 9600 baud pseudo-random signal which had the level required for +/- 3 kHz deviation.
4. Narrowband 2 level/9600 baud modulation: the power amplifier output was modulated with a 2 level 9600 baud pseudo-random signal which had the level required for +/- 1.9 kHz deviation.
5. C4FM 9600 bits/second modulation: the power amplifier output was modulated with a C4FM pseudo-random signal which had the level required for a maximum of +/- 2826 Hz deviation.
6. C4FM 4800 bits/second modulation: the power amplifier output was modulated with a C4FM pseudo-random signal which had the level required for a maximum of +/- 1100 Hz deviation.

For all of these measurements, the power amplifier output was connected to the spectrum analyzer through a 10 dB and a 20 dB attenuator.

5.3.4 Test Results

Table 5-11 lists the modulation modes measured:

Table 5-11: Emission Mask Results

Frequency (MHz)	Type of signal	Test result	Reference
425.025 MHz	2500 Hz analog (WB)	Pass	Figure 7-10
425.025 MHz	2500 Hz analog (NB)	Pass	Figure 7-11
425.025 MHz	2 level 9600 baud / +/- 3 KHz deviation	Pass	Figure 7-12
425.025 MHz	2 level 9600 baud / +/- 1.9 KHz deviation	Pass	Figure 7-13
425.025 MHz	C4FM / 9600 bits/sec	Pass	Figure 7-14
425.025 MHz	C4FM / 4800 bits/sec	Pass	Figure 7-15

5.3.5 Test Conclusion

The test results met the requirement.

5.3.6 Test Equipment List

Table 5-12: Test Equipment used for Emission Mask

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005
Spectrum analyzer	HP	8564A	40 GHz	SSG012069	28/04/2005

The measurement instrumentation conforms to ANSI C63.2[5]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.4 Field Strength of Spurious Emissions

5.4.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-13: Field Strength of Spurious Emissions Requirement

Requirement	Part / Section
FCC	90.210, 2.1053

5.4.1.1 Limits

The following specification levels are worst-case limits taken from all test specifications.

Table 5-14: Field Strength of Spurious Emissions Limit

Frequency Range (MHz)	ERP Limit (dBm)
30 to 4500	-20

The ERP limit was calculated using the minimum attenuation requirement of FCC 90.210 d)3).

Attenuation = minimum of $50 + 10 \log (P)$ dB or 70 dB (when 12.5 kHz channels are used)
= minimum of $50 + 10 \log (100)$ or 70 dB
= minimum of 70 dB or 70 dB
= 70 dB

ERP limit = $10 \log (100 \text{ W}) - 70 \text{ dB}$
= -20 dBm

When operating at 10 W, the ERP limit for spurious emissions is – 20 dBm.

5.4.2 Test Facility Information

Location: Solelectron Design and Engineering 10m Ambient Free Chamber
Date tested: November 20 and December 1, 2004
Tested by: S. Cullen, S. Turner, and D. Lalonde

5.4.3 Test Procedure

Verifications of the test equipment and AFC were performed prior to the installation of the EUT in accordance with the quality assurance procedures in KP000270-LP-EMC-01-01 [7]. The test was performed as per the relevant Test procedures: ANSI C63.4 [4].

The system was tested in the following manner:

- The EUT was placed on a turntable inside the AFC and it was configured as in normal operation. The system and its cables were separated from the ground plane by an insulating support 10 mm in height. The system was grounded in accordance with its normal installation specifications. No additional grounding connections are allowed.
- For tests between 30 MHz and 1 GHz a broadband bilog antenna was placed at a 10 m distance; a horn antenna, placed also at 10 m distance from the EUT, was used for measurements between 1 GHz and 5.12 GHz.
- A pre-scan was performed to find emissions (frequencies) requiring detail measurement. The pre-scan (using a peak detector) was performed by rotating the system 360 degrees while recording all emissions (frequency and amplitude). This procedure was repeated for

antenna heights of 1 to 4 meters, in steps of 1 meter, and for horizontal and vertical polarizations of the receiving antenna (for measurements above 30 MHz).

- Prescan optimization was performed based on the pre-scan data. All frequencies, having emission levels within 10 dB of the specification(s) limits, were optimized. For each such frequency, the EUT was rotated in azimuth over 360 degrees and the direction of maximum emission was noted. Antenna height was then varied from 1 to 4 meters at this azimuth to obtain maximum emissions. The procedure was repeated for both horizontal and vertical polarizations of the search antenna. Then the maximum level measured was recorded.
- The frequency range investigated was 30 MHz to 5.12 GHz.
- Between 30 MHz and 1 GHz, a resolution bandwidth of 120 kHz was used.
- Above 1 GHz, a 1 MHz resolution bandwidth and 1 MHz video bandwidth were used.
- The highest emissions were evaluated using the substitution method. This is accomplished by replacing the EUT by a calibrated antenna, cable and signal generator. This equipment is used to transmit a signal that will generate a RF meter reading level identical to the one recorded when the EUT was present. The signal generator power level, the calibration data of the cable and antenna is then used to evaluate the Effective Radiated Power (ERP) of the EUT. The following formula is used:

$$\text{ERP} = \text{Signal generator level} - \text{Cable losses} + \text{Antenna gain (dBi)} - \text{Gain of tuned dipole (dBi)}$$

$$\text{Margin} = \text{Limit} - \text{ERP}$$

The measurement was performed while the power amplifier was operating at minimum power output (10 W) and its maximum power output (100 W). A 2 level 9600 baud wideband signal tuned at 403.025 MHz and 449.975 MHz was used for this test. A 50 ohm load was connected to the power amplifier output.

5.4.4 Test Results

Table 5-15 lists the highest emissions measured, all other emissions had more than 20 dB margin:

Table 5-15: Field Strength of Spurious Emissions

Tx Channel	Freq. of Emission (MHz)	Signal Generator Level Hi Power (dBm)	Antenna Gain (dBi)	Cable losses (dB)	ERP Low Power (dBm)	ERP Hi Power (dBm)	Margin (dB)	Reference
403.025 MHz	1209.075 (3Tx)	-28.0	7.0	1.2	-48.0	-24.4	4.4	Figure 7-16 to Figure 7-19
	1612.1 (4Tx)	-46.2	8.4	1.3	-65.8	-41.3	21.3	
	2821.175 (7Tx)	-37.7	9.7	1.8	-60.4	-32.0	12.0	
449.975 MHz	1349.925 (3Tx)	-47.1	7.6	1.3	-60.1	-43.0	23.0	Figure 7-20 to Figure 7-23
	2249.875 (5Tx)	-52.6	9.1	1.6	-57.3	-47.3	27.3	

5.4.5 Test Conclusion

The test results met the requirement.

5.4.6 Test Equipment List

Table 5-16: Test Equipment used for Field Strength of Spurious Emissions

Description	Manufacturer	Model	Serial Number	Cal. Due
Bilog Antenna	Antenna Research	LPB 2520A	SSG012299	3/2/2005
Double Ridged Horn	Emco	3115	SSG012298	12/29/2004
Pre-Amplifier	BNR	LNA	SSG012360	2/11/2005
Quasi-Peak Adapter, HP85650A, (EMI # 2)	HP	85650A	SSG013046	10/13/2005
RF Amplifier, HP8447 # 1	Agilent	8447D	SSG013045	10/13/2005
Spec. A, RF PreSelector, HP85685A (AFC #1)	HP	85685A	SSG012010	4/29/2005
Spectrum Analyzer Display, HP 85662A	HP	85662A	SSG012433	4/29/2005
Spectrum Analyzer, HP8566B, (AFC #1)	HP	8566B	SSG012521	4/29/2005
Sucoflex Cable, EMC Cable # 1	Huber & Suhner	106A	SSG012454	2/12/2005
Sucoflex Cable, EMC Cable # 2	Huber & Suhner	106A	SSG012453	2/12/2005
Sucoflex Cable, EMC Cable # 5	Huber & Suhner	104PEA	SSG012359	2/11/2005
Sucoflex Cable, EMC Cable # 6	Huber & Suhner	106A	SSG012456	2/12/2005
Utiflex Cable, EMC Cable # 4	Micro-Coax	UFA 147B-1-0300-70X70	SSG012309	10/13/2005
Signal generator	HP	83732A	SSG012125	13/10/2005
Horn Antenna	EMCO	3115	2703	24/02/05

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.5 Frequency Stability

5.5.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-17: Frequency Stability Requirement

Requirement	Part / Section
FCC	90.213, 2.1055
RSS-119	7.0

5.5.1.1 Limits

The specification levels are listed in Table 5-18.

Table 5-18: Frequency Stability Limits

Frequency Range (MHz)	Bandwidth (kHz)	Minimum Frequency Stability (ppm)
421 to 512	6.25	0.5
421 to 512	12.5	1.5
421 to 512	25	2.5

5.5.2 Test Facility Information

Location: Soletron Design and Engineering Lab 9
Date tested: December 7 and 21, 2004
Tested by: Denis Lalonde

5.5.3 Test Procedure

The 425.025 MHz unmodulated output of the power amplifier was connected through attenuators into a frequency counter. A 10 MHz rubidium frequency reference was used to provide improved frequency accuracy to the frequency counter.

Frequency measurements were performed with 2 configurations of the base station frequency reference. A 10 MHz external frequency reference is used when the base station is deployed with a 6.25 kHz bandwidth. A 12.8 MHz internal frequency reference is used when the base station is deployed with 12.5 kHz and 25 kHz bandwidths.

The base station was installed in an environmental chamber. The temperature was changed from – 30 degree Celsius up to 50 degree Celsius in 10 degree increments while the EUT was powered

off. The temperature was allowed to stabilize for 1 hour after changing the temperature. The measurement of frequency was done 5 minutes after the base station was powered on.

Frequency accuracy measurement were also performed at 20 degree Celsius while modifying the voltage of the AC mains from 85% (102 VAC) to 115% (138 VAC) of the nominal value (120 VAC).

5.5.4 Test Results

The table below lists the frequency stability measurement results:

Table 5-19: Frequency Stability Results (425.025 MHz)

Temperature (degree. Celsius)	AC Voltage (V)	External 10 MHz Frequency Reference (Used for 6.25 kHz Bandwidth)		Internal 12.8 MHz Frequency Reference (Used for 12.5 and 25 kHz Bandwidths)	
		Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	120	425.025013	0.031	425.025513	1.21
-20	120	425.025013	0.031	425.025223	0.52
-10	120	425.025013	0.031	425.02486	-0.33
0	120	425.025013	0.031	425.024767	-0.55
10	120	425.025013	0.031	425.024828	-0.40
20	102	425.025013	0.031	425.025	0.00
20	120	425.025013	0.031	425.025	0.00
20	138	425.025013	0.031	425.025	0.00
30	120	425.025013	0.031	425.02511	0.26
40	120	425.025013	0.031	425.025209	0.49
50	120	425.025013	0.031	425.025182	0.43

5.5.5 Test Conclusion

The test results met the requirement.

5.5.6 Test Equipment List

Table 5-20: Test Equipment used for Frequency Stability

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Frequency Reference	UCT	2008	Rubidium 10 MHz	A1010	27/04/2005
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005
Digital Multimeter	Fluke	83		SSG012586	20/04/2005
Frequency Counter	HP	5385A		SS013044	12/07/2005

The measurement instrumentation conforms to ANSI C63.2[5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.6 Transient Frequency Behavior

5.6.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-21: Transient Frequency Behavior Requirement

Requirement	Part / Section
FCC	90.214
RSS-119	6.5

5.6.1.1 Limits

The specification levels are listed in Table 5-22.

Table 5-22: Transient Frequency Behavior Limit

Channel Spacing (kHz)	Time Interval (ms)	Maximum Frequency Difference (kHz)
25	T1 = 10	+/- 25
	T2= 25	+/- 12.5
	T3= 10	+/- 25
12.5	T1 = 10	+/- 12.5
	T2= 25	+/- 6.25
	T3= 10	+/- 12.5
6.25	T1 = 10	+/- 6.25
	T2= 25	+/- 3.125
	T3= 10	+/- 6.25

Note:

T1 is the time period immediately following Txon

T2 the time period immediately following T1.

T3 is the time period from the instant when the transmitter is turned off until Txoff.

5.6.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1
Date tested: December 9 , 2004
Tested by: Denis Lalonde

5.6.3 Test Procedure

The test procedure of ANSI/TIA-603B-2002 [14] section 2.2.19 (modulation domain analyzer method) was used.

5.6.4 Test Results

Table 5-23 shows the transient frequency behavior measurement results. Each graph shows the transmitted signal frequency at the center of the +/- 25 kHz frequency scale over 25 msec. The measurement was actually performed over 35 msec. The transient frequency behavior over the 10 msec part of the measurement which is not shown on the plots is the same or lower than recorded in Table 5-23.

Table 5-23: Transient Frequency Behavior Test Results

Channel	Channel Spacing (kHz)	Time Interval (ms)	Maximum Frequency Difference (kHz)	Measured Frequency Difference (kHz)	Measurement reference
425.025 MHz	25	T1 = 10	+/- 25	< 1	Figure 7-24
		T2= 25	+/-12.5	< 1	Figure 7-24 & Figure 7-25
		T3= 10	+/- 25	< 1	Figure 7-25
425.025 MHz	12.5	T1 = 10	+/- 12.5	< 1	Figure 7-26
		T2= 25	+/-6.25	< 1	Figure 7-26 & Figure 7-27
		T3= 10	+/- 12.5	< 1	Figure 7-27
425.025 MHz	6.25	T1 = 10	+/- 6.25	< 1	Figure 7-24
		T2= 25	+/-3.125	< 1	Figure 7-24 & Figure 7-25
		T3= 10	+/- 6.25	< 1	Figure 7-25

5.6.5 Test Conclusion

The test results met the requirement.

5.6.6 Test Equipment List

Table 5-24: Test Equipment used for Transient Frequency Behavior Measurement

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005
Modulation Domain analyzer	HP	53310A		3121A01217	27/04/2005

Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.7 Audio Frequency Response

5.7.1 Test Specification

The system was tested to the limits of the following requirement:

Table 5-25: Frequency Response Requirement

Requirement	Part / Section
FCC	2.1047

5.7.1.1 Limits

The specification levels are listed in Table 5-26.

Table 5-26: Frequency Response Limit

Frequency Range (kHz)	TIA 603-b [14] Recommended Response (dB)
0.3 to 2.5	+1 dB or -3 dB from a true 6 dB per octave pre-emphasis characteristic as referenced to the 1000 Hz level. The exception is from 500 Hz to 300 Hz, where an additional 6 dB per octave rolloff is allowed.
2.5 to 3	An additional 6 dB per octave attenuation is allowed

5.7.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1

Date tested: November 29, 2004

Tested by: Denis Lalonde

5.7.3 Test Procedure

The frequency deviation of the transmitter output was initially set to 20% of the rated system deviation at 1 kHz by varying the level in the audio input signal to the base station. The frequency of the input signal was then swept from 100 Hz to 5 kHz while keeping the input level constant. The frequency deviation was recorded as the input frequency was changed.

The frequency response was determined by the following formula.


$$\text{Response (dB)} = 20 \log (\text{measured frequency deviation/frequency deviation at 1 kHz})$$

The transmitter was set for wideband analog signal for this test at 425.025 MHz.

5.7.4 Test Results

Figure 5-1 illustrates the frequency response of the system:

Figure 5-1: Audio Frequency Response Results

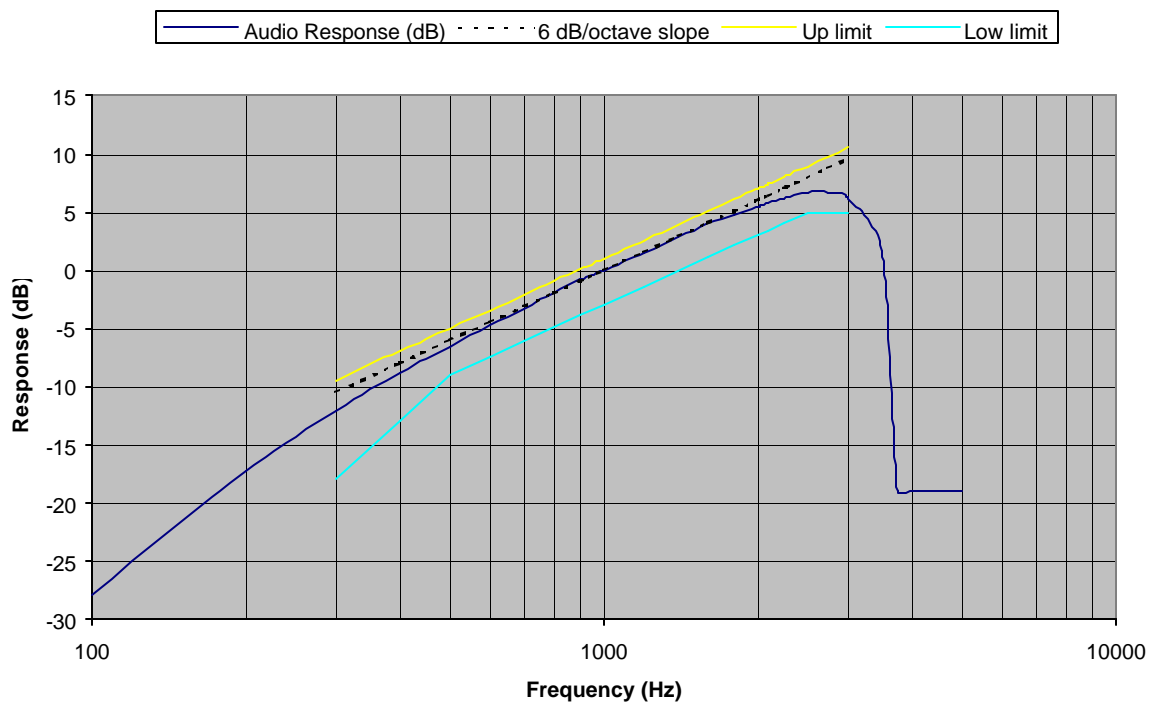

5.7.5 Test Conclusion

The test results met the requirement.

5.7.6 Test Equipment List

Table 5-27: Test Equipment used for Frequency Response Measurement

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Modulation Domain analyzer	HP	53310A		3121A01217	27/04/2005
Transmission Test Set	HP	4947A		SSG012652	25/05/2005
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005

Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.8 Audio Low Pass Filter Response

5.8.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-28: Audio Low Pass Filter Response Requirement

Requirement	Part / Section
FCC	2.1047
RSS-119	6.6

5.8.1.1 Limits

The specification levels are listed in Table 5-29.

Table 5-29: Audio Low Pass Filter Response Limit

Frequency Range (kHz)	RSS-119 Recommended Attenuation (dB)
3 to 20	$60 \log (\text{freq. (Hz)}/3000)$
20 to 30	50

5.8.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1

Date tested: November 29, 2004

Tested by: Denis Lalonde

5.8.3 Test Procedure


The system was initially set to transmit a signal with a deviation of 60% of the system rated deviation at 1 kHz. The output of the power amplifier was connected to a FM demodulator. The demodulated output was then fed into an audio signal analyzer. The audio signal analyzer measured the amplitude of the demodulated audio signal while the frequency of the transmitter audio signal was increased from 1 kHz to 30 kHz. The measured amplitude of the audio signal amplitude was recorded for each frequency measurement.

The test was conducted with the transmitter set to 425.025 MHz.

5.8.4 Test Results

Figure 5-2 shows the low pass filter response measurement results.

Figure 5-2 Audio Low Pass Filter Response

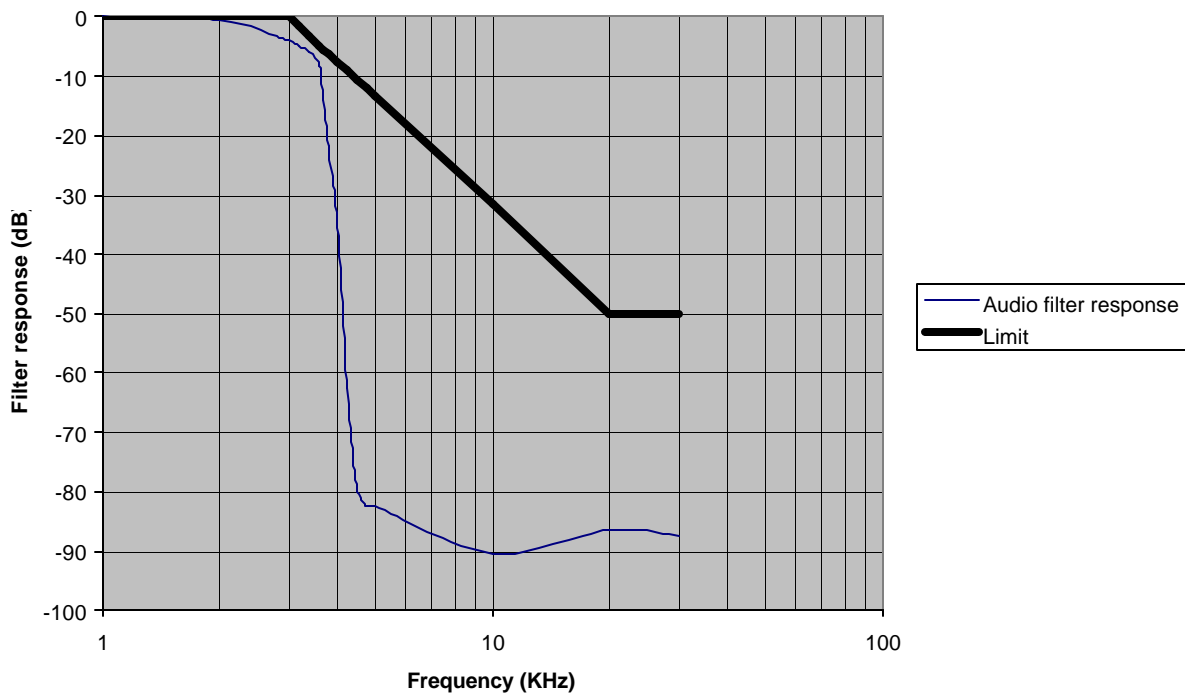

5.8.5 Test Conclusion

The test results met the requirement.

5.8.6 Test Equipment List

Table 5-30: Test Equipment used for Audio Low Pass Filter Response Measurement

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Spectrum analyzer	HP	3585A	40 MHz, 1 Mohm IN	1750A03502	14/10/2005
Spectrum analyzer	Rohde & Schwarz	FSM		SSG012659	7/10/2005
Modulation Domain analyzer	HP	53310A		3121A01217	27/04/2005
Transmission Test Set	HP	4934A		SSG012418	23/02/2005
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005

Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.9 Modulation Limiting

5.9.1 Test Specification

The system was tested to the limits of the following requirements:

Table 5-31: Modulation Limiting Requirement

Requirement	Part / Section
FCC	2.1047

5.9.1.1 Limits

The specification levels are listed in Table 5-32.

Table 5-32: Modulation Limiting Limit

Relative Input Signal Level (dB)	12.5 kHz Channel Spacing (kHz)	25 kHz Channel Spacing (kHz)
-20 to 20	< rated deviation (2.5 kHz)	< rated deviation (5 kHz)

5.9.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1

Date tested: November 30, 2004

Tested by: Denis Lalonde

5.9.3 Test Procedure

The system was initially set to transmit a signal with a deviation of 60% of the system rated deviation at 1 kHz. The input level required for this deviation was then recorded as the reference level. The positive peak and negative peak frequency deviation was then recorded while the input signal was changed from -20 dB to 20 dB relative to the reference level. This was repeated for an input signal of 300 Hz and 2500 Hz.

The measurements were performed while the transmitter transmitted a wideband and narrowband analog signal at 425.025 MHz.

5.9.4 Test Results

Figure 5-3 to Figure 5-6 shows the modulation limiting measurement results:

Figure 5-3 Modulation Limiting, Positive Peak (25 kHz channel)

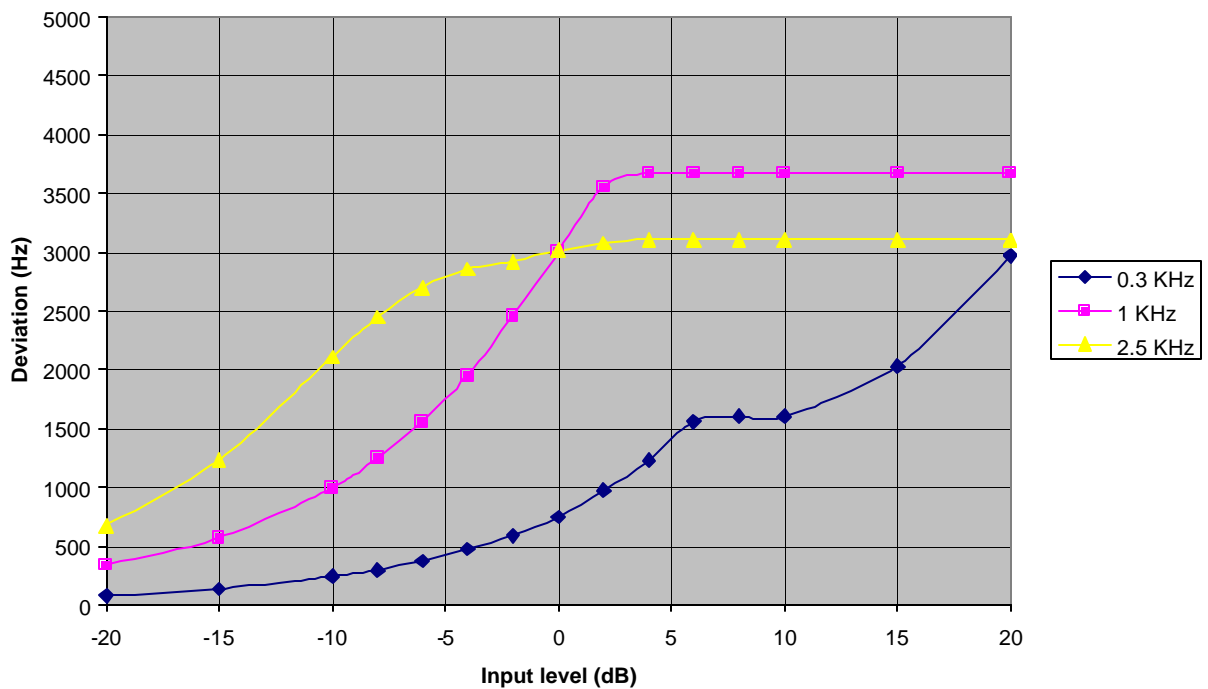


Figure 5-4 Modulation Limiting, Negative Peak (25 kHz channel)

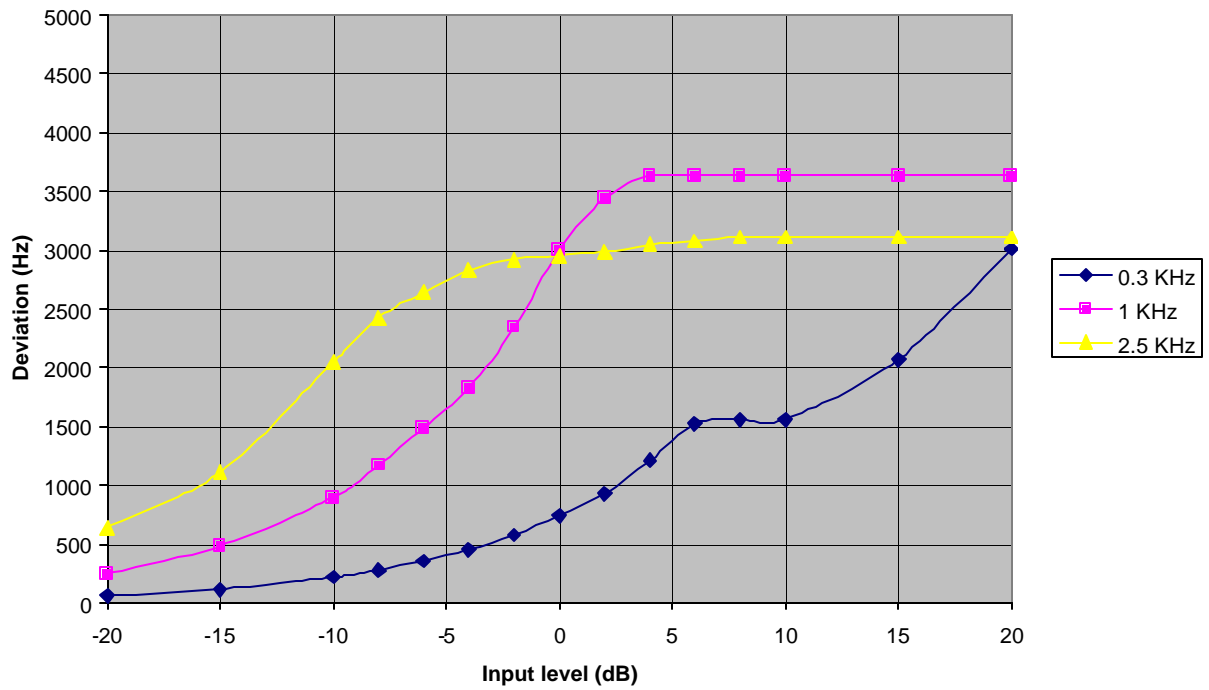


Figure 5-5 Modulation Limiting, Positive Peak (12.5 kHz channel)


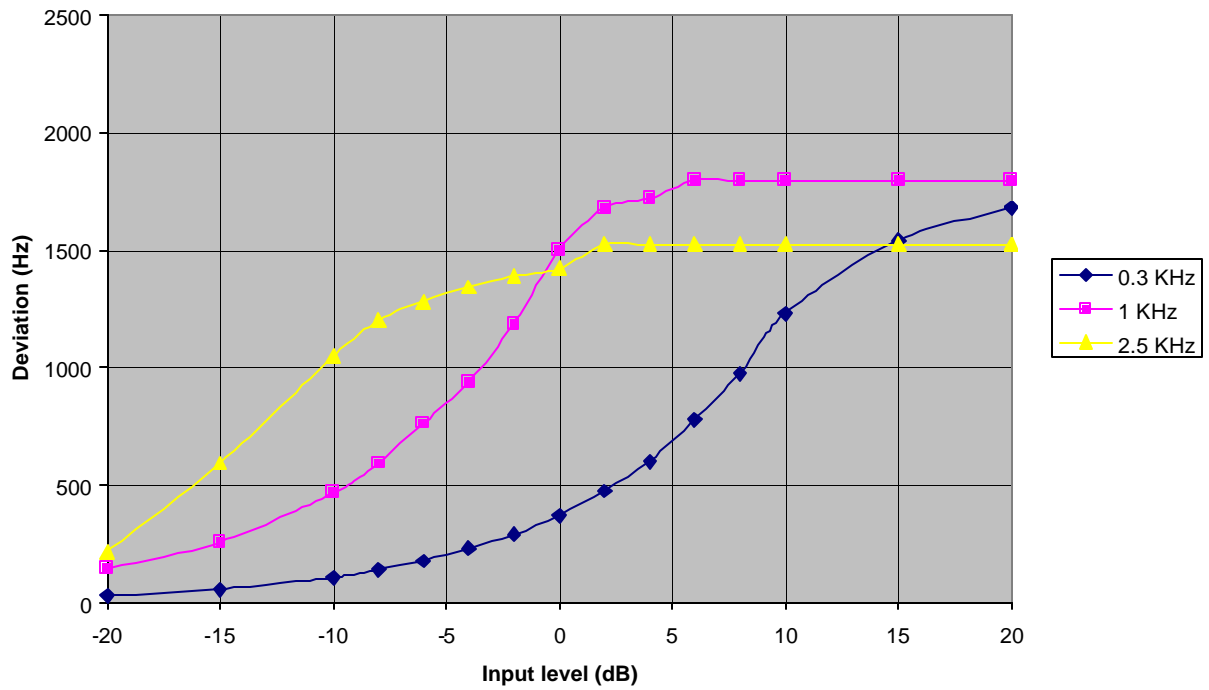


Figure 5-6 Modulation Limiting, Negative Peak (12.5 kHz channel)

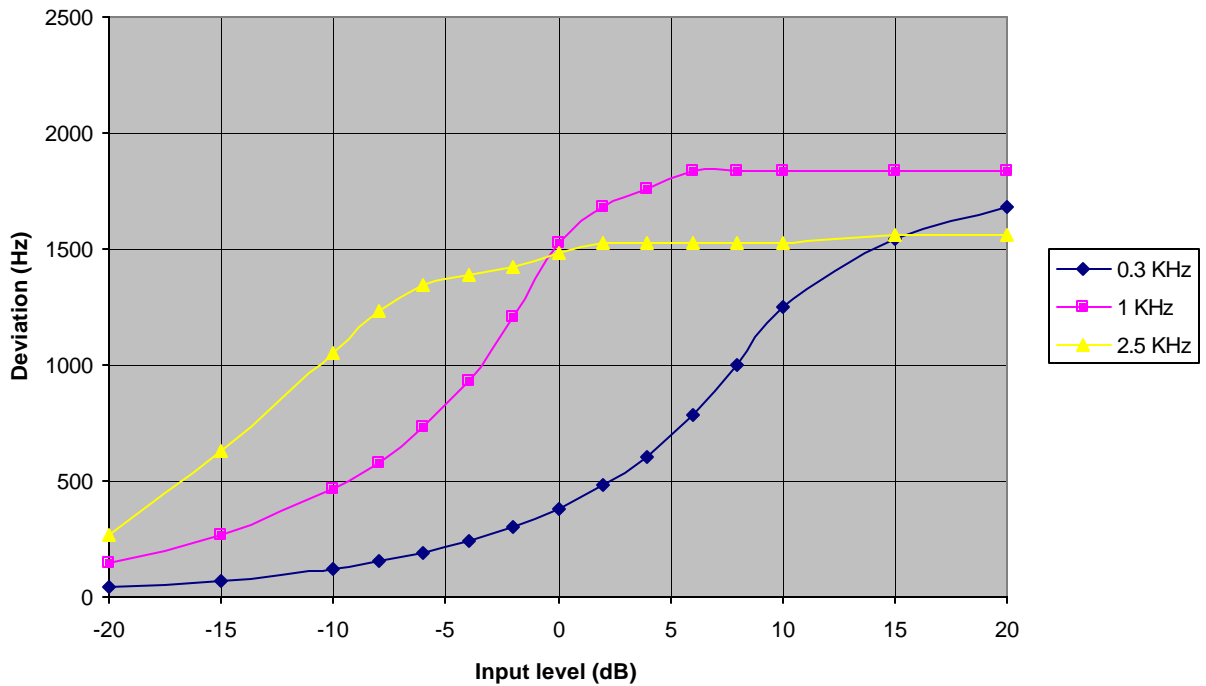

5.9.5 Test Conclusion

The test results met the requirement.

5.9.6 Test Equipment List

Table 5-33: Test Equipment used for Audio Low Pass Filter Response Measurement

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Modulation Domain analyzer	HP	53310A		3121A01217	27/04/2005
Transmission Test Set	HP	4947A		SSG012652	25/05/2005
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005

Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.10 Occupied Bandwidth

5.10.1 Test Specification

The system occupied bandwidth was evaluated according to the specifications listed in Table 5-34:

Table 5-34: Occupied Bandwidth

Requirement	Part / Section
FCC	2.202
RSP-100	7.2

5.10.2 Test Facility Information

Location: Solelectron Design and Engineering Lab 1
Date tested: December 9, 2004
Tested by: Denis Lalonde

5.10.3 Test Procedure

Six occupied bandwidth measurements were performed at 425.025 MHz.

1. Wideband Analog signal: the power amplifier output was modulated with a 2500 Hz signal which had a level 16 dB higher than what was required to produce a deviation of 50% of rated system deviation (5 kHz) at 1 kHz.
2. Narrowband Analog signal: the power amplifier output was modulated with a 2500 Hz signal which had a level 16 dB higher than what was required to produce a deviation of 50% of rated system deviation (2.5 kHz) at 1 kHz.
3. Wideband two level/9600 baud modulation: the power amplifier output was modulated with a 2 level 9600 baud pseudo-random signal which had the level required for +/- 3 kHz deviation.
4. Narrowband two level/9600 baud modulation: the power amplifier output was modulated with a 2 level 9600 baud pseudo-random signal which had the level required for +/- 1.9 kHz deviation.
5. C4FM 9600 bits/sec. modulation: the power amplifier output was modulated with a C4FM pseudo-random signal which had the level required for a maximum of +/- 2826 Hz deviation.
6. C4FM 4800 bits/sec. modulation: the power amplifier output was modulated with a C4FM pseudo-random signal which had the level required for a maximum of +/- 1100 Hz deviation.

For all of these measurements, the power amplifier output was connected to the spectrum analyzer through a 10 dB and a 20 dB attenuator.

The occupied bandwidth was measured using the 99% bandwidth measuring feature of the spectrum analyzer.

5.10.4 Test Results

The table below lists the calculated and measured occupied bandwidth.

Table 5-35: Occupied Bandwidth Values (425.025 MHz)

Type of signal	Calculation	Measurement (kHz)	Emission designator
Audio (wideband)	Max. modulation (M) = 3 kHz Max. deviation (D) = 5 kHz K = 1 Bn = 2M + 2DK Bn = 16 kHz	10.0 kHz Figure 7-28 (measured with 2.5 kHz tone)	16K0F3E
Audio (narrowband)	Max. modulation (M) = 3 kHz Max. deviation (D) = 2.5 kHz K = 1 Bn = 2M + 2DK Bn = 11 kHz	5.2 kHz Figure 7-29 (measured with 2.5 kHz tone)	11K0F3E
2 level 9600 baud / 3 KHz deviation	Max. modulation (B) = 9.6 kHz Max. deviation (D) = 3 kHz K = 1 Bn = B + 2DK Bn = 15.6 kHz	10.8 kHz Figure 7-30	15K6F1D 15K6F1E
2 level 9600 baud / 1.9 KHz deviation	Max. modulation (B) = 9.6 kHz Max. deviation (D) = 1.9 kHz K = 1 Bn = B + 2DK Bn = 13.4 kHz	8.0 kHz Figure 7-31	13K4F1D 13K4F1E
C4FM / 9600 bits/s	Max. modulation (B) = 4.8 kHz Max. deviation (D) = 2.826 kHz K = 1 Bn = B + 2DK Bn = 10.452 kHz	8.2 kHz Figure 7-32	10K5F1D 10K5F1E
C4FM / 4800 bits/s	Max. modulation (B) = 2.4 kHz Max. deviation (D) = 1.1 kHz K = 1 Bn = B + 2DK Bn = 4.6 kHz	3.25 kHz Figure 7-33	4K60F1D 4K60F1E

5.10.5 Test Equipment List

Table 5-36: Test Equipment used for Occupied bandwidth

Category	Manufacture	Model	Description	Serial Number	Cal. Due
Attenuator	Weinschel	53-20-33	20 dB, 500 W	KW975	22/04/2005
Attenuator	Weinschel	6070-10	10 dB, 25 W	BE0846	13/10/2005
Spectrum analyzer	HP	8564A	40 GHz	SSG012069	28/04/2005

The measurement instrumentation conforms to ANSI C63.2[5]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

5.11 Receive Antenna Port Conducted Emissions

These tests are performed to assure that the product does not produce excessive conducted emissions on the receive antenna port.

5.11.1 Test Specification

The system was tested to the requirements listed in Table 5-37:

Table 5-37: Receive Port Conducted Emissions Requirement

Requirement	Section	Country of Application
RSS-119	8	Canada
FCC Part 15, Subpart B	15.111	USA

5.11.1.1 Limits

The specification levels in Table 5-38 are worst-case limits taken from all test specifications.

Table 5-38: Receive Antenna Port Conducted Emissions Limits

Frequency Range (MHz)	FCC Part 15 / RSS-119 (dBm)
30 - 2560	-57

5.11.2 Test Facility Information

Location: Soletron Design and Engineering Lab 1

Date tested: December 9, 2004

Tested by: Denis Lalonde

5.11.3 Test Configurations


For conducted emissions test cases, the EUT hardware configuration / software load used is described in sections 3.6 (see Figure 3-2).

5.11.4 Test Procedure

Verifications of the test equipment were performed prior to the installation of the EUT in accordance with the quality assurance procedures in KP000270-LP-EMC-01-01 [7]. The test was performed as per the relevant Test procedures: ANSI C63.4 [4], RSS-119[13].

The test method shown in Figure 5-7 was used for conducted emission measurements on the receive antenna port.

Figure 5-7: Rx Antenna Port Test Method

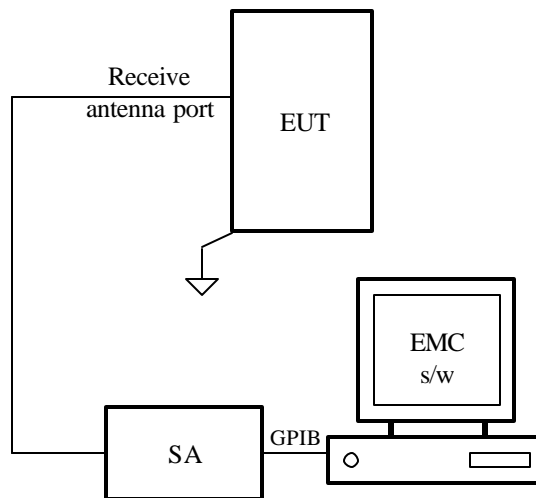

Abbreviations used in the above figures:

EUT	Equipment under test
SA	Spectrum Analyzer

- The connection of the antenna port cable was representative of installation practice as shown in the figure above.
- Conducted emissions were measured by connecting the spectrum analyzer input to the antenna port of the Receiver Front End Module
- A pre-scan was taken for all the frequency range from the requirement, using a peak detector on the spectrum analyzer. The pre-scan data was then compared to the specification limits. All emissions within 10 dB from the limit lines were recorded.

5.11.5 Test Results:

This section presents the conducted emissions on the receive antenna port test results. Graphical representations of the measurements taken appear in Appendix H: Conducted Receiver Emissions Plots .

All emissions had more than 10 dB margin.

5.11.6 Test Conclusion

The EUT has passed the Receive Antenna Port Conducted Emissions tests with respect to FCC Part 15 and RSS-119 with more than 10 dB of margin.

5.11.7 Test Equipment List

Table 5-39: Test Equipment used for Conducted Spurious Emissions

Category	Manufacture	Model Number	Description	Serial Number	Cal. Due
Spectrum analyzer	HP	8564A	40 GHz	SSG012069	28/04/2005

The measurement instrumentation conforms to ANSI C63.2 [5] and CISPR 16 [6]. Calibration of the measurement instrumentation is maintained in accordance with the supplier's recommendations, or as necessary to ensure its accuracy.

6. References

1. Standards Council of Canada Scope of Accreditation Letter SCC 1003-15/163 dated 2002-12-16 (Scope of accreditation is effective until 2005-10-05 and includes FCC Part 15 and ICES-003). This scope of accreditation is outlined at the following web site <http://www.scc.ca/scopes/reg126-eng-s.pdf>.
2. Solelectron EMS Canada Inc. Quality Manual, K0000608-QD-QM-01-07, 2004.
3. Solelectron EMS Canada Inc. Lab Operations Manual KG000347-QD-LAB-01-05, 2004.
4. ANSI C63.4-2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, 17 June 2001.
5. ANSI C63.2-1996, American National Standard for Electromagnetic Noise and Field Strength Instrumentation, 10 Hz to 40 GHz – Specifications.
6. CISPR 16-1, Specification for Radio Disturbance and Immunity Measuring Apparatus and Methods - Part 1: Radio Disturbance and Immunity Measuring Apparatus, Edition 2.0, 1999-10.
7. Solelectron EMS Canada Inc., EMC General Lab Test Procedure, KP000270-LP-EMC-01-01, February 2004.
8. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 2, U.S. Federal Communications Commission.
9. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 22, U.S. Federal Communications Commission.
10. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 74, U.S. Federal Communications Commission.
11. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 80, U.S. Federal Communications Commission.
12. FCC Rules for Radio Frequency Devices, Title 47 of the Code of Federal Regulations), Part 90, U.S. Federal Communications Commission.
13. RSS-119, Issue 6, "Land Mobile and Fixed Radio, Transmitters and Receivers, 27.41 to 960 MHz" March 25, 2000.
14. ANSI/TIA-603-B-2002, "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards", November 7, 2002
15. VCCI, V-3/02.04 16th edition, April 2002. Title: AGREEMENT OF VOLUNTARY CONTROL COUNCIL FOR INTERFERENCE BY INFORMATION TECHNOLOGY EQUIPMENT
16. APLAC, Asia Pacific Laboratory Accreditation Cooperation, Website (February 10th, 2004): <http://www.aplac.org>.

17. ILAC, International Laboratory Accreditation Cooperation,
Website (February 10th, 2004): <http://www.ilac.org/>
18. Industry Canada, RSS 212, Test Facilities and Test Methods for Radio Equipment, Issue 1
(Provisional), February 27, 1999.

7. Appendices


7.1 Appendix A: Glossary

Included below are definitions and abbreviations of terms used in this document.

Term	Definition
AC	Alternating Current
AFC	Ambient Free Chamber
AM	Amplitude modulation
ANSI	American National Standards Institute
AVG	Average detector
CISPR	Comité International Spécial Perturbation Radioélectrique (International Special Committee on Radio Interference)
Class A	Class A Limits for typical commercial establishments
Class B	Class B Limits for typical domestic and residential establishments
dB	Decibel
EMC	Electromagnetic Compatibility
EMI	Electromagnetic Interference
EN	European Normative
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
GND	Ground
IC	Industry Canada
PA	Broadband Power Amplifier
RBW	Resolution Bandwidth
RF	Radio-Frequency
RFI	Radio-Frequency Interference
SCC	Standards Council of Canada

7.2 Appendix B: Test Set-up Photographs

Figure 7-1: M/A-COM MASTRIII UHF Base Station Radiated Emissions Set-up

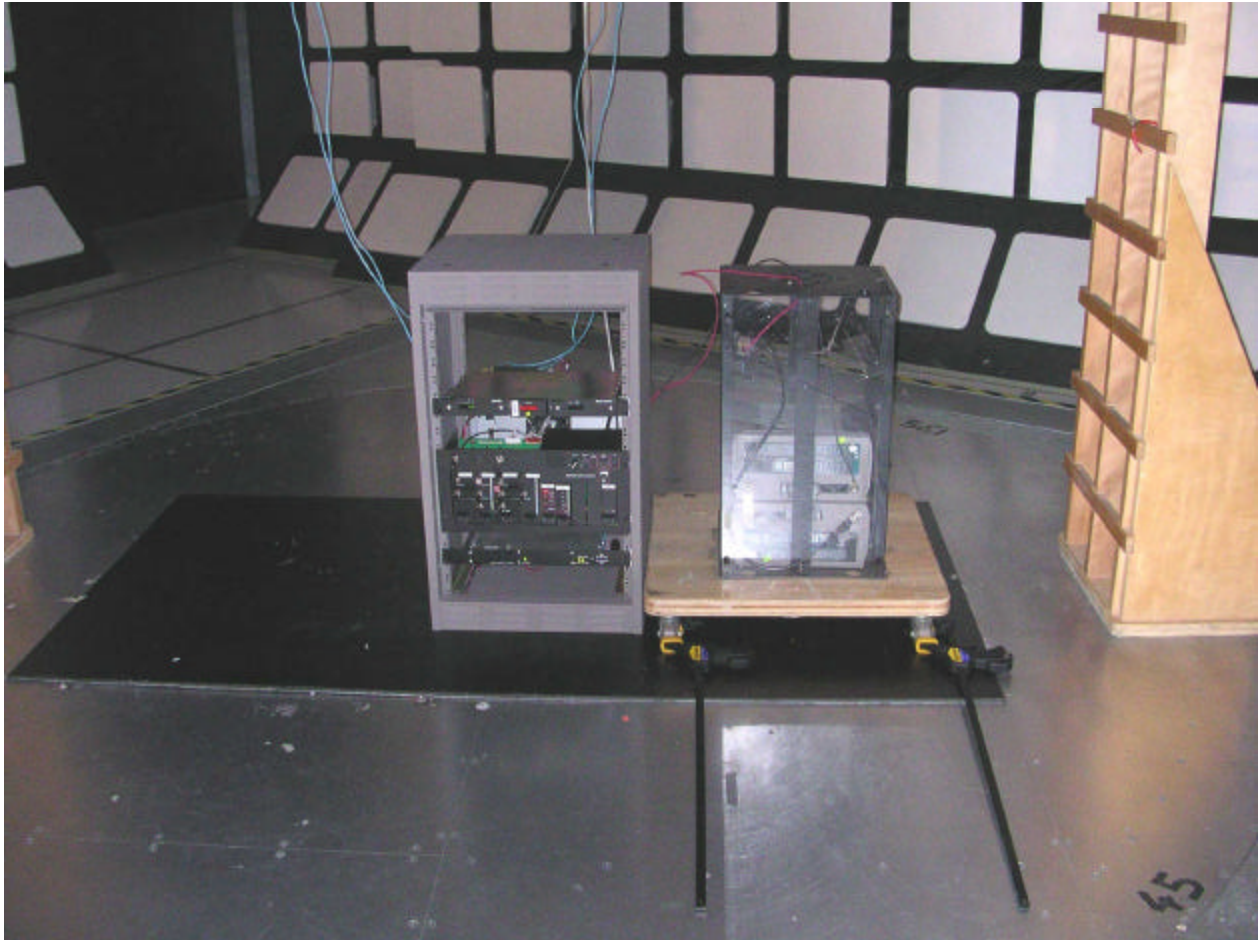

7.3 Appendix C: Conducted Spurious Emissions Plots

Figure 7-2: Tx at 403.025 MHz, 100 W Power, 30 MHz to 800 MHz

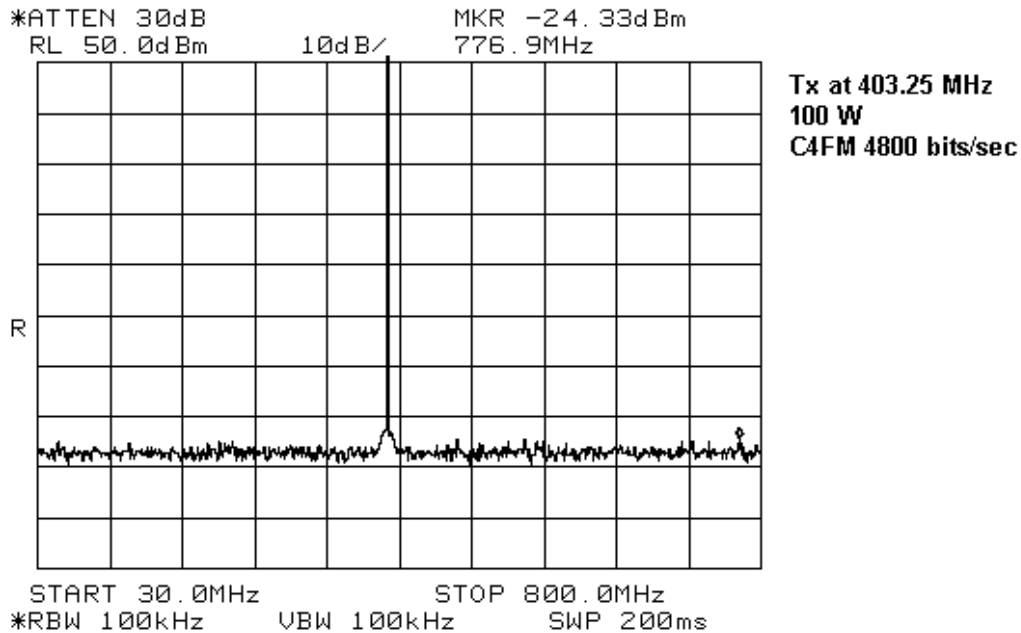


Figure 7-3: Tx at 403.025 MHz, 100 W Power, 800 MHz to 5.12 GHz

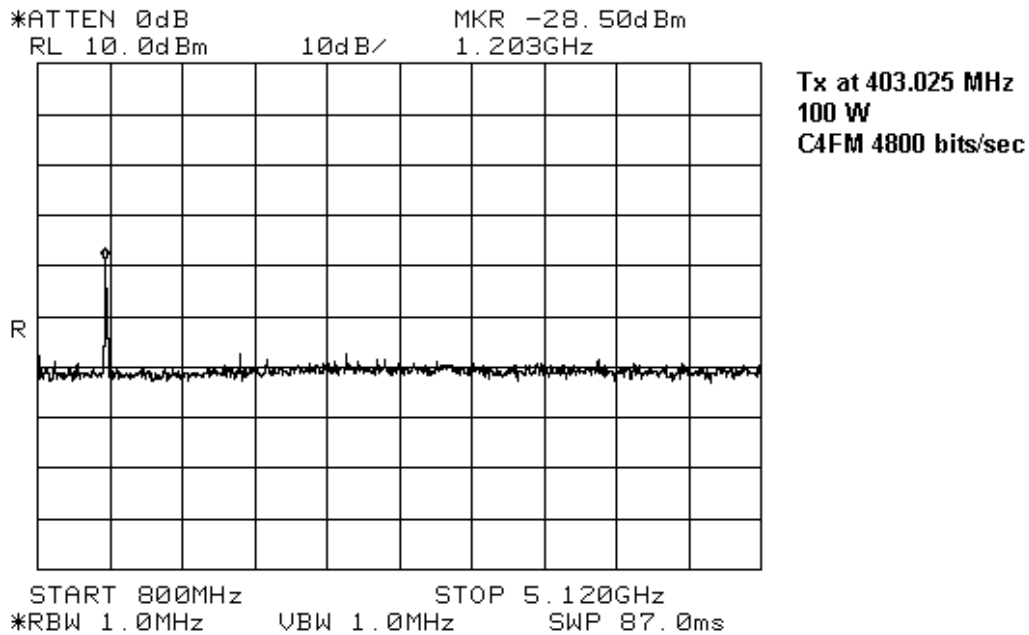


Figure 7-4: Tx at 403.025 MHz , 10 W Power, 30 MHz to 800 MHz

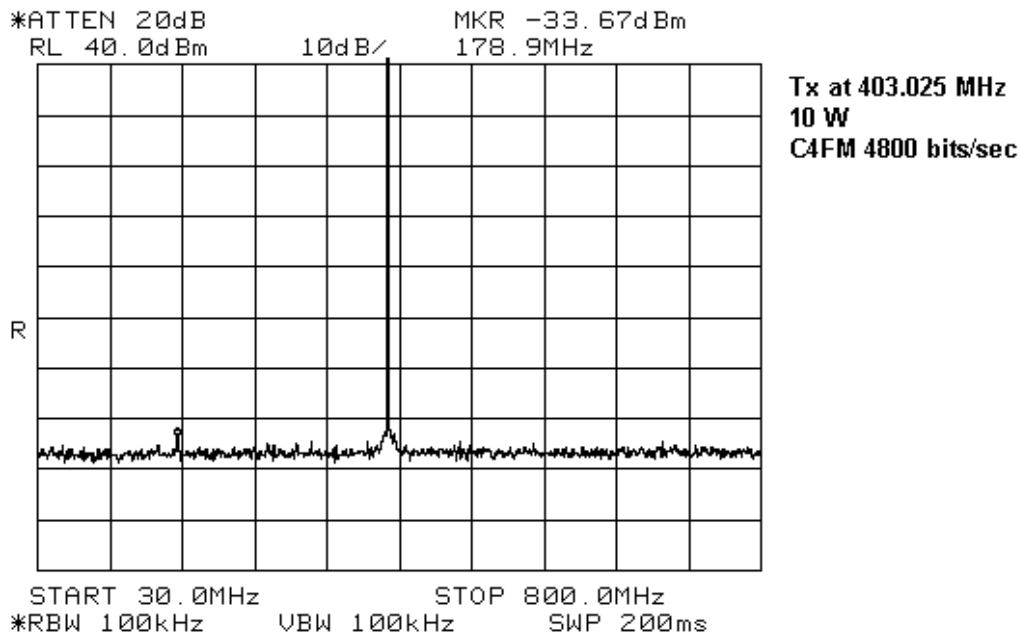


Figure 7-5: Tx at 403.025 MHz , 10 W Power, 800 MHz to 5.12 GHz

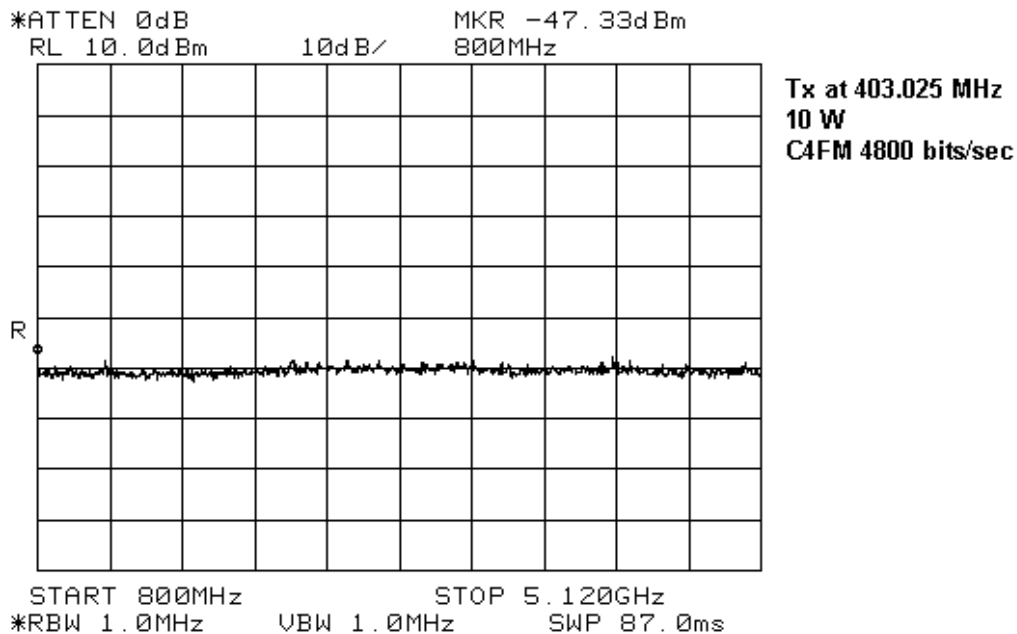


Figure 7-6: Tx at 449.975 MHz, 100 W Power, 30 MHz to 800 MHz

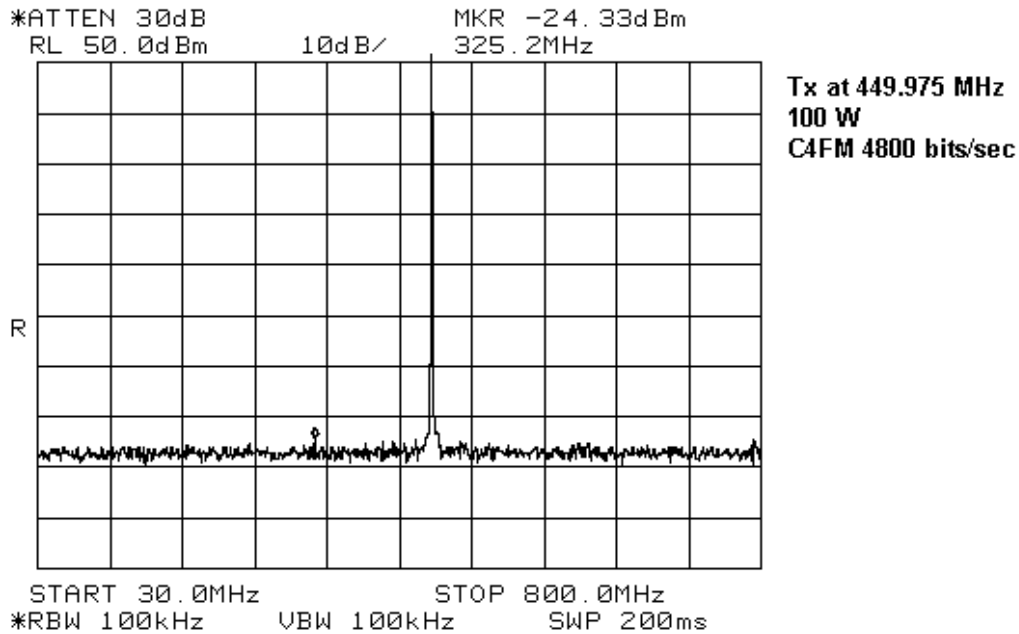


Figure 7-7: Tx at 449.975 MHz, 100 W Power, 800 MHz to 5.12 GHz

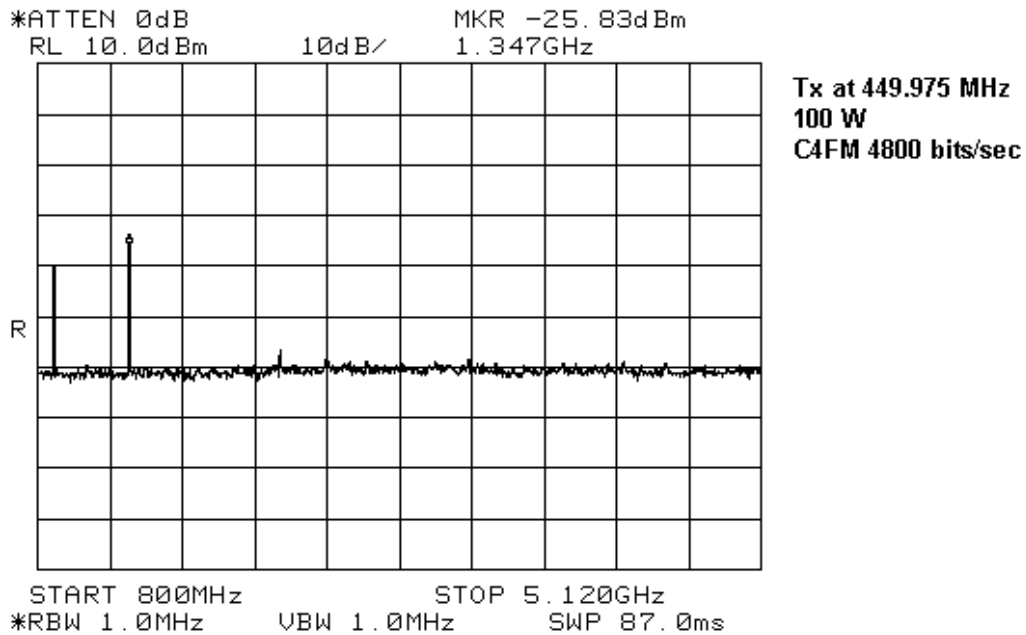


Figure 7-8: Tx at 449.975 MHz , 10 W Power, 30 MHz to 800 MHz


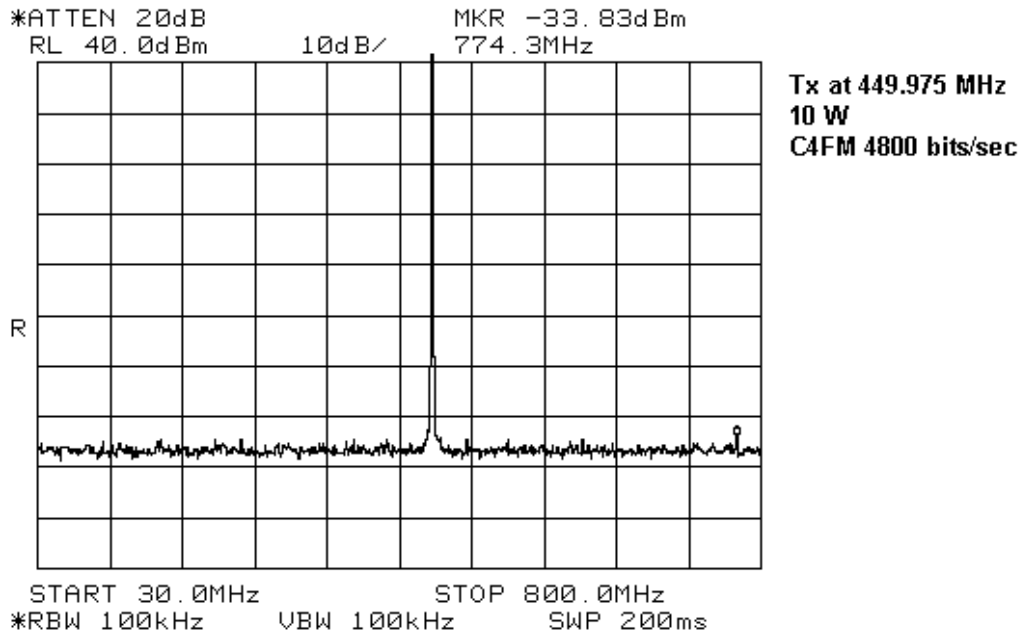


Figure 7-9: Tx at 449.975 MHz , 10 W Power, 800 MHz to 5.12 GHz

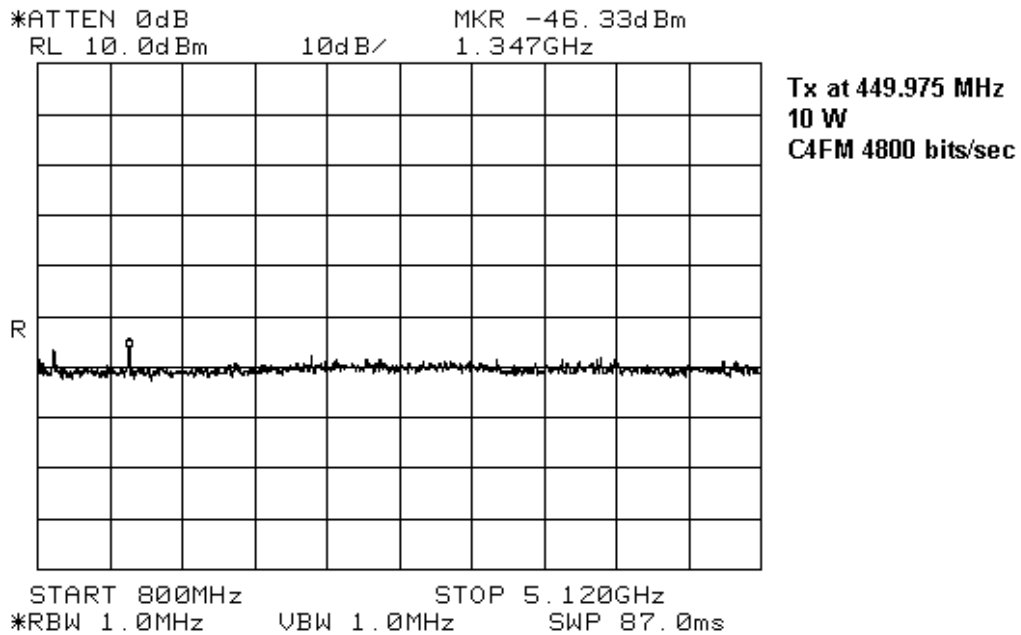

7.4 Appendix D: Emission Mask Plots

This appendix presents all emission mask plots for the test cases measured.

Figure 7-10: 2500 Hz Audio Signal Wideband, 425.025 MHz

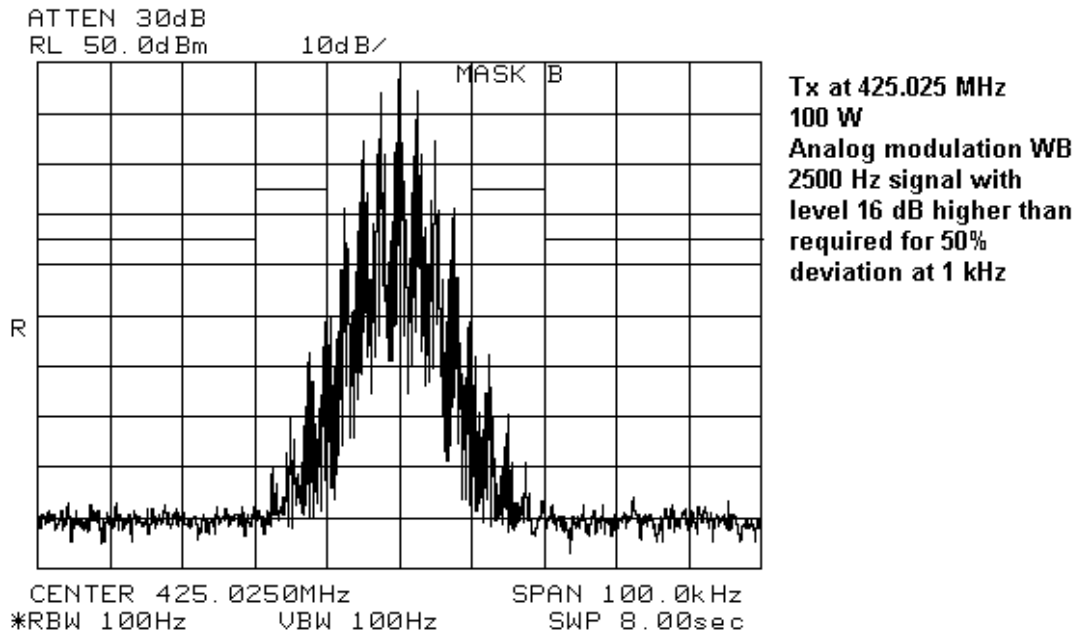


Figure 7-11: 2500 Hz Audio Signal Narrowband, 425.025 MHz

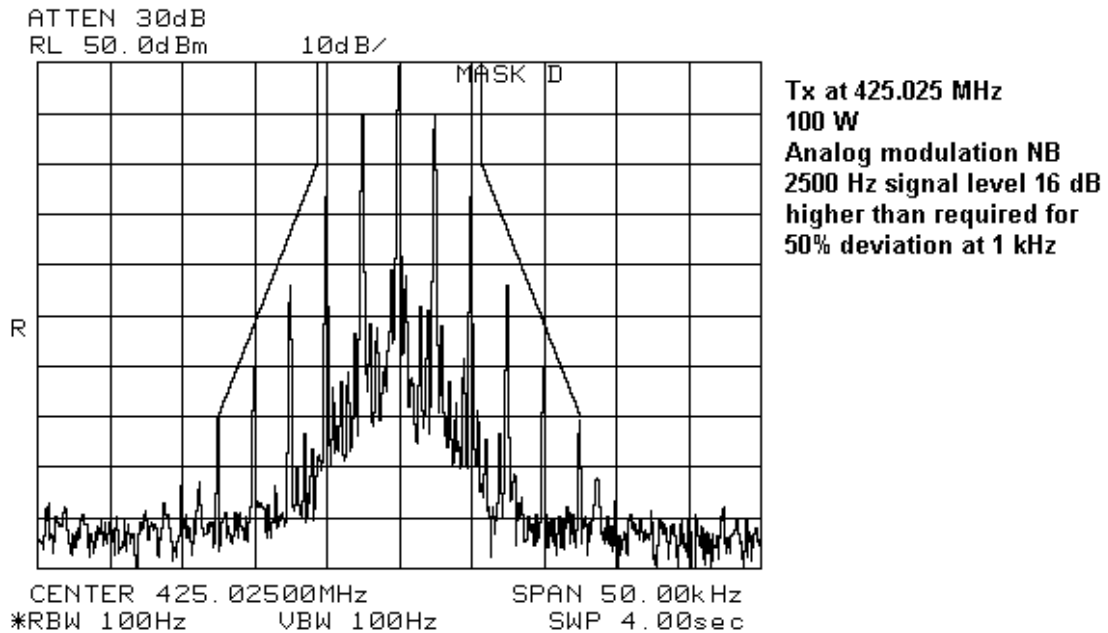
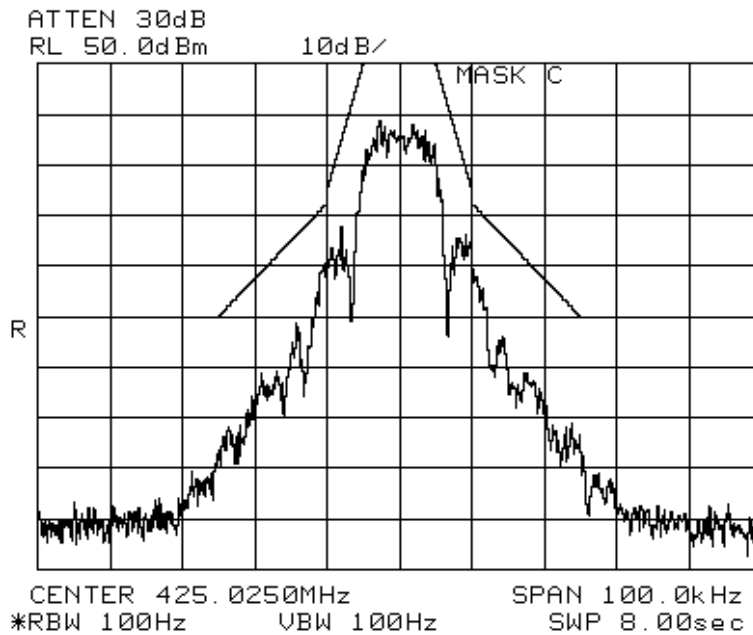
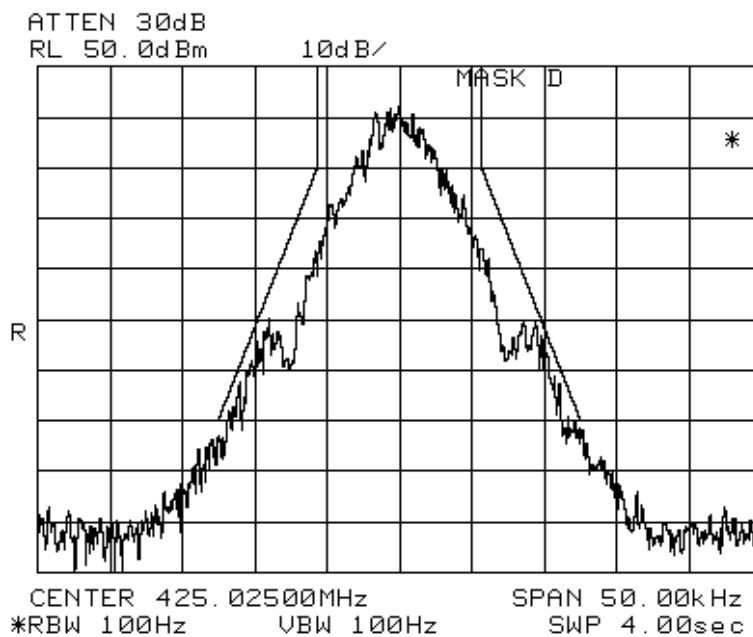


Figure 7-12: 2 Level 9600 baud Signal with +/- 3 kHz Deviation, 425.025 MHz

Tx at 425.025 MHz
100 W
2 level digital modulation
+/- 3 kHz deviation

Figure 7-13: 2 Level 9600 baud Signal with +/- 1.9 kHz Deviation, 425.025 MHz

Tx at 425.025 MHz
100 W
2 level digital modulation
+/- 1.9 kHz deviation

Figure 7-14: C4FM / 9600 bits/second Signal, 425.025 MHz


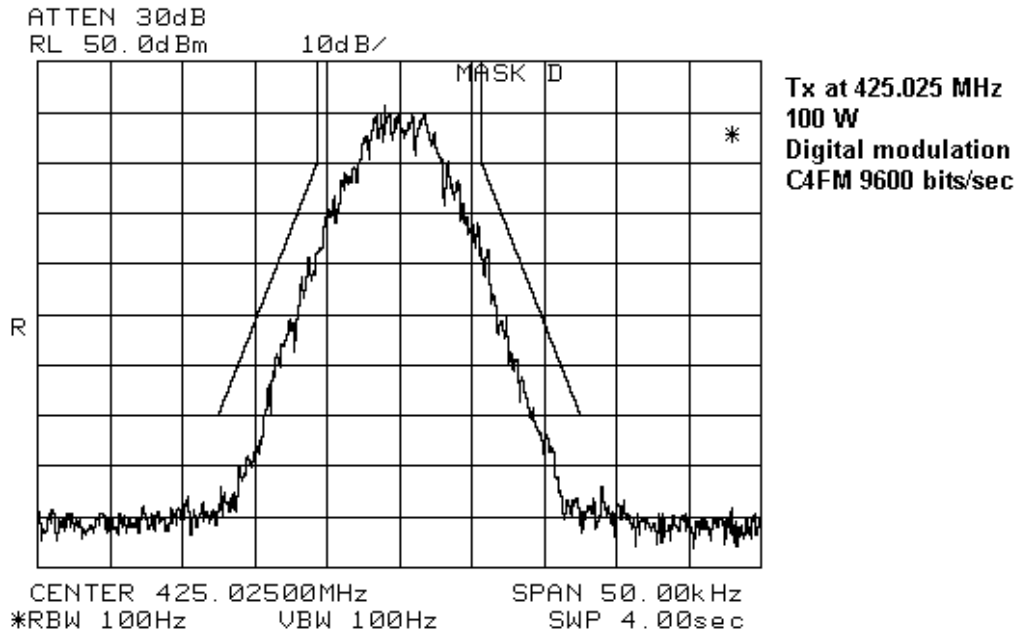



Figure 7-15: C4FM / 4800 bits/second Signal, 425.025 MHz

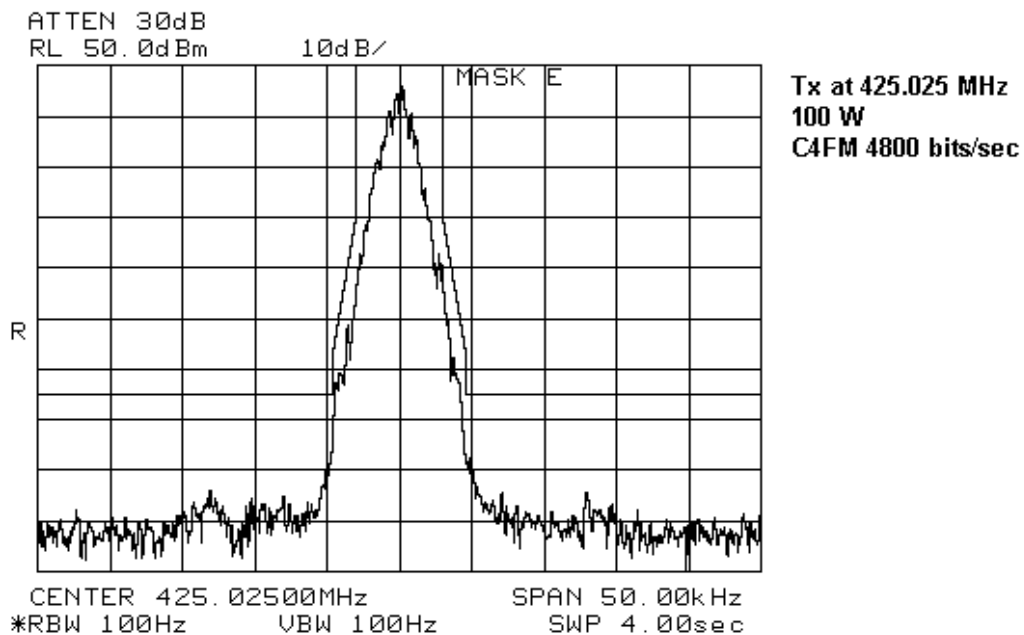

7.5 Appendix E: Field Strength of Spurious Emissions Plots

This appendix presents all field strength plots for the test cases measured.

Figure 7-16: Field Strength with 100 W Tx, 30 MHz to 1 GHz (Tx at 403.025 MHz)

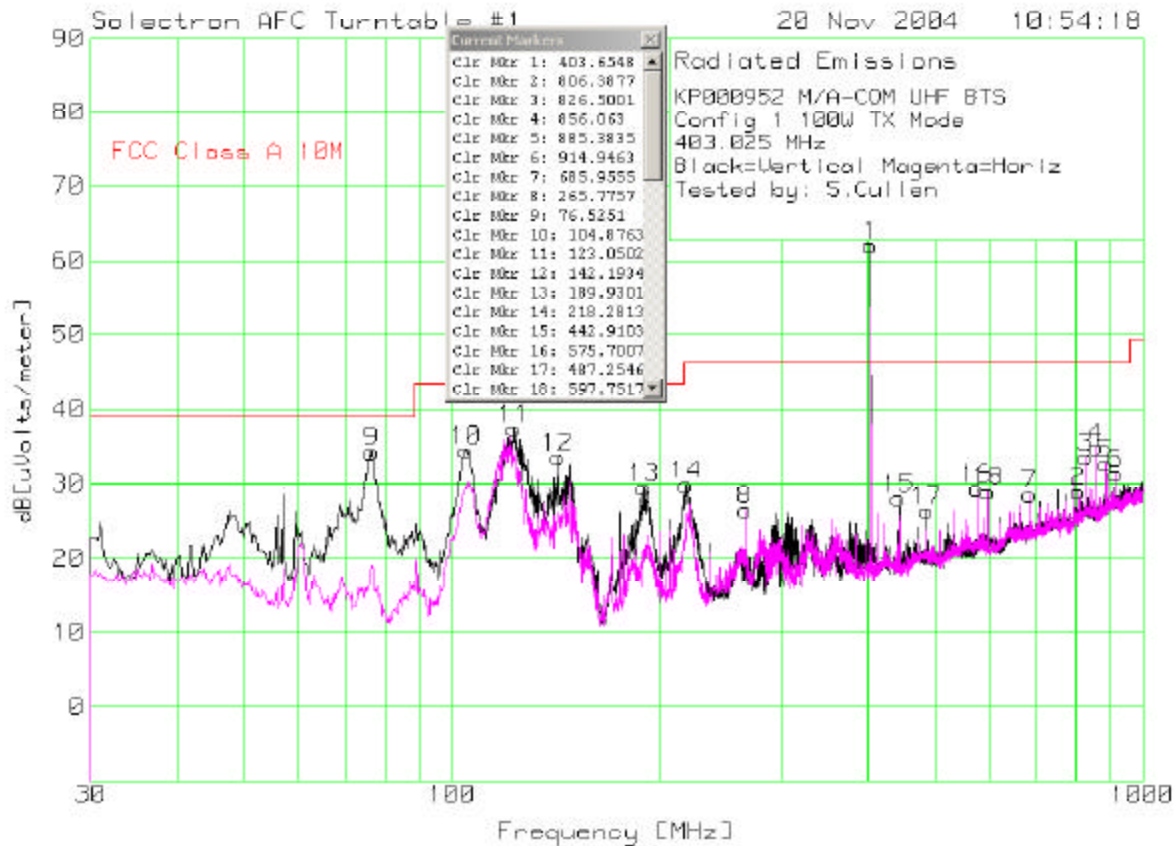

Note: the emissions at 403 MHz is leakage of the transmitted signal.

Figure 7-17: Field Strength with 100 W Tx, 1 GHz to 5.12 GHz, low frequency split (Tx at 403.025 MHz)

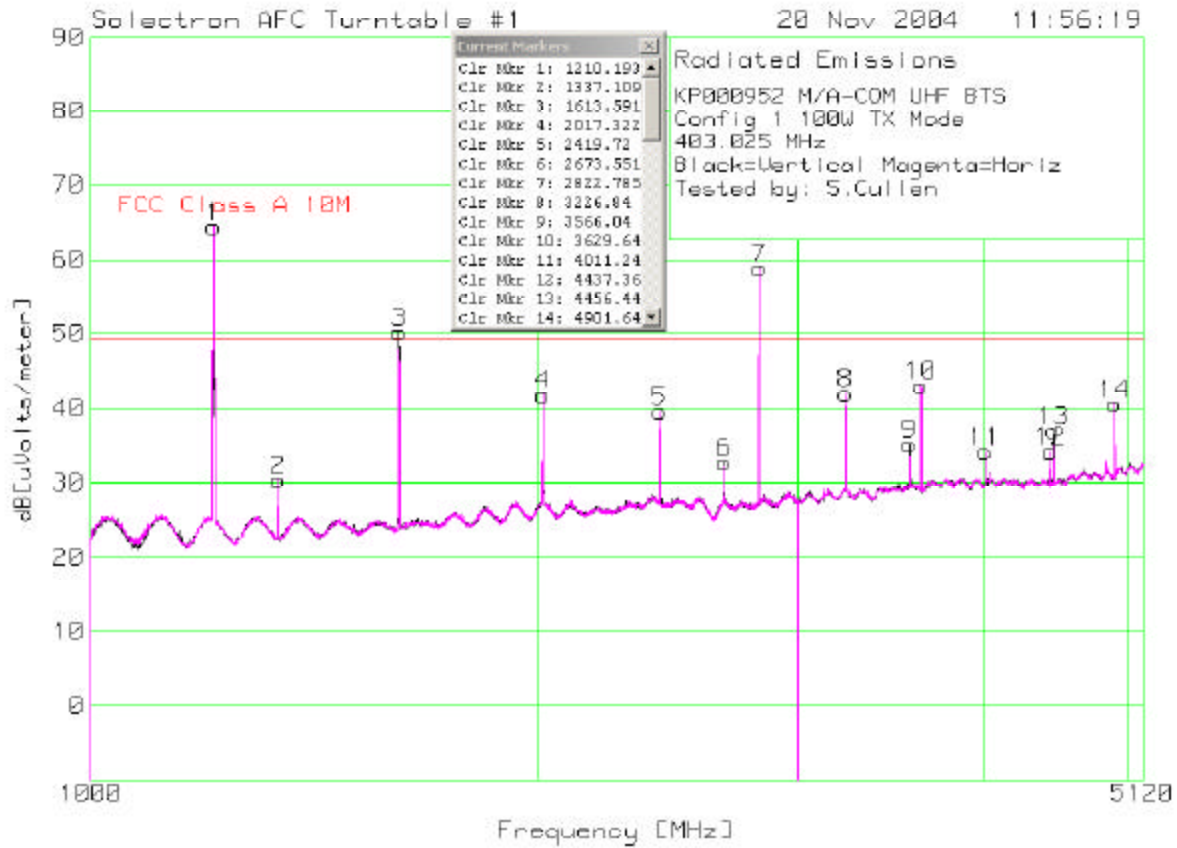
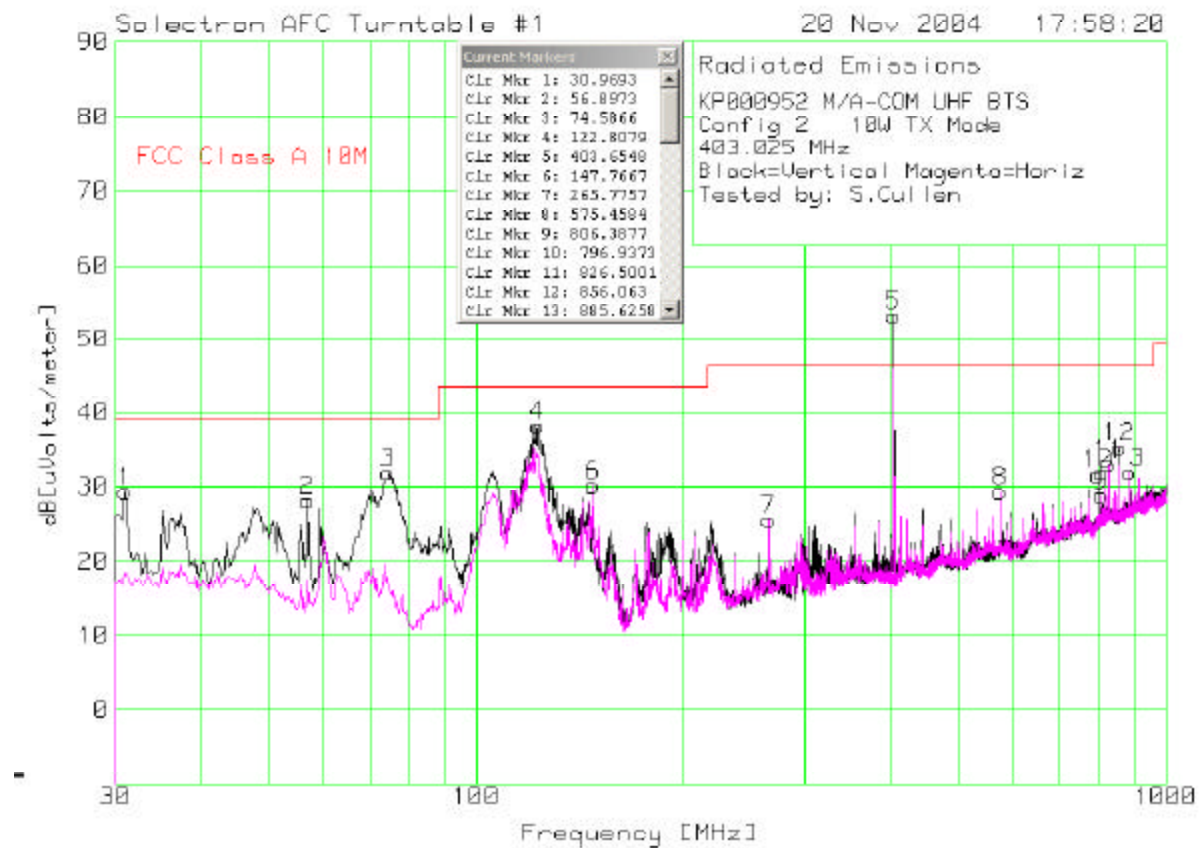


Figure 7-18: Field Strength with 10 W Tx, 30 MHz to 1 GHz (Tx at 403.025 MHz)


Note: the emissions at 403 MHz is leakage of the transmitted signal.

Figure 7-19: Field Strength with 10 W Tx, 1 GHz to 5.12 GHz, (Tx at 403.025 MHz)

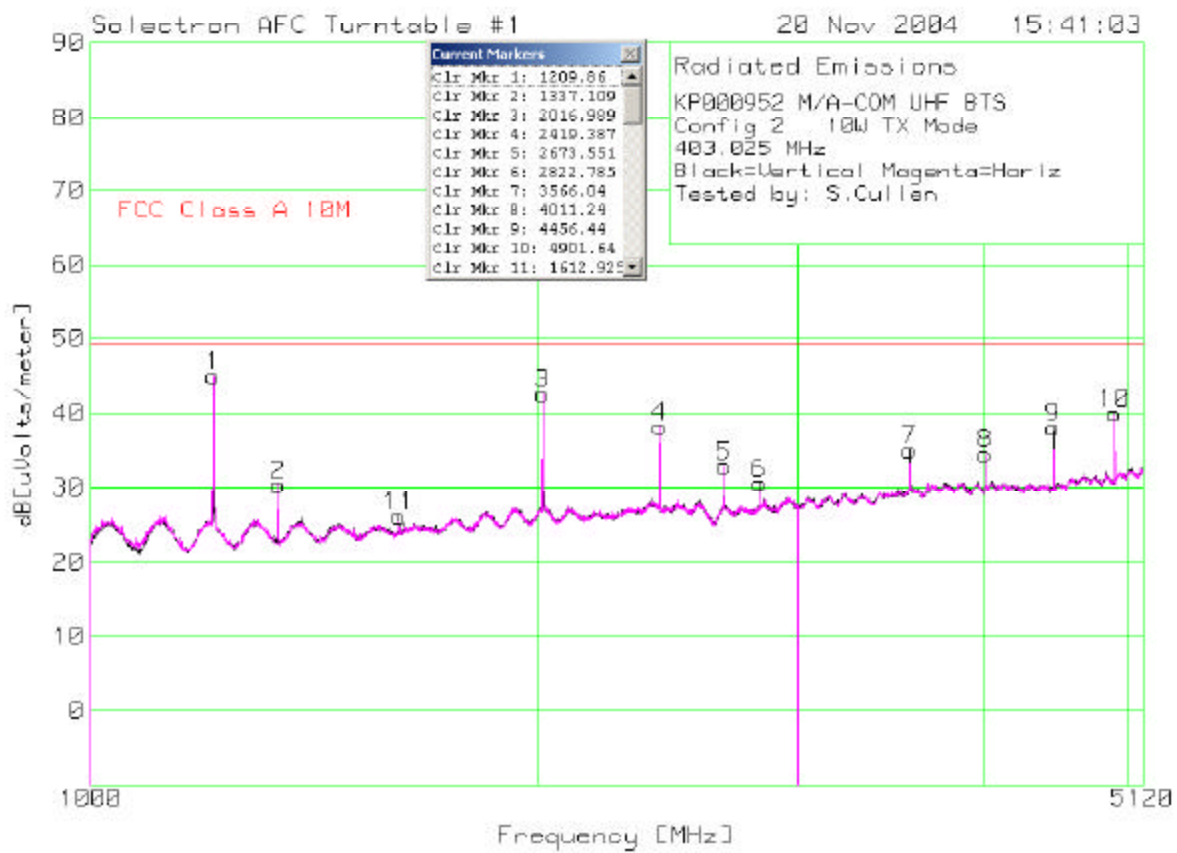
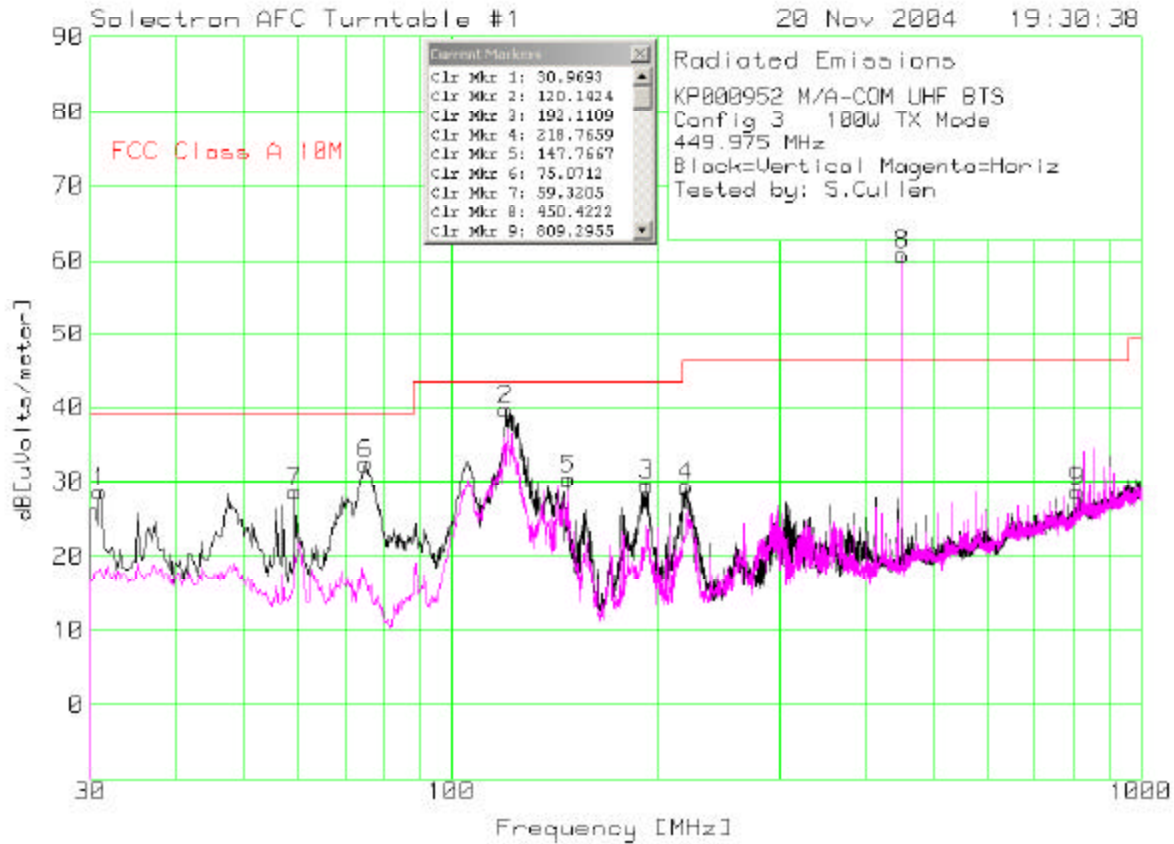


Figure 7-20: Field Strength with 100 W Tx, 30 MHz to 1 GHz (Tx at 449.975 MHz)


Note: the emissions at 450 MHz is leakage of the transmitted signal.

Figure 7-21: Field Strength with 100 W Tx, 1 GHz to 5.12 GHz, (Tx at 449.975 MHz)



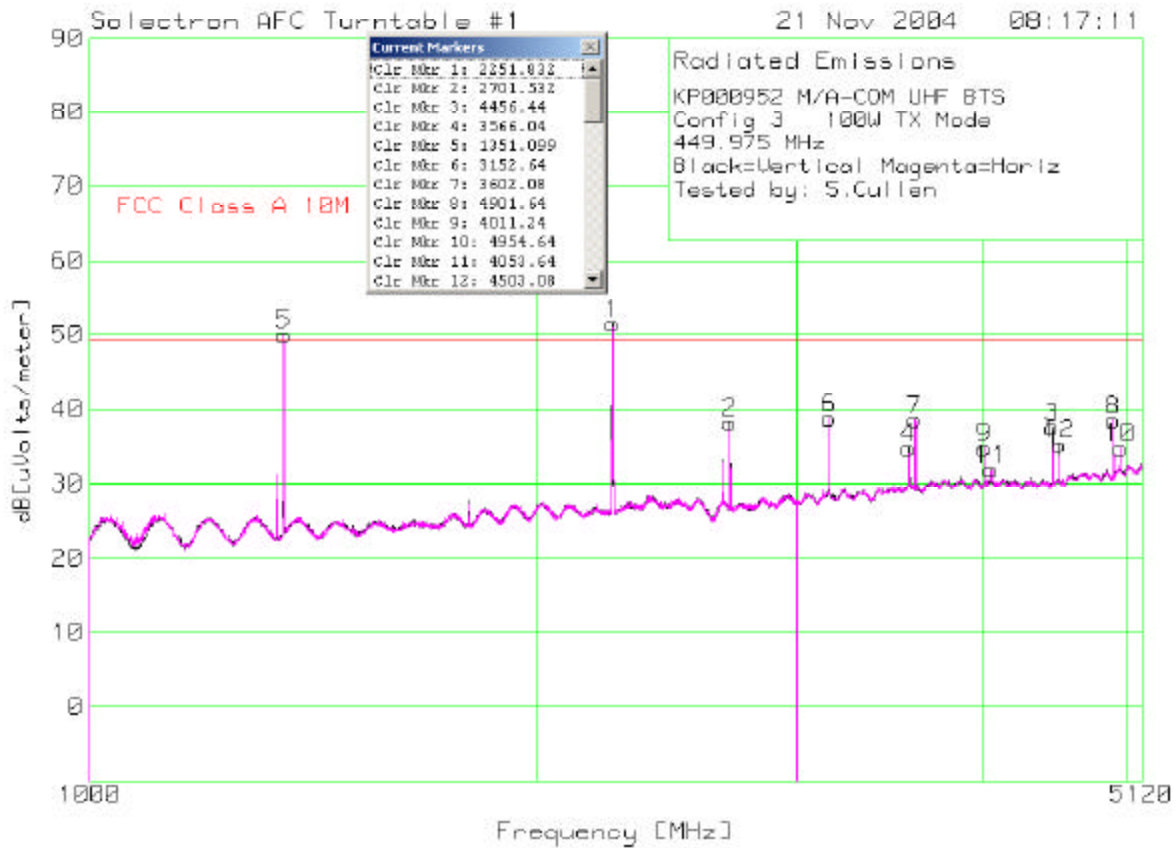


Figure 7-22: Field Strength with 10 W Tx, 30 MHz to 1 GHz (Tx at 449.975 MHz)


Note: the emissions at 450 MHz is leakage of the transmitted signal.

Figure 7-23: Field Strength with 10 W Tx, 1 GHz to 5.12 GHz, (Tx at 449.975 MHz)

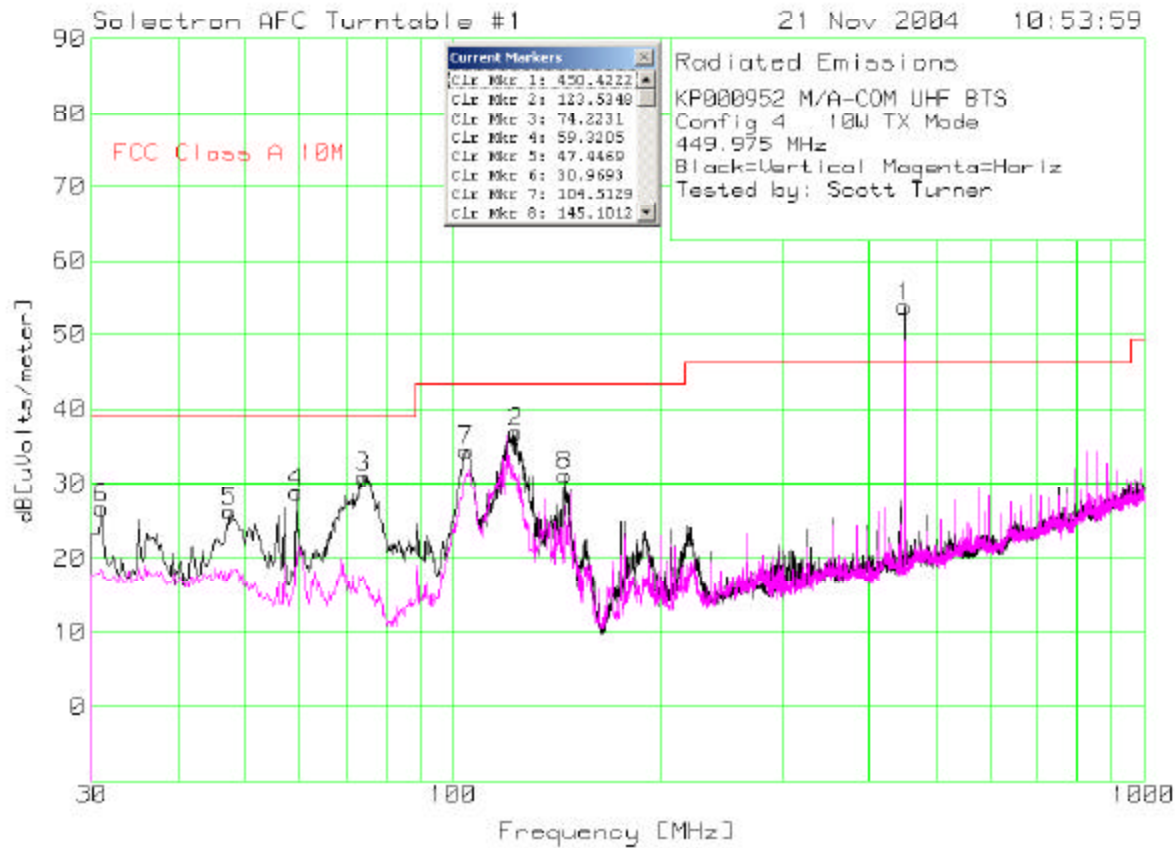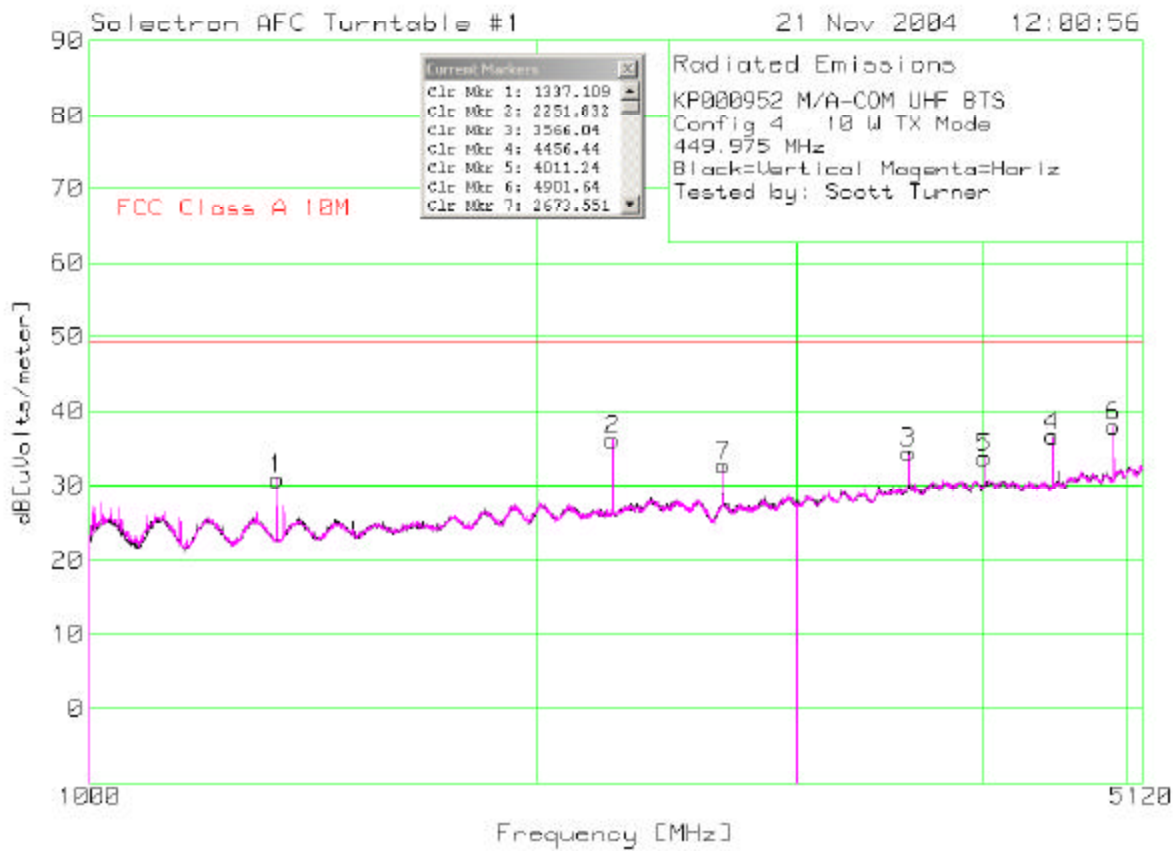

7.6 Appendix F: Transient Frequency Behavior Plots

This appendix presents all the transient frequency behavior plots for the test cases measured

Figure 7-24 Transient Frequency Behavior, Tx at 425.025 MHz, Wideband, Transmitter on

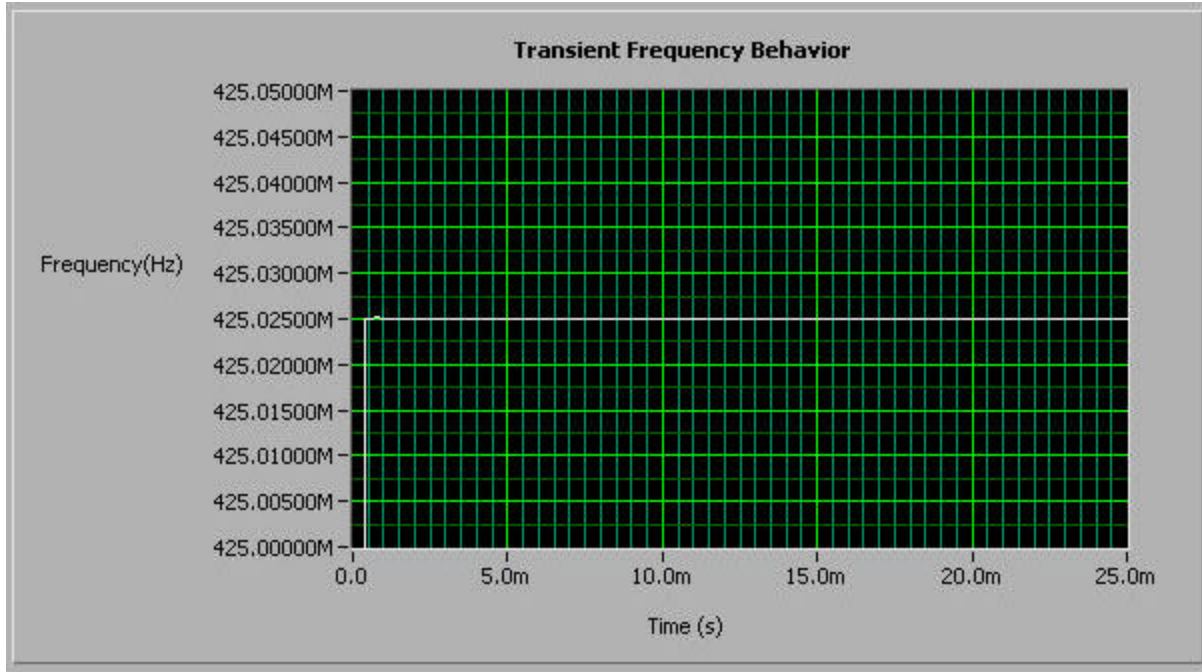


Figure 7-25 Transient Frequency Behavior, Tx at 425.025 MHz, Wideband, Transmitter off

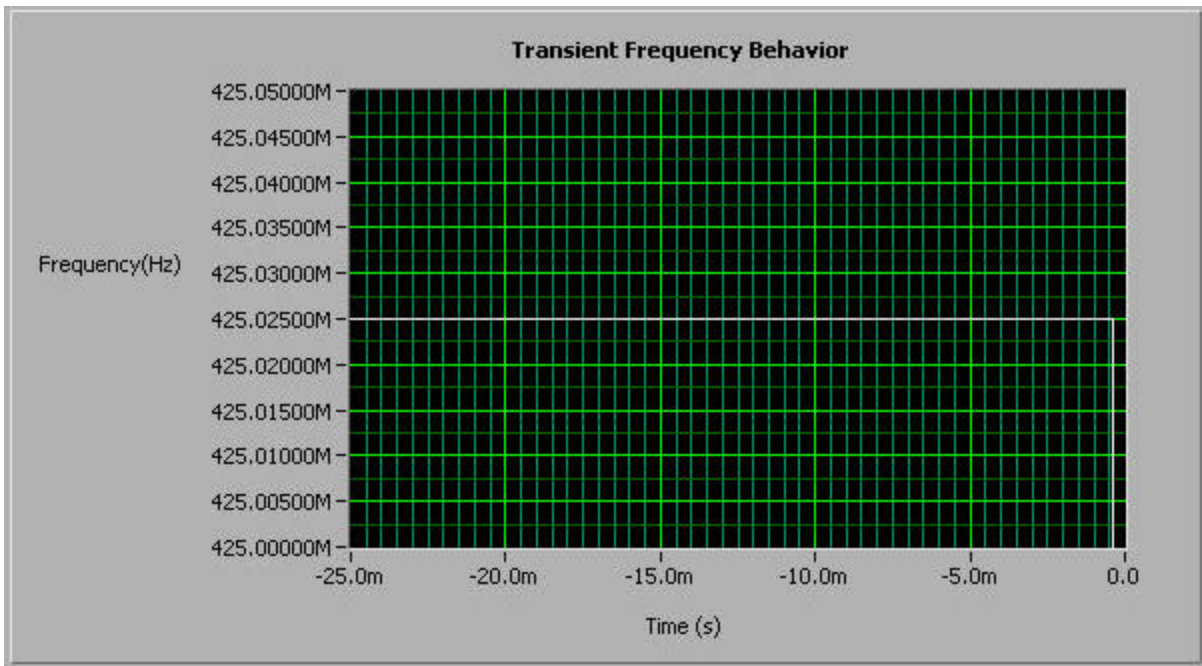


Figure 7-26 Transient Frequency Behavior, Tx at 425.025 MHz, Narrowband, Transmitter on


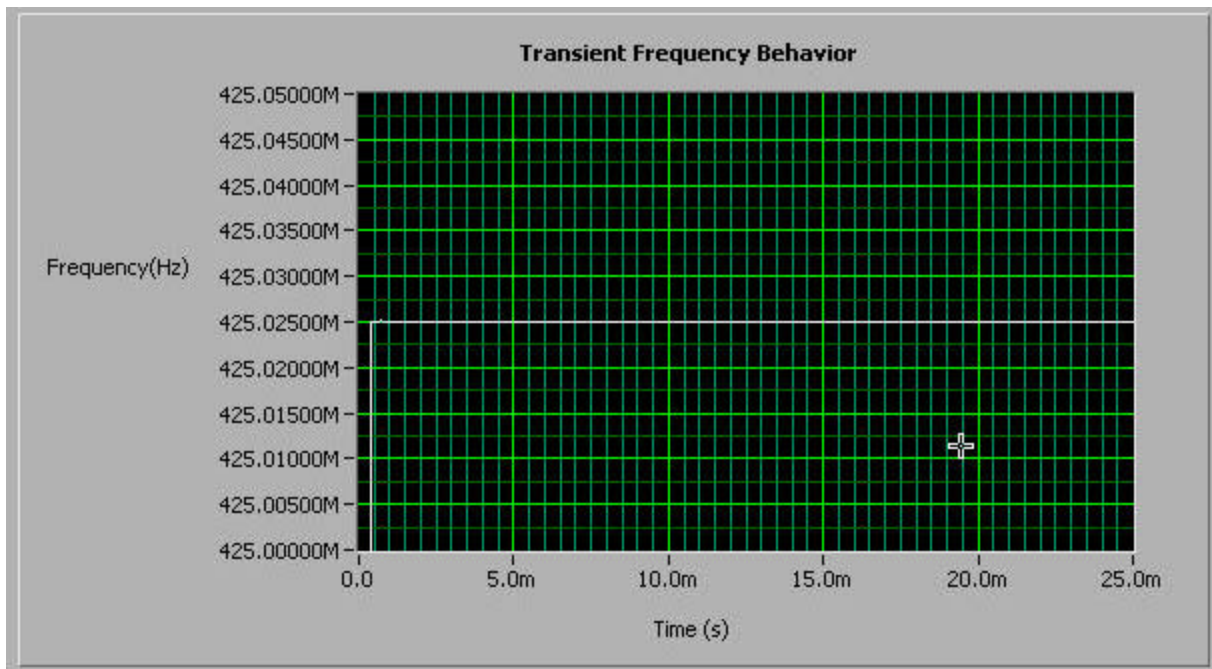



Figure 7-27 Transient Frequency Behavior, Tx at 425.025 MHz, Narrowband, Transmitter off

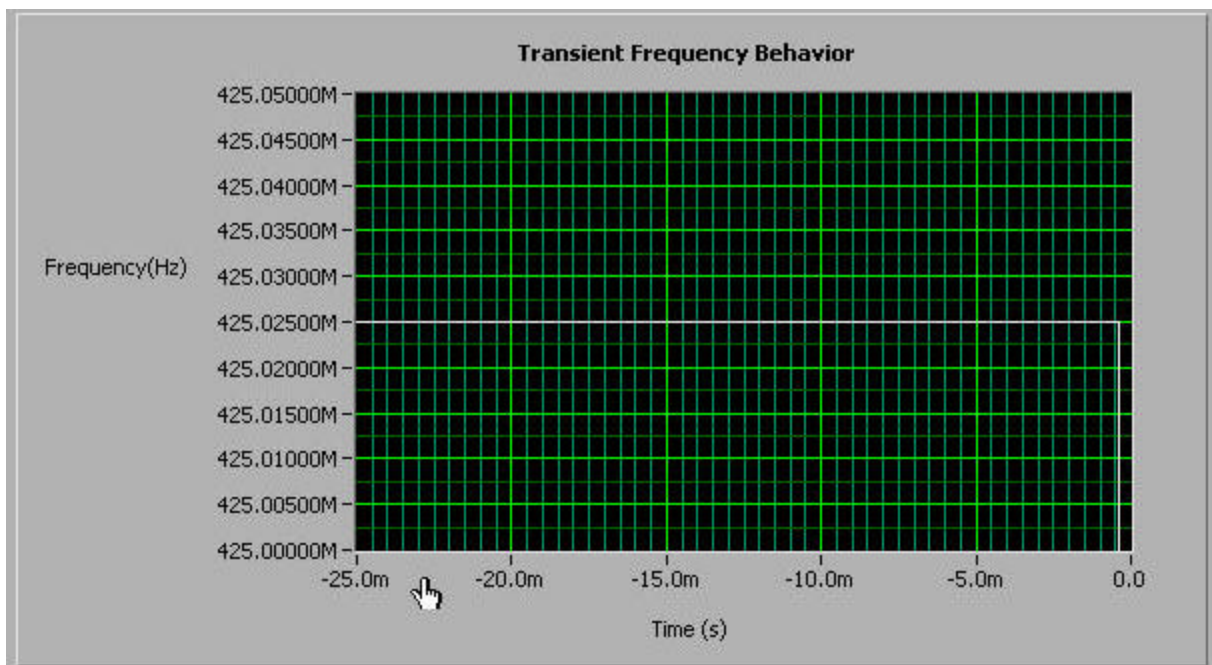

7.7 Appendix G: Occupied Bandwidth Plots


This appendix presents all the occupied bandwidth plots for the test cases measured.

Figure 7-28: 2500 Hz Audio Signal Wideband, 425.025 MHz

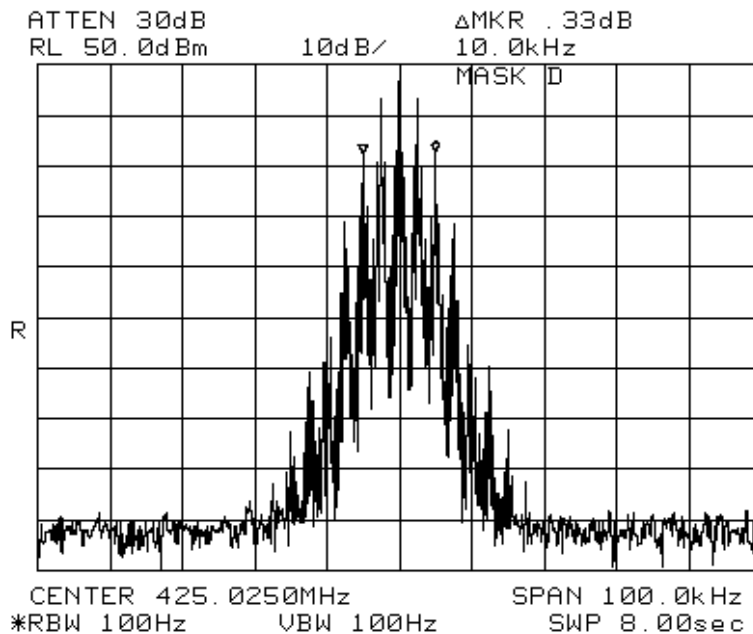

Tx at 425.025 MHz
100 W
Analog modulation WB
2500 Hz signal level 16 dB
higher than required for
50% deviation at 1 kHz

Figure 7-29: 2500 Hz Audio Signal Narrowband, 425.025 MHz

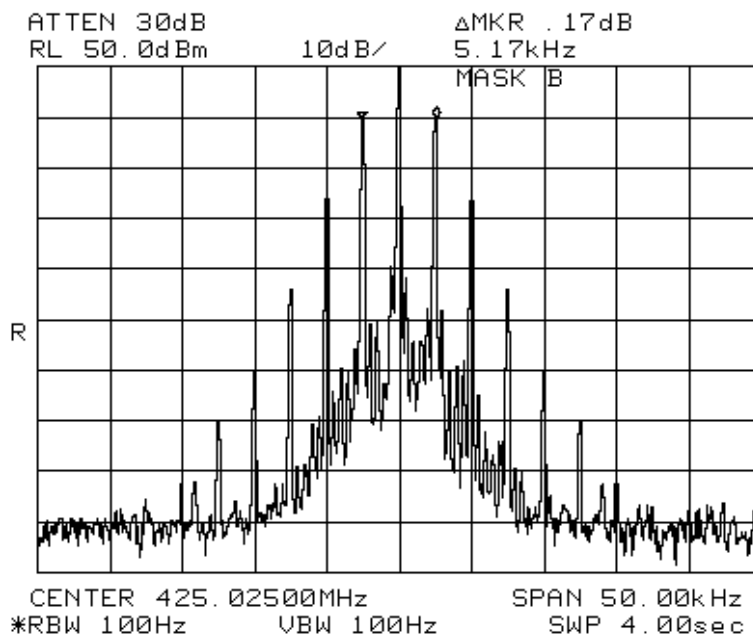

Tx at 425.025 MHz
100 W
Analog Modulation
2500 Hz signal level 16 dB
higher than required for
50% deviation at 1 kHz

Figure 7-30: 2 Level 9600 baud Signal with +/- 3 kHz Deviation, 425.025 MHz

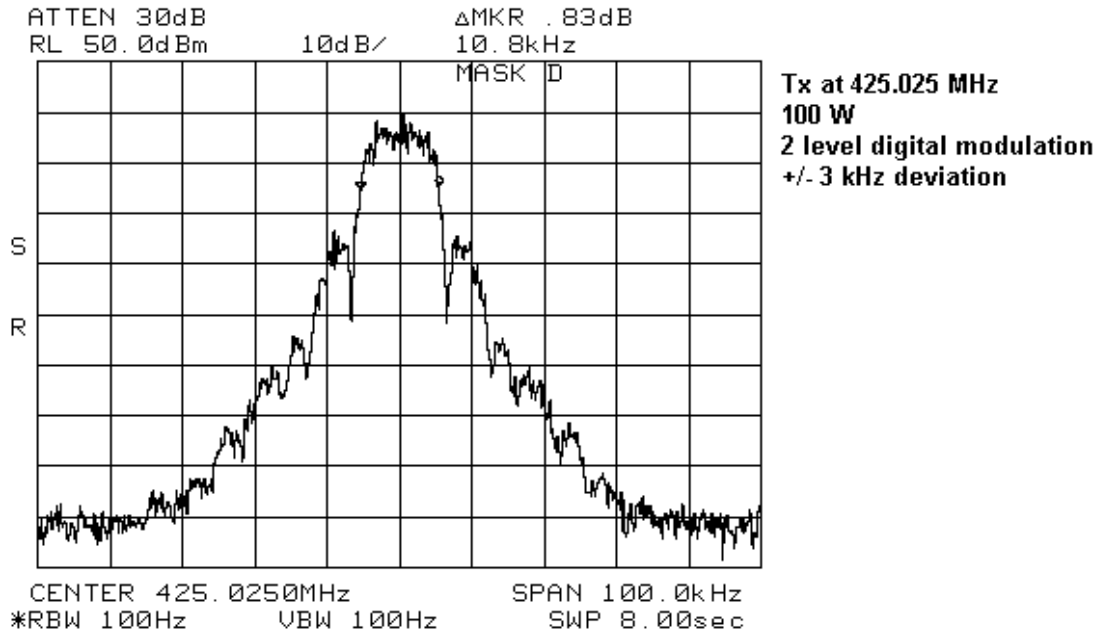


Figure 7-31: 2 Level 9600 baud Signal with +/- 1.9 kHz Deviation, 425.025 MHz

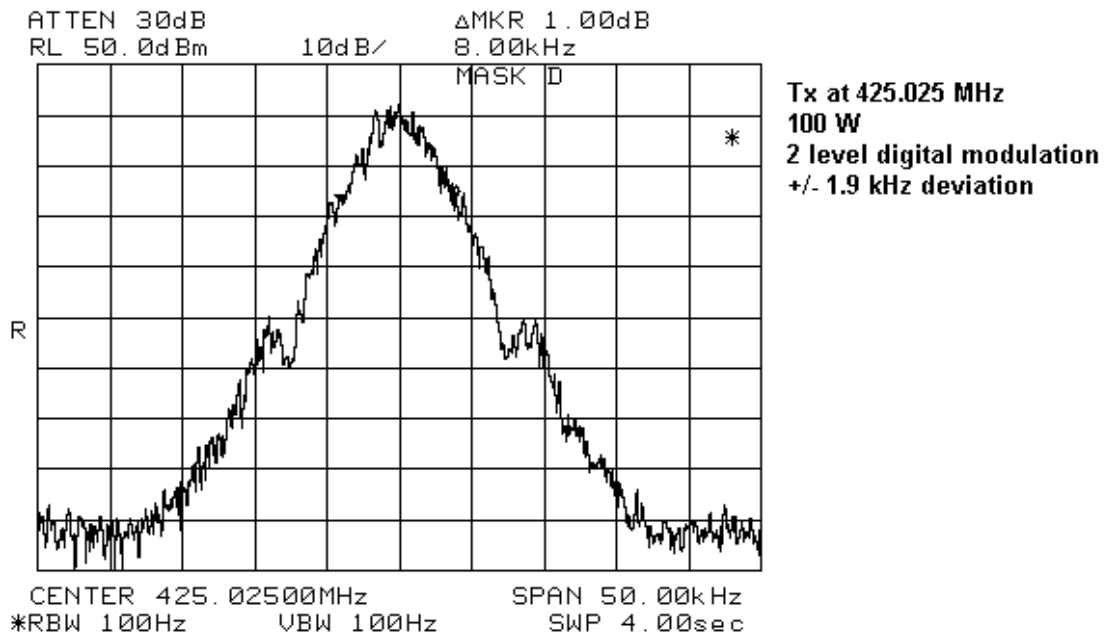


Figure 7-32: C4FM / 9600 bits/sec Signal, 425.025 MHz


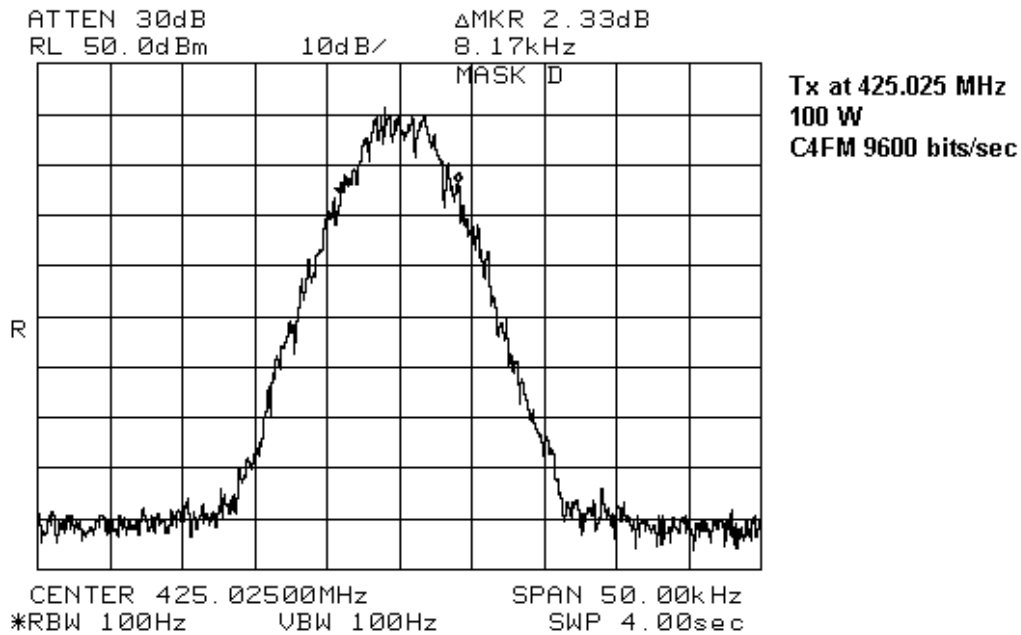


Figure 7-33: C4FM / 4800 bits/sec Signal, 425.025 MHz

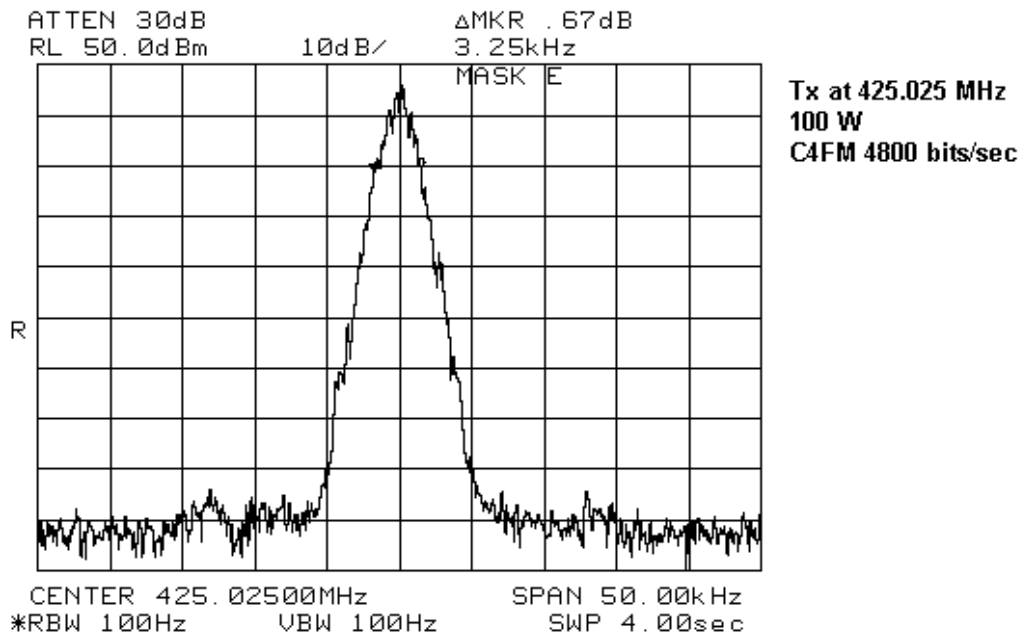

7.8 Appendix H: Conducted Receiver Emissions Plots

Figure 7-34: Rx at 423.975 MHz, 30 MHz to 1GHz


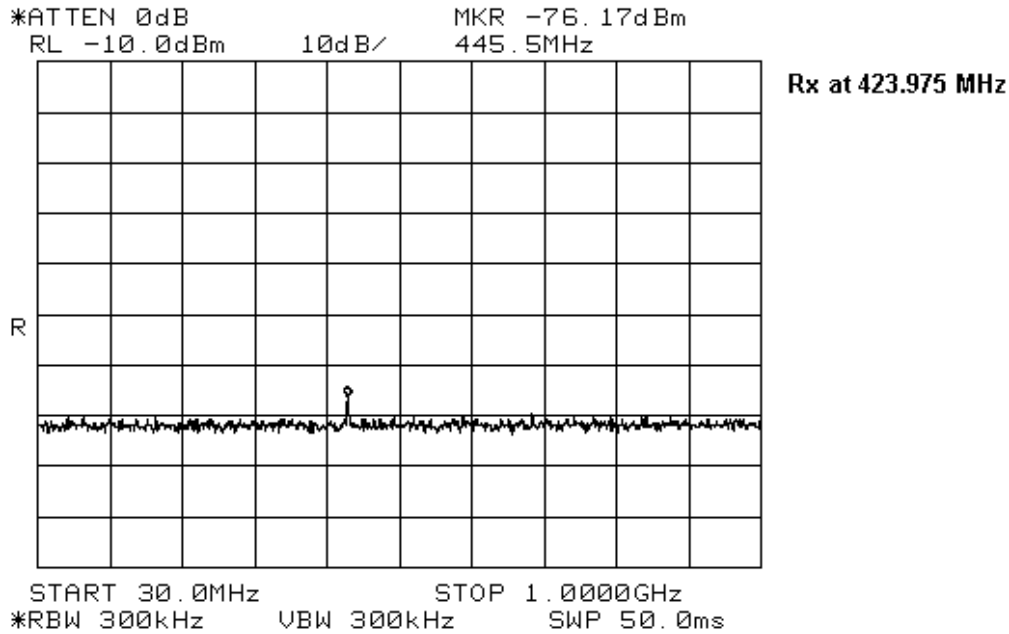


Figure 7-35: Rx at 423.975 MHz, 1 GHz to 2.56 GHz

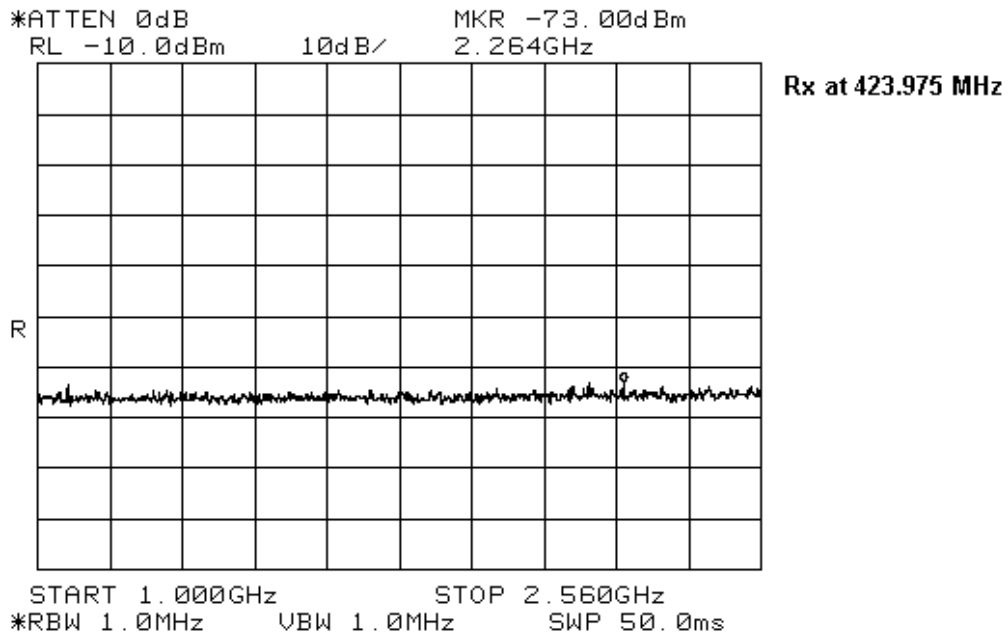

SOLETRON EMS CANADA INC.

Certification Report for M/A-COM MASTRIII UHF Base Station FCC Part 90 & RSS-119

© Copyright Soletron EMS Canada Inc. December 21, 2004

The master of this document is stored on an electronic database and is "write-protected" and may be altered only by authorized persons at Soletron EMS Canada Inc. Viewing of the master document electronically ensures access to the current issue. Any hard copies must be regarded as uncontrolled copies.

Soletron EMS Canada Inc. accepts no liability for the content of this document except when it is reproduced in its entirety by a method acceptable to Soletron EMS Canada Inc.
