



Engineering and Testing for EMC and Safety Compliance



Accredited under NVLAP Lab Code 200061-0

Certification Report

M/A-Com, Inc.
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Contact: Daryl Popowitch
Phone: (434) 455-9527
E-Mail: popowitda@tycoelectronics.com

Model: M5300 900 MHz Mobile Radio

FCC ID: OWDTR-0049-E
IC: 3636B-0049

May 22, 2007

Standards Referenced for this Report	
Part 2: 2006	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 15: 2006	Radio Frequency Devices - §15.109: Radiated Emissions Limits
Part 90: 2006	Private Land Portable Radio Services
ANSI TIA-603-C-2004	Land Portable FM or PM Communications Equipment - Measurement and Performance Standards
ANSI TIA/EIA-102.CAAA; 2002	Digital C4FM/CQPSK Transceiver Measurement Methods
RSS-119; Issue 6; 2000	Land Portable and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Emissions Designator
896-901	30.0	0.63	11K0F3E (Analog Voice)
935-940	30.0	0.63	11K0F3E (Analog Voice)
896-901	30.0	0.63	11K7F1D/E (2 level FSK NB 9600bps)
935-940	30.0	0.63	11K7F1D/E (2 level FSK NB 9600bps)
896-901	30.0	0.63	7K7F1D/E (2 level FSK NB 4800bps)
935-940	30.0	0.63	7K7F1D/E (2 level FSK NB 4800bps)
896-901	30.0	0.63	8K4F1D/E (4-level FSK P25)
935-940	30.0	0.63	8K4F1D/E (4-level FSK P25)
896-901	30.0	0.63	8K8F1D/E (4-level FSK OTP)

Report Prepared by Test Engineer: Daniel Biggs

Document Number: 2007163-001/QRTL07-087

*This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc.
Test results relate only to the item tested.*

360 Herndon Parkway, Suite 1400
Herndon, VA 20170
Tel: 703-689-0368 Fax: 703-689-2056

Table of Contents

1	General Information.....	5
1.1	Test Facility	5
1.2	Related Submittal(s)/Grant(s)	5
2	Tested System Details	6
3	FCC Rules and Regulations Part 2 §2.1033(c)(8) Voltages and Currents Through The Final Amplifying Stage	7
4	FCC Rules and Regulations Part 2 §2.1046(a): RF Power Output: Conducted; RSS-119 §6.2: Output P.....	
	Power Test	8
4.1	Test Procedure.....	8
4.2	Test Data.....	8
5	FCC Rules and Regulations Part 2 §2.1051: Spurious Emissions at Antenna Terminals; Part 90 §90.210: Emissions Masks; RSS-119 §5.8: Transmitter Unwanted Emissions.....	9
5.1	Test Procedure.....	9
5.2	Test Data.....	9
6	FCC Rules and Regulations Part 2 §2.1053(a): Field Strength of Spurious Radiation; RSS-119 §6.3: Unwanted Emissions.....	12
6.1	Test Procedure.....	12
6.2	Test Data.....	12
6.2.1	CFR 47 Part 90.210 Requirements	12
7	FCC Rules and Regulations Part 2 §2.1049: Occupied Bandwidth; Part 90 §90.210(i)&(j): Emissions Masks; RSS-119 §5.8: Transmitter Unwanted Emissions.....	14
7.1	Test Procedure.....	14
7.2	Test Data.....	15
8	FCC Rules and Regulations Part 90 §90.213 and Part 2 §2.1055: Frequency Stability	24
8.1	Test Procedure.....	24
8.2	Test Data.....	24
8.2.1	CFR 47 Part 90.213 Requirements	24
8.2.2	Frequency Stability/Temperature Variation	25
8.2.3	Frequency Stability/Voltage Variation.....	27
9	FCC Rules and Regulations Part 2 §2.1047(a): Modulation Characteristics - Audio Frequency Response	28
9.1	Test Procedure.....	28
9.2	Test Data.....	28
10	FCC Rules and Regulations Part 2 §2.1047(a): Modulation Characteristics – Audio Low Pass Filter.....	30
10.1	Test Procedure.....	30
10.2	Test Data.....	30
11	FCC Rules and Regulations Part 2 §2.1047(b): Modulation Characteristics - Modulation Limiting	31
11.1	Test Procedure.....	31
11.2	Test Data.....	31
12	FCC Rules and Regulations Part 2 §2.202: Necessary Bandwidth and Emission Bandwidth	35
13	Conclusion.....	35

Table of Figures

Figure 2-1: Configuration of Tested System.....	7
---	---

Table of Tables

Table 2-1: Equipment under Test (EUT).....	6
Table 2-2: Support Equipment.....	6
Table 4-1: RF Power Output (High Power): Carrier Output Power (Unmodulated).....	8
Table 4-2: RF Power Output (Rated Power).....	8
Table 4-3: Test Equipment for Testing RF Power Output - Conducted.....	8
Table 5-1: Conducted Spurious Emissions – 896.000 MHz; Narrow Band; High Power.....	9
Table 5-2: Conducted Spurious Emissions – 898.675 MHz; Narrow Band; High Power.....	10
Table 5-3: Conducted Spurious Emissions – 900.675 MHz; Narrow Band; High Power.....	10
Table 5-4: Conducted Spurious Emissions – 935.000 MHz; Narrow Band; High Power.....	10
Table 5-5: Conducted Spurious Emissions – 937.675 MHz; Narrow Band; High Power.....	11
Table 5-6: Conducted Spurious Emissions – 939.675 MHz; Narrow Band; High Power.....	11
Table 5-7: Test Equipment for Testing Conducted Spurious Emissions.....	11
Table 6-1: Field Strength of Spurious Radiation – 898.675 MHz; Narrow Band; High Power.....	12
Table 6-2: Field Strength of Spurious Radiation – 937.675 MHz; Narrow Band; High Power.....	13
Table 6-3: Test Equipment for Testing Field Strength of Spurious Radiation.....	13
Table 7-1: Test Equipment for Testing Occupied Bandwidth.....	23
Table 8-1: Frequency Stability/Temperature Variation – 937.675 MHz.....	25
Table 8-2: Test Equipment for Testing Frequency Stability/Temperature.....	26
Table 8-3: Frequency Stability/Voltage Variation – 937.675 MHz.....	27
Table 8-4: Test Equipment for Testing Frequency Stability/Voltage.....	27
Table 9-1: Test Equipment for Testing Audio Frequency Response.....	29
Table 11-1: Test Equipment for Testing Modulation Limiting.....	34

Table of Plots

Plot 7-1: Occupied Bandwidth – 898.500 MHz; Mask I; Analog; High Power.....	15
Plot 7-2: Occupied Bandwidth – 937.675 MHz; Mask I; Analog; High Power.....	16
Plot 7-3: Occupied Bandwidth – 898.500 MHz; Mask J; 2-level FSK; 9600 BPS.....	17
Plot 7-4: Occupied Bandwidth – 937.675 MHz; Mask J; 2-level FSK; 9600 BPS.....	18
Plot 7-5: Occupied Bandwidth – 898.500 MHz; Mask J; 2-level FSK; 4800 BPS.....	19
Plot 7-6: Occupied Bandwidth – 937.675 MHz; Mask J; 2-level FSK; 4800 BPS.....	20
Plot 7-7: Occupied Bandwidth – 898.500 MHz; Mask J; 4-level FSK (P25 mode); 4800 SPS.....	21
Plot 7-8: Occupied Bandwidth – 937.500 MHz; Mask J; 4-level FSK (P25 mode); 4800 SPS.....	22
Plot 7-9: Occupied Bandwidth – 898.500 MHz; Mask J; 4-level FSK (NB OTP mode); 4800 SPS.....	23
Plot 8-1: Temperature Frequency Stability – 937.675 MHz Channel.....	25
Plot 8-2: Temperature Frequency Stability – 937.675 MHz Channel.....	27
Plot 9-1: Modulation Characteristics - Audio Frequency Response; 898.500 MHz.....	28
Plot 9-2: Modulation Characteristics - Audio Frequency Response; 937.675 MHz.....	29
Plot 10-1: Modulation Characteristics – Audio Low Pass Filter (Post Limited Frequency Response).....	30
Plot 11-1: Modulation Characteristics – Modulation Limiting: 898.500 MHz; Narrow Band; Positive Peak.....	31
Plot 11-2: Modulation Characteristics – Modulation Limiting: 898.500 MHz; Narrow Band; Negative Peak.....	32
Plot 11-3: Modulation Characteristics – Modulation Limiting: 937.675 MHz; Narrow Band; Positive Peak.....	33
Plot 11-4: Modulation Characteristics – Modulation Limiting: 937.675 MHz; Narrow Band; Negative Peak.....	34

Table of Appendixes

Appendix A: Agency Authorization	36
Appendix B: Confidentiality Request Letter	37
Appendix C: IC Letters	38
Appendix D: Operational Description	39
Appendix E: Schematics.....	40
Appendix F: Block Diagrams	41
Appendix G: Parts List.....	42
Appendix H: Alignment/Tune Up Procedure	43
Appendix I: User Manual	44
Appendix J: Label & Location	45
Appendix K: Test Configuration Photographs	48
Appendix L: External Photographs	50
Appendix M: Internal Photographs	53

1 General Information

This following Certification Report is prepared on behalf of **M/A-COM, Inc.** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **M5300 900 MHz Mobile Radio with GPS, remote mount only; FCC ID: OWDTR-0049-E, IC: 3636B-0049**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with applicable FCC Rules and Regulations CFR 47 and Industry Canada RSS-119. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

1.2 Related Submittal(s)/Grant(s)

This is an original application report.

2 Tested System Details

The test sample was received on May 4, 2007. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this testing, as applicable.

Table 2-1: Equipment under Test (EUT)


The test system contains the following components:

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Mobile Radio	M/A-Com, Inc.	M5300 900 MHz	RU-144750-181	OWDTR-0049-E	17925
Control Head	M/A-Com, Inc.	N/A	CU23218/96000140	N/A	17926
Microphone	M/A-Com, Inc.	N/A	MC101616-040	N/A	17928
Speaker	M/A-Com, Inc.	N/A	LS102824V10R1A	N/A	17913
Antenna	M/A-Com, Inc.	Roof mount w/ GPS	AN-025177-004	N/A	17914
Antenna	M/A-Com, Inc.	Roof mount	AN-025177-009	N/A	17915
Antenna	M/A-Com, Inc.	Magnetic mount	AN-025177-005	N/A	17916

Table 2-2: Support Equipment

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
Test Box	M/A-Com, Inc.	M5300	N/A	N/A	17930
Power Supply	Alinco	DM330-MVT	0008661	N/A	901439

Figure 2-1: Configuration of Tested System

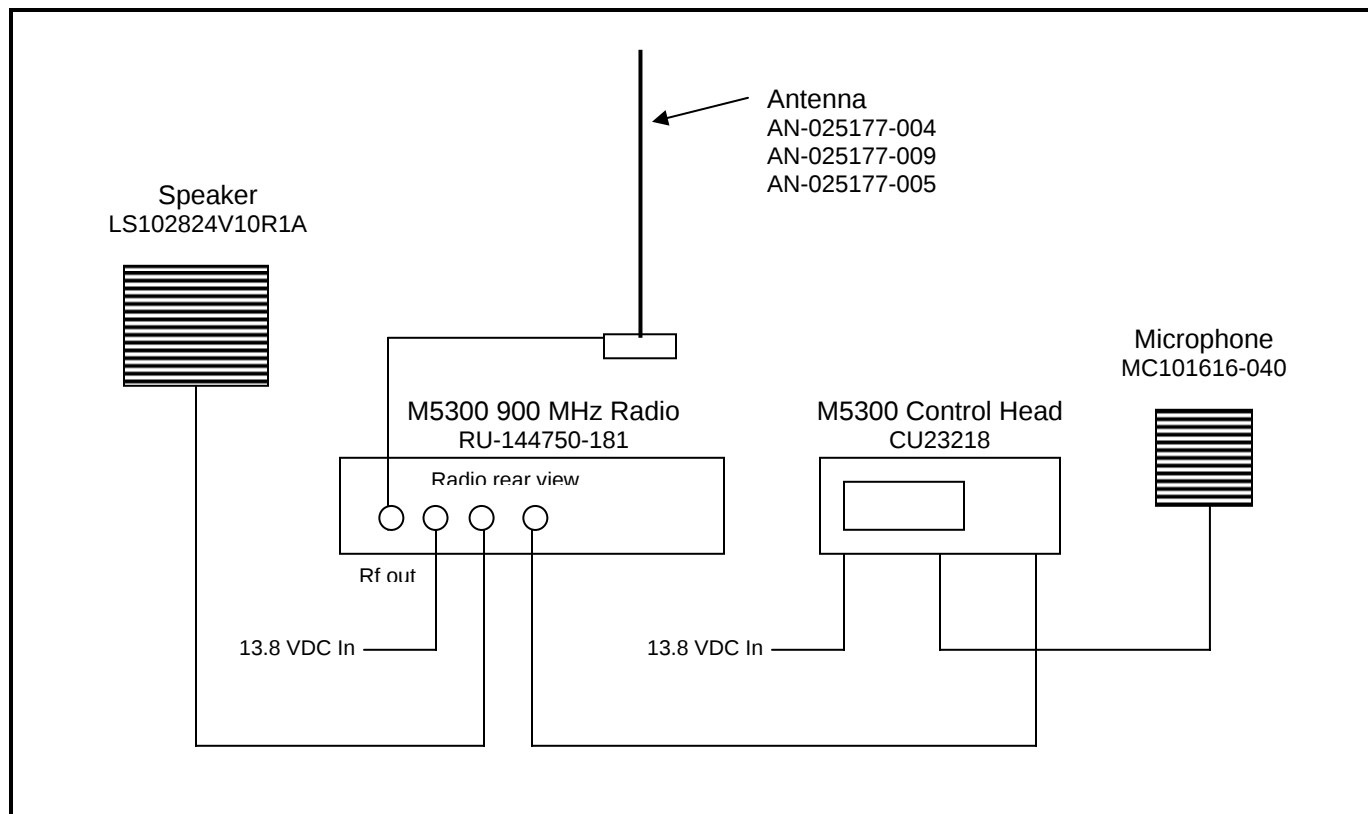

Test configuration notes:

- The control head is remote mount only.
- The radio contains a GPS which was tested for unintentional digital emissions; a DoC report is on file and available upon request.
- The following antennas will be offered with the system. Three antennas were selected to be tested based on their technical characteristics and were judged to represent the worst case emissions, and they are listed in Table 2-1.
 - o AN102800V1
 - o AN102800V2
 - o AN-025177-001
 - o AN-025177-002
 - o AN-025177-003
 - o AN-025177-004
 - o AN-025177-009
 - o AN-025177-010

3 FCC Rules and Regulations Part 2 §2.1033(c)(8) Voltages and Currents Through the Final Amplifying Stage

Nominal DC Voltage: 13.8 VDC

Current: 6.5 A

4 FCC Rules and Regulations Part 2 §2.1046(a): RF Power Output: Conducted; RSS-119 §6.2: Output Power Test

4.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.1

The EUT was connected with a power sensor/meter through an appropriate 50 ohm attenuator. Attenuator loss was accounted for.

4.2 Test Data

Table 4-1: RF Power Output (High Power): Carrier Output Power (Unmodulated)

Channel	Frequency (MHz)	RF Power Measured (W)*
1 (High Power)	896.000	32.5
2 (High Power)	898.675	32.8
3 (High Power)	900.675	33.3
4 (High Power)	935.000	31.3
5 (High Power)	937.675	31.1
6 (High Power)	939.675	31.5

* Measurement accuracy: +/- .02 dB (logarithmic mode)

Table 4-2: RF Power Output (Rated Power)

Channel	Frequency (MHz)	Rated Power (W)*
1 (High Power)	896.000	30.0
2 (High Power)	898.675	30.0
3 (High Power)	900.675	30.0
4 (High Power)	935.000	30.0
5 (High Power)	937.675	30.0
6 (High Power)	939.675	30.0

* Measurement accuracy: +/- .02 dB (logarithmic mode)

Table 4-3: Test Equipment for Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901184	Agilent Technologies	E4416A	EPM-P Power Meter, Single Channel	GB41050573	10/3/07
901356	Agilent Technologies	E9323A	Power Sensor	31764-264	10/3/07
900819	Weinschel Corporation	BF0830	Attenuator 10 db	N/A	12/2/08

Test Personnel:

Dan Biggs		May 7, 2007
Test Engineer	Signature	Date Of Test

5 FCC Rules and Regulations Part 2 §2.1051: Spurious Emissions at Antenna Terminals; Part 90 §90.210: Emissions Masks; RSS-119 §5.8: Transmitter Unwanted Emissions

5.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.13.

The transmitter was interfaced with a spectrum analyzer through an appropriate 50 ohm attenuator and a notch filter. The transmitter was operated at maximum power. Attenuator and cable losses were accounted for.

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600 bps.

5.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10xFc.

Limit = 50 + 10 Log (P) dB or 70 dB, whichever is greater.

The worst case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

Table 5-1: Conducted Spurious Emissions – 896.000 MHz; Narrow Band; High Power

Freq = 896.000 MHz - Limit = 50 + 10 Log P = 65.1 dBc - Conducted Power = 45.1 dBm = 32.5 W

Frequency (MHz)	SA Level w/ Notch (dBm)	Level (dBc)	Limit (dBc)	Margin(dB)
1792	-49.6	94.7	65.1	-29.6
2688	-47.5	92.6	65.1	-27.5
3584	-39.1	84.2	65.1	-19.1
4480	-58.7	103.8	65.1	-38.7
5376	-54.6	99.7	65.1	-34.6
6272	-53.8	98.9	65.1	-33.8
7168	-54.6	99.7	65.1	-34.6
8064	-55.8	100.9	65.1	-35.8
8960	-54.6	99.7	65.1	-34.6

Table 5-2: Conducted Spurious Emissions – 898.675 MHz; Narrow Band; High Power

Freq = 898.675 MHz - Limit = $50 + 10 \log P = 65.2$ dBc - Conducted Power = 45.2 dBm = 32.5 W

Frequency (MHz)	SA Level w/ Notch (dBm)	Level (dBc)	Limit (dBc)	Margin(dB)
1797.350	-49.5	94.7	65.2	-29.5
2696.025	-46.9	92.1	65.2	-26.9
3594.700	-39.6	84.8	65.2	-19.6
4493.375	-55.9	101.1	65.2	-35.9
5392.050	-54.3	99.5	65.2	-34.3
6290.725	-55.9	101.1	65.2	-35.9
7189.400	-54.6	99.8	65.2	-34.6
8088.075	-55.4	100.6	65.2	-35.4
8986.750	-54.5	99.7	65.2	-34.5

Table 5-3: Conducted Spurious Emissions – 900.675 MHz; Narrow Band; High Power

Freq = 900.675 MHz - Limit = $50 + 10 \log P = 65.2$ dBc - Conducted Power = 45.2 dBm = 33.3 W

Frequency (MHz)	SA Level w/ Notch (dBm)	Level (dBc)	Limit (dBc)	Margin(dB)
1801.350	-61.1	106.1	65.2	-40.9
2702.025	-57.1	102.1	65.2	-36.9
3602.700	-39.1	84.1	65.2	-18.9
4503.375	-56.8	101.8	65.2	-36.6
5404.050	-55.2	100.2	65.2	-35.0
6304.725	-54.8	99.8	65.2	-34.6
7205.400	-55.2	100.2	65.2	-35.0
8106.075	-56.1	101.1	65.2	-35.9
9006.750	-56.4	101.4	65.2	-36.2

Table 5-4: Conducted Spurious Emissions – 935.000 MHz; Narrow Band; High Power

Freq = 935.000 MHz - Limit = $50 + 10 \log P = 64.9$ dBc - Conducted Power = 45 dBm = 31.3 W

Frequency (MHz)	Notch/Cable Loss (dB)	Level (dBc)	Limit (dBc)	Margin(dB)
1870	-30.5	74.4	64.9	-9.4
2805	-48.1	88.0	64.9	-23.0
3740	-57.9	102.8	64.9	-37.8
4675	-55.2	96.9	64.9	-31.9
5610	-56.0	100.5	64.9	-35.5
6545	-53.7	95.0	64.9	-30.0
7480	-54.7	91.9	64.9	-26.9
8415	-55.3	99.2	64.9	-34.2
9350	-54.2	94.2	64.9	-29.2

Table 5-5: Conducted Spurious Emissions – 937.675 MHz; Narrow Band; High Power

Freq = 937.675 MHz - Limit = $50 + 10 \log P = 64.9$ dBc - Conducted Power = 44.9 dBm = 31.3 W

Frequency (MHz)	Notch/Cable Loss (dB)	Level (dBc)	Limit (dBc)	Margin(dB)
1875.350	-48.2	91.8	64.9	-26.9
2813.025	-48.1	89.4	64.9	-24.5
3750.700	-50.5	94.9	64.9	-30.0
4688.375	-58.4	101.1	64.9	-36.2
5626.050	-58.2	102.6	64.9	-37.7
6563.725	-58.1	100.5	64.9	-35.6
7501.400	-57.1	96.1	64.9	-31.2
8439.075	-56.3	100.1	64.9	-35.2
9376.750	-56.1	94.3	64.9	-29.4

Table 5-6: Conducted Spurious Emissions – 939.675 MHz; Narrow Band; High Power

Freq = 939.675 MHz - Limit = $50 + 10 \log P = 65$ dBc - Conducted Power = 45 dBm = 31.5 W

Frequency (MHz)	Notch/Cable Loss (dB)	Level (dBc)	Limit (dBc)	Margin(dB)
939.675	-49.9	94.1	65.0	-29.1
1879.350	-49.3	92.8	65.0	-27.8
2819.025	-50.6	95.2	65.0	-30.2
3758.700	-56.6	100.6	65.0	-35.6
4698.375	-57.8	102.3	65.0	-37.3
5638.050	-55.6	97.1	65.0	-32.1
6577.725	-56.2	98.0	65.0	-33.0
7517.400	-56.4	101.2	65.0	-36.2
8457.075	-55.8	88.8	65.0	-23.8

Table 5-7: Test Equipment for Testing Conducted Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	1/13/09
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	12/5/07

Test Personnel:

Daniel Biggs		May 8, 2007
Test Engineer	Signature	Date Of Test

6 FCC Rules and Regulations Part 2 §2.1053(a): Field Strength of Spurious Radiation; RSS-119 §6.3: Unwanted Emissions

6.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

Digital Modulation: Modulated to its maximum extent using a pseudo random data sequence – 9600 bps.

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

where:

P_d is the dipole equivalent power

P_g is the generator output power into the substitution antenna

6.2 Test Data

6.2.1 CFR 47 Part 90.210 Requirements

Limit = 50 + 10 Log (P) dB or 70 dB, whichever is greater. The worst case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

Table 6-1: Field Strength of Spurious Radiation – 898.675 MHz; Narrow Band; High Power

Freq = 898.675 MHz - Limit = 50 + 10 Log P = 65.2 dBc - Conducted Power = 45.2 dBm = 32.5 W

Frequency (MHz)	Measured Level (dBuV)		Signal Gen. Level (db)		Cable Loss (dB)	Antenna Gain (dBd)		Corrected Level (dBc)		Limit (dBc)	Margin (dB)	
898.675	H	V	H	V		H	V	H	V		H	V
1797.350	41.0	40.1	-27.9	-29.1	5.5	4.8	5.0	73.8	74.8	65.2	-8.6	-9.6
2696.030	36.8	39.6	-49.5	-46.5	6.7	6.9	7.1	94.5	91.3	65.2	-29.3	-26.1
3594.700	55.6	63.8	-28.7	-21.2	8.0	7.3	7.7	74.6	66.7	65.2	-9.4	-1.5
4493.380	25.8	25.9	-54.5	-54.2	9.2	7.9	8.2	101.0	100.4	65.2	-35.8	-35.2
5392.050	28.3	28.3	-49.9	-49.4	10.2	7.9	8.0	97.4	96.8	65.2	-32.2	-31.6
6290.730	26.3	26.2	-53.6	-54.0	11.2	8.8	8.8	101.2	101.6	65.2	-36.0	-36.4
7189.400	30.2	31.0	-50.8	-50.6	12.1	8.4	8.5	99.7	99.4	65.2	-34.5	-34.2
8088.080	30.8	32.1	-48.9	-47.8	12.8	7.4	7.5	99.5	98.3	65.2	-34.3	-33.1
8986.750	30.2	31.1	-48.6	-48.1	14.0	8.6	8.4	99.2	98.9	65.2	-34.0	-33.7

Table 6-2: Field Strength of Spurious Radiation – 937.675 MHz; Narrow Band; High Power

Freq = 937.675 MHz - Limit = $50 + 10 \log P = 64.9 \text{ dBc}$ - Conducted Power = 44.9 dBm = 31.3 W

Frequency (MHz)	Measured Level (dBuV)		Signal Gen. Level (db)		Cable Loss (dB)	Antenna Gain (dBd)		Corrected Level (dBc)		Limit (dBc)	Margin (dB)	
937.675	H	V	H	V		H	V	H	V		H	V
1875.35	33.0	33.3	-36.1	-36.0	5.5	4.8	5.0	81.7	81.4	64.9	-16.8	-16.5
2813.03	42.6	47.3	-43.5	-38.7	6.5	6.9	7.1	88.0	83.0	64.9	-23.1	-18.1
3750.70	56.2	58.2	-26.1	-24.2	8.3	7.2	7.3	72.1	70.1	64.9	-7.2	-5.2
4688.38	27.8	29.8	-52.2	-50.5	9.2	7.8	7.8	98.5	96.8	64.9	-33.6	-31.9
5626.05	27.4	32.2	-52.8	-48.9	10.6	8.2	8.2	100.1	96.2	64.9	-35.2	-31.3
6563.73	31.9	33.2	-47.8	-47.0	11.6	8.6	8.8	95.7	94.7	64.9	-30.8	-29.8
7501.40	31.2	31.1	-47.5	-48.3	12.4	8.7	8.9	96.1	96.7	64.9	-31.2	-31.8
8439.08	32.2	31.5	-45.5	-47.1	13.0	8.0	8.3	95.4	96.7	64.9	-30.5	-31.8
9376.75	31.0	31.2	-46.5	-46.0	14.2	8.6	8.8	97.0	96.3	64.9	-32.1	-31.4

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the ½ wave dipole antenna.

Table 6-3: Test Equipment for Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900791	Schaffner-Chase	CBL6112	Antenna (25 MHz – 2 GHz)	2099	6/12/07
900772	EMCO	3161-02	Horn Antennas (2 – 4 GHz)	9504-1044	5/20/07
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	5/20/07
900323	EMCO	3160-07	Horn Antennas (8.2 – 12 GHz)	9605-1054	7/31/09
900814	Electro-Metrics	EM-6961 (RGA-60)	Double Ridges Guide Antenna (1-18 GHz)	2310	3/30/09
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
901426	Insulated Wire Inc.	KPS-1503-3600-KPS	RF Cable, 30'	NA	12/6/07
901425	Insulated Wire, Inc.	KPS-1503-2400-KPS	RF Cable, 20'	NA	12/5/07
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF Cable 36"	NA	12/5/07

Test Personnel:

Daniel Biggs		May 17, 2007
Test Engineer	Signature	Date Of Test

7 FCC Rules and Regulations Part 2 §2.1049: Occupied Bandwidth; Part 90 §90.210(i)&(j): Emissions Masks; RSS-119 §5.8: Transmitter Unwanted Emissions

7.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.11.

The transmitter was interfaced with a spectrum analyzer through an appropriate 50 ohm attenuator and a notch filter. The transmitter was operated at maximum power. Attenuator losses were accounted for.

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

The device uses digital modulation modulated to its maximum extent using a pseudo-random data sequence of 9600 bps.

Limit Mask I:

For Emission Mask I for transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 6.8 kHz, but not more than 9.0 kHz: at least 25 dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 9.0 kHz, but not more than 15 kHz: at least 35 dB;
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 15 kHz: at least $43 + 10 \log (P)$ dB, or 70 dB, whichever is the lesser attenuation.


Limit Mask J:

For Emission Mask J for transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:


- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 2.5 kHz, but not more than 6.25 kHz: at least $53 \log (f_d/2.5)$ dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 6.25 kHz, but not more than 9.5 kHz: at least $103 \log (f_d/3.9)$ dB;
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 9.5 kHz: at least $157 \log (f_d/5.3)$ dB, or $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

7.2 Test Data


Plot 7-1: Occupied Bandwidth – 898.500 MHz; Mask I; Analog; High Power

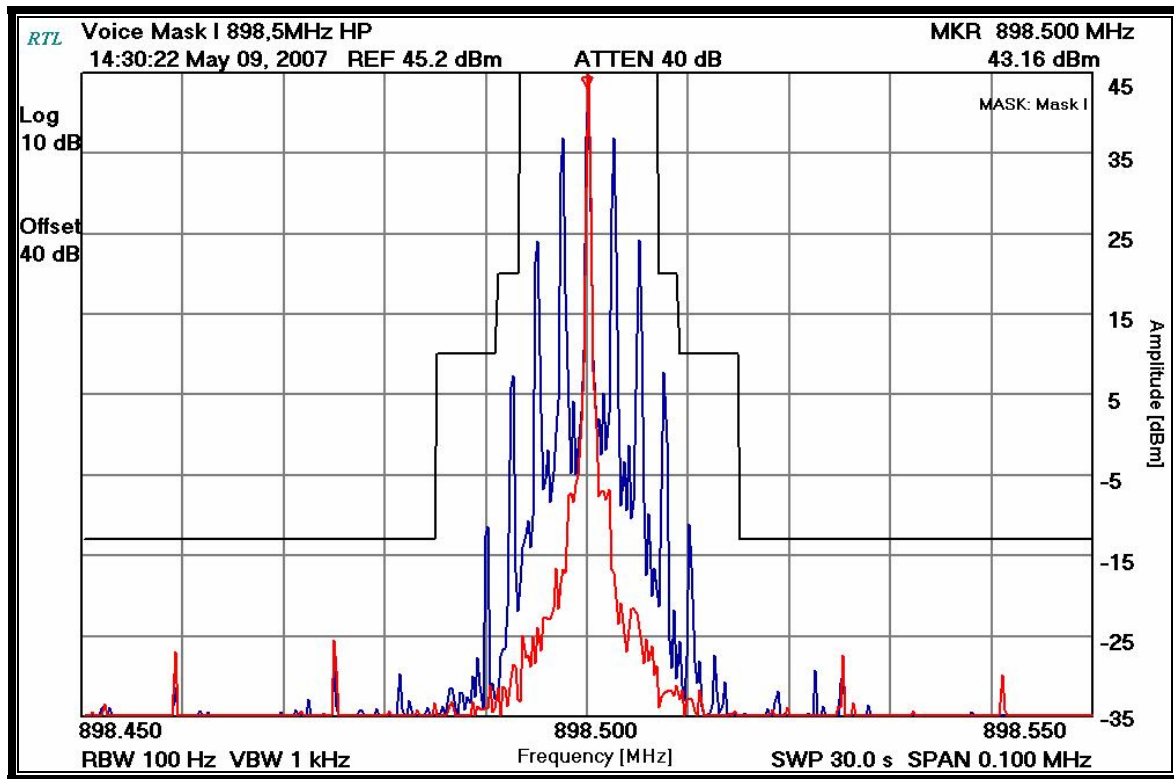


Plot 7-2: Occupied Bandwidth – 937.675 MHz; Mask I; Analog; High Power

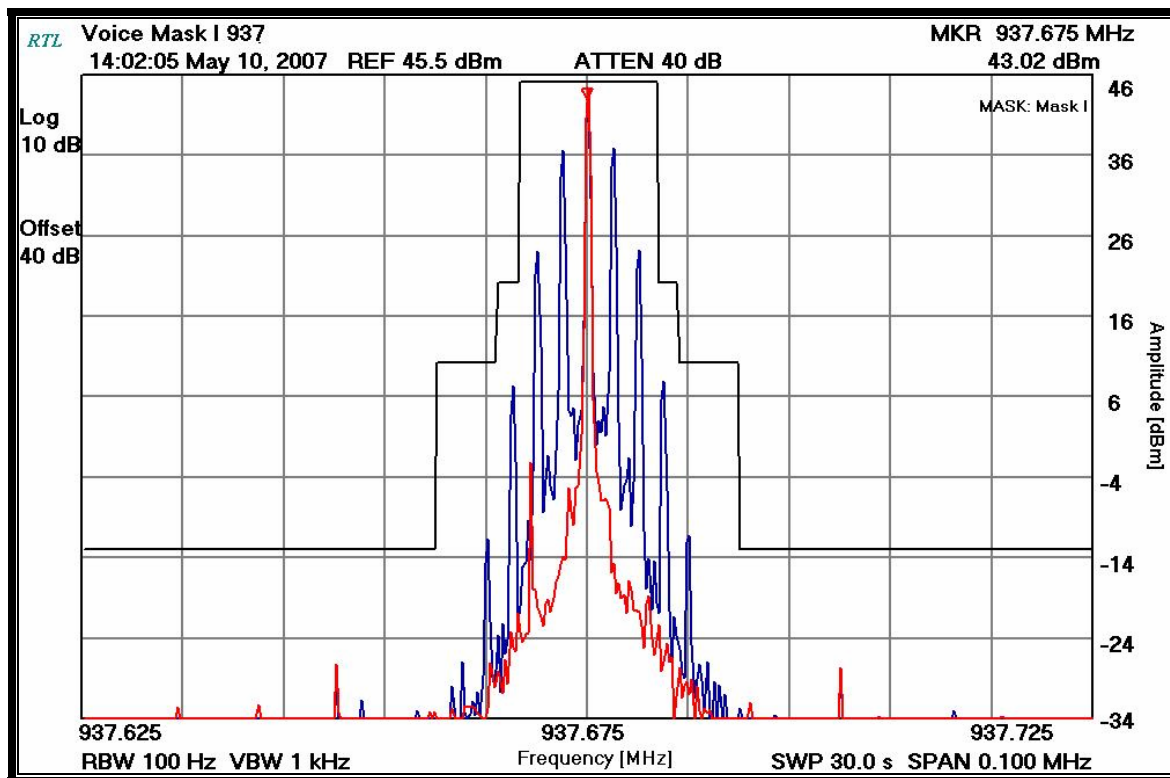


Plot 7-3: Occupied Bandwidth – 898.500 MHz; Mask J; 2-level FSK; 9600 BPS

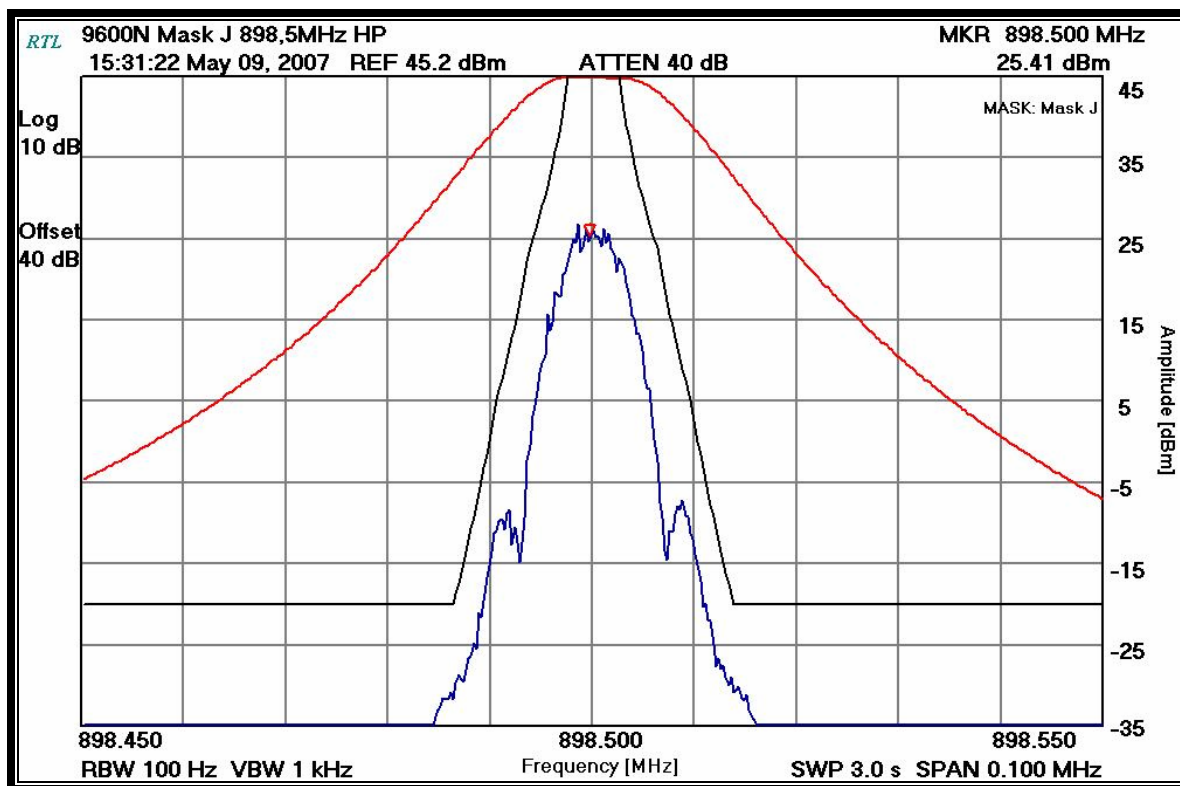


Plot 7-4: Occupied Bandwidth – 937.675 MHz; Mask J; 2-level FSK; 9600 BPS

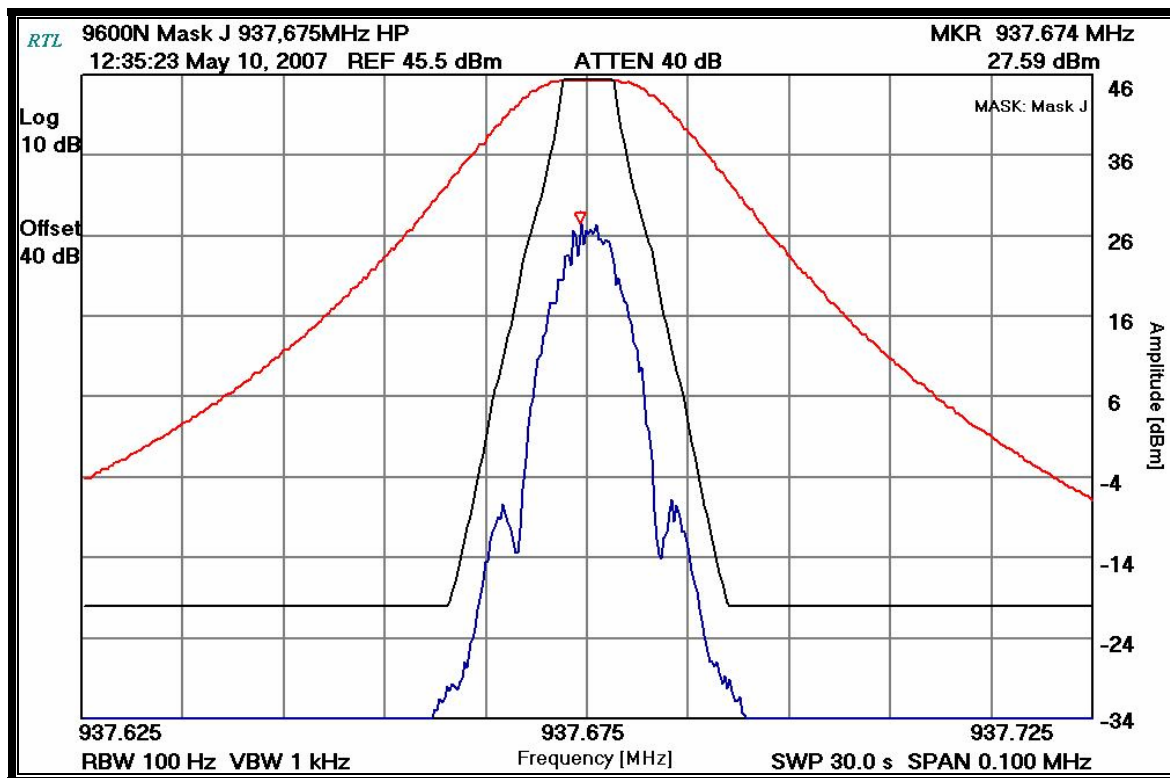


Plot 7-5: Occupied Bandwidth – 898.500 MHz; Mask J; 2-level FSK; 4800 BPS

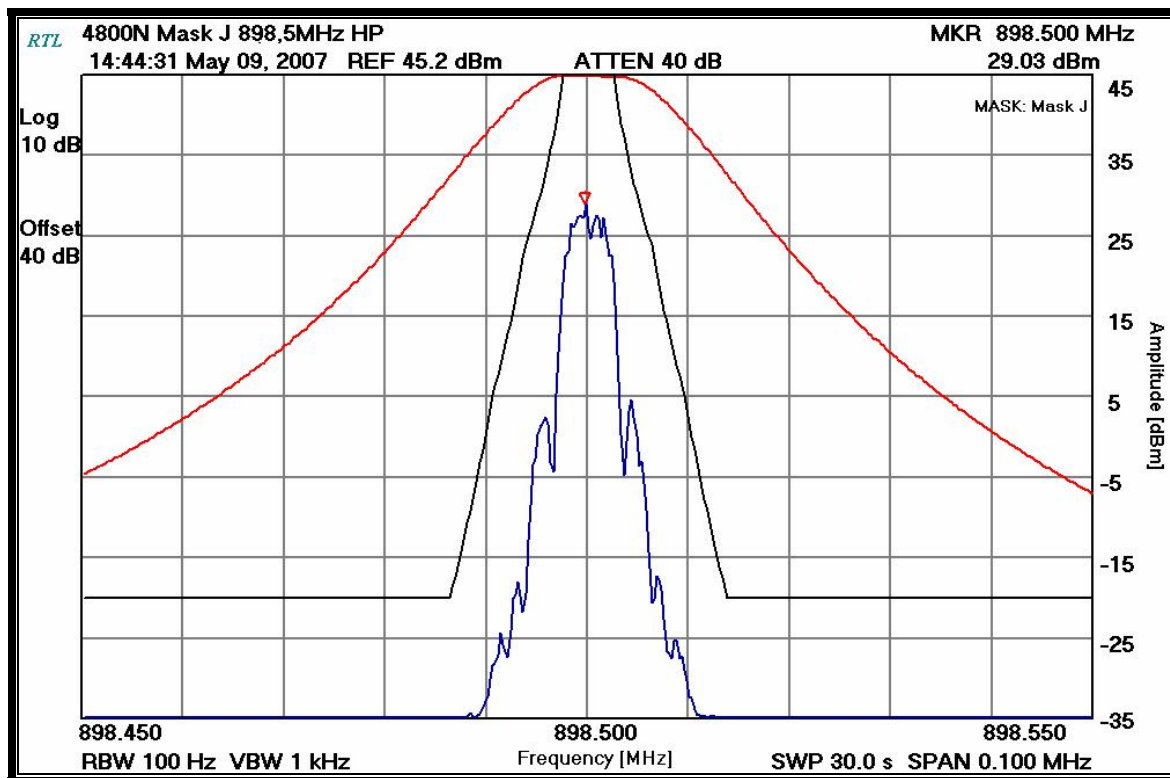


Plot 7-6: Occupied Bandwidth – 937.675 MHz; Mask J; 2-level FSK; 4800 BPS

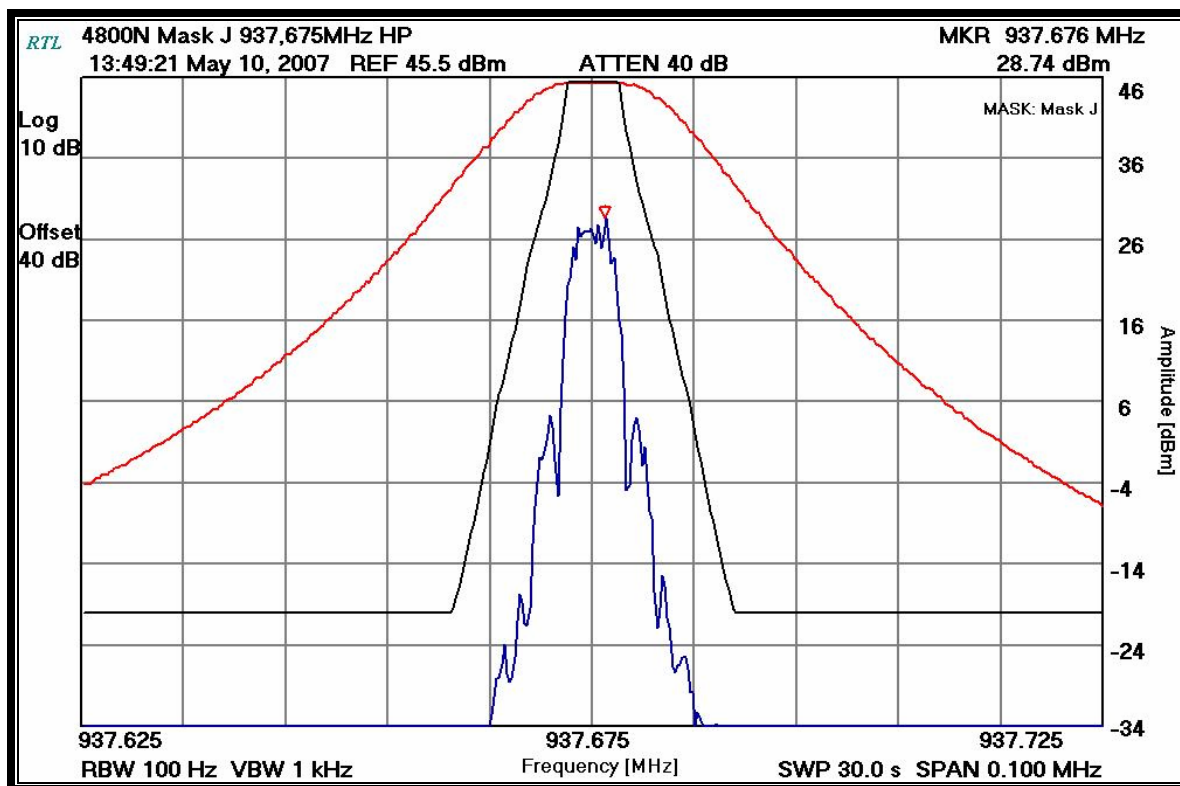

Plot 7-7: Occupied Bandwidth – 898.500 MHz; Mask J; 4-level FSK (P25 mode); 4800 SPS

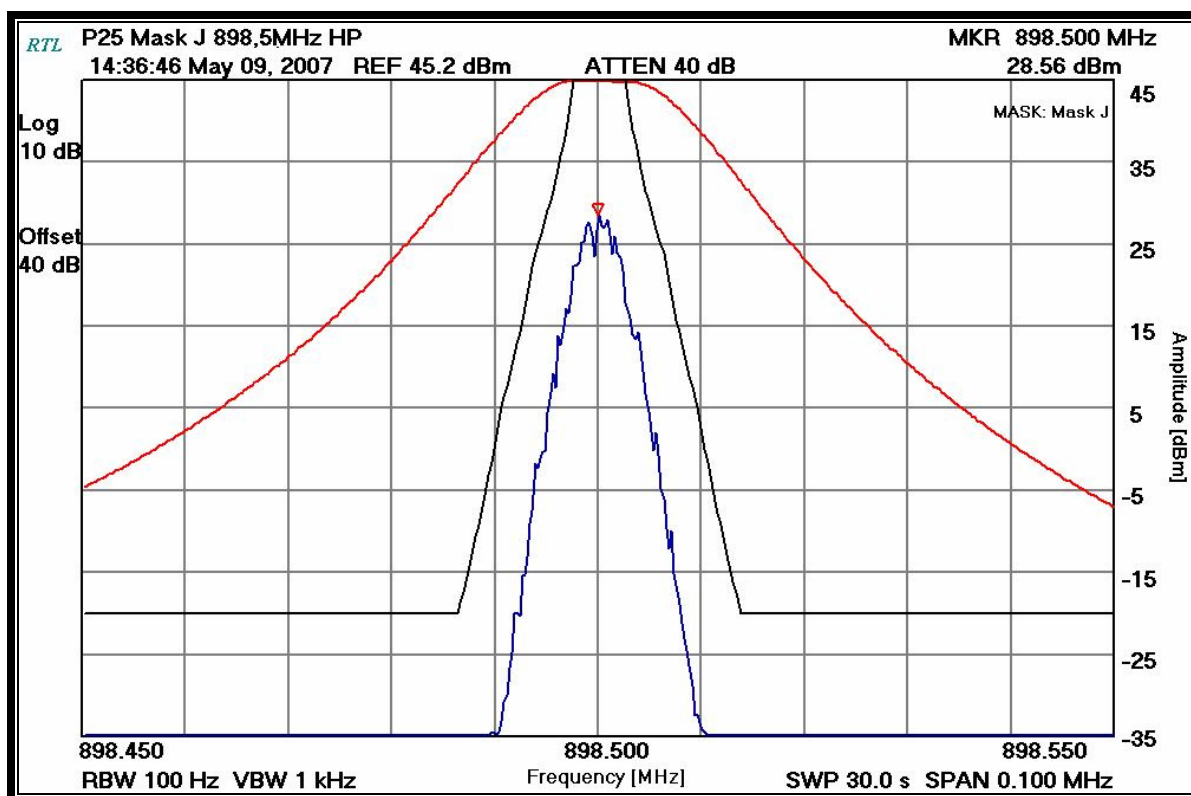

Plot 7-8: Occupied Bandwidth – 937.500 MHz; Mask J; 4-level FSK (P25 mode); 4800 SPS

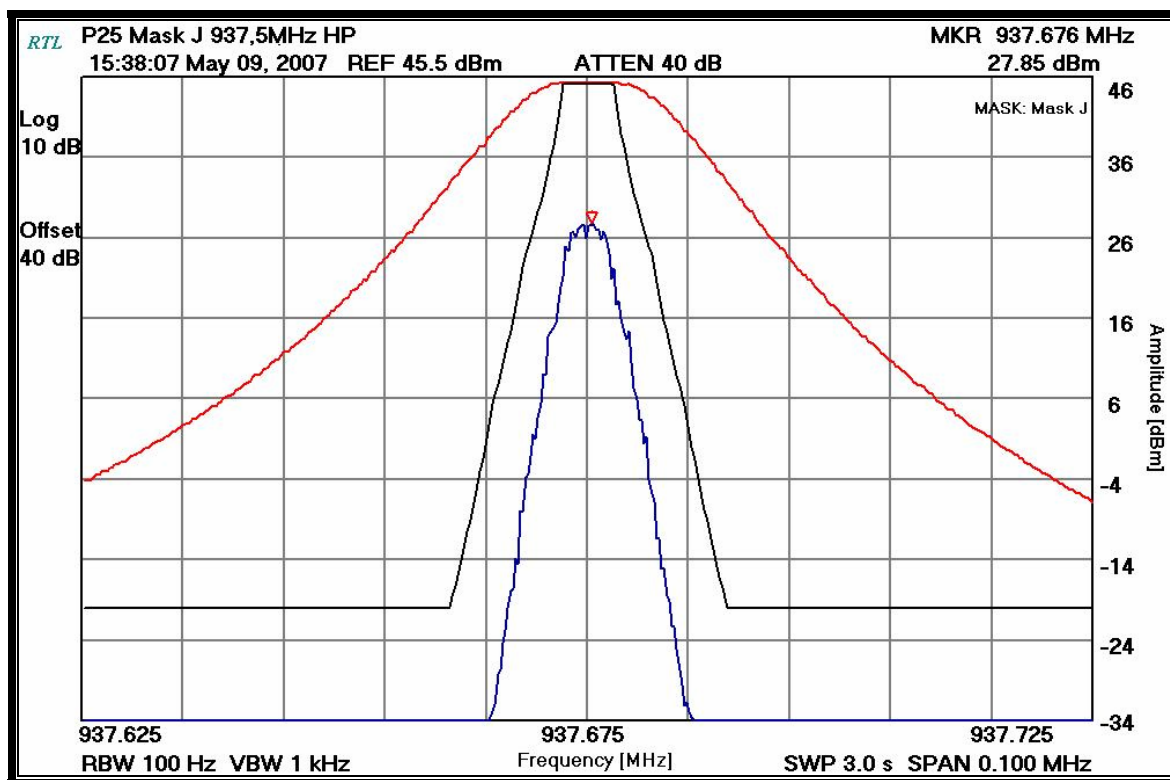

Plot 7-9: Occupied Bandwidth – 898.500 MHz; Mask J; 4-level FSK (NB OTP mode); 4800 SPS

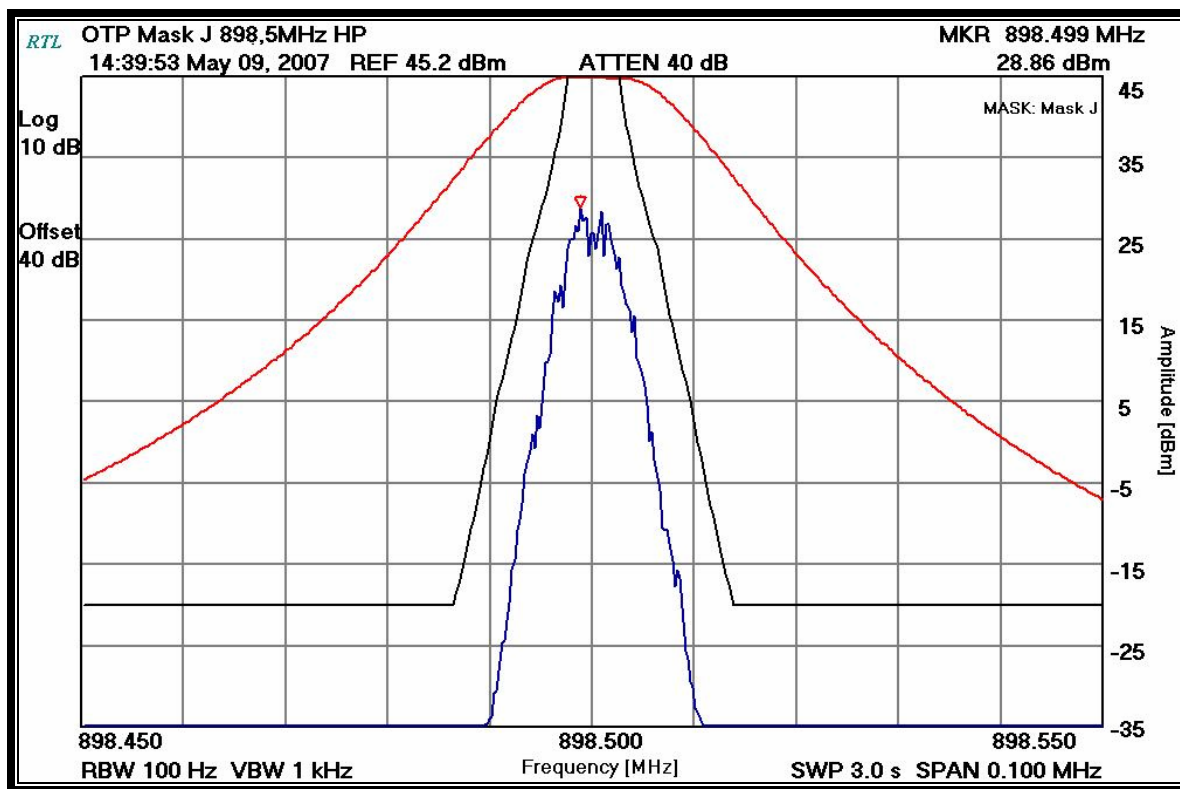


Table 7-1: Test Equipment for Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901215	Hewlett Packard	8596EM	EMC Analyzer (9 kHz – 12.8 GHz)	3826A00144	10/16/07
900912	Hewlett Packard	85662A	EMI Receiver	2542A12739	3/21/08
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/02/08

Test Personnel:

Daniel Biggs		May 9 & 10, 2007
Test Technician/Engineer	Signature	Dates of Tests

8 FCC Rules and Regulations Part 90 §90.213 and Part 2 §2.1055: Frequency Stability

8.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10°C through the range. A ½ hour period was observed to stabilize the EUT at each measurement step, and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied from the battery operating end point to 122.7% of nominal value.

The worst-case test data are shown below in Table 8-1 and Table 8-3.

8.2 Test Data

8.2.1 CFR 47 Part 90.213 Requirements

For transmitters over 2 Watts output power:

896 - 901 MHz band:	1.5 ppm
902 - 928 MHz band:	2.5 ppm
935 - 940 MHz band:	1.5 ppm

8.2.2 Frequency Stability/Temperature Variation

Plot 8-1: Temperature Frequency Stability – 937.675 MHz Channel

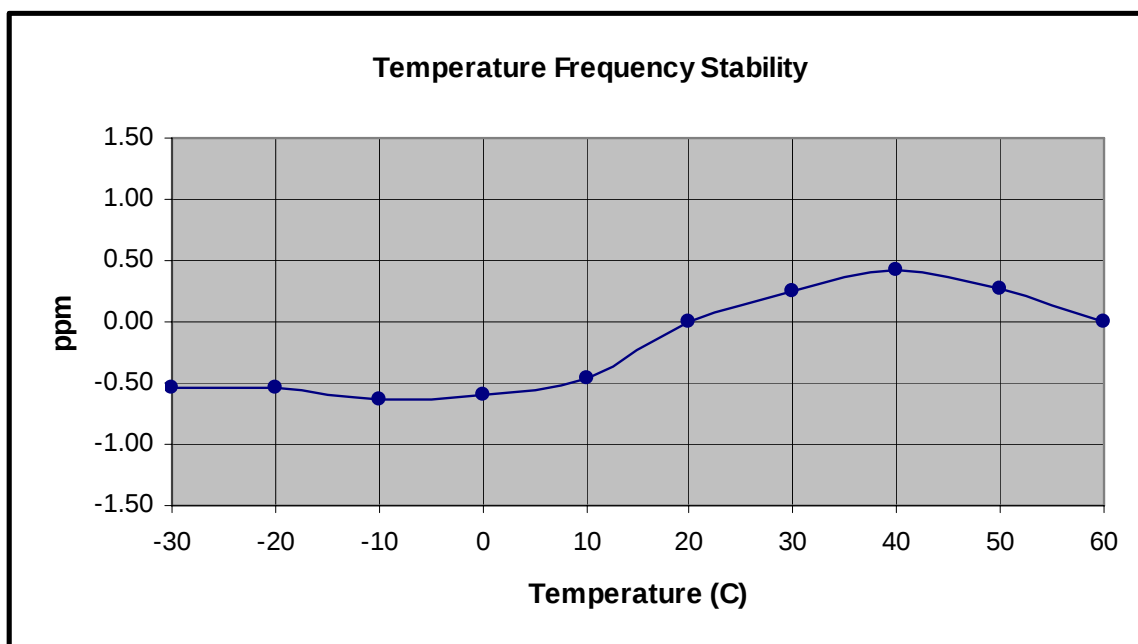


Table 8-1: Frequency Stability/Temperature Variation – 937.675 MHz

Temperature °C	Measured Frequency (MHz)	ppm
-30	937.673867	-0.53
-20	937.673856	-0.54
-10	937.673780	-0.63
0	937.673800	-0.60
10	937.673930	-0.47
20	937.674367	0.00
30	937.674605	0.25
40	937.674759	0.42
50	937.674620	0.27
60	937.674372	0.01

Table 8-2: Test Equipment for Testing Frequency Stability/Temperature

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	01/20/08
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/2/08
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF Cable 36"	NA	12/12/07
901300	Agilent Technologies	53131A	Frequency Counter	MY40001345	12/15/2007

Test Personnel:

Daniel Biggs		May 15, 2007
Test Engineer	Signature	Date Of Test

8.2.3 Frequency Stability/Voltage Variation

Plot 8-2: Temperature Frequency Stability – 937.675 MHz Channel

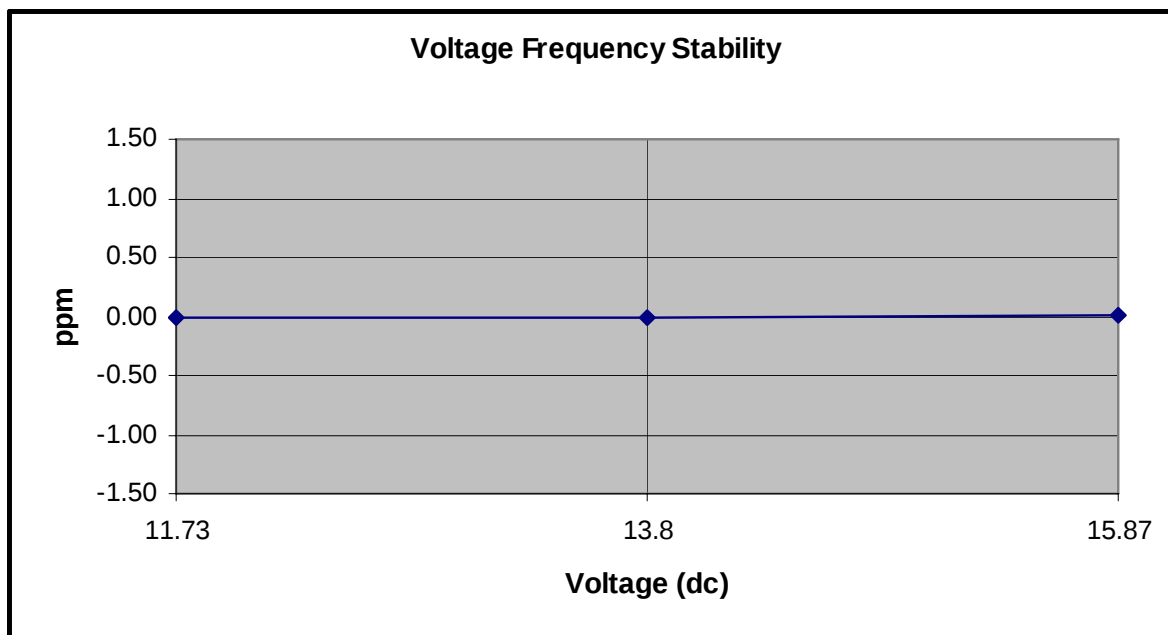


Table 8-3: Frequency Stability/Voltage Variation – 937.675 MHz

Voltage (VDC)	Measured Frequency (MHz)	ppm
11.73	937.674372	-0.01
13.8	937.674380	0.00
15.87	937.674382	0.00

Table 8-4: Test Equipment for Testing Frequency Stability/Voltage

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901300	Agilent Technologies	53131A	Frequency Counter	MY40001345	12/15/07
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	12/2/08
901424	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	N/A	12/12/07
901247	Wavetek	DM25XT	Digital Multimeter	40804098	12/7/07

Test Personnel:

Daniel Biggs		May 15, 2007
Test Engineer	Signature	Date Of Test

9 FCC Rules and Regulations Part 2 §2.1047(a): Modulation Characteristics - Audio Frequency Response

9.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.6.

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

$$\text{Audio Frequency Response} = 20 \text{ LOG } (\text{DEVfreq}/\text{DEVref})$$

9.2 Test Data

Plot 9-1: Modulation Characteristics - Audio Frequency Response; 898.500 MHz



Plot 9-2: Modulation Characteristics - Audio Frequency Response; 937.675 MHz

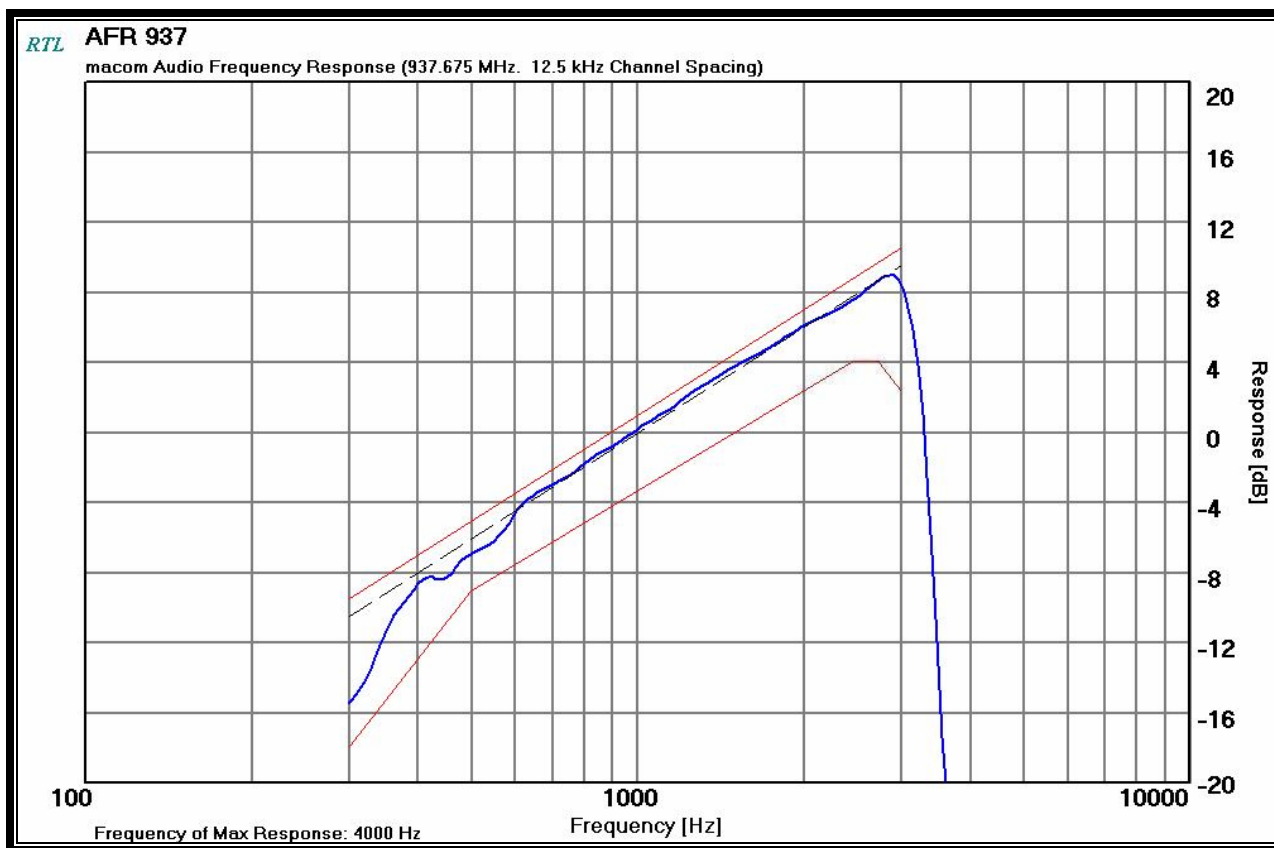


Table 9-1: Test Equipment for Testing Audio Frequency Response

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	12/19/07
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	07/21/07
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	10/19/07

Test Personnel:

Daniel Biggs		May 10, 2007
Test Technician/Engineer	Signature	Date Of Test

10 FCC Rules and Regulations Part 2 §2.1047(a): Modulation Characteristics – Audio Low Pass Filter

10.1 Test Procedure

2.1047(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage, shall be submitted.


ANSI TIA-603-C-2004, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

The audio frequency response of the post-limiter filter cannot be measured directly as it is embedded within DSP code. The following plot is a simulation of the audio low pass filter circuitry, and is deemed “equivalent data” per 2.1047(a).

10.2 Test Data

Plot 10-1: Modulation Characteristics – Audio Low Pass Filter (Post Limited Frequency Response)

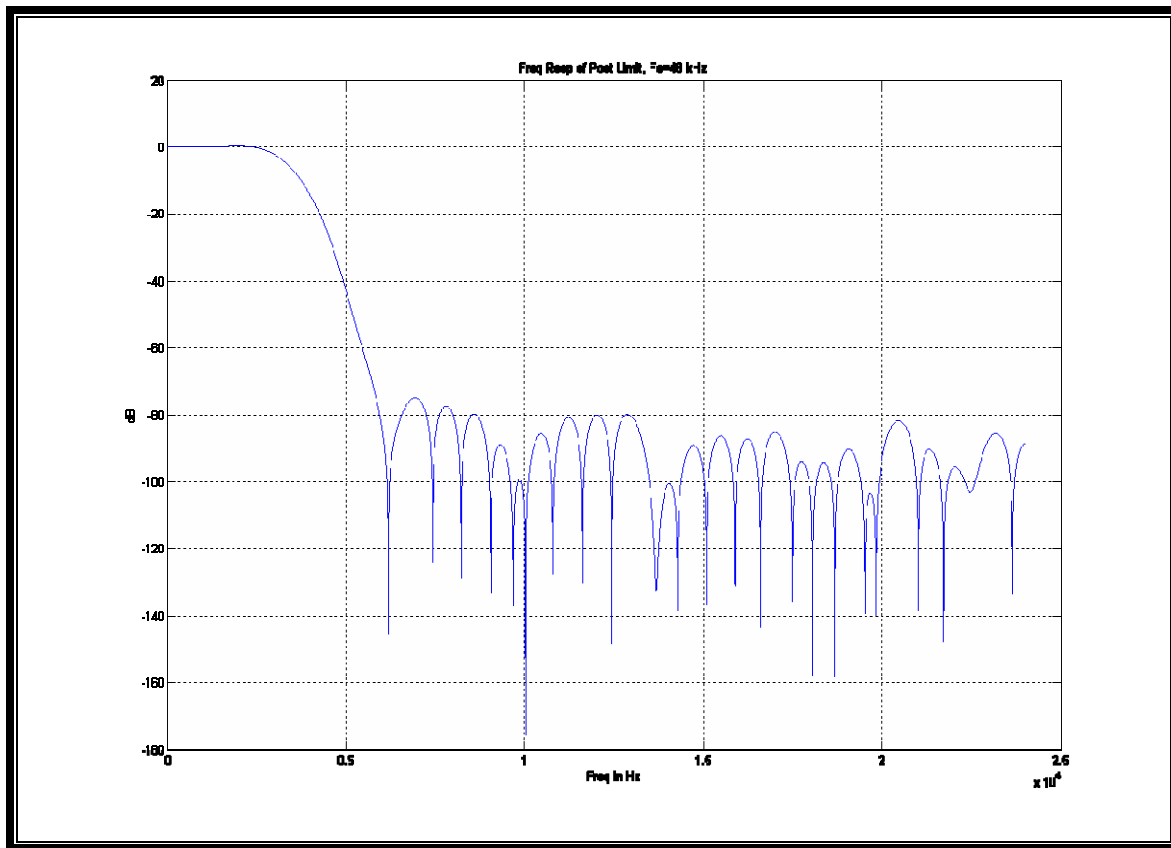

11 FCC Rules and Regulations Part 2 §2.1047(b): Modulation Characteristics - Modulation Limiting


11.1 Test Procedure

ANSI TIA-603-C-2004, section 2.2.3.


The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level as a reference (0 dB), the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

11.2 Test Data


Plot 11-1: Modulation Characteristics – Modulation Limiting: 898.500 MHz; Narrow Band; Positive Peak

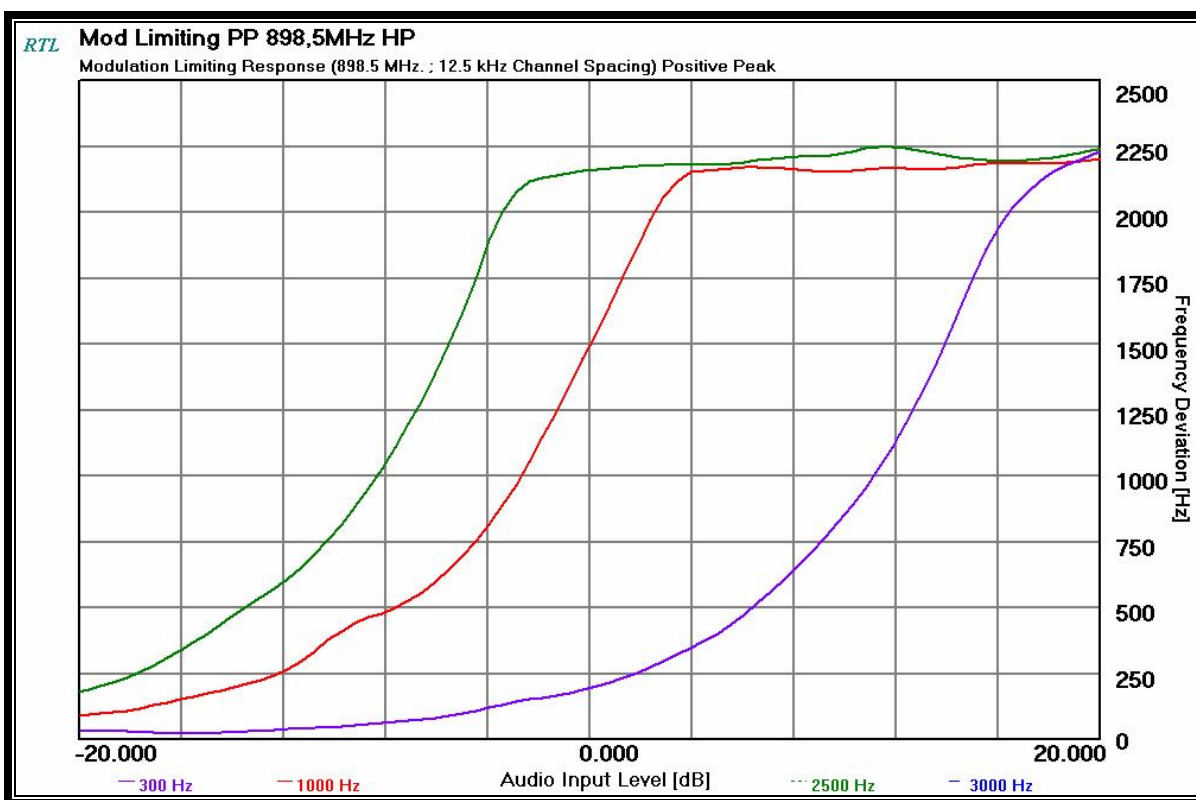

Plot 11-2: Modulation Characteristics – Modulation Limiting: 898.500 MHz; Narrow Band; Negative Peak

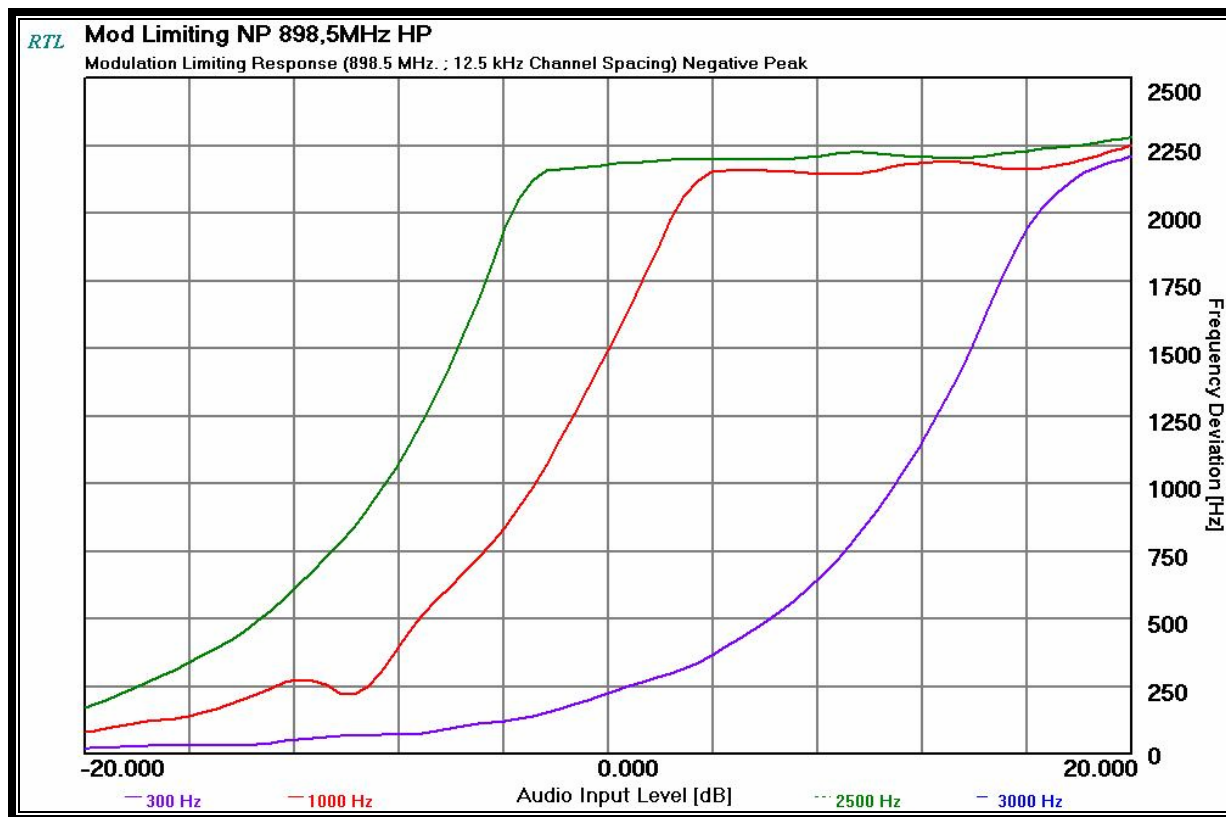

Plot 11-3: Modulation Characteristics – Modulation Limiting: 937.675 MHz; Narrow Band; Positive Peak

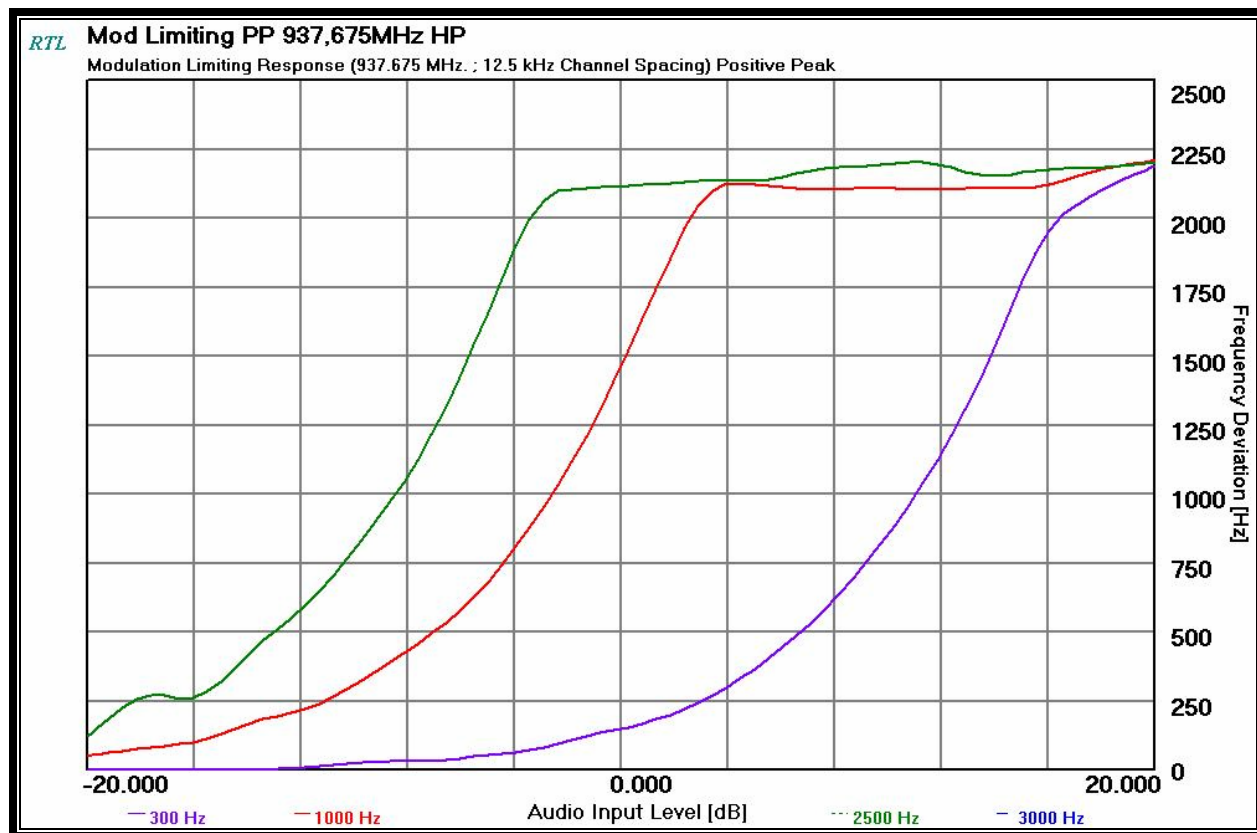

Plot 11-4: Modulation Characteristics – Modulation Limiting: 937.675 MHz; Narrow Band; Negative Peak

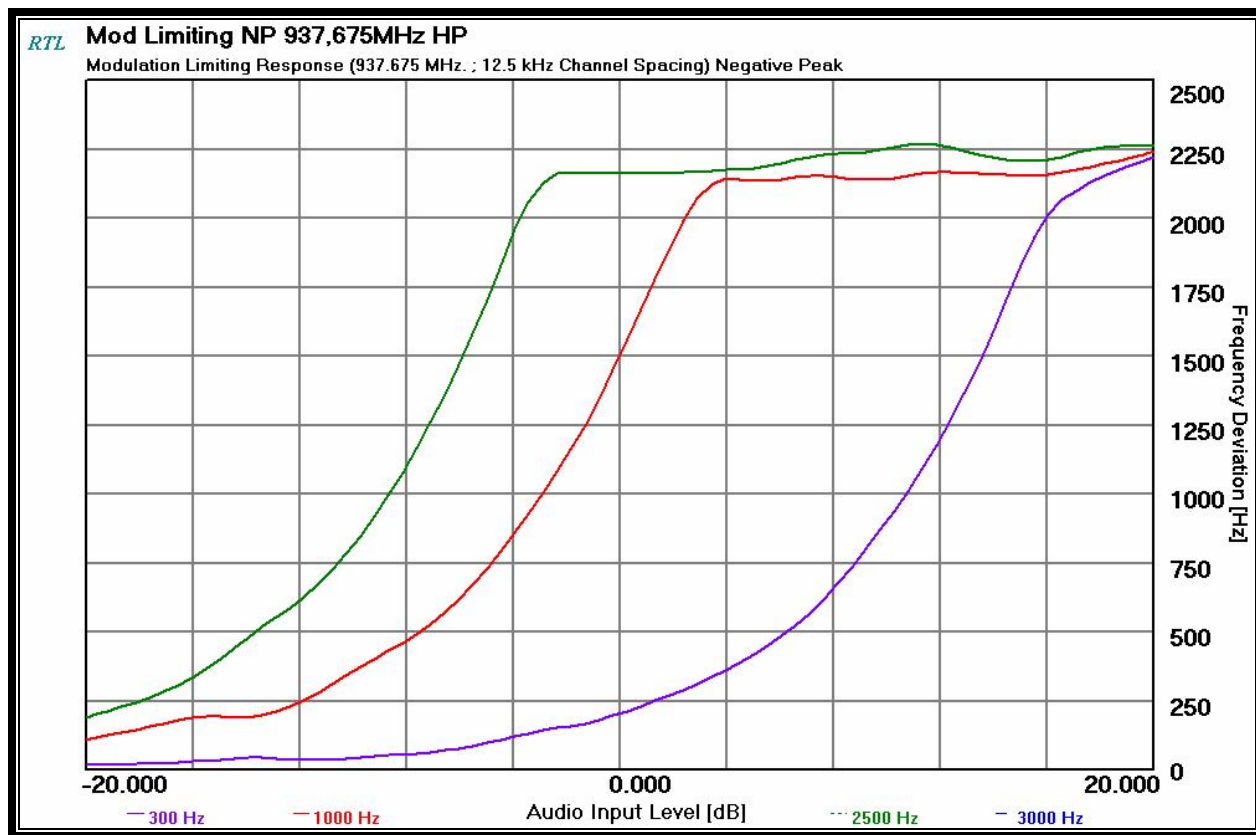


Table 11-1: Test Equipment for Testing Modulation Limiting

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	12/19/07
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	07/21/07
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	10/19/07

Test Personnel:

Daniel Biggs		May 11, 2007
Test Technician/Engineer	Signature	Date Of Test

12 FCC Rules and Regulations Part 2 §2.202: Necessary Bandwidth and Emission Bandwidth

Type of Emission: F3E, F1D, F1E

Voice – Narrow Band; 12.5 kHz Channel Spacing

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2 \times M + 2 \times D \times K = 11.0 \text{ kHz}$

Emission designator: 11K0F3E

Digital Voice and Data - 2 level FSK; 9600 bps; Narrow Band; 12.5 kHz Channel Spacing

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 2350

$B_n = 3.86D + 0.27R = 3.86(2350) + 0.27(9600) = 11.663 \text{ kHz}$

Emission designator: 11K7F1D, 11K7F1E

Digital Voice and Data - 2 level FSK; 4800 bps; Narrow Band; 12.5 kHz Channel Spacing

Calculation:

Data rate in bps (R) = 4800

Peak deviation of carrier (D) = 1500

$B_n = 3.86D + 0.27R = 3.86(1500) + 0.27(4800) = 7.086 \text{ kHz}$

Emission designator: 7K1F1D, 7K1F1E

Digital Data – 4 level FSK (P25 Standard); 4800 bps; Narrow Band; 12.5 kHz Channel Spacing

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = +/-1.8 kHz

Number of states in each symbol (S) = 2

$B_n = [4800/\log_2(2) + 2(1800)(1)] = 8.400 \text{ kHz}$

Emission designator: 8K4F1D, 8K4F1E

Digital Data – 4 level FSK (NB OTP); 4800 bps; Narrow Band; 12.5 kHz Channel Spacing

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = +/-1.8 kHz

Number of states in each symbol (S) = 2

$B_n = [4800/\log_2(2) + 2(2000)(1)] = 8.800 \text{ kHz}$

Emission designator: 8K8F1D, 8K8F1E

13 Conclusion

The data in this measurement report shows that the **M/A-COM, Inc. Model M5300 900 MHz Mobile Radio, FCC ID: OWDTR-0049-E, IC: 3636B-0049**, complies with all the applicable requirements of Parts 90, 15 and 2 of the FCC Rules and Regulations, and Industry Canada RSS-119, Issue 6, 2000.