



Engineering and Testing for EMC and Safety Compliance

FCC & IC Certification Report

Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Daryl Popowitch
Phone: (434) 455-9527

MODEL: M7300 440-512MHz 50W
Mobile Radio

FCC ID: OWDTR-0062-E
IC: 3636B-0062

September 15, 2010

Standards Referenced for this Report	
Part 2: 2009	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 90: 2009	Private Land Mobile Radio Services
TIA-EIA-603-C August 2004	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
ANSI/TIA/EIA – 102.CAAA-2002	Digital C4FM/CQPSK Transceiver Measurement Methods
ANSI/TIA/EIA– 102.BAAA–1998	Project 25 FDMA Common Air Interface—New Technology Standards Project—Digital Radio Technical Standards
RSS-119 Issue 10 2010	Land Mobile and Fixed Radio Transmitters and Receivers 27.41 to 960.0 MHz

Report Prepared By: Daniel Baltzell

Document Number: 2010130

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Frequency Range (MHz) *	Manufacturer's Rated Power (W)	Frequency Tolerance (ppm)	Emission Designator
440-512	50	0.5	16K0F3E
440-512	50	0.5	11K0F3E
440-512	50	0.5	14K2F1D (2 level WB)
440-512	50	0.5	14K2F1E (2 level WB)
440-512	50	0.5	9K90F1D (2 level NB 9600)
440-512	50	0.5	9K90F1E (2 level NB 9600)
440-512	50	0.5	7K10F1D (2 level NB 4800)
440-512	50	0.5	7K10F1E (2 level NB 4800)
440-512	50	0.5	13K1F9W (OpenSky TDMA)
440-512	50	0.5	8K40F1D (OpenSky TDMA)
440-512	50	0.5	8K40F1E (OpenSky TDMA)
440-512	50	0.5	8K40F1D (P25)
440-512	50	0.5	8K40F1E (P25)

* 450-470 MHz only for Canada

Table of Contents

1	Test Result Summary	7
2	General Information	7
2.1	Test Facility	7
2.2	Related Submittal(s)/Grant(s)	7
2.3	Grant Notes	7
3	Tested System Details	8
4	FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage	9
5	FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.205 Transmitting Power Limits, RSS-119 5.4: Transmitter Output Power	10
5.1	Test Procedure	10
5.2	Test Data	10
6	FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations, RSS-119 5.8: Transmitter Unwanted Emissions	11
6.1	Test Procedure	11
6.2	Test Data	11
7	FCC Rules and Regulations Part 2.1053(a): Field Strength of Spurious Radiation; Part 90 90.210 Out of Band Emissions Limit; RSS-119 5.8: Unwanted Emissions	15
7.1	Test Procedure	15
7.2	Test Data	15
7.2.1	CFR 47 Part 90.210 Requirements	15
8	FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210 Authorized Bandwidth; RSS-119 5.8: Transmitter Unwanted Emissions	20
8.1	Test Procedure	20
8.2	Test Data	20
9	FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213: Frequency Stability; RSS-119 §5.3: Transmitter Frequency Stability	68
9.1	Test Procedure	68
9.2	Test Data	68
10	FCC Part 2.1047(a): Modulation Characteristics - Audio Frequency Response	71
10.1	Test Procedure	71
10.2	Test Data	71
11	FCC Part 2.1047(a): Modulation Characteristics – Audio Low Pass Filter	73
11.1	Test Procedure	73
11.2	Test Data	73
12	FCC Rules and Regulations Part 2.1047(b): Modulation Characteristics - Modulation Limiting	75
12.1	Test Procedure	75
12.2	Test Data	75
13	FCC Rules and Regulations Part §90.214; IC RSS-119 §5.9: Transient Frequency Response	79
13.1	Test Procedure	79
13.2	Test Data	79
14	FCC Rules and Regulations Part 2 §2.202: Necessary Bandwidth and Emission Bandwidth	100
15	Conclusion	101

Table of Figures

Figure 3-1: Configuration of Tested System	9
--	---

Table of Tables

Table 3-1: Equipment Under Test (EUT).....	8
Table 5-1: RF Conducted Output Power - Measured	10
Table 5-2: Test Equipment Used For Testing RF Power Output - Conducted	10
Table 6-1: Test Equipment Used For Testing Spurious Emissions	14
Table 7-1: Field Strength of Spurious Radiation – 440 MHz – Analog High Power.....	15
Table 7-2: Field Strength of Spurious Radiation – 450 MHz – Analog High Power.....	16
Table 7-3: Field Strength of Spurious Radiation – 454 MHz – Analog High Power.....	16
Table 7-4: Field Strength of Spurious Radiation – 456 MHz – Analog High Power.....	17
Table 7-5: Field Strength of Spurious Radiation – 470 MHz – Analog High Power.....	17
Table 7-6: Field Strength of Spurious Radiation – 512 MHz – Analog High Power.....	18
Table 7-7: Test Equipment Used For Testing Field Strength of Spurious Radiation	18
Table 8-1: Test Equipment Used For Testing Occupied Bandwidth.....	67
Table 9-1: Temperature Frequency Stability – 450 MHz.....	68
Table 9-2: Temperature Frequency Stability – 454 MHz.....	69
Table 9-3: Temperature Frequency Stability – 456 MHz.....	69
Table 9-4: Temperature Frequency Stability – 470 MHz.....	69
Table 9-5: Temperature Frequency Stability – 512 MHz.....	70
Table 9-6: Test Equipment Used For Testing Frequency Stability	70
Table 10-1: Test Equipment Used For Testing Audio Frequency Response.....	72
Table 11-1: Test Equipment Used For Testing Audio Low Pass Filter Response	74
Table 12-1: Test Equipment Used For Testing Modulation Limiting	78
Table 13-1: Test Equipment Used For Testing Transient Frequency Behavior	99

Table of Plots

Plot 6-1: Conducted Spurious - 440 MHz - Analog High Power	11
Plot 6-2: Conducted Spurious - 450 MHz - Analog High Power	12
Plot 6-3: Conducted Spurious – 454 MHz – Analog High Power.....	12
Plot 6-4: Conducted Spurious – 456 MHz – Analog High Power.....	13
Plot 6-5: Conducted Spurious – 470 MHz – Analog High Power.....	13
Plot 6-6: Conducted Spurious – 512 MHz – Analog High Power.....	14
Plot 8-1: Occupied Bandwidth – 440 MHz; Analog WB (Mask B).....	20
Plot 8-2: Occupied Bandwidth – 450 MHz; Analog WB (Mask B).....	21
Plot 8-3: Occupied Bandwidth – 454 MHz; Analog WB (Mask B).....	22
Plot 8-4: Occupied Bandwidth – 456 MHz; Analog WB (Mask B).....	23
Plot 8-5: Occupied Bandwidth – 470 MHz; Analog WB (Mask B).....	24
Plot 8-6: Occupied Bandwidth – 512 MHz; Analog WB (Mask B).....	25
Plot 8-7: Occupied Bandwidth – 440 MHz; Analog NB (Mask D)	26
Plot 8-8: Occupied Bandwidth – 450 MHz; Analog NB (Mask D)	27
Plot 8-9: Occupied Bandwidth – 454 MHz; Analog NB (Mask D)	28
Plot 8-10: Occupied Bandwidth – 456 MHz; Analog NB (Mask D)	29
Plot 8-11: Occupied Bandwidth – 470 MHz; Analog NB (Mask D)	30
Plot 8-12: Occupied Bandwidth – 512 MHz; Analog NB (Mask D)	31
Plot 8-13: Occupied Bandwidth – 440 MHz; 2-Level 9600 FSK WB (Mask C)	32
Plot 8-14: Occupied Bandwidth – 450 MHz; 2-Level 9600 FSK WB (Mask C)	33
Plot 8-15: Occupied Bandwidth – 454 MHz; 2-Level 9600 FSK WB (Mask C)	34
Plot 8-16: Occupied Bandwidth – 456 MHz; 2-Level 9600 FSK WB (Mask C)	35

Plot 8-17:	Occupied Bandwidth – 470 MHz; 2-Level 9600 FSK WB (Mask C)	36
Plot 8-18:	Occupied Bandwidth – 512 MHz; 2-Level 9600 FSK WB (Mask C)	37
Plot 8-19:	Occupied Bandwidth – 440 MHz; 2-Level 9600 FSK NB (Mask D)	38
Plot 8-20:	Occupied Bandwidth – 450 MHz; 2-Level 9600 FSK NB (Mask D)	39
Plot 8-21:	Occupied Bandwidth – 454 MHz; 2-Level 9600 FSK NB (Mask D)	40
Plot 8-22:	Occupied Bandwidth – 456 MHz; 2-Level 9600 FSK NB (Mask D)	41
Plot 8-23:	Occupied Bandwidth – 470 MHz; 2-Level 9600 FSK NB (Mask D)	42
Plot 8-24:	Occupied Bandwidth – 512 MHz; 2-Level 9600 FSK NB (Mask D)	43
Plot 8-25:	Occupied Bandwidth – 440 MHz; 2-Level 4800 FSK; (Mask D)	44
Plot 8-26:	Occupied Bandwidth – 450 MHz; 2-Level 4800 FSK; (Mask D)	45
Plot 8-27:	Occupied Bandwidth – 454 MHz; 2-Level 4800 FSK; (Mask D)	46
Plot 8-28:	Occupied Bandwidth – 456 MHz; 2-Level 4800 FSK; (Mask D)	47
Plot 8-29:	Occupied Bandwidth – 470 MHz; 2-Level 4800 FSK; (Mask D)	48
Plot 8-30:	Occupied Bandwidth – 512 MHz; 2-Level 4800 FSK; (Mask D)	49
Plot 8-31:	Occupied Bandwidth – 440 MHz; TDMA WB; (Mask C)	50
Plot 8-32:	Occupied Bandwidth – 450 MHz; TDMA WB; (Mask C)	51
Plot 8-33:	Occupied Bandwidth – 454 MHz; TDMA WB; (Mask C)	52
Plot 8-34:	Occupied Bandwidth – 456 MHz; TDMA WB; (Mask C)	53
Plot 8-35:	Occupied Bandwidth – 470 MHz; TDMA WB; (Mask C)	54
Plot 8-36:	Occupied Bandwidth – 512 MHz; TDMA WB; (Mask C)	55
Plot 8-37:	Occupied Bandwidth – 440 MHz; TDMA NB; (Mask D)	56
Plot 8-38:	Occupied Bandwidth – 450 MHz; TDMA NB; (Mask D)	57
Plot 8-39:	Occupied Bandwidth – 454 MHz; TDMA NB; (Mask D)	58
Plot 8-40:	Occupied Bandwidth – 456 MHz; TDMA NB; (Mask D)	59
Plot 8-41:	Occupied Bandwidth – 470 MHz; TDMA NB; (Mask D)	60
Plot 8-42:	Occupied Bandwidth – 512 MHz; TDMA NB; (Mask D)	61
Plot 8-43:	Occupied Bandwidth – 440 MHz; P25; (Mask D)	62
Plot 8-44:	Occupied Bandwidth – 450 MHz; P25; (Mask D)	63
Plot 8-45:	Occupied Bandwidth – 454 MHz; P25; (Mask D)	64
Plot 8-46:	Occupied Bandwidth – 456 MHz; P25; (Mask D)	65
Plot 8-47:	Occupied Bandwidth – 470 MHz; P25; (Mask D)	66
Plot 8-48:	Occupied Bandwidth – 512 MHz; P25; (Mask D)	67
Plot 10-1:	Modulation Characteristics - Audio Frequency Response	71
Plot 11-1:	Modulation Characteristics – Audio Low Pass Filter	73
Plot 12-1:	Modulation Characteristics – Modulation Limiting; Positive Peak; Wideband	75
Plot 12-2:	Modulation Characteristics – Modulation Limiting; Negative Peak; Wideband	76
Plot 12-3:	Modulation Characteristics – Modulation Limiting; Positive Peak; Narrowband	77
Plot 12-4:	Modulation Characteristics – Modulation Limiting; Negative Peak; Narrowband	78
Plot 13-1:	Transient Frequency Behavior – 450 MHz; High Power; Wide Band; Carrier On Time	79
Plot 13-2:	Transient Frequency Behavior – 450 MHz; High Power; Wide Band; Carrier Off Time	80
Plot 13-3:	Transient Frequency Behavior – 450 MHz; High Power; Narrow Band; Carrier On Time	81
Plot 13-4:	Transient Frequency Behavior – 450 MHz; High Power; Narrow Band; Carrier Off Time	82
Plot 13-5:	Transient Frequency Behavior – 454 MHz; High Power; Wide Band; Carrier On Time	83
Plot 13-6:	Transient Frequency Behavior – 454 MHz; High Power; Wide Band; Carrier Off Time	84
Plot 13-7:	Transient Frequency Behavior – 454 MHz; High Power; Narrow Band; Carrier On Time	85
Plot 13-8:	Transient Frequency Behavior – 454 MHz; High Power; Narrow Band; Carrier Off Time	86
Plot 13-9:	Transient Frequency Behavior – 456 MHz; High Power; Wide Band; Carrier On Time	87
Plot 13-10:	Transient Frequency Behavior – 456 MHz; High Power; Wide Band; Carrier Off Time	88
Plot 13-11:	Transient Frequency Behavior – 456 MHz; High Power; Narrow Band; Carrier On Time	89
Plot 13-12:	Transient Frequency Behavior – 456 MHz; High Power; Narrow Band; Carrier Off Time	90
Plot 13-13:	Transient Frequency Behavior – 470 MHz; High Power; Wide Band; Carrier On Time	91
Plot 13-14:	Transient Frequency Behavior – 470 MHz; High Power; Wide Band; Carrier Off Time	92
Plot 13-15:	Transient Frequency Behavior – 470 MHz; High Power; Narrow Band; Carrier On Time	93
Plot 13-16:	Transient Frequency Behavior – 470 MHz; High Power; Narrow Band; Carrier Off Time	94
Plot 13-17:	Transient Frequency Behavior – 512 MHz; High Power; Wide Band; Carrier On Time	95
Plot 13-18:	Transient Frequency Behavior – 512 MHz; High Power; Wide Band; Carrier Off Time	96
Plot 13-19:	Transient Frequency Behavior – 512 MHz; High Power; Narrow Band; Carrier On Time	97
Plot 13-20:	Transient Frequency Behavior – 512 MHz; High Power; Narrow Band; Carrier Off Time	98

Table of Appendixes

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093: RF Exposure.....	102
Appendix B:	Agency Authorization	103
Appendix C:	FCC Confidentiality Request Letter	104
Appendix D:	IC Letters.....	105
Appendix E:	IC Confidentiality Request Letter.....	106
Appendix F:	Label Information.....	107
Appendix G:	Operational Description.....	109
Appendix H:	Parts List	110
Appendix I:	Test / Tune Procedure.....	111
Appendix J:	Schematics.....	112
Appendix K:	Block Diagram	113
Appendix L:	Manual	114
Appendix M:	Test Configuration Photographs.....	115
Appendix N:	External Photographs.....	117
Appendix O:	Internal Photographs	124

Table of Photographs

Photograph 1:	FCC & IC ID Label Sample with RF Statement	107
Photograph 2:	Part 15.19 Label Sample	107
Photograph 3:	ID Label and RF Label Statement Location on Side	108
Photograph 4:	Radiated Emissions – Front View.....	115
Photograph 5:	Radiated Emissions – Back View	116
Photograph 6:	HB Local – Front View.....	117
Photograph 7:	HB Local – Rear View	118
Photograph 8:	HB Local – Top View	119
Photograph 9:	HB Local – Bottom View.....	120
Photograph 10:	HB Local – Left View	121
Photograph 11:	HB Local – Right View.....	122
Photograph 12:	HB Remote – Front View.....	123
Photograph 13:	HB – Top Cover Removed	124
Photograph 14:	HB Bottom Cover Removed	125
Photograph 15:	HB Bottom Cover and Shield Removed	126
Photograph 16:	HB RF Processor Board Component Side	127
Photograph 17:	HB RF Processor Board Solder Side.....	128
Photograph 18:	HB PK Board Component Side.....	129
Photograph 19:	HB PK Board Solder Side.....	130

1 Test Result Summary

Test	FCC Reference	IC Reference	Result
RF Power Output	2.1046(a), 90.205	RSS-119 5.4	Complies
Spurious Emissions at Antenna Terminals	2.1046(a), 90.210	RSS-119 5.5, 5.8	Complies
Field Strength of Spurious Radiation	2.1053(a), 90.210	RSS-119 5.5, 5.8	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 90.210	RSS-119 5.5, 5.8	Complies
Frequency Stability vs. Temperature and Voltage	2.1055, 90.213	RSS-119 5.3	Complies
Modulation Characteristics	2.1047(a)(b)	N/A	Complies
Transient Frequency Response	90.214	RSS-119 5.9	Complies

2 General Information

The following Type Certification Report is prepared on behalf of **Harris Corporation** in accordance with the Federal Communications Commission and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **M7300 440-512MHz 50W Mobile Radio; FCC ID: OWDTR-0062-E, IC: 3636B-0062.**

The radio can be used with a GPS, remote and front mount control heads, and a motorcycle mount configuration and is subject to FCC DoC. DoC testing was performed for the aforementioned accessories and configurations, and the data is contained in a separate DoC report.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47 Parts 2 and 90, and Industry Canada RSS-119. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

N/A

2.3 Grant Notes

Power is continuously variable from 10–50 W. The grant listed power is rated power and the actual measured power is 52.5 W as shown in the test report.

3 Tested System Details

The test sample was received on August 11, 2010. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable. The device was programmed for multiple modes of operation and modulation types.

Table 3-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	Part Number	FCC ID	RTL Bar Code
440-512MHz 50 W Mobile Radio	Harris Corporation	M7300	RU144750-031	OWDTR-0062-E	19847
Front Mount Control Head (Installed)	Harris Corporation	CH721	CU23218-0001	N/A	N/A
440-512MHz 50 W Mobile Radio	Harris Corporation	M7300	RU144750-031	OWDTR-0062-E	19846
Front Mount Control Head	Harris Corporation	CH721	CU23218-0004	N/A	19545
Speaker	Harris Corporation	N/A	LS102824V10R1A	N/A	19548
Microphone	Harris Corporation	N/A	MC-103334-041 Rev. 0945	N/A	19549

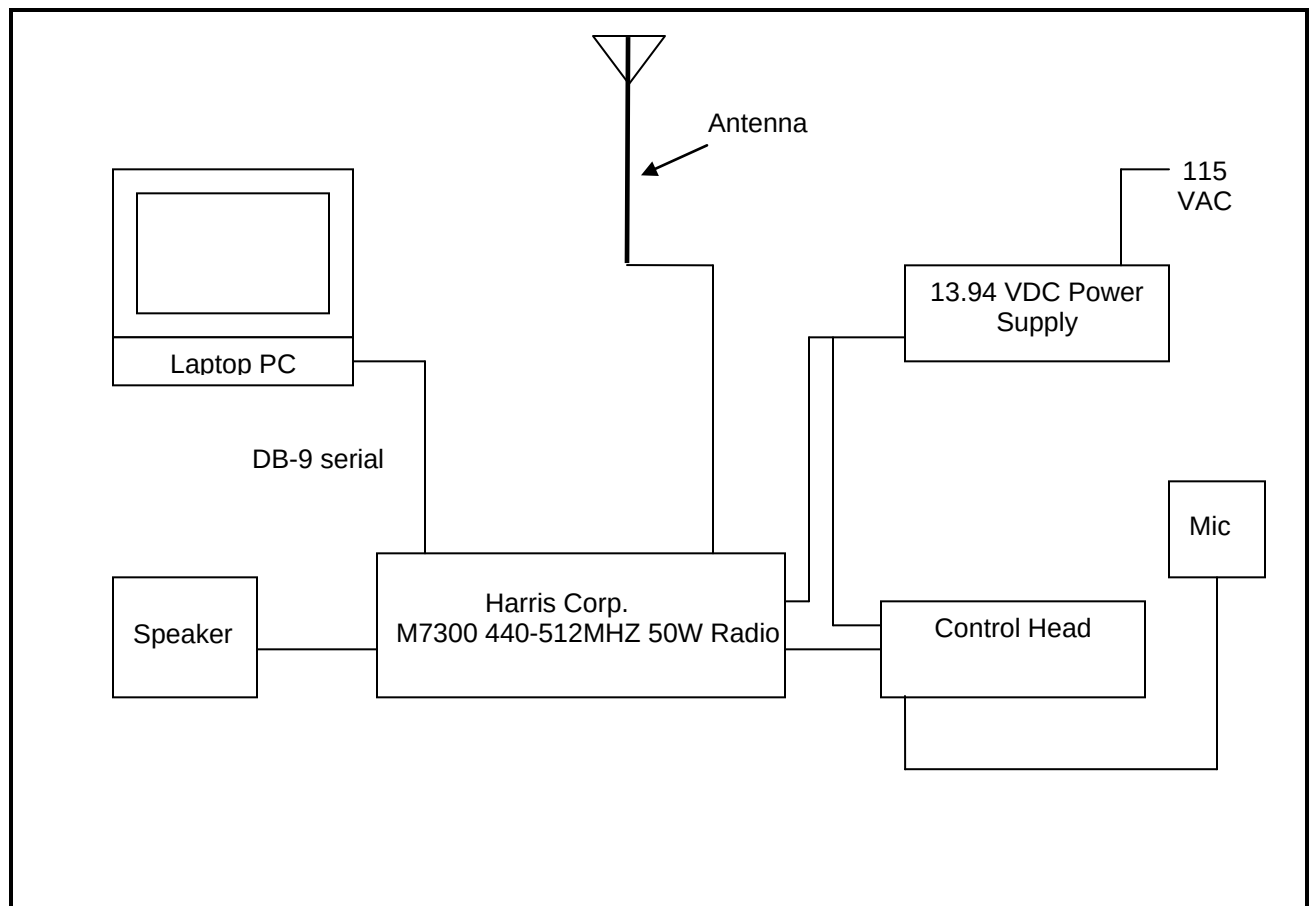


Figure 3-1: Configuration of Tested System

4 FCC Rules and Regulations Part 2.1033(C)(8) Voltages and Currents Through The Final Amplifying Stage

13.94 V / 9.43 A

5 FCC Rules and Regulations Part 2.1046(a): RF Power Output: Conducted, Part 90.205 Transmitting Power Limits, RSS-119 5.4: Transmitter Output Power

5.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

Manufacturer's rated power: 50 W

5.2 Test Data

Table 5-1: RF Conducted Output Power - Measured

Frequency (MHz)	High Power (dBm)	High Power (W)
440	47.2	52.5
450	47.2	52.5
454	47.2	52.5
456	47.2	52.5
470	47.2	52.5
512	47.2	52.5

Notes: Data presented is for Analog mode. All other modes were investigated and found to have equivalent power within measurement tolerances.

Table 5-2: Test Equipment Used For Testing RF Power Output - Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	11/18/10
901356	Agilent Technologies	E9323A	Power Sensor	31764-264	11/18/10
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	2/17/11

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

August 11 &
September 1, 2010
Dates Of Test

6 FCC Rules and Regulations Part 2.1051: Spurious Emissions at Antenna Terminals; Part 90.210: Emission Limitations, RSS-119 5.8: Transmitter Unwanted Emissions

6.1 Test Procedure

ANSI/TIA/EIA-603-2002, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 modes.

6.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10 x Fc


Limits: $(43 + 10 \text{ LOG } P(W))$

The following channels (MHz) were investigated:


440, 450, 454, 456, 470, 512

Both high and low power settings were checked; high power was found to be worst case. All modes were investigated, and analog mode is presented as representative data.


Plot 6-1: Conducted Spurious - 440 MHz - Analog High Power

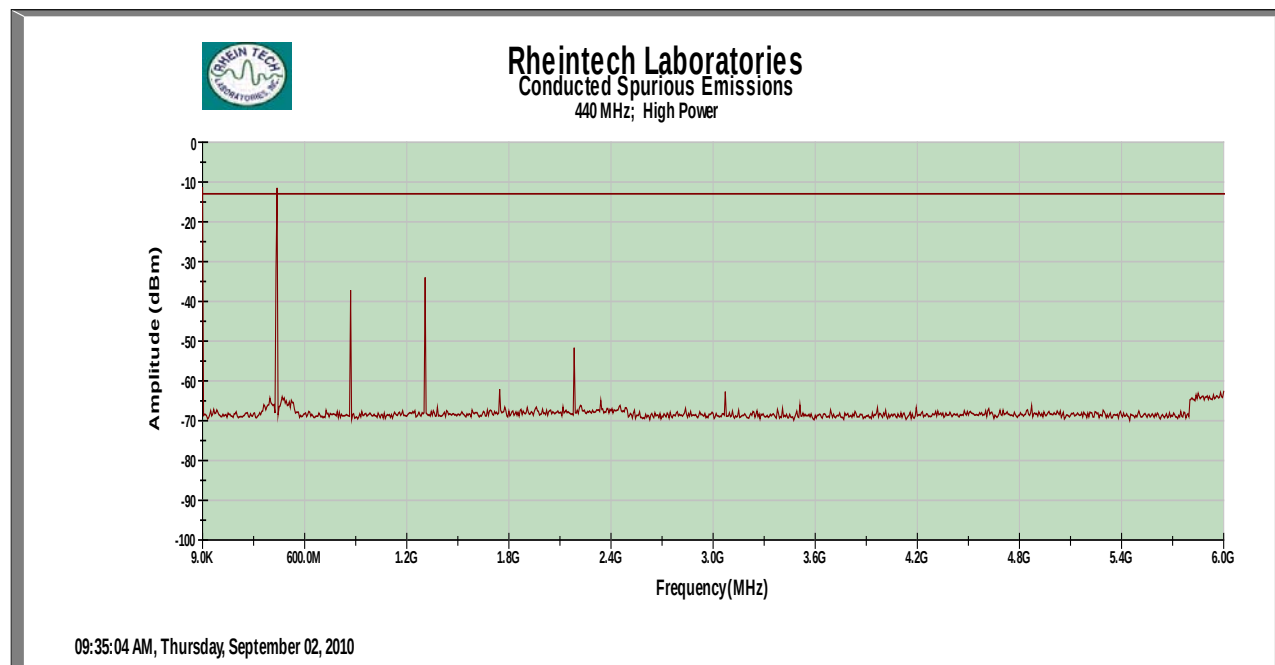


Plot 6-2: Conducted Spurious - 450 MHz - Analog High Power

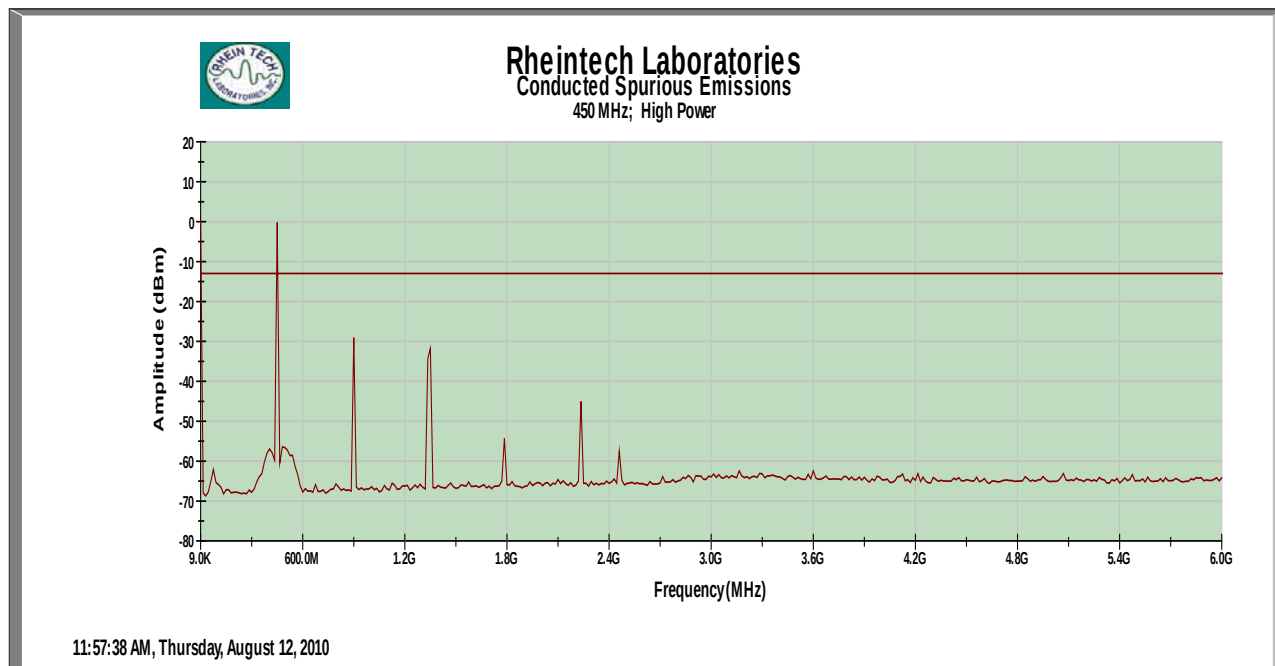


Plot 6-3: Conducted Spurious – 454 MHz – Analog High Power

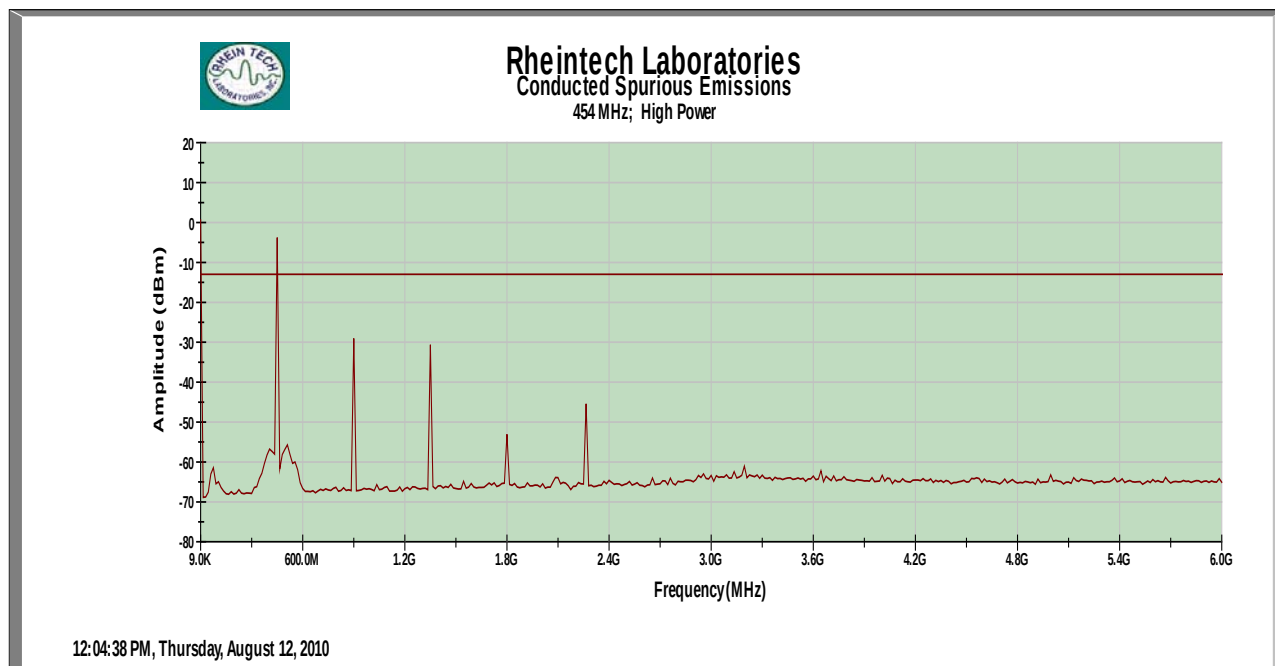

Plot 6-4: Conducted Spurious – 456 MHz – Analog High Power

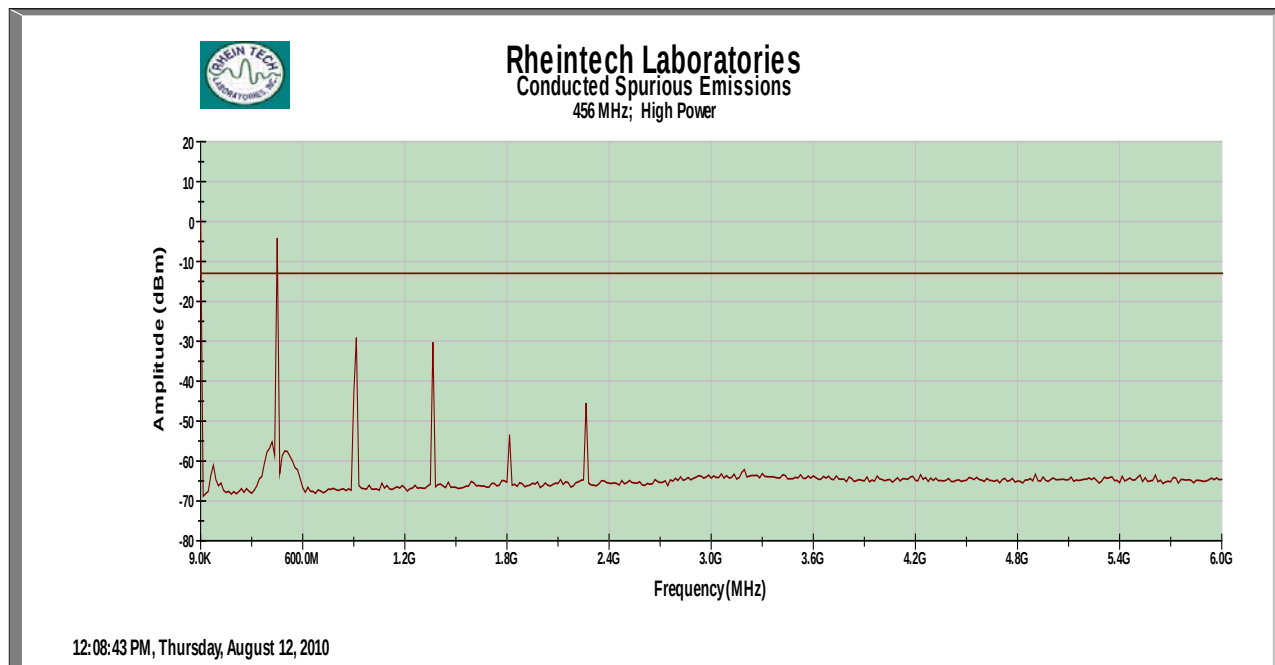

Plot 6-5: Conducted Spurious – 470 MHz – Analog High Power

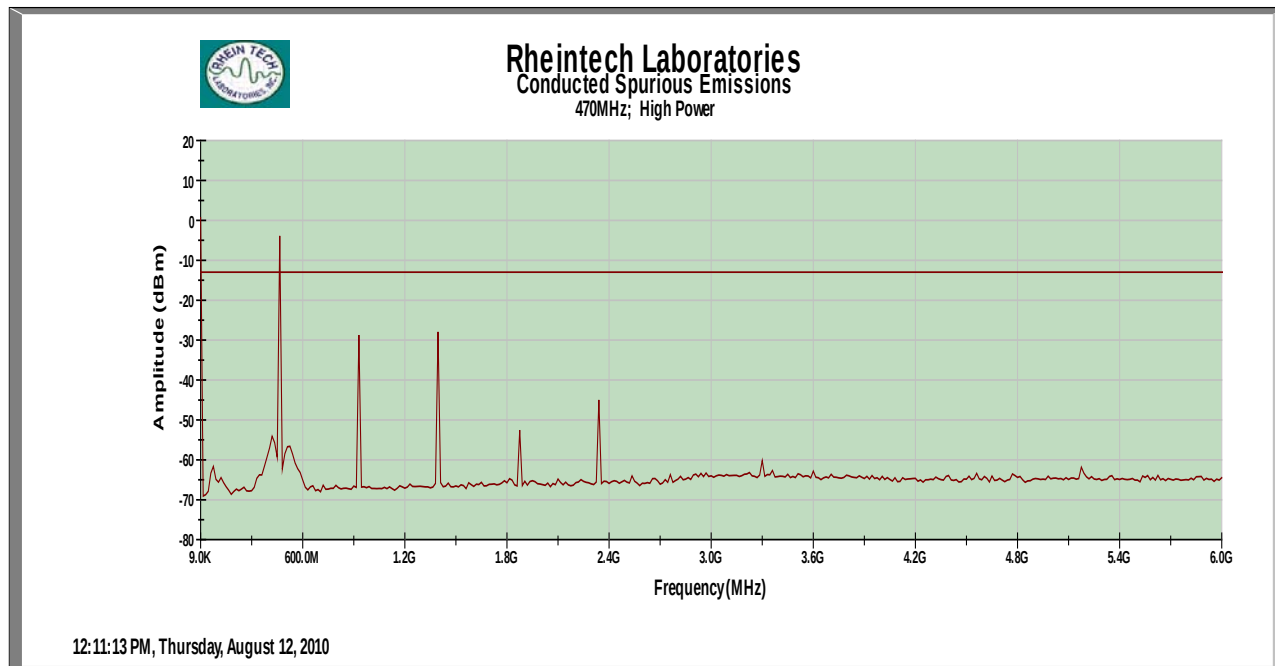

Plot 6-6: Conducted Spurious – 512 MHz – Analog High Power

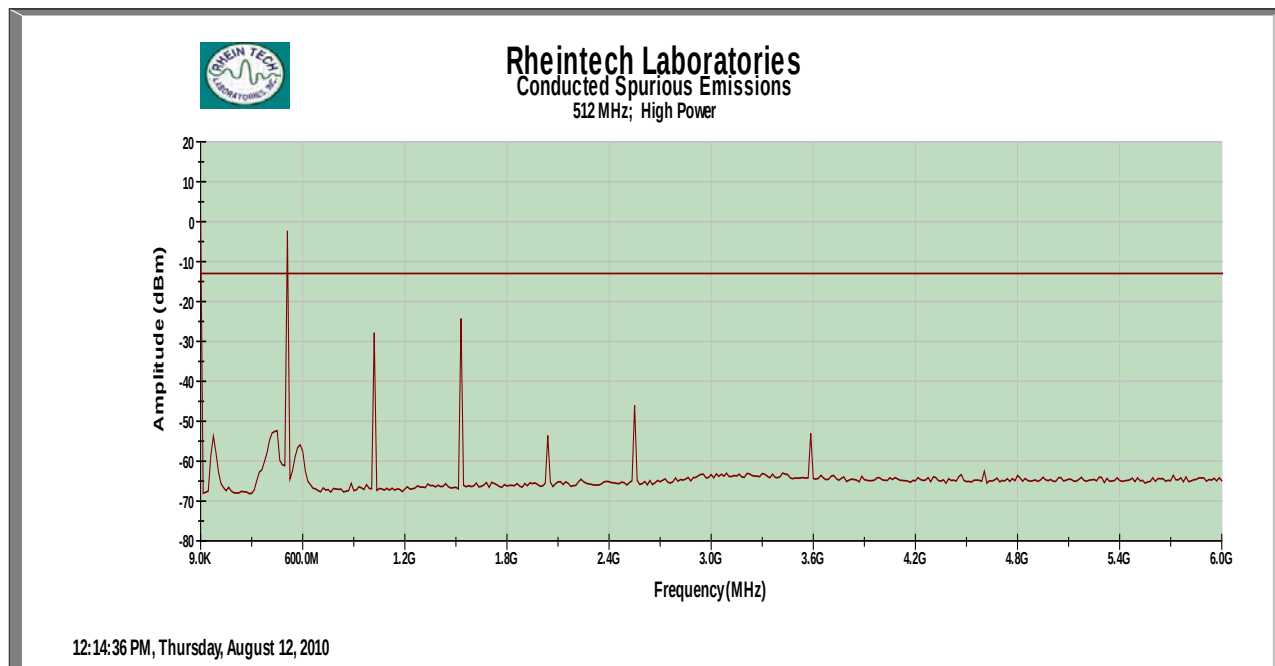


Table 6-1: Test Equipment Used For Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	11/23/10
901396	MCE Weinschel	48-40-34	Attenuator, 40 dB, DC-18 GHz, 100 W	93453	2/17/11
901133	Par Electronics	400-512 (25W)	UHF Notch Filter	N/A	3/10/12

Test Personnel:

Daniel Baltzell EMC Test Engineer	 Signature	August 12 & September 2, 2010 Dates Of Test
--------------------------------------	--	---

7 FCC Rules and Regulations Part 2.1053(a): Field Strength of Spurious Radiation; Part 90 90.210 Out of Band Emissions Limit; RSS-119 5.8: Unwanted Emissions

7.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz. Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 and EDACS modes.

The spurious emissions levels were measured, and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

7.2 Test Data

7.2.1 CFR 47 Part 90.210 Requirements

The worst-case emissions test data are shown.

Table 7-1: Field Strength of Spurious Radiation – 440 MHz – Analog High Power

Frequency (MHz)	Spectrum Analyzer Level (dBuV/M)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (dBc)	Limit (dBc)	Margin (dB)
880.0	51.0	-63.5	0.4	1.2	109.9	52.5	-57.4
1320.0	45.0	-72.0	0.4	7.4	112.2	52.5	-59.7
1760.0	38.2	-75.5	0.6	8.6	114.7	52.5	-62.2
2200.0	26.8	-69.1	0.7	9.4	107.6	52.5	-55.1
2640.0	21.9	-65.3	0.7	9.6	103.6	52.5	-51.1
3080.0	26.1	-61.0	1.7	9.3	100.6	52.5	-48.1
3520.0	20.2	-62.7	1.2	9.6	101.5	52.5	-49.0
3960.0	24.7	-59.2	1.3	9.4	98.3	52.5	-45.8
4400.0	21.0	-57.1	1.7	10.7	95.3	52.5	-42.8

Table 7-2: Field Strength of Spurious Radiation – 450 MHz – Analog High Power

Frequency (MHz)	Spectrum Analyzer Level (dBuV/M)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (dBc)	Limit (dBc)	Margin (dB)
900.0	29.9	-54.3	1.5	1.3	101.7	52.5	-49.2
1350.0	40.5	-52.4	1.6	5.5	95.7	52.5	-43.2
1800.0	24.6	-66.5	2.3	6.5	109.5	52.5	-57.1
2250.0	25.4	-65.0	2.2	7.3	107.1	52.5	-54.6
2700.0	22.4	-69.1	2.1	7.7	110.7	52.5	-58.3
3150.0	21.2	-70.4	3.2	7.1	113.7	52.5	-61.3
3600.0	20.4	-68.3	3.8	7.3	112.0	52.5	-59.6
4050.0	17.6	-70.2	3.5	7.8	113.1	52.5	-60.7
4500.0	17.1	-66.3	4.6	8.9	109.2	52.5	-56.8

Table 7-3: Field Strength of Spurious Radiation – 454 MHz – Analog High Power

Frequency (MHz)	Spectrum Analyzer Level (dBuV/M)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (dBc)	Limit (dBc)	Margin (dB)
908.0	28.3	-55.9	1.5	1.3	103.3	52.5	-50.8
1362.0	29.2	-63.7	1.7	5.6	107.0	52.5	-54.5
1816.0	24.5	-66.6	1.9	6.4	109.3	52.5	-56.8
2270.0	23.4	-67.0	2.6	7.3	109.5	52.5	-57.0
2724.0	21.0	-70.5	2.1	7.8	112.0	52.5	-59.6
3178.0	19.8	-71.8	3.3	7.0	115.3	52.5	-62.8
3632.0	21.0	-67.7	3.4	7.2	111.1	52.5	-58.7
4086.0	18.8	-69.0	3.8	8.0	112.0	52.5	-59.5
4540.0	16.3	-67.1	3.8	9.0	109.1	52.5	-56.6

Table 7-4: Field Strength of Spurious Radiation – 456 MHz – Analog High Power

Frequency (MHz)	Spectrum Analyzer Level (dBuV/M)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (dBc)	Limit (dBc)	Margin (dB)
912.0	17.6	-66.6	1.6	1.3	114.1	52.5	-61.6
1368.0	23.1	-69.8	1.6	5.6	113.0	52.5	-60.5
1824.0	17.4	-73.7	2.9	6.4	117.4	52.5	-64.9
2280.0	22.9	-67.5	2.6	7.3	110.0	52.5	-57.5
2736.0	19.9	-71.6	2.2	7.8	113.2	52.5	-60.7
3192.0	19.0	-72.6	3.5	7.0	116.3	52.5	-63.8
3648.0	20.5	-68.2	3.4	7.1	111.7	52.5	-59.2
4104.0	18.5	-69.3	4.1	8.1	112.5	52.5	-60.0
4560.0	17.9	-65.5	4.0	9.0	107.7	52.5	-55.2

Table 7-5: Field Strength of Spurious Radiation – 470 MHz – Analog High Power

Frequency (MHz)	Spectrum Analyzer Level (dBuV/M)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (dBc)	Limit (dBc)	Margin (dB)
940.0	17.7	-68.6	1.6	1.5	115.9	52.5	-63.4
1410.0	26.1	-68.5	1.9	5.9	111.7	52.5	-59.2
1880.0	15.0	-73.6	1.9	6.2	116.5	52.5	-64.0
2350.0	29.6	-58.7	1.7	7.3	100.3	52.5	-47.9
2820.0	18.7	-72.8	2.6	8.0	114.6	52.5	-62.1
3290.0	19.8	-64.1	2.9	7.1	107.2	52.5	-54.7
3760.0	18.9	-67.6	3.6	7.0	111.4	52.5	-59.0
4230.0	18.4	-72.6	3.6	8.6	114.8	52.5	-62.3
4700.0	21.9	-60.8	4.2	9.0	103.2	52.5	-50.8

Table 7-6: Field Strength of Spurious Radiation – 512 MHz – Analog High Power

Frequency (MHz)	Spectrum Analyzer Level (dBuV/M)	Signal Generator Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Signal Generator (dBc)	Limit (dBc)	Margin (dB)
1024.0	17.5	-73.5	1.6	4.4	117.9	52.5	-65.4
1536.0	24.4	-67.1	1.7	6.6	109.4	52.5	-57.0
2048.0	18.8	-68.0	2.0	6.7	110.5	52.5	-58.0
2560.0	18.8	-66.4	2.5	7.4	108.7	52.5	-56.3
3072.0	33.2	-51.8	3.6	7.2	95.4	52.5	-42.9
3584.0	25.0	-60.4	3.9	7.3	104.2	52.5	-51.7
4096.0	22.9	-65.3	4.0	8.0	108.5	52.5	-56.0
4608.0	23.4	-58.9	4.4	9.1	101.4	52.5	-48.9
5120.0	22.0	-58.5	4.4	8.6	101.5	52.5	-49.0


Table 7-7: Test Equipment Used For Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	12/12/10
901364	MITEQ	JS4-01002600-36-5P	Amplifier 0.1-26 GHz, 28 dB gain, power 5 dB	849863	2/22/11
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	11/23/10
900928	Hewlett Packard	83752A	Synthesized Sweeper, (0.01 - 20 GHz)	3610A00866	2/17/11
901426	Insulated Wire Inc.	KPS-1503-3600-KPS	RF cable, 30'	NA	10/19/10
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS-09302008	RF cable, 20'	NA	10/19/10
901517	Insulated Wire Inc.	KPS-1503-360-KPS-09302008	RF cable 36"	NA	10/19/10
901262	ETS	3160-9	Double ridged Guide Antenna (1 - 18 GHz)	6748	5/1/11
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	6/14/11
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	6/14/10
901413	Agilent Technologies	E4448A	Spectrum Analyzer	US44020346	11/10/10
900724	Antenna Research Associates, Inc.	LPB-2520	LOG/Bicon Antenna (25 – 1000 MHz)	1037	7/17/11
900905	Rhein Tech Labs	PR-1040	OATS 1 Preamplifier 40dB (30 MHz – 2 GHz)	1006	4/10/11

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: M7300 440-512MHz 50W Mobile Radio
IDs: OWDTR-0062-E/3636B-0062
Standards: FCC Part 90/IC RSS-119
Report #: 2010130

Test Personnel:

Daniel Baltzell		August 16 & September 1, 2010
Test Engineer	Signature	Dates Of Test

8 FCC Rules and Regulations Part 2.1049(c)(1): Occupied Bandwidth; Part 90.210 Authorized Bandwidth; RSS-119 5.8: Transmitter Unwanted Emissions

Occupied Bandwidth - Compliance with the Emission Masks


8.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.11 and TIA/EIA-102.CAAA-2002 section 2.2.5


Device with digital modulation: Modulated to its maximum extent using a pseudo-random data sequence – 19,200 bps for OTP and 9,600 bps for P25 and EDACS modes.

8.2 Test Data


Plot 8-1: Occupied Bandwidth – 440 MHz; Analog WB (Mask B)

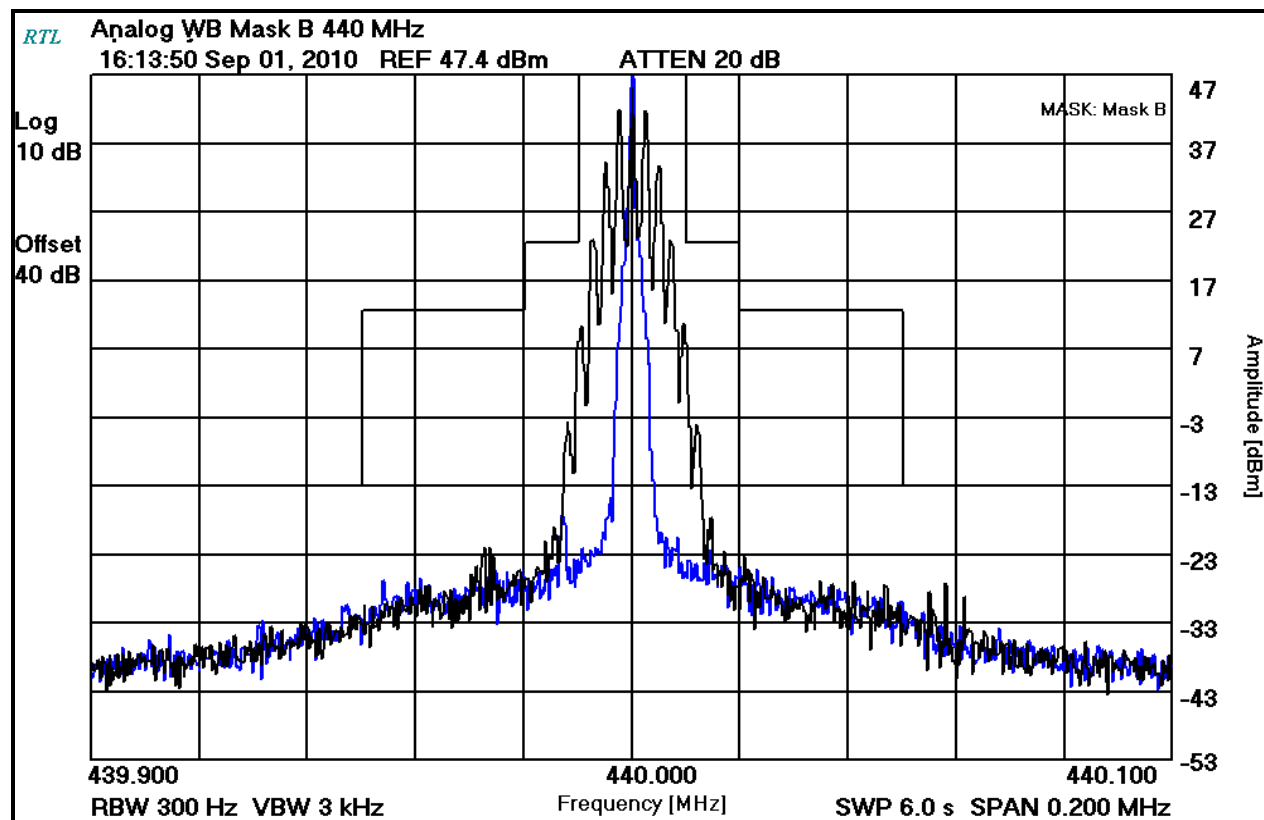


Plot 8-2: Occupied Bandwidth – 450 MHz; Analog WB (Mask B)

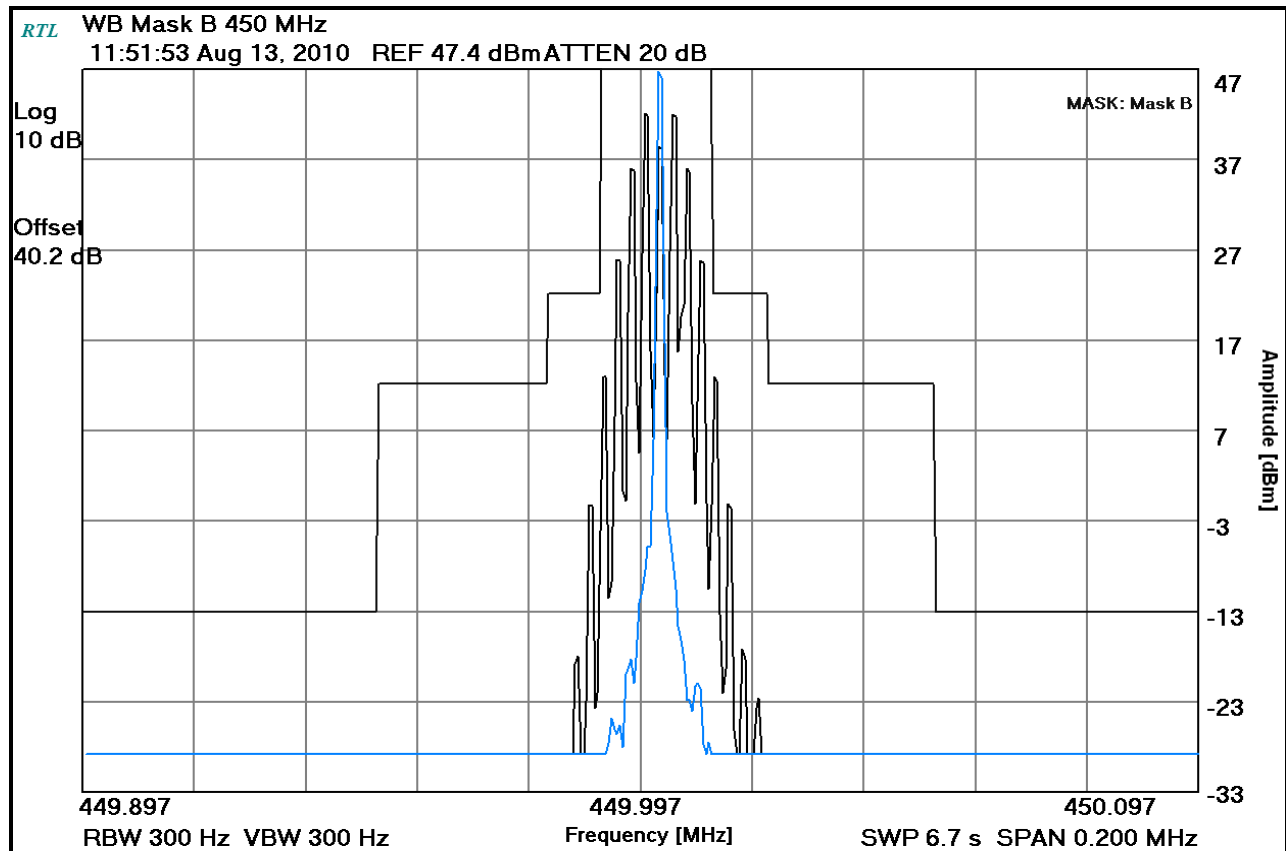


Plot 8-3: Occupied Bandwidth – 454 MHz; Analog WB (Mask B)

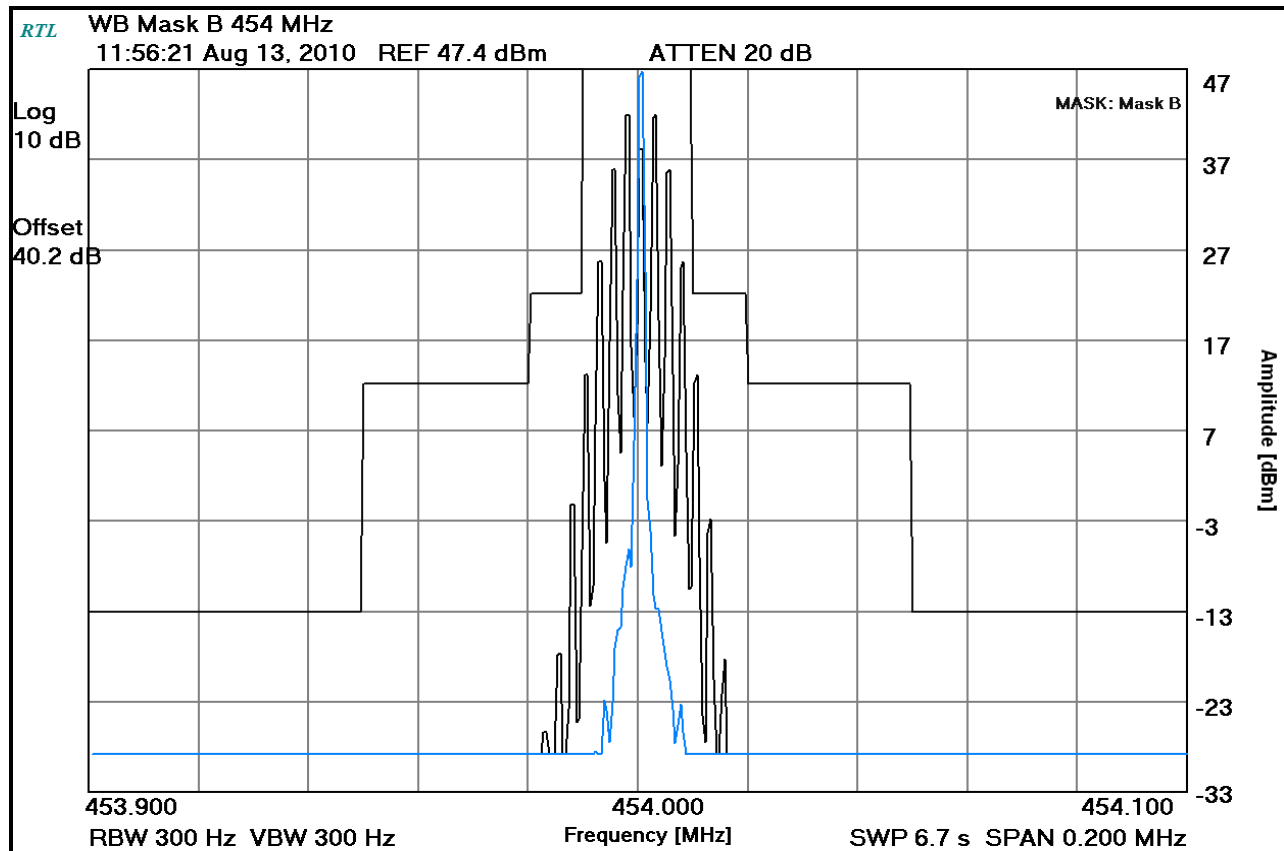


Plot 8-4: Occupied Bandwidth – 456 MHz; Analog WB (Mask B)

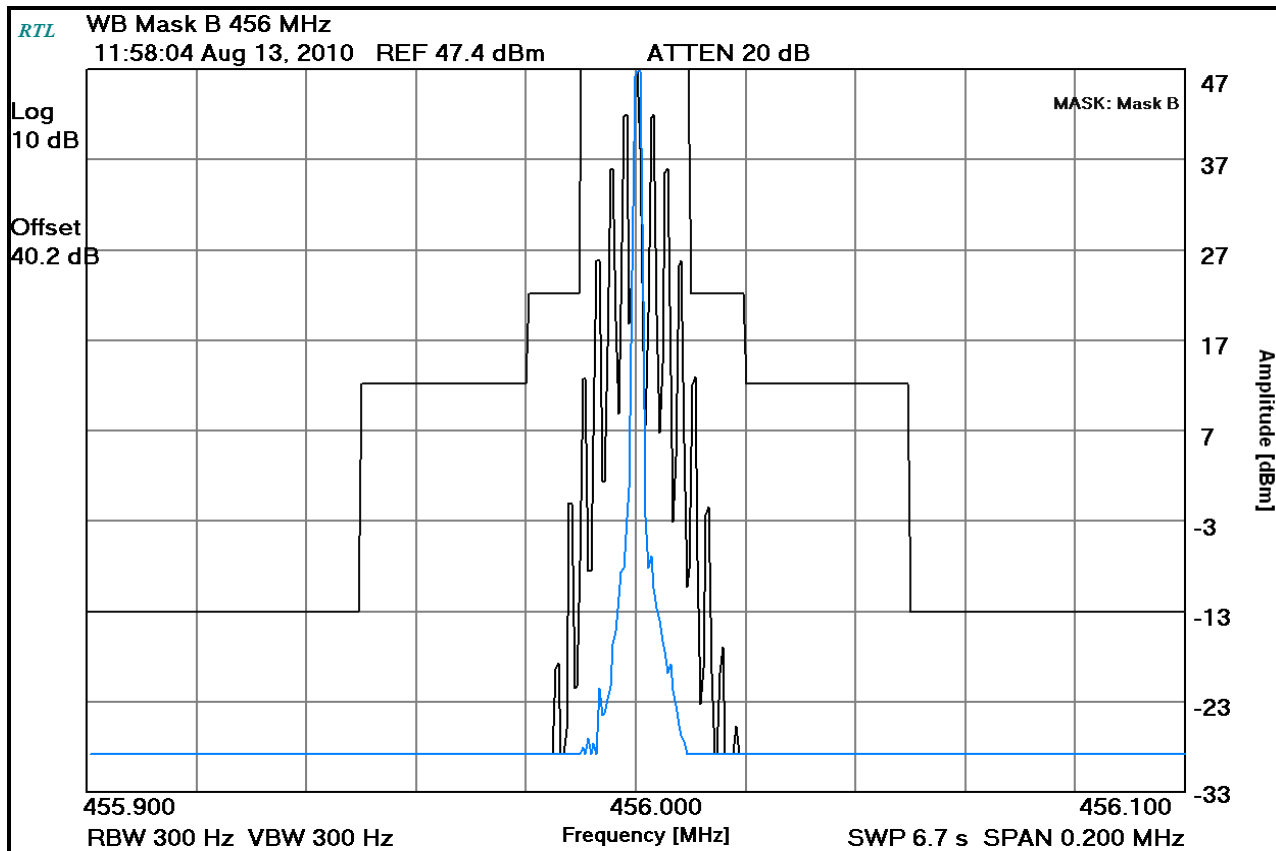


Plot 8-5: Occupied Bandwidth – 470 MHz; Analog WB (Mask B)

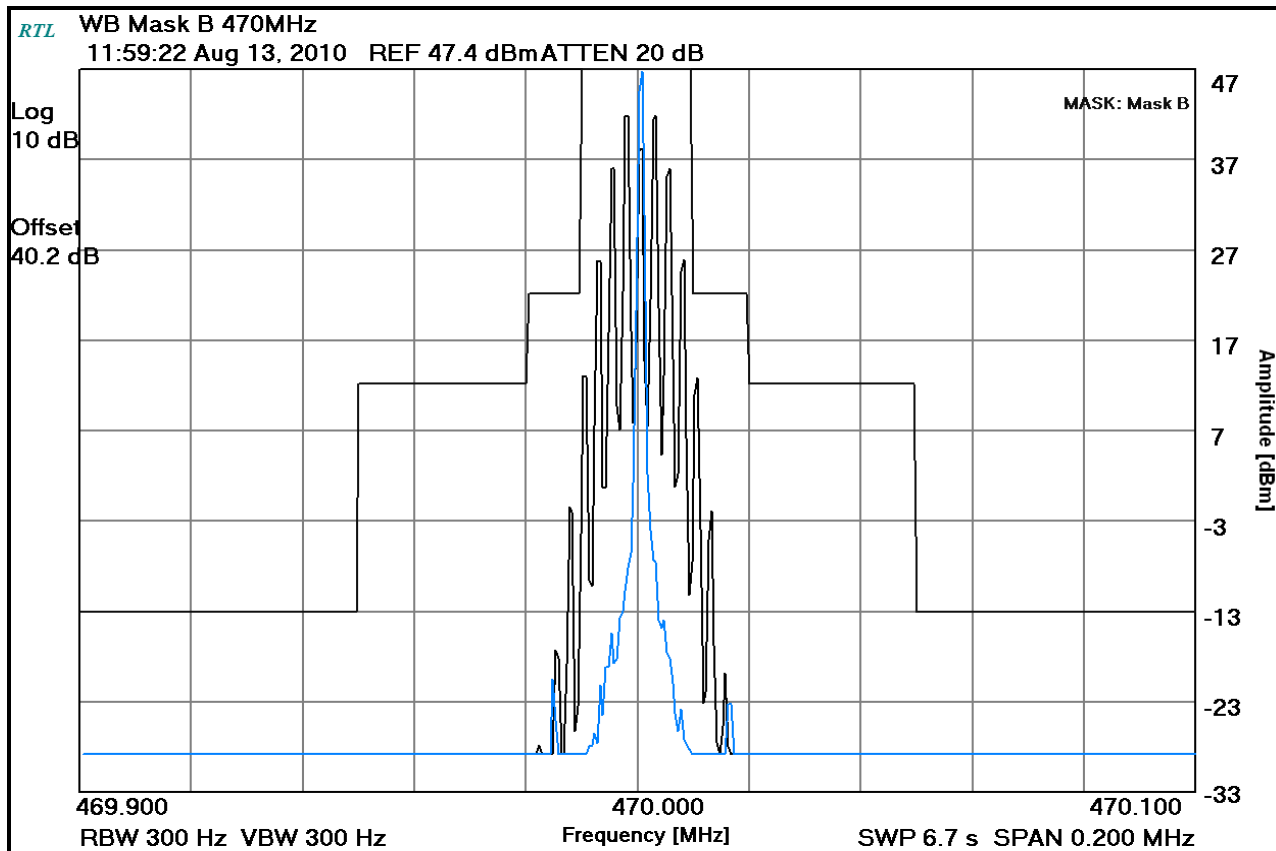


Plot 8-6: Occupied Bandwidth – 512 MHz; Analog WB (Mask B)

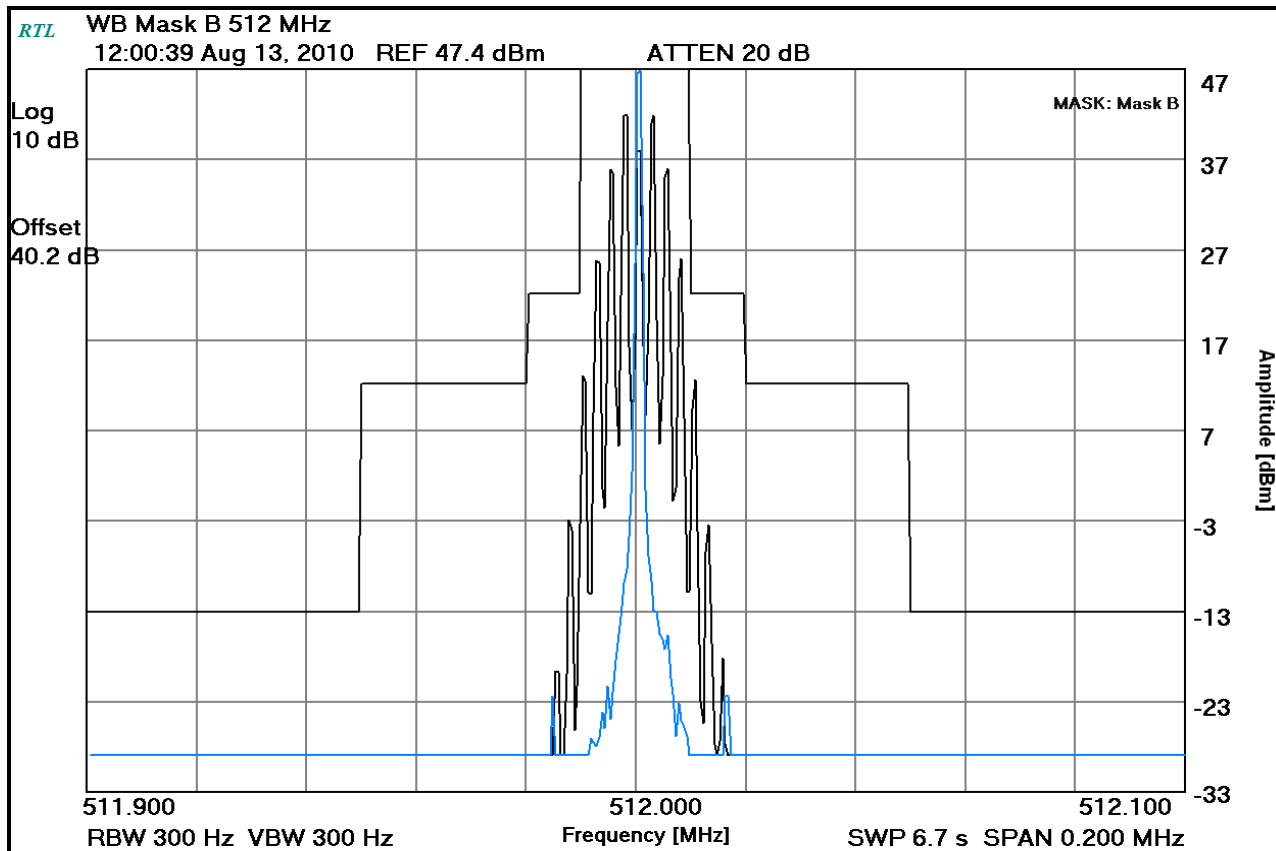


Plot 8-7: Occupied Bandwidth – 440 MHz; Analog NB (Mask D)

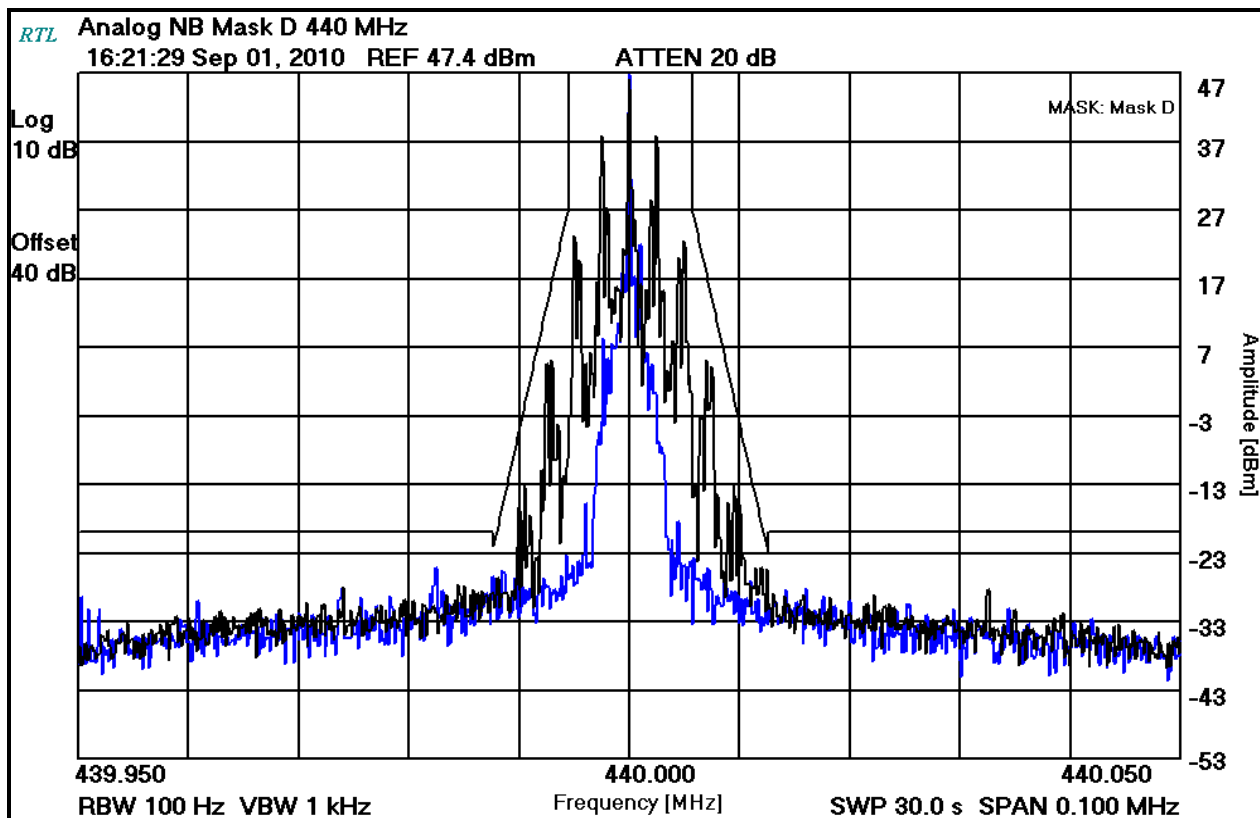


Plot 8-8: Occupied Bandwidth – 450 MHz; Analog NB (Mask D)

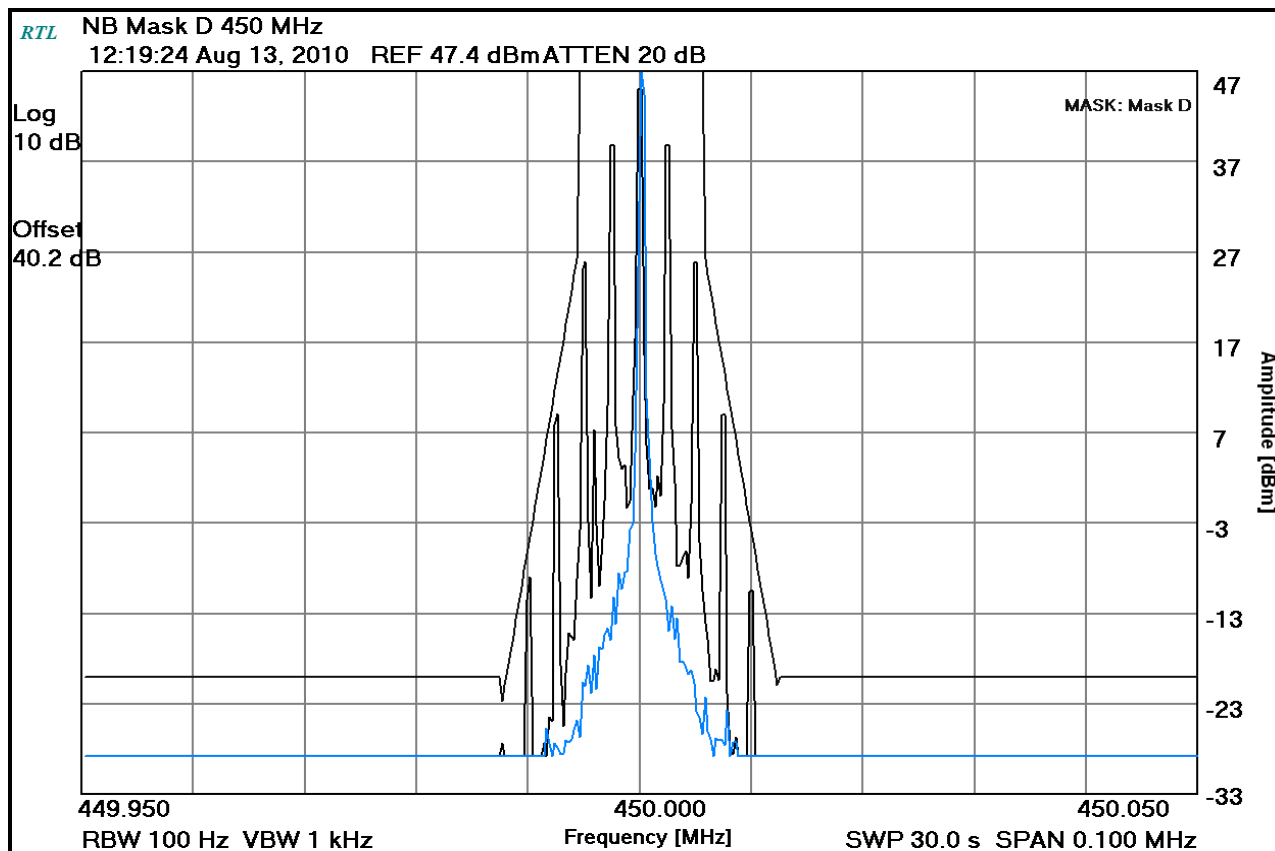


Plot 8-9: Occupied Bandwidth – 454 MHz; Analog NB (Mask D)

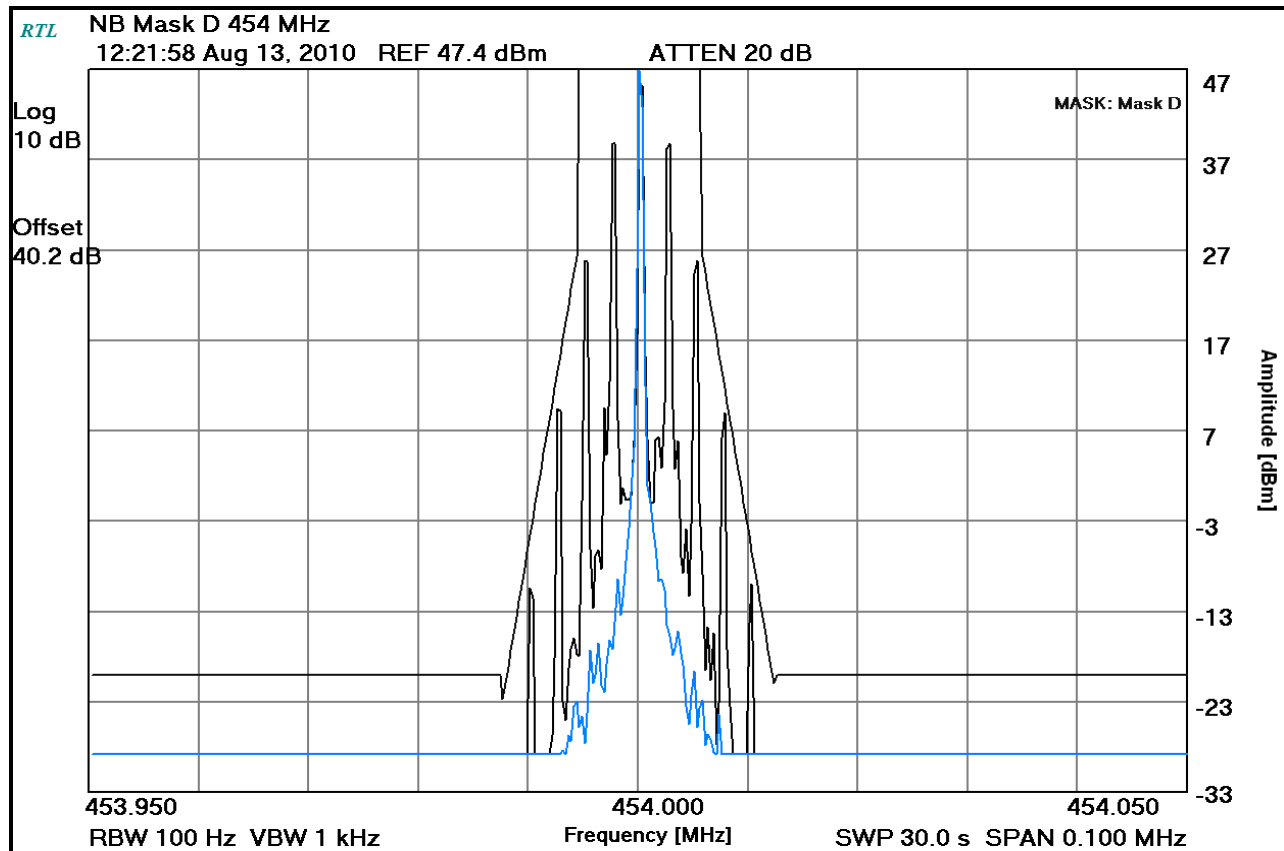


Plot 8-10: Occupied Bandwidth – 456 MHz; Analog NB (Mask D)

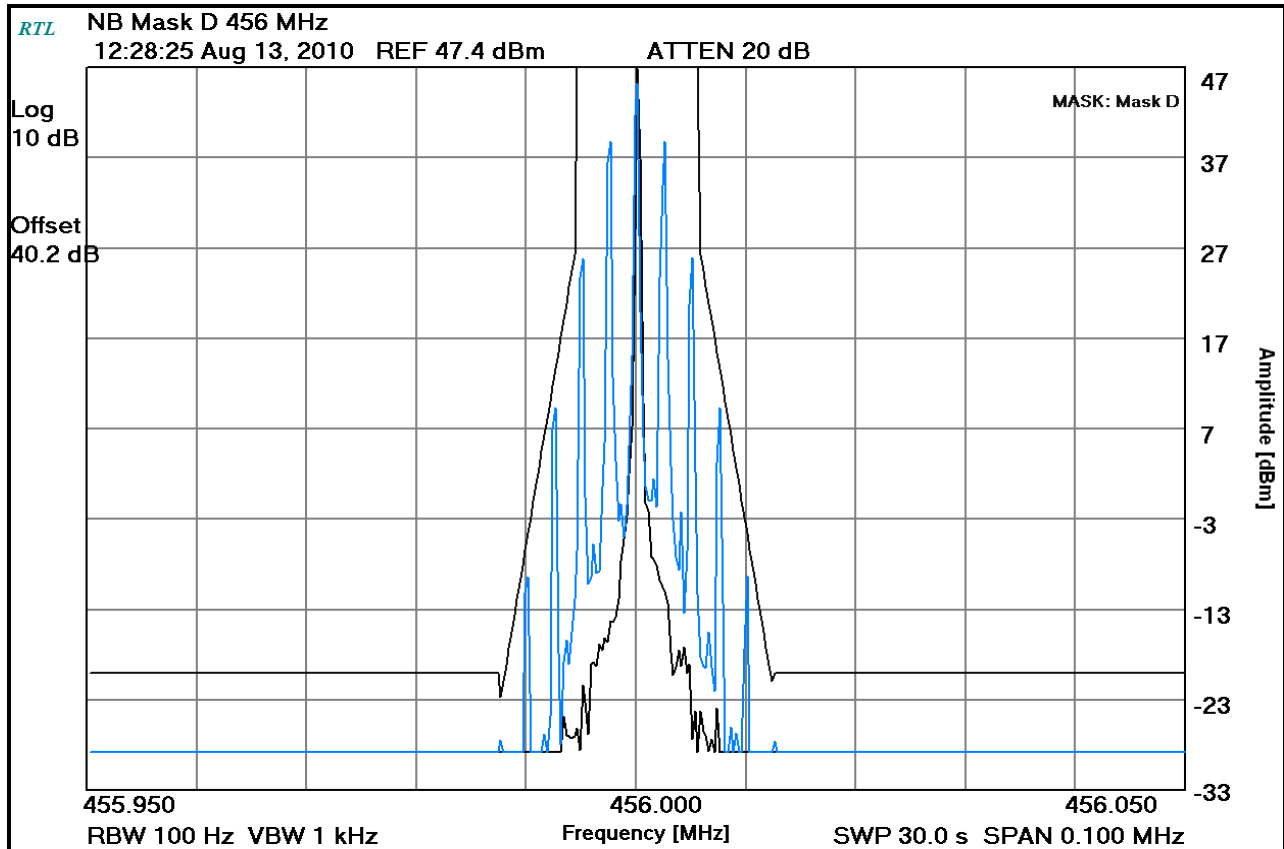


Plot 8-11: Occupied Bandwidth – 470 MHz; Analog NB (Mask D)

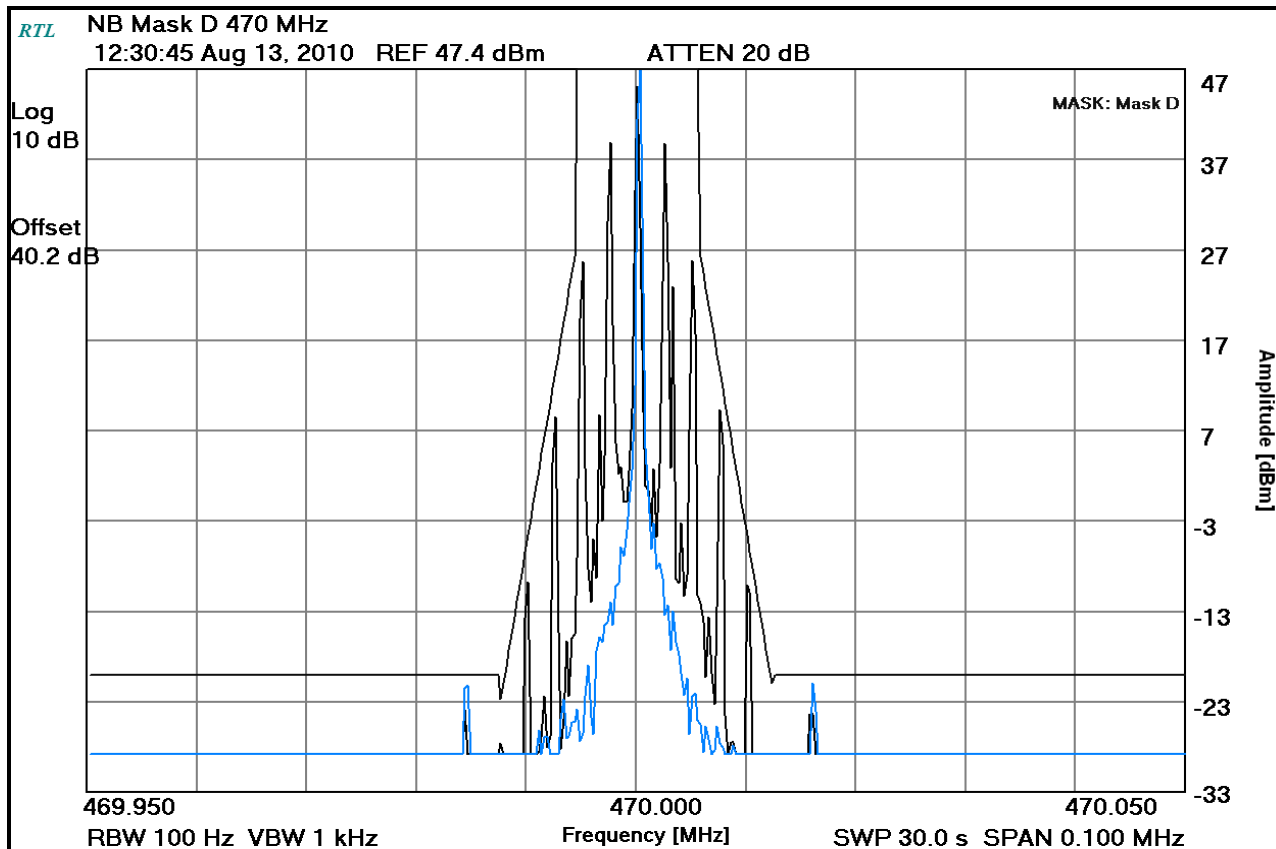


Plot 8-12: Occupied Bandwidth – 512 MHz; Analog NB (Mask D)

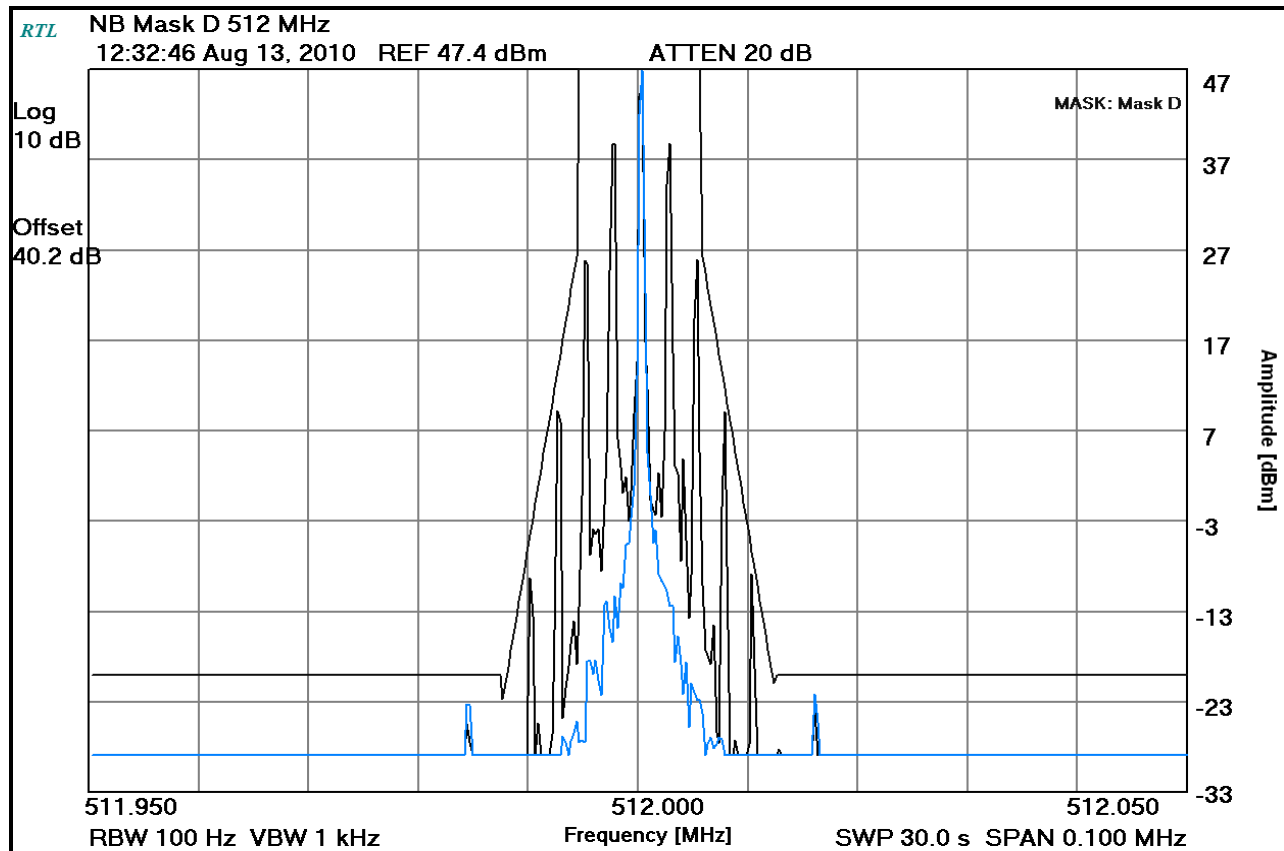


Plot 8-13: Occupied Bandwidth – 440 MHz; 2-Level 9600 FSK WB (Mask C)

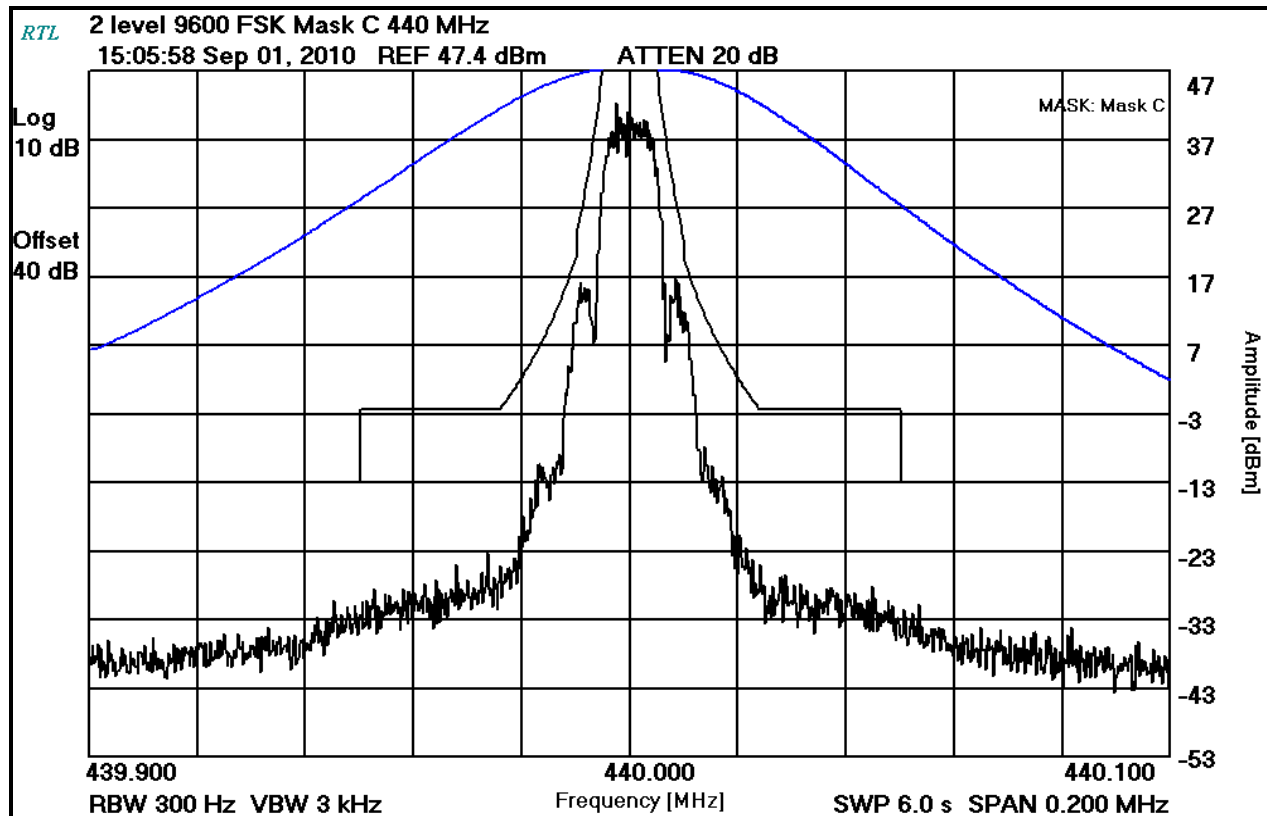


Plot 8-14: Occupied Bandwidth – 450 MHz; 2-Level 9600 FSK WB (Mask C)

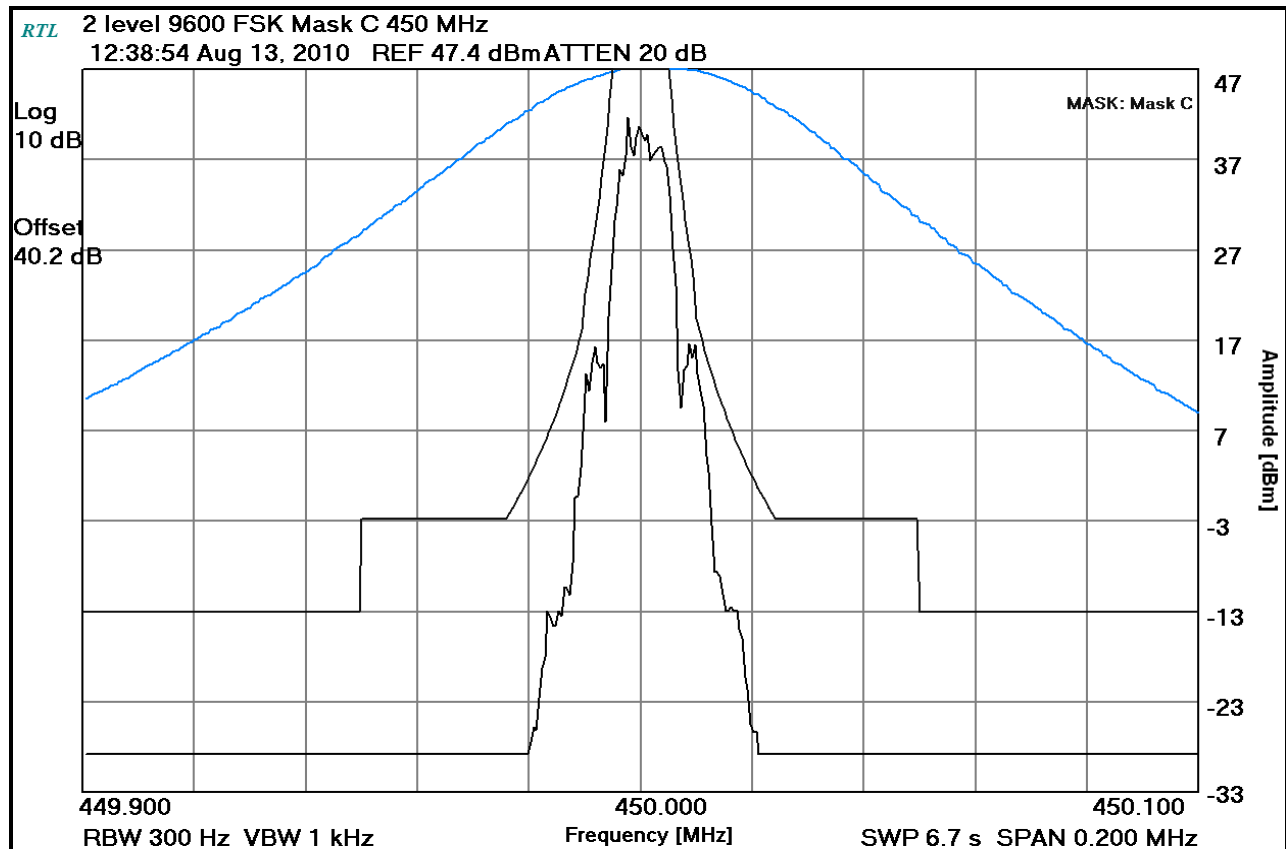


Plot 8-15: Occupied Bandwidth – 454 MHz; 2-Level 9600 FSK WB (Mask C)

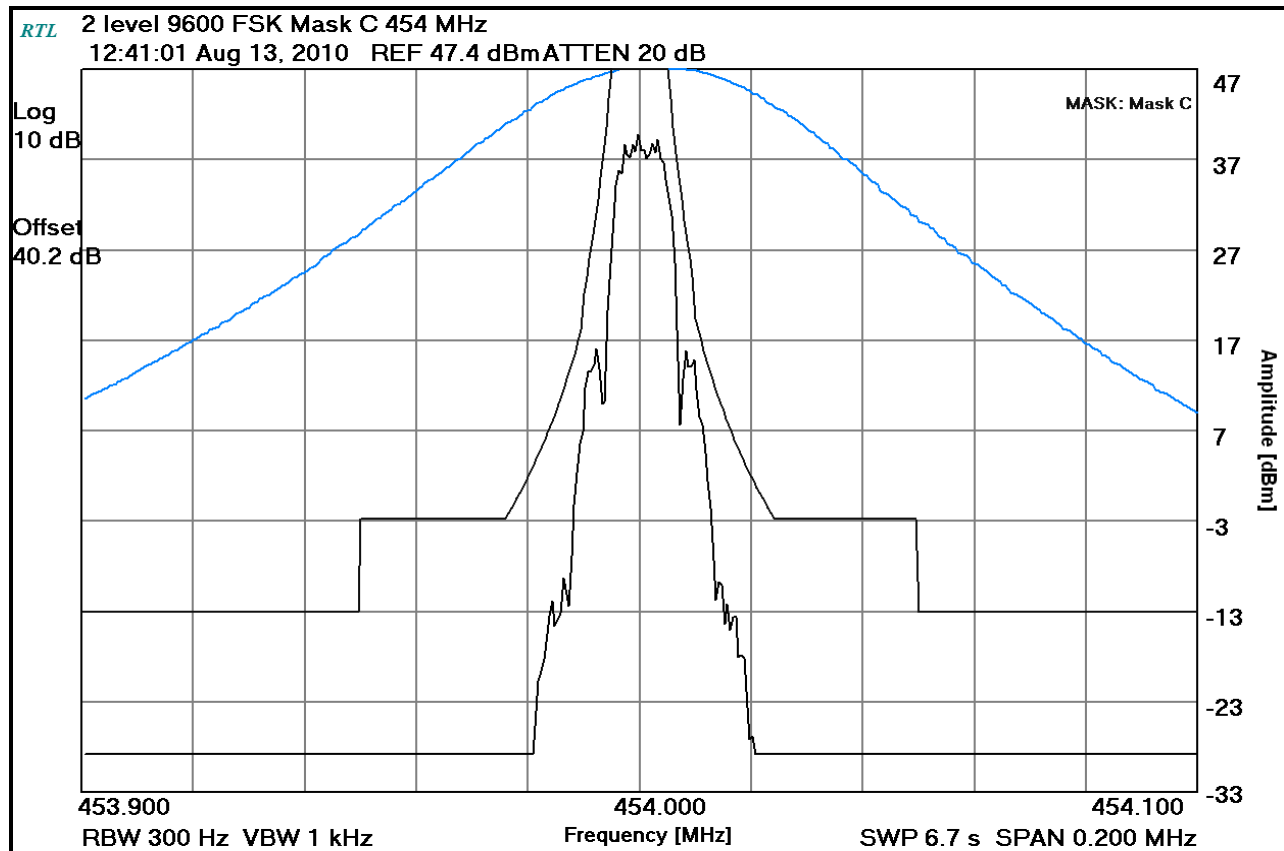


Plot 8-16: Occupied Bandwidth – 456 MHz; 2-Level 9600 FSK WB (Mask C)

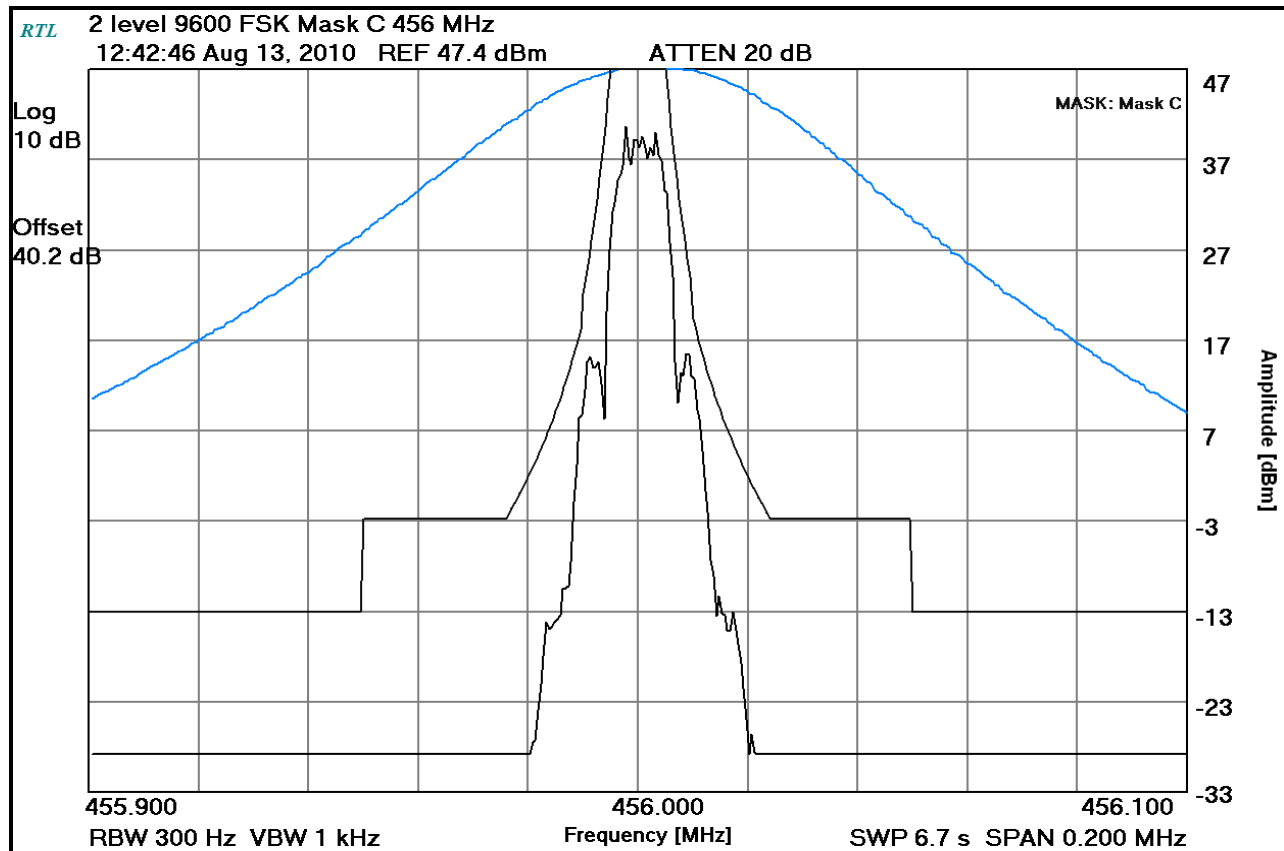


Plot 8-17: Occupied Bandwidth – 470 MHz; 2-Level 9600 FSK WB (Mask C)

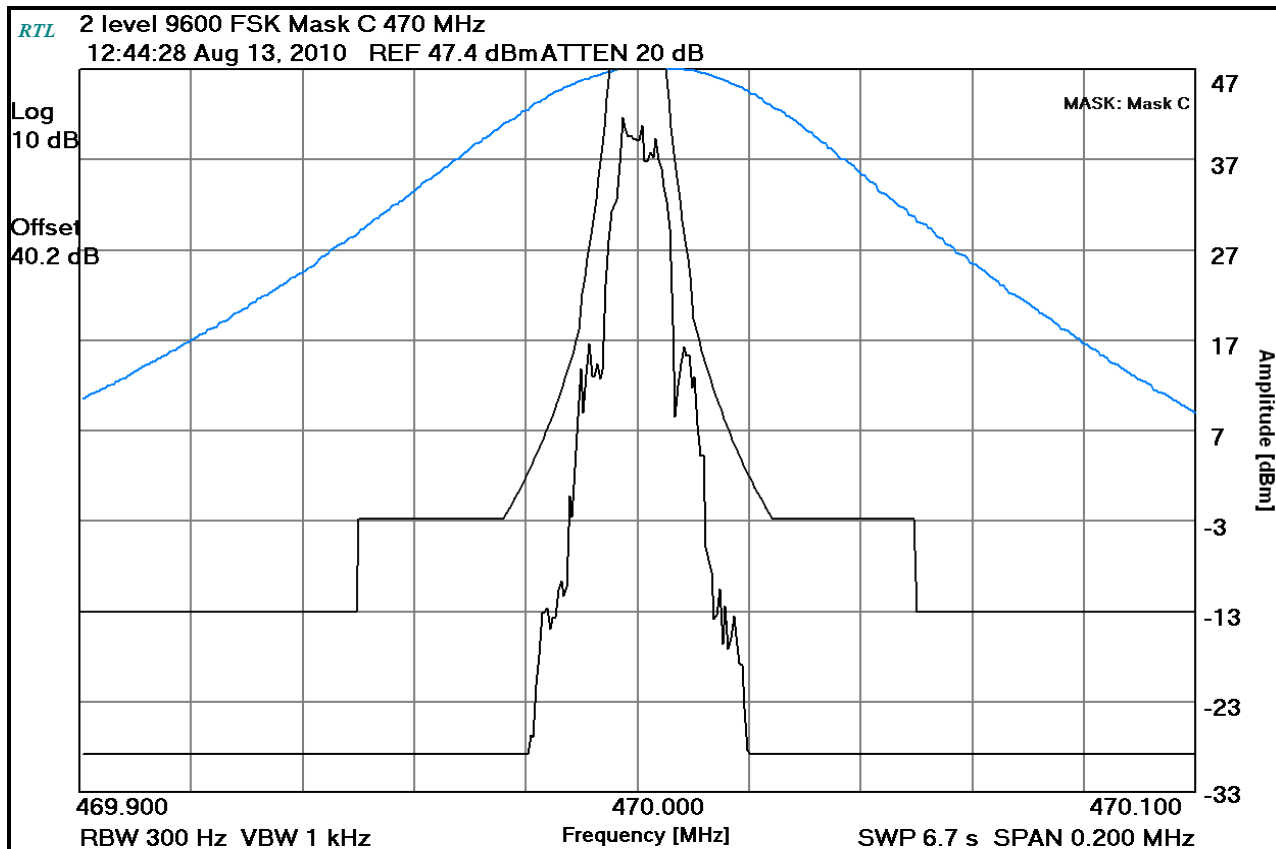


Plot 8-18: Occupied Bandwidth – 512 MHz; 2-Level 9600 FSK WB (Mask C)

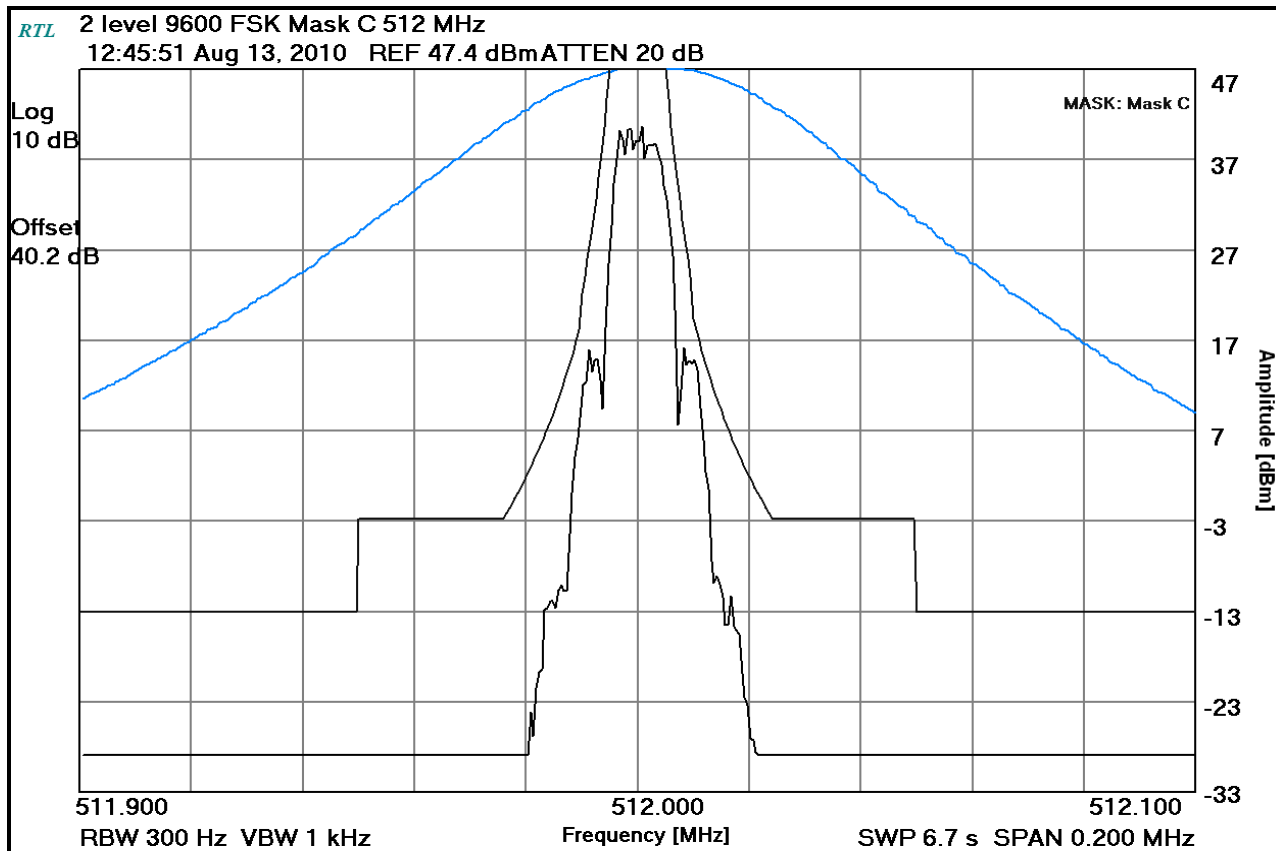


Plot 8-19: Occupied Bandwidth – 440 MHz; 2-Level 9600 FSK NB (Mask D)

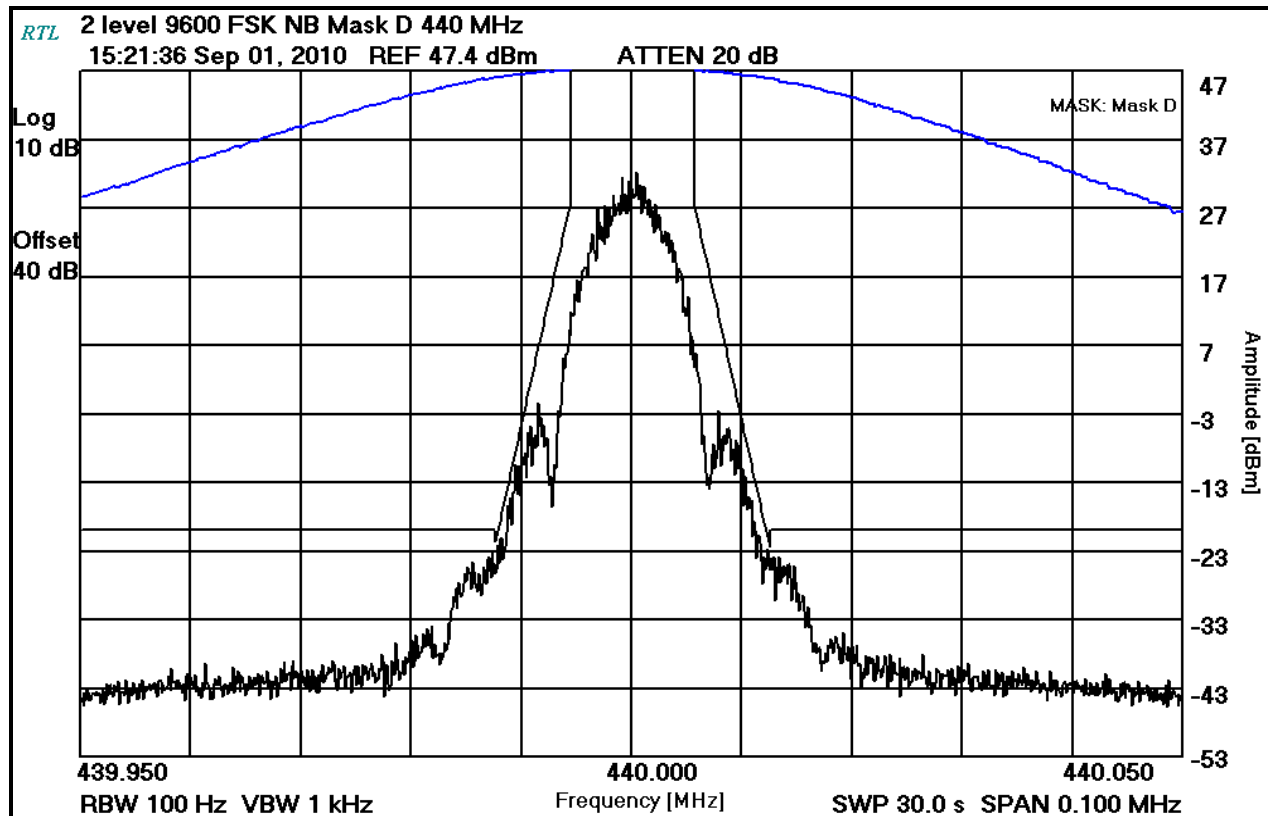


Plot 8-20: Occupied Bandwidth – 450 MHz; 2-Level 9600 FSK NB (Mask D)

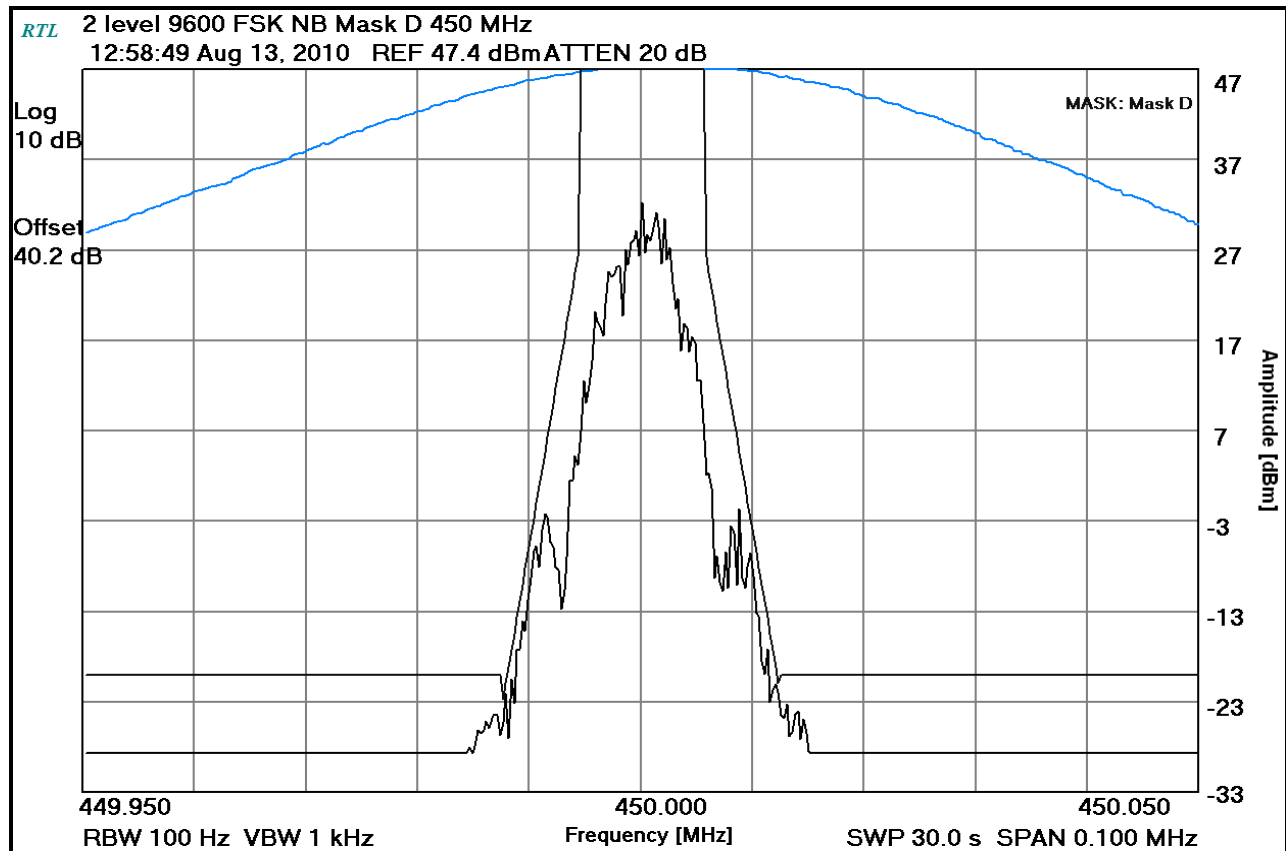


Plot 8-21: Occupied Bandwidth – 454 MHz; 2-Level 9600 FSK NB (Mask D)

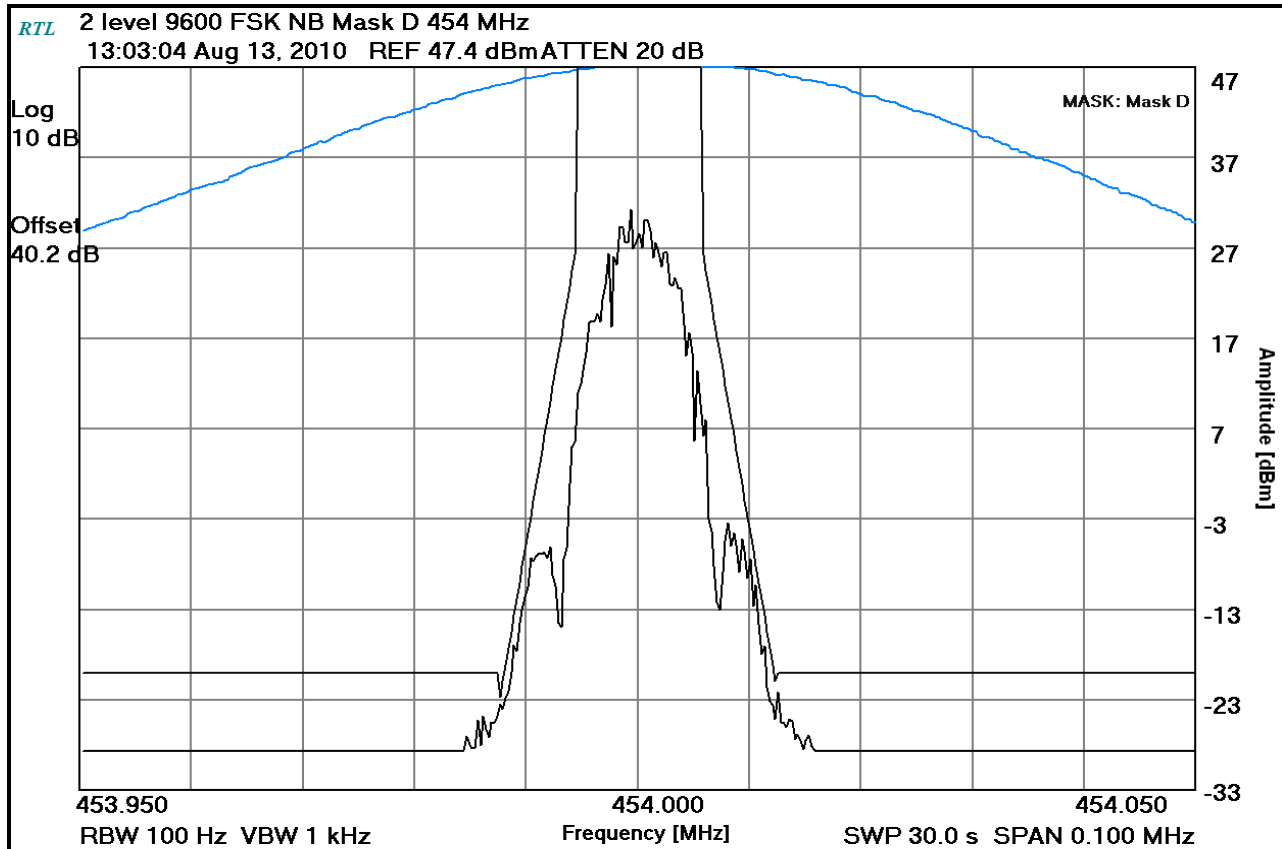


Plot 8-22: Occupied Bandwidth – 456 MHz; 2-Level 9600 FSK NB (Mask D)

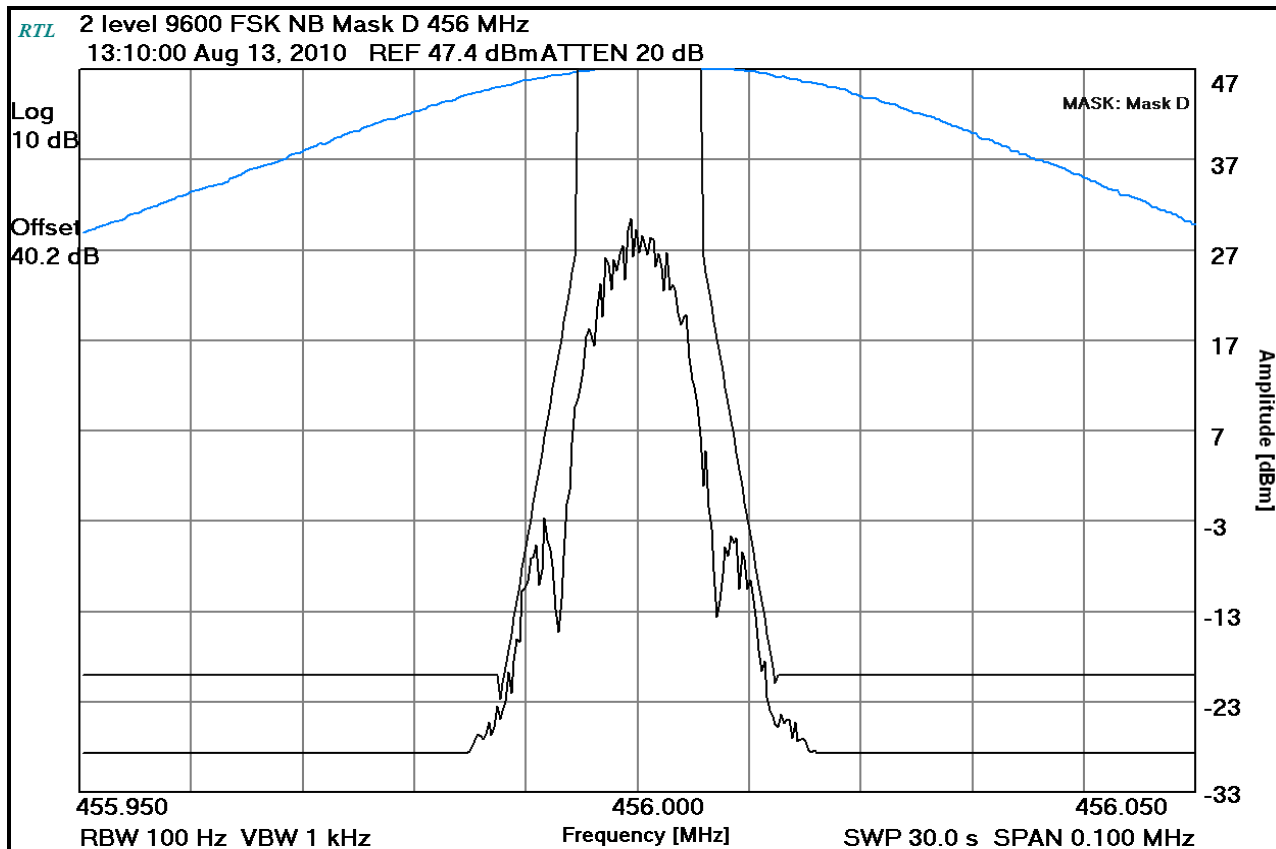


Plot 8-23: Occupied Bandwidth – 470 MHz; 2-Level 9600 FSK NB (Mask D)

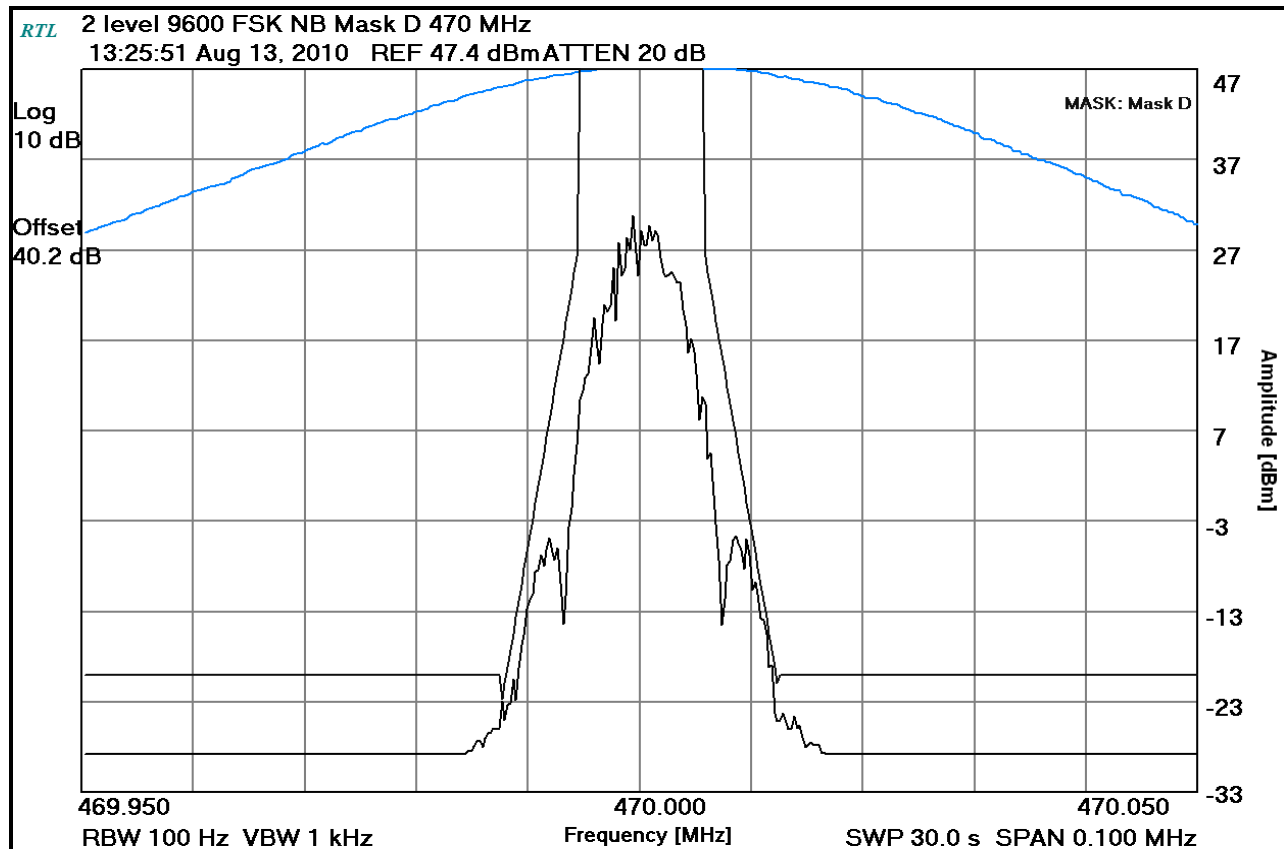


Plot 8-24: Occupied Bandwidth – 512 MHz; 2-Level 9600 FSK NB (Mask D)

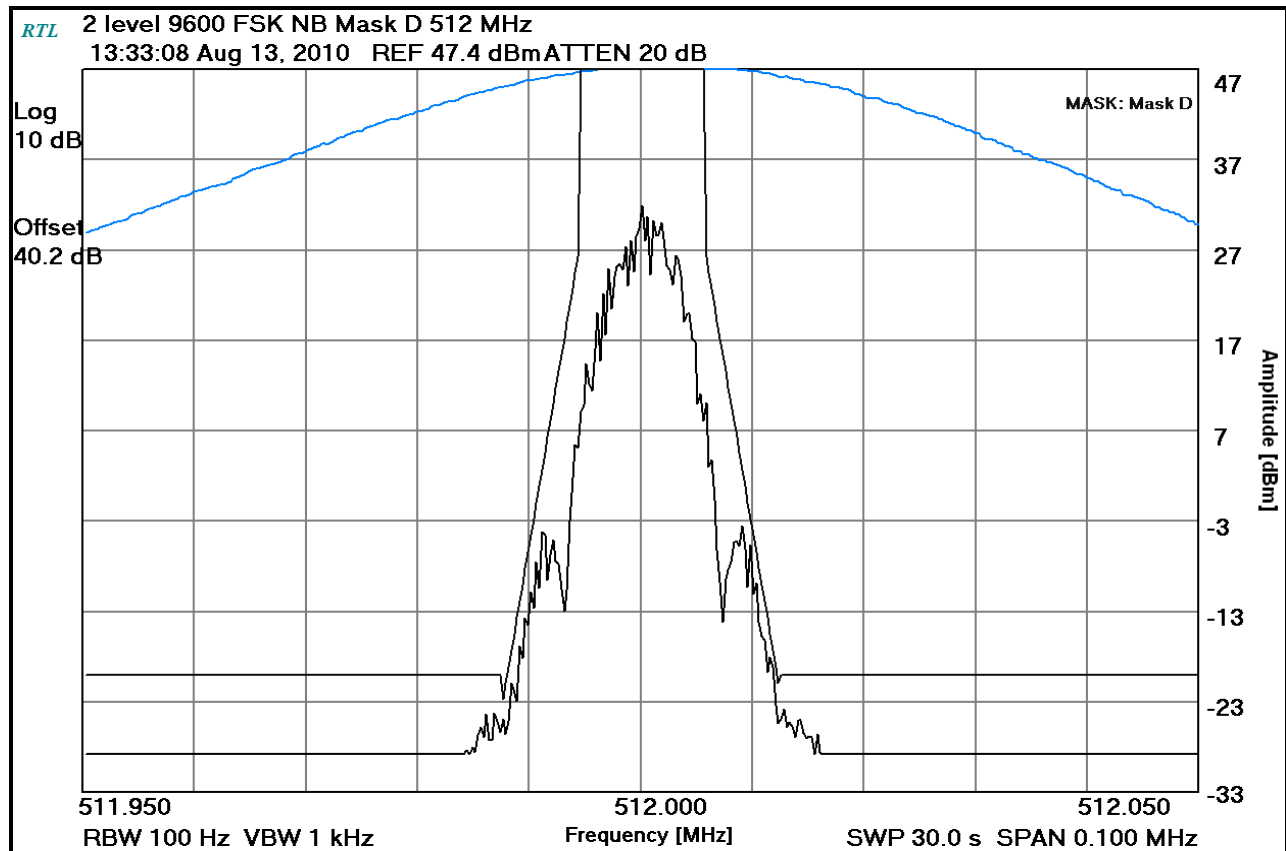


Plot 8-25: Occupied Bandwidth – 440 MHz; 2-Level 4800 FSK; (Mask D)

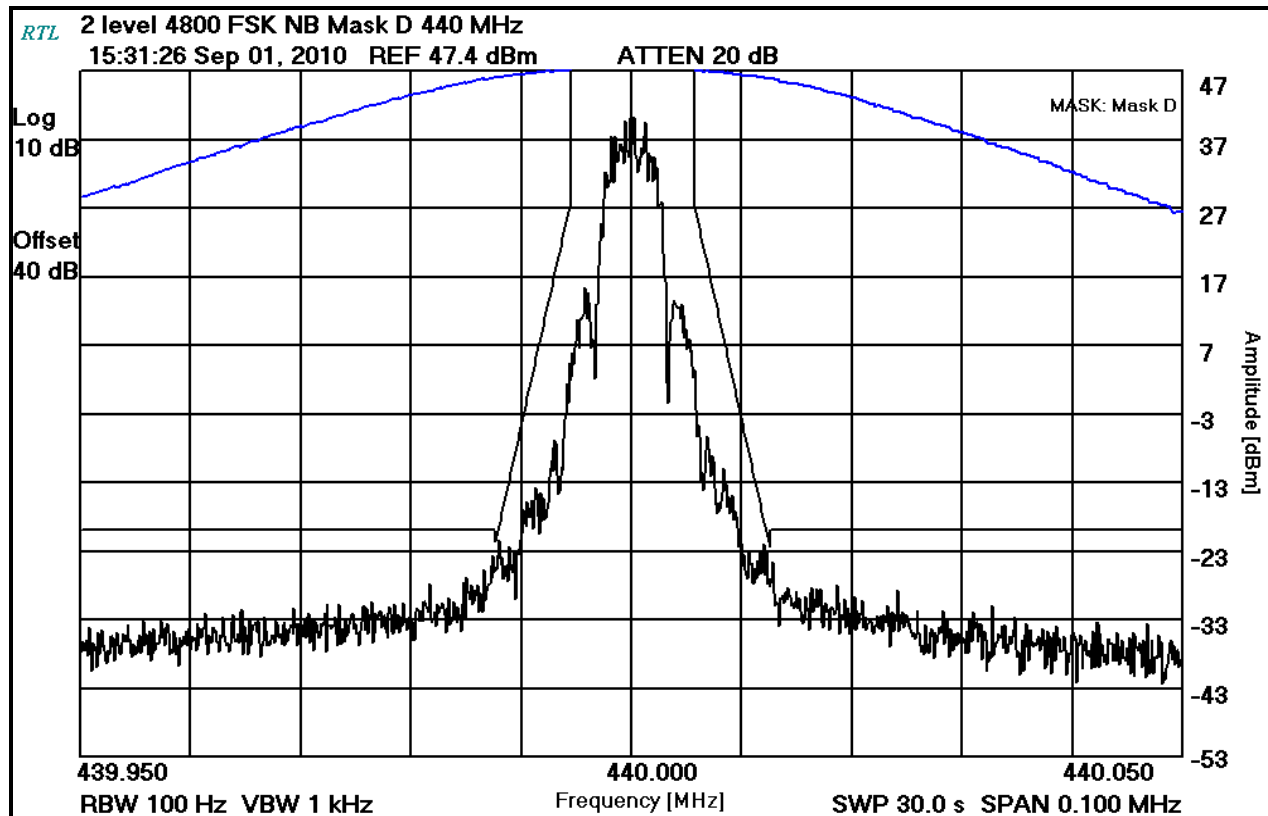


Plot 8-26: Occupied Bandwidth – 450 MHz; 2-Level 4800 FSK; (Mask D)

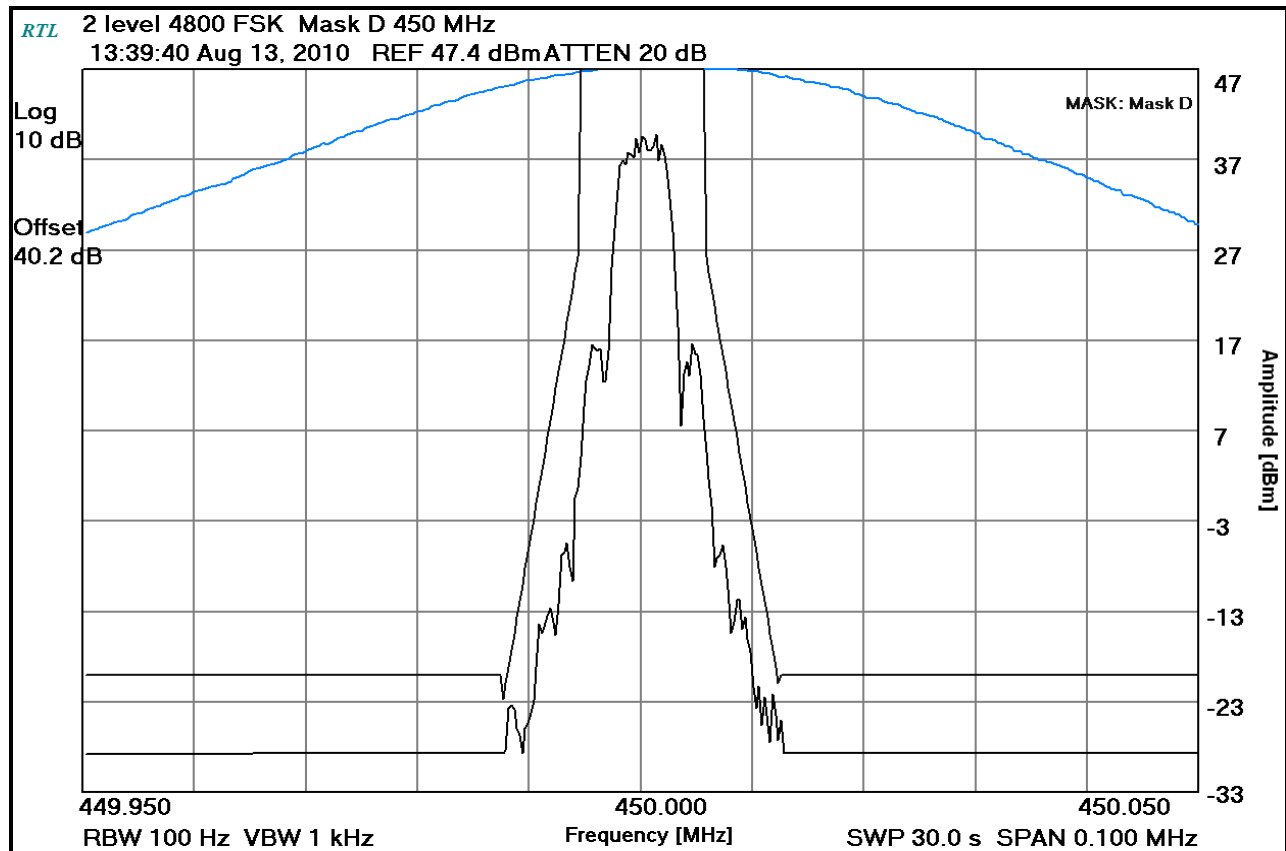


Plot 8-27: Occupied Bandwidth – 454 MHz; 2-Level 4800 FSK; (Mask D)

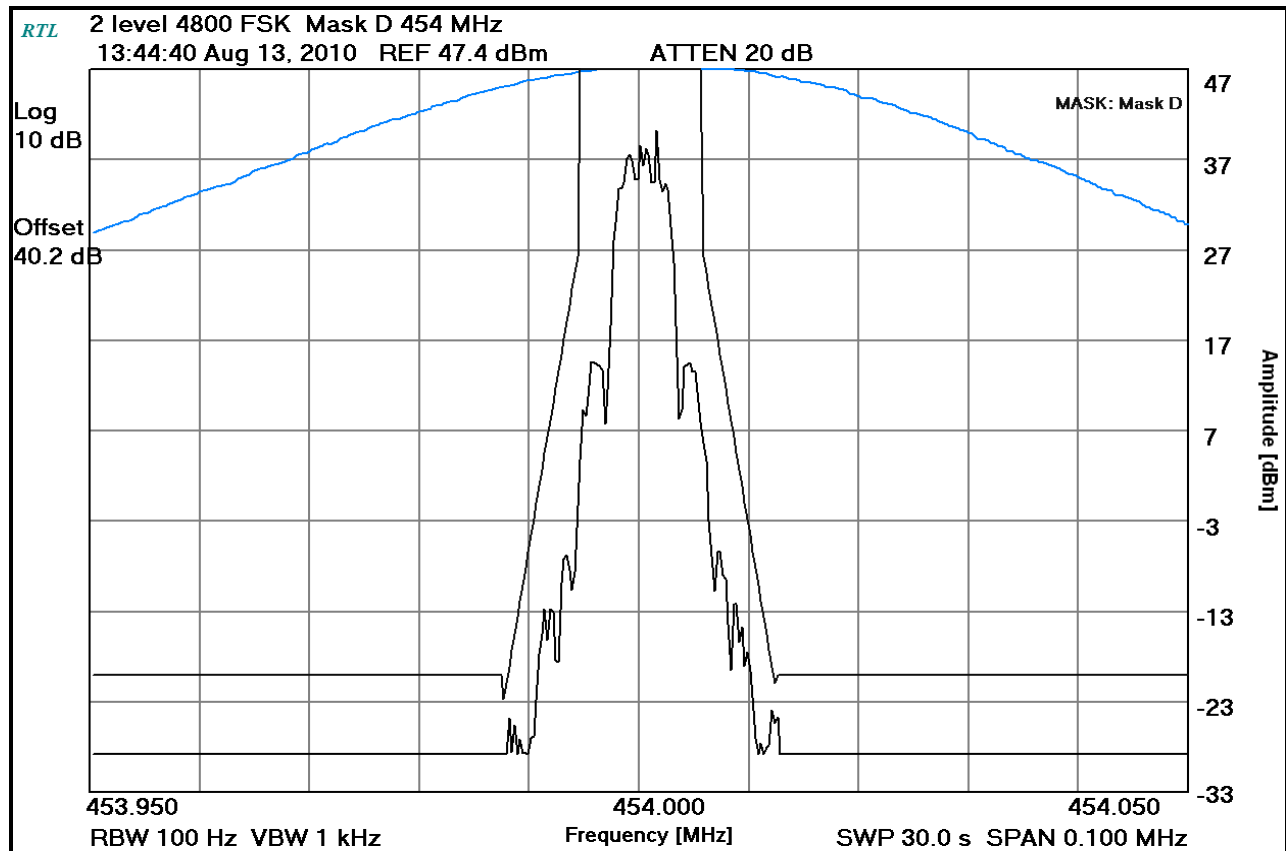


Plot 8-28: Occupied Bandwidth – 456 MHz; 2-Level 4800 FSK; (Mask D)

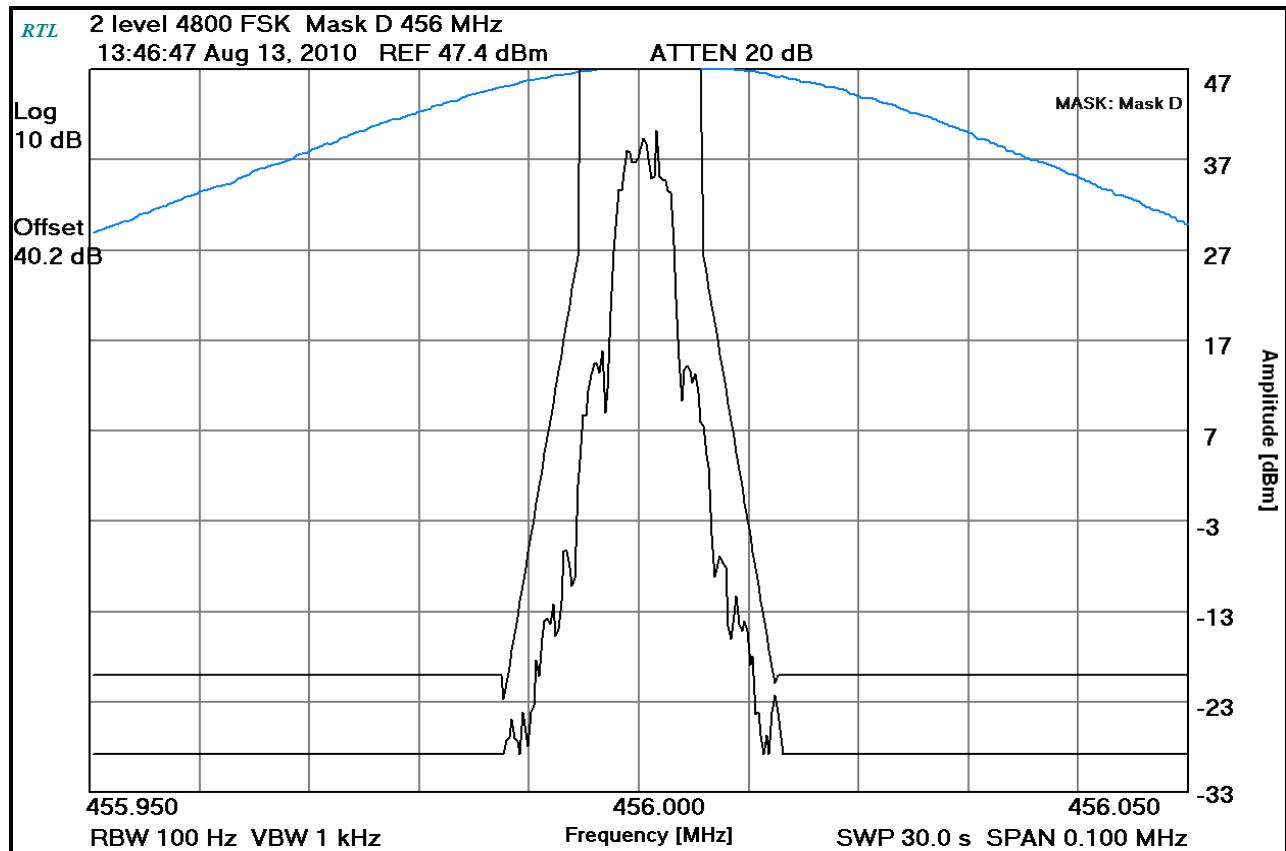


Plot 8-29: Occupied Bandwidth – 470 MHz; 2-Level 4800 FSK; (Mask D)

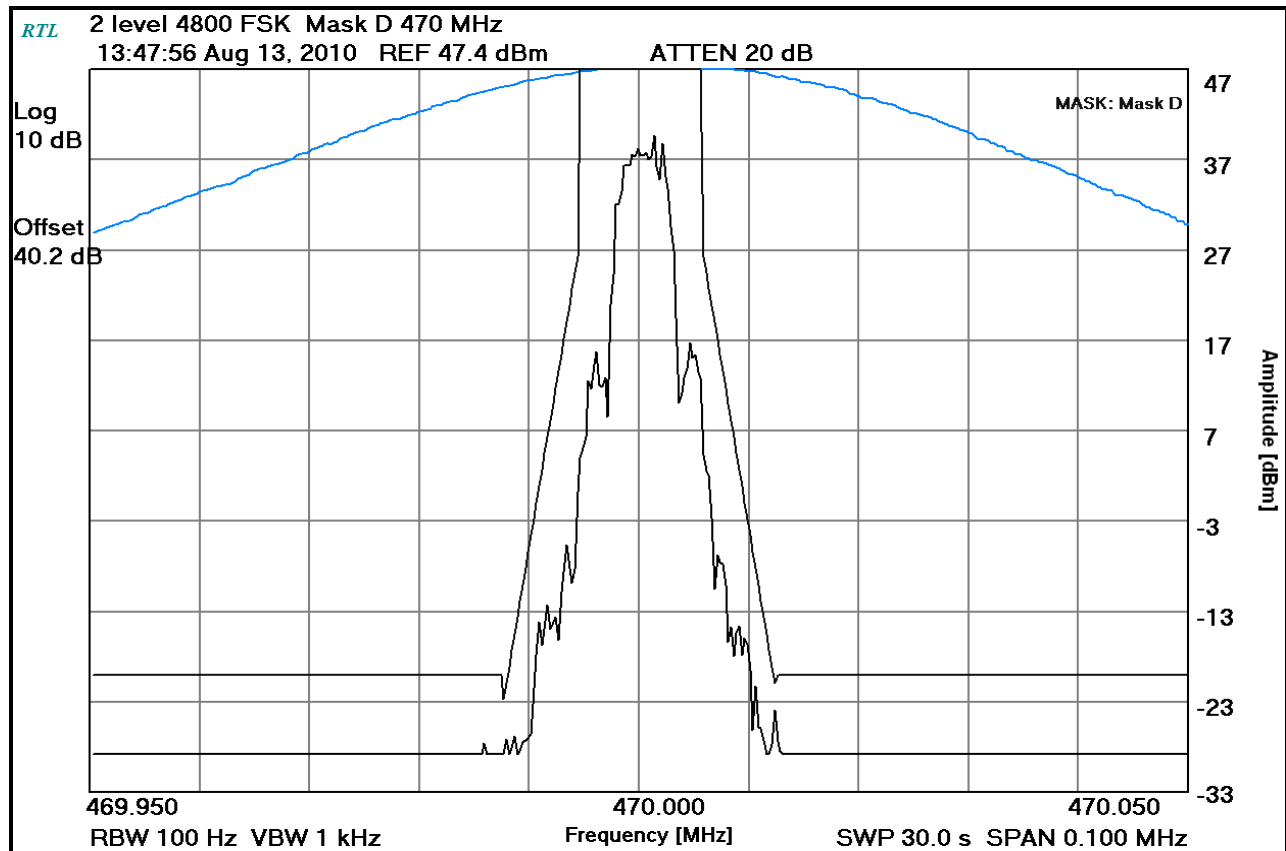


Plot 8-30: Occupied Bandwidth – 512 MHz; 2-Level 4800 FSK; (Mask D)

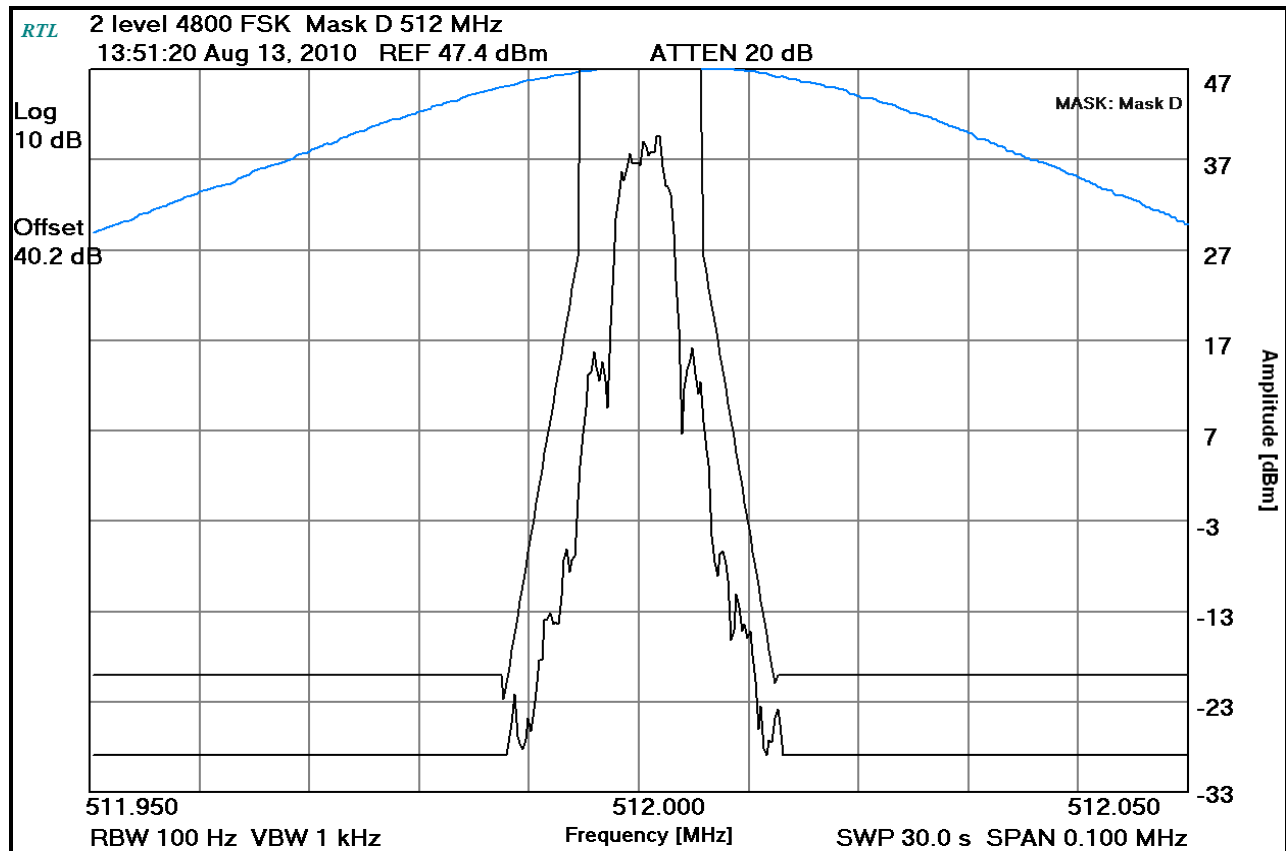


Plot 8-31: Occupied Bandwidth – 440 MHz; TDMA WB; (Mask C)

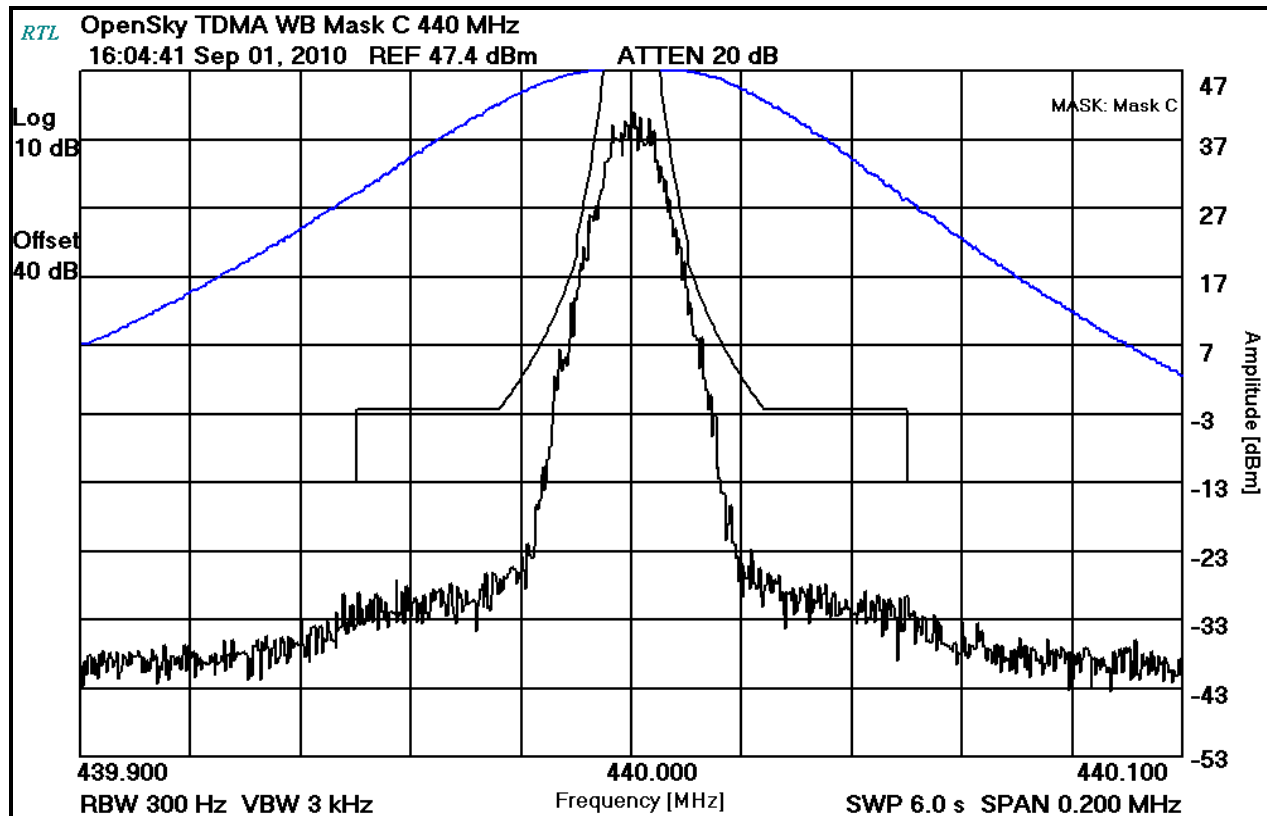


Plot 8-32: Occupied Bandwidth – 450 MHz; TDMA WB; (Mask C)

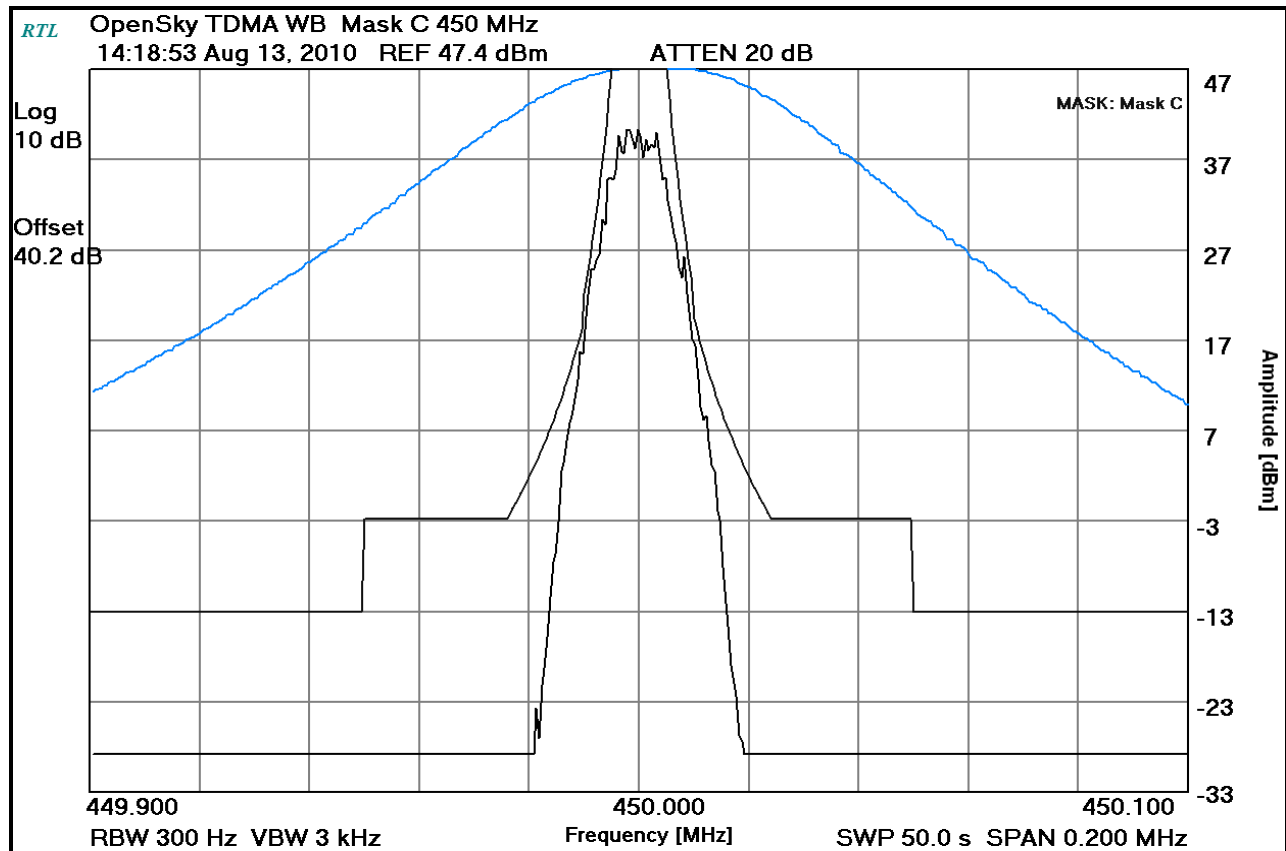


Plot 8-33: Occupied Bandwidth – 454 MHz; TDMA WB; (Mask C)

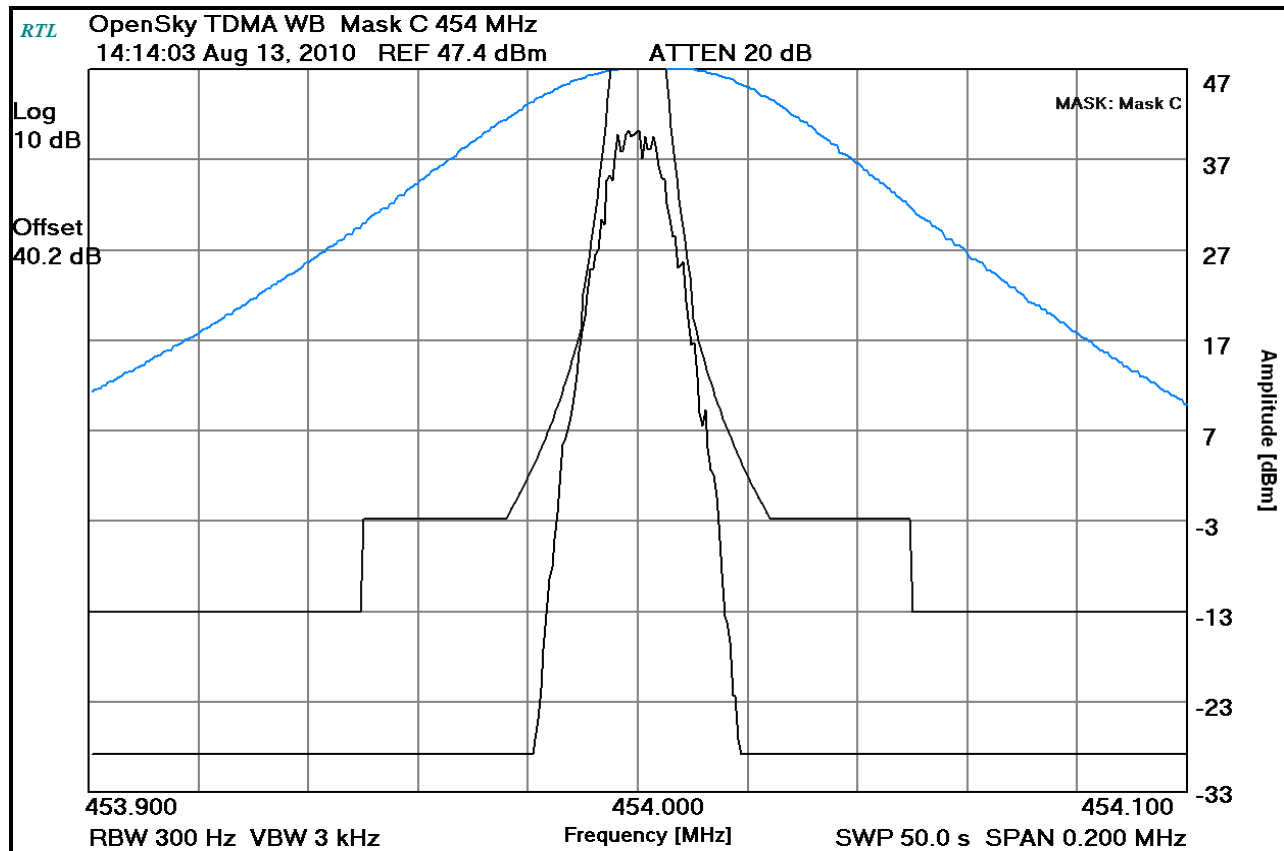


Plot 8-34: Occupied Bandwidth – 456 MHz; TDMA WB; (Mask C)

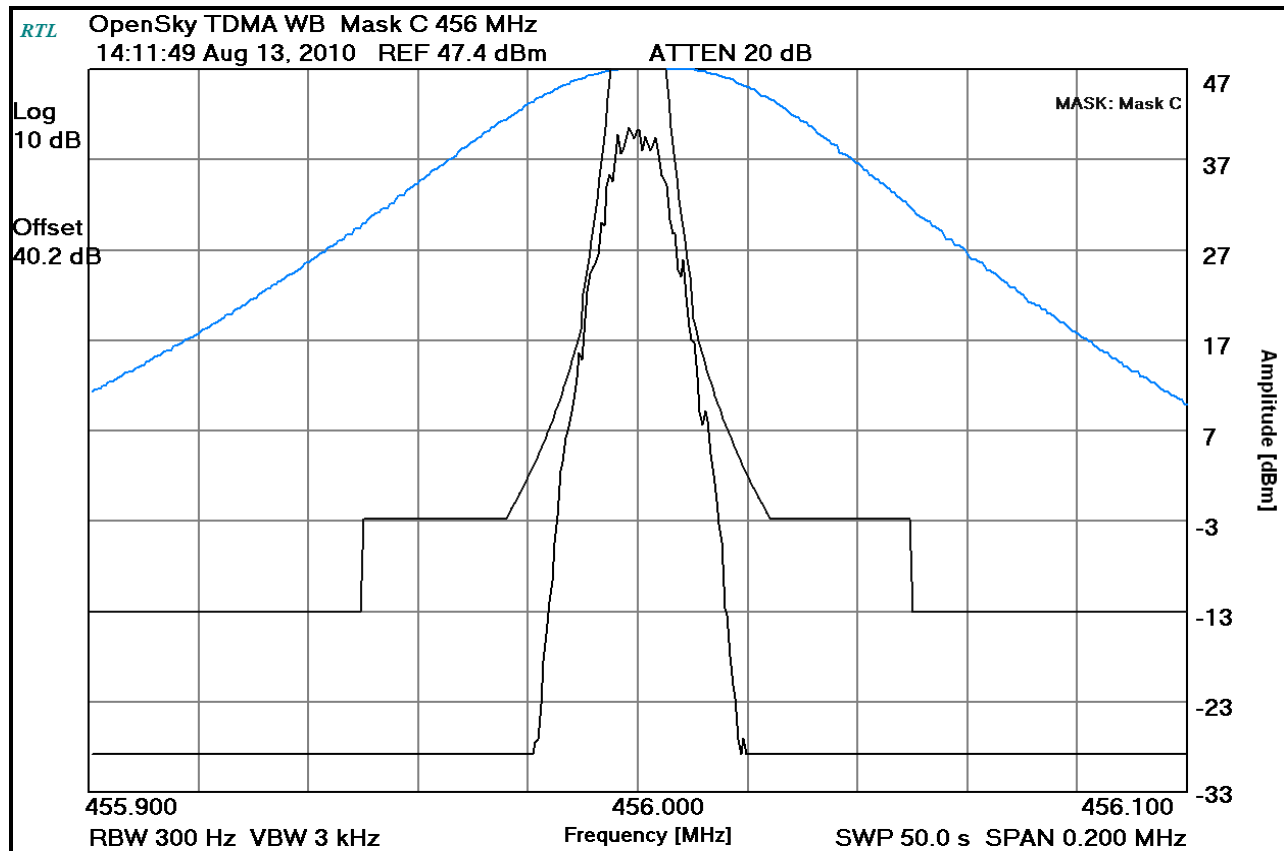


Plot 8-35: Occupied Bandwidth – 470 MHz; TDMA WB; (Mask C)

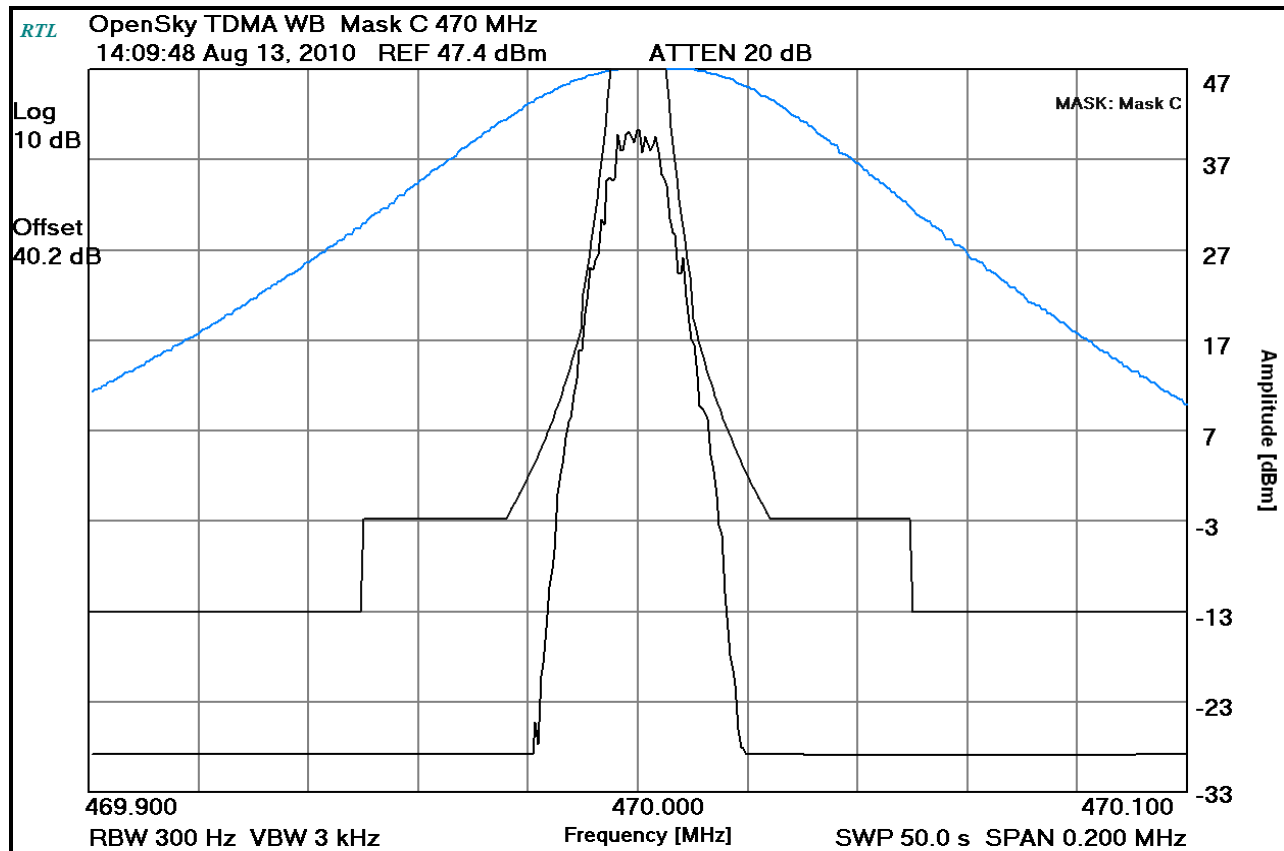


Plot 8-36: Occupied Bandwidth – 512 MHz; TDMA WB; (Mask C)

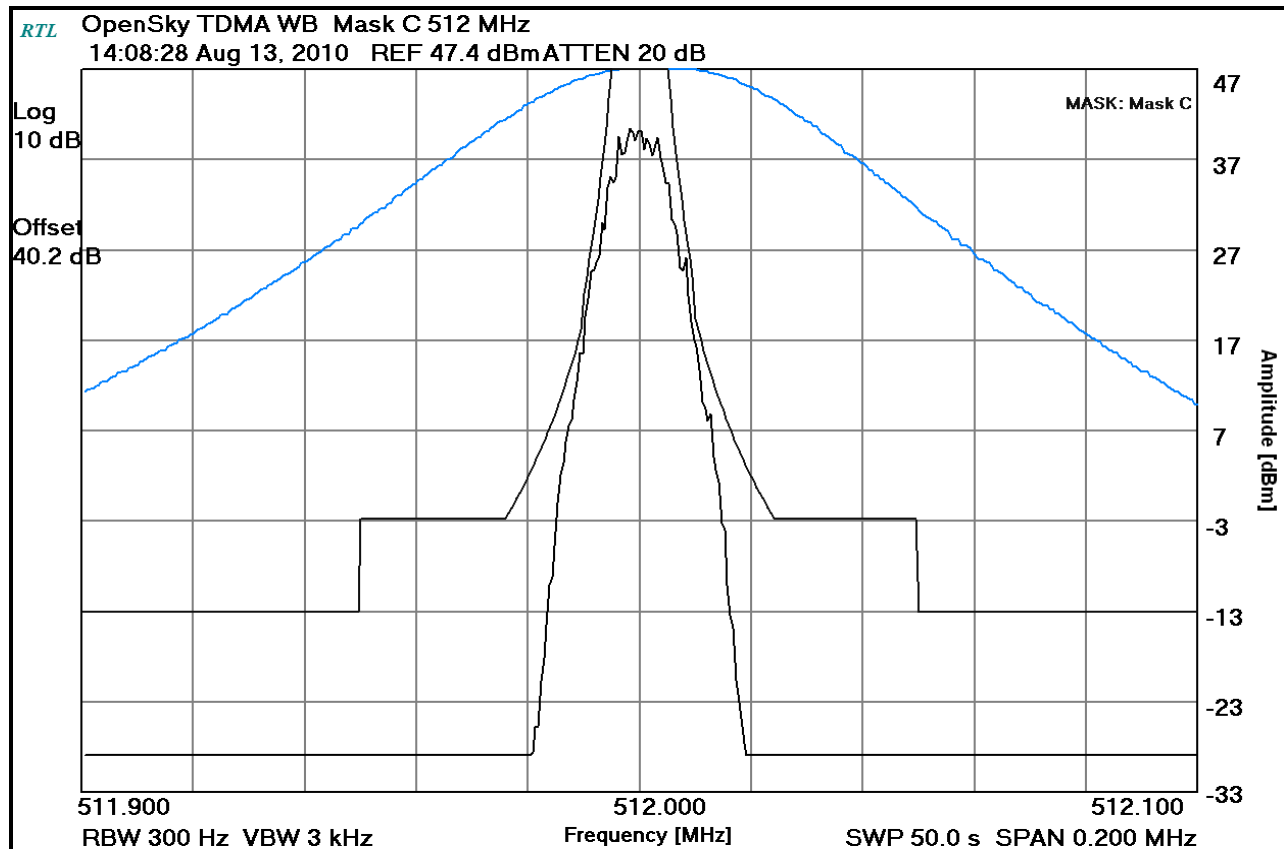


Plot 8-37: Occupied Bandwidth – 440 MHz; TDMA NB; (Mask D)

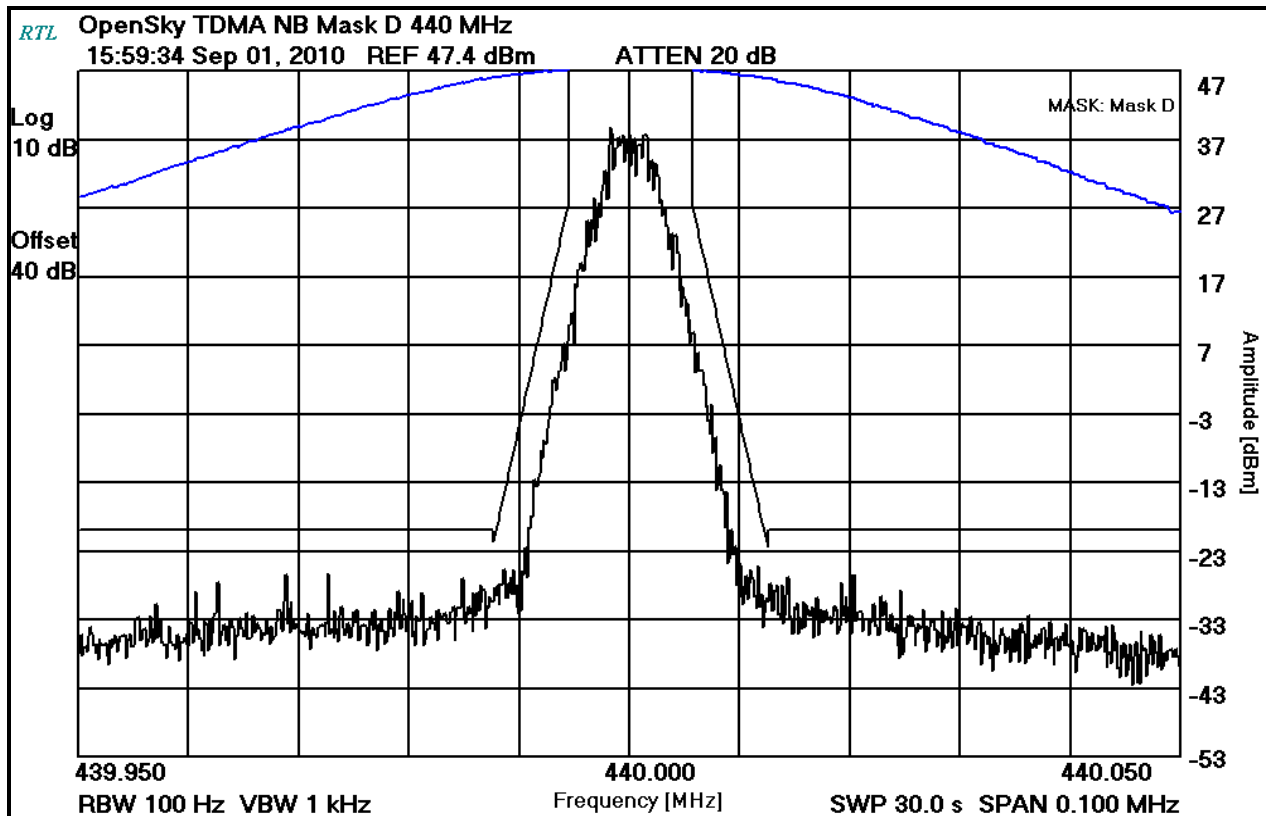


Plot 8-38: Occupied Bandwidth – 450 MHz; TDMA NB; (Mask D)

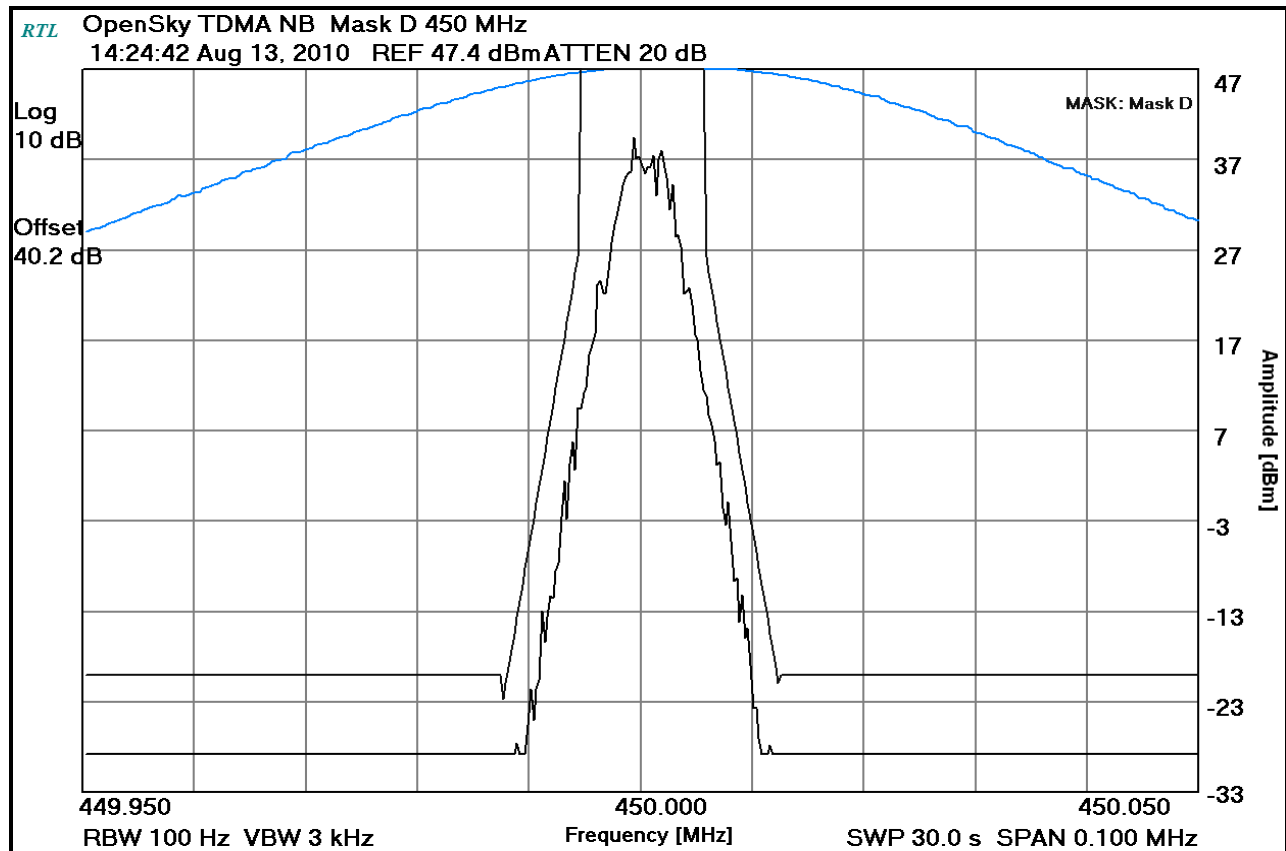


Plot 8-39: Occupied Bandwidth – 454 MHz; TDMA NB; (Mask D)

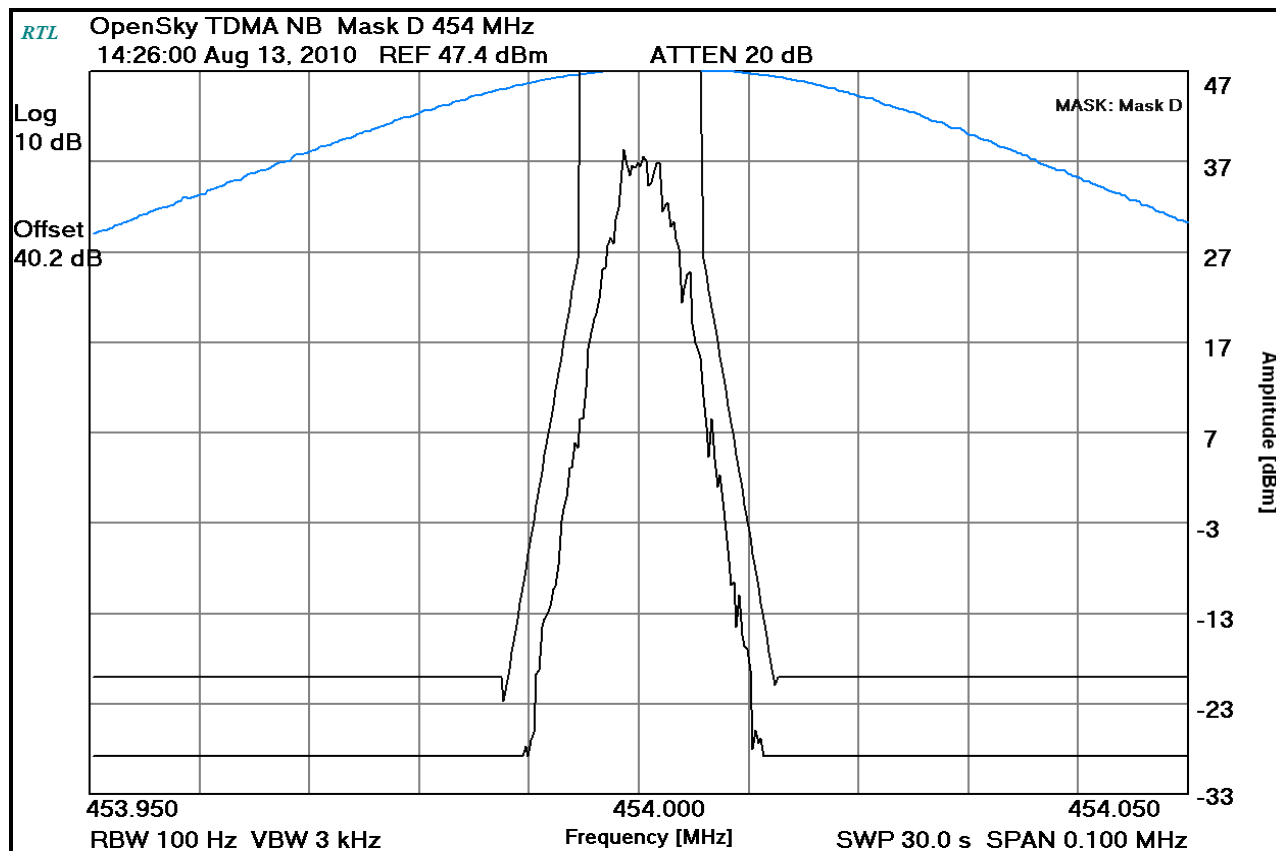


Plot 8-40: Occupied Bandwidth – 456 MHz; TDMA NB; (Mask D)

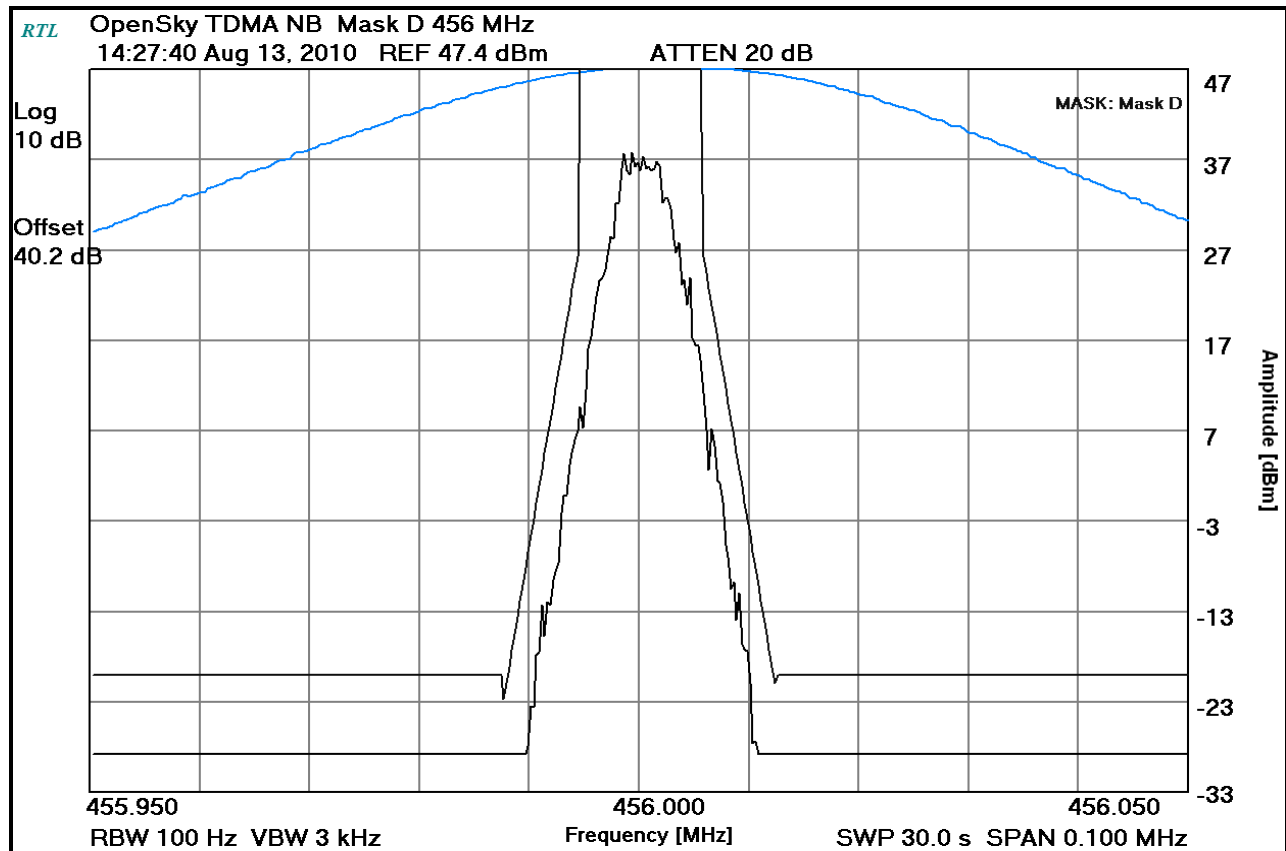


Plot 8-41: Occupied Bandwidth – 470 MHz; TDMA NB; (Mask D)

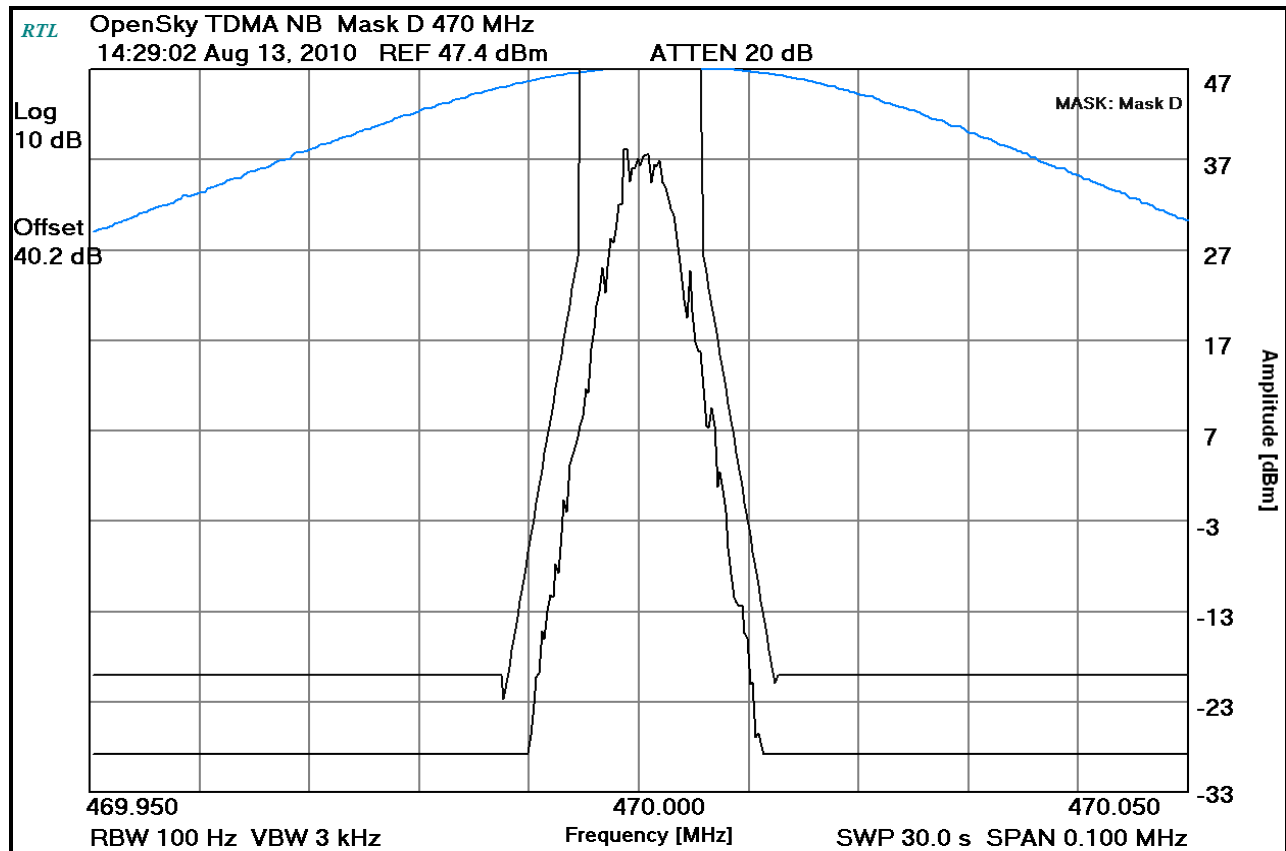


Plot 8-42: Occupied Bandwidth – 512 MHz; TDMA NB; (Mask D)

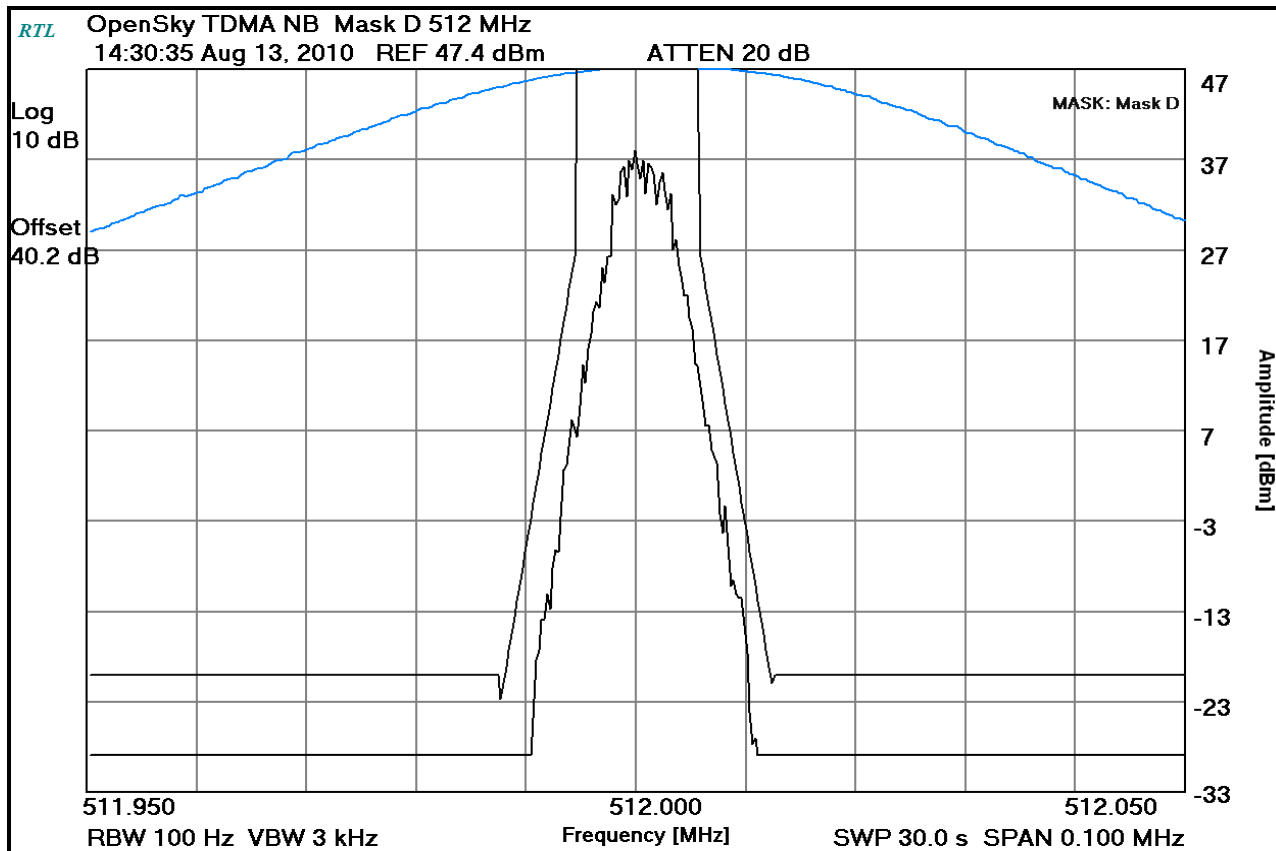


Plot 8-43: Occupied Bandwidth – 440 MHz; P25; (Mask D)

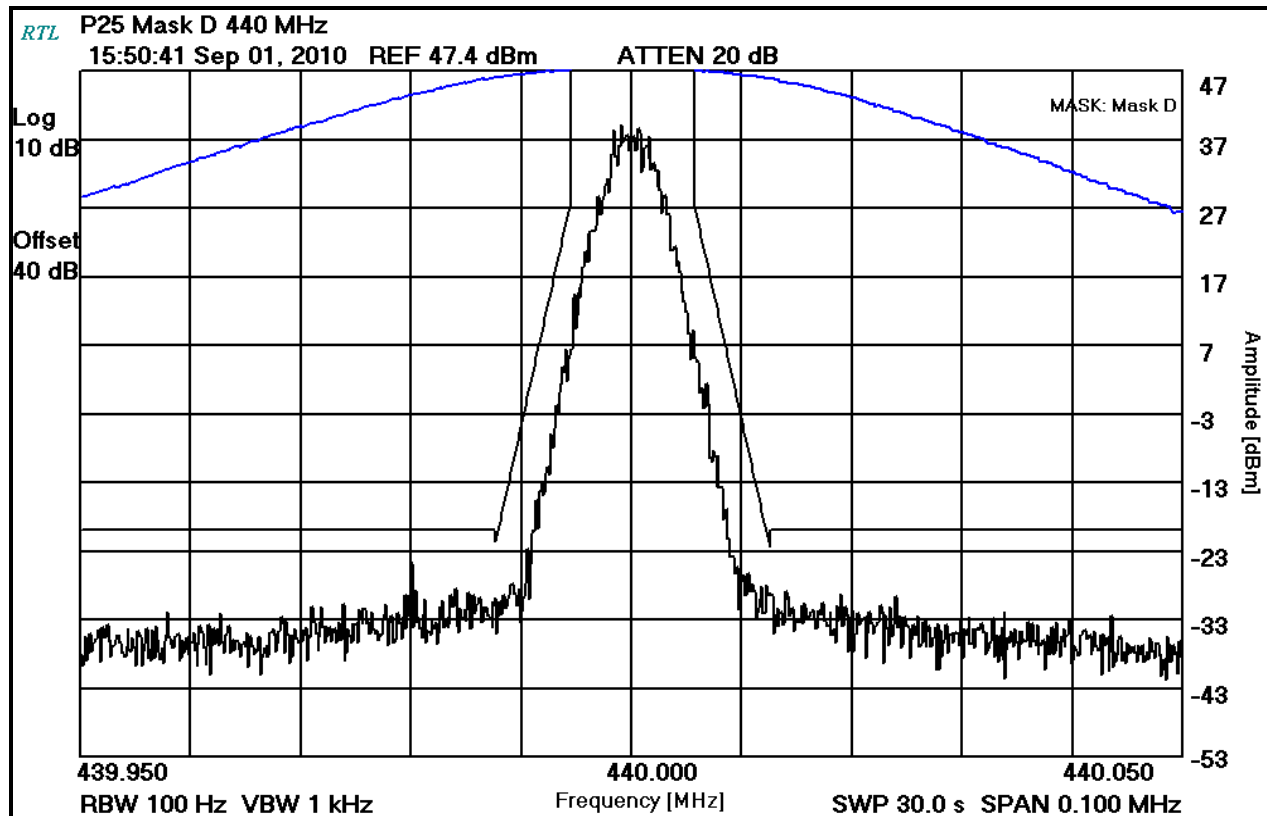


Plot 8-44: Occupied Bandwidth – 450 MHz; P25; (Mask D)

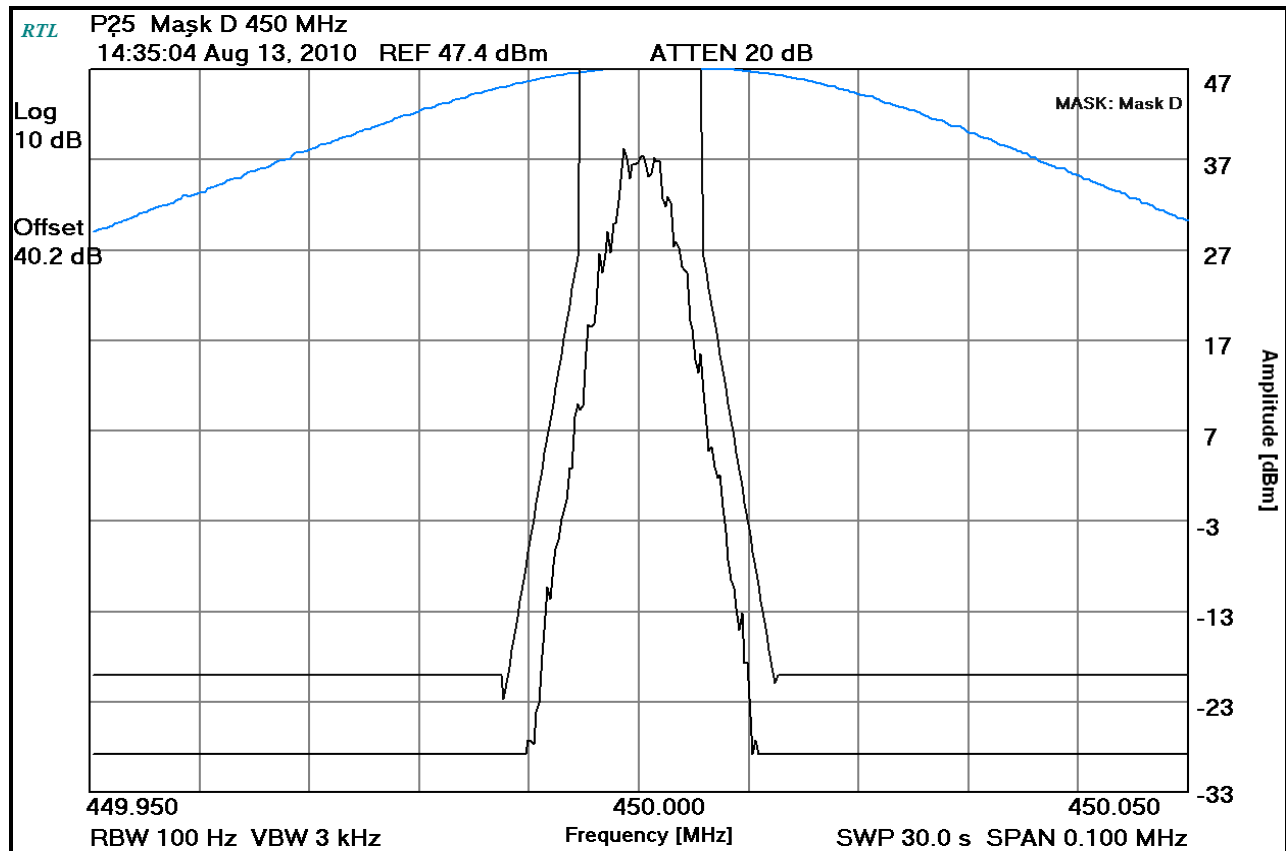


Plot 8-45: Occupied Bandwidth – 454 MHz; P25; (Mask D)

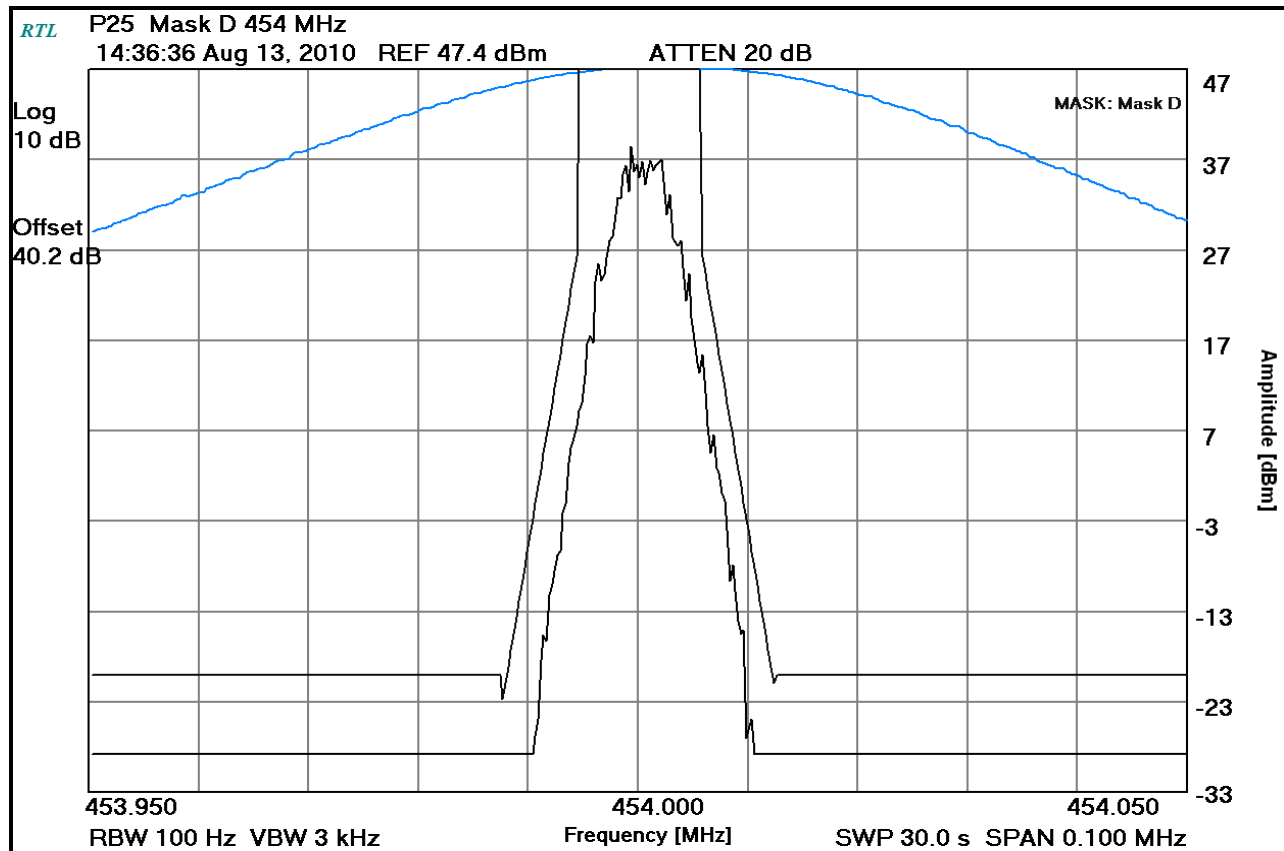

Plot 8-46: Occupied Bandwidth – 456 MHz; P25; (Mask D)

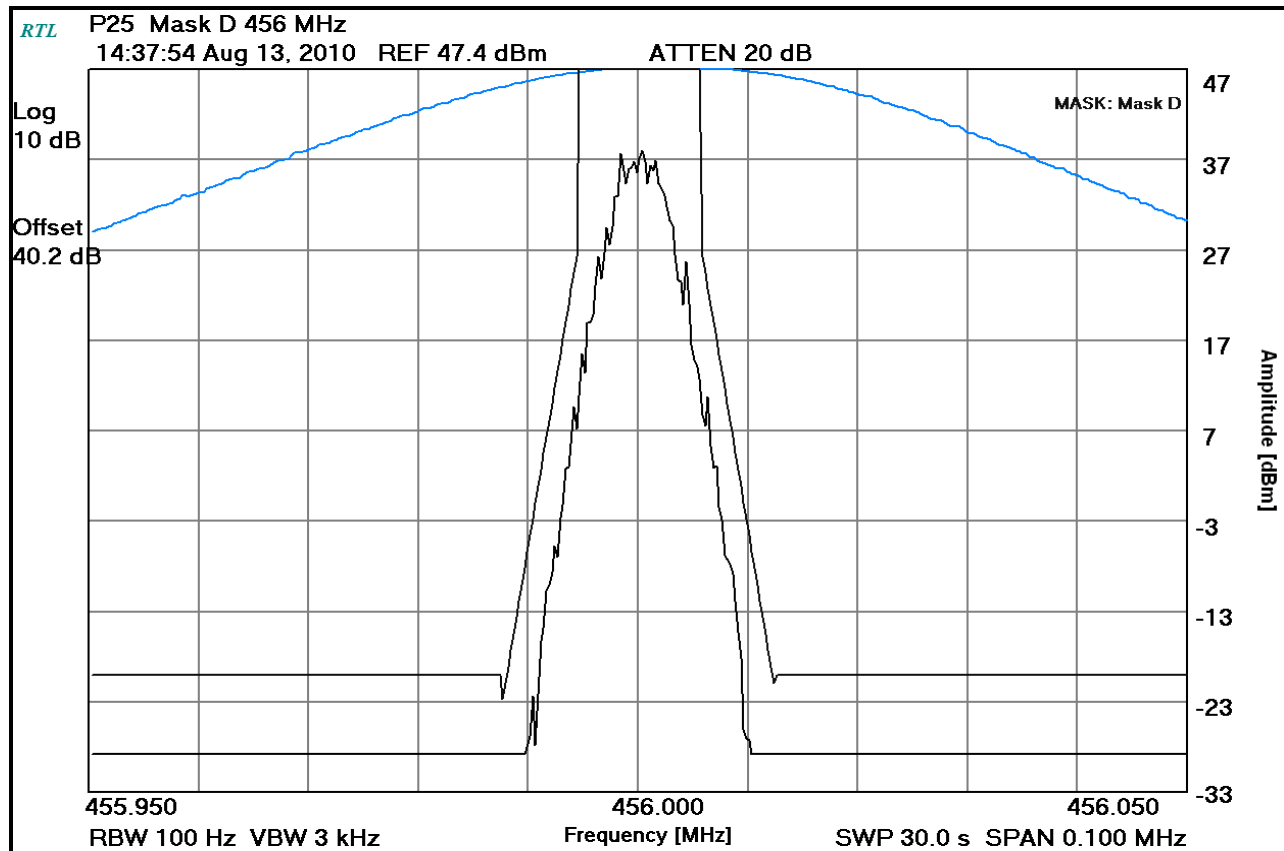

Plot 8-47: Occupied Bandwidth – 470 MHz; P25; (Mask D)

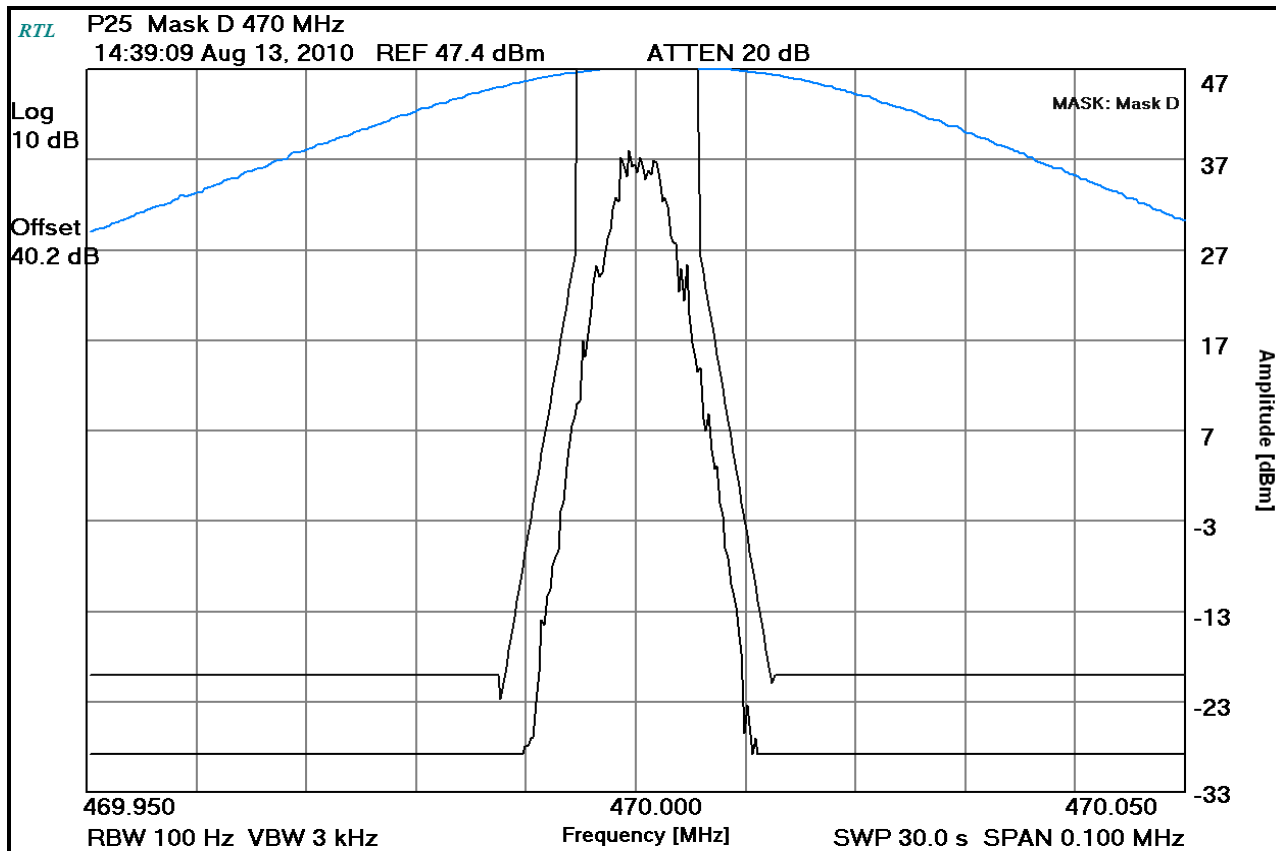

Plot 8-48: Occupied Bandwidth – 512 MHz; P25; (Mask D)

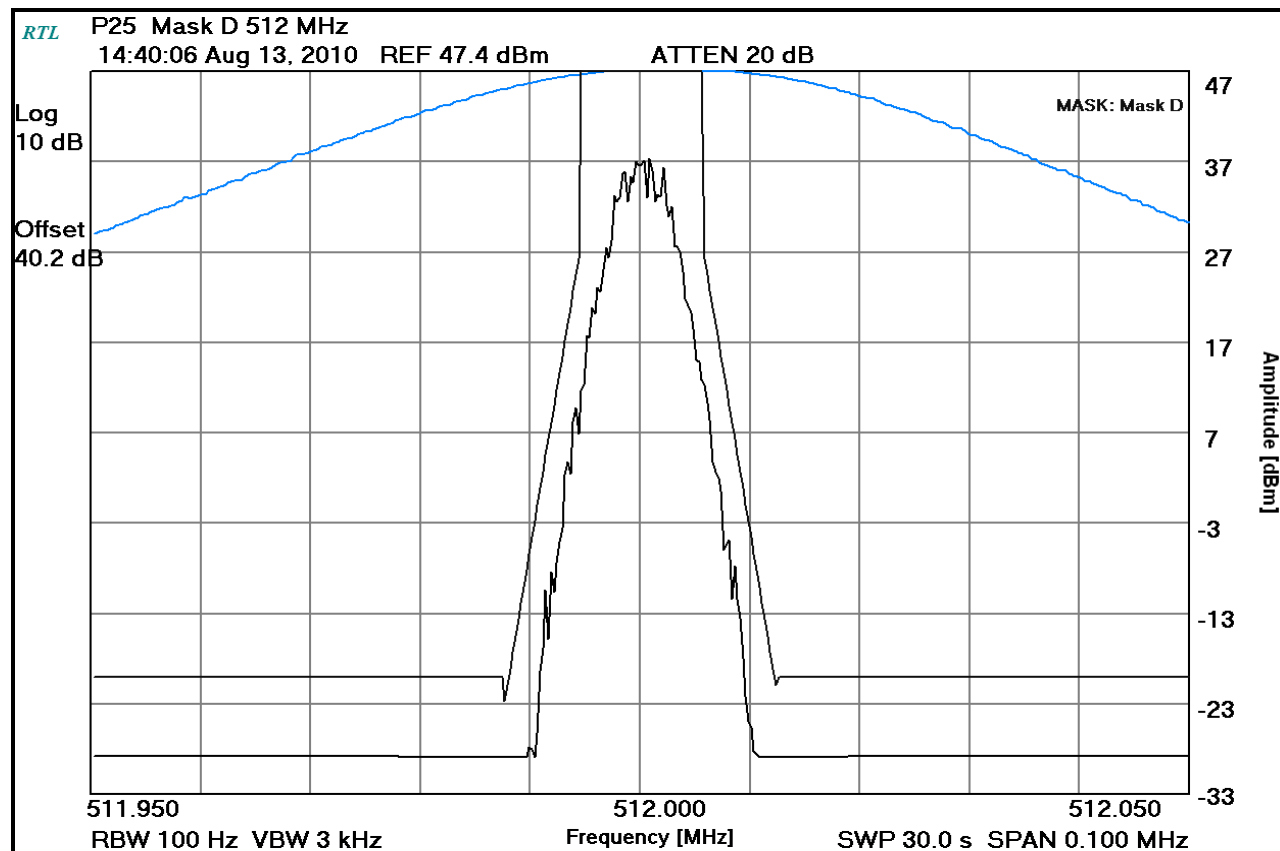


Table 8-1: Test Equipment Used For Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Date
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	11/23/10
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 40dB	BK5859	2/17/11
900930	Hewlett Packard	85662A	Spectrum Analyzer Display Section	3144A20839	6/26/11
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	6/26/11

Test Personnel:

Daniel Baltzell
Test Engineer

Signature

August 13 &
September 1, 2010
Dates Of Test

9 FCC Rules and Regulation Part 2.1055: Frequency Stability; Part 90.213: Frequency Stability; RSS-119 §5.3: Transmitter Frequency Stability

9.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +60°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½-hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter.

Limit: 20 kHz Authorized Bandwidth (ABW) or 25 kHz Channel Bandwidth (CBW) = 5ppm; 11.25 kHz ABW or 12.5 kHz CBW = 2.5 ppm; and 6.25 kHz ABW or CBW = 1 ppm for mobile > 2W

9.2 Test Data

Table 9-1: Temperature Frequency Stability – 450 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	449.999840	-0.36
-20	449.999840	-0.36
-10	449.999823	-0.39
0	449.999768	-0.52
10	449.999756	-0.54
20	449.999772	-0.51
30	449.999808	-0.43
40	449.999823	-0.39
50	449.999815	-0.41
60	449.999774	-0.50

Table 9-2: Temperature Frequency Stability – 454 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	453.999838	-0.36
-20	453.999938	-0.14
-10	453.999819	-0.40
0	453.999766	-0.52
10	453.999755	-0.54
20	453.999770	-0.51
30	453.999807	-0.43
40	453.999819	-0.40
50	453.999812	-0.41
60	453.999772	-0.50

Table 9-3: Temperature Frequency Stability – 456 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	455.999835	-0.36
-20	455.999836	-0.36
-10	455.999817	-0.40
0	455.999764	-0.52
10	455.999749	-0.55
20	455.999766	-0.51
30	455.999803	-0.43
40	455.999818	-0.40
50	455.999811	-0.41
60	455.999771	-0.50

Table 9-4: Temperature Frequency Stability – 470 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	469.999832	-0.36
-20	469.999832	-0.36
-10	469.999812	-0.40
0	469.999760	-0.51
10	469.999743	-0.55
20	469.999760	-0.51
30	469.999799	-0.43
40	469.999814	-0.40
50	469.999807	-0.41
60	469.999766	-0.50

Table 9-5: Temperature Frequency Stability – 512 MHz

Temperature (°C)	Measured Frequency (Hz)	ppm
-30	511.999815	-0.36
-20	511.999816	-0.36
-10	511.999792	-0.41
0	511.999737	-0.51
10	511.999718	-0.55
20	511.999736	-0.52
30	511.999780	-0.43
40	511.999780	-0.43
50	511.999807	-0.38
60	511.999743	-0.50

The worst-case deviation was found to be 0.6 ppm.

Result: The EUT is compliant.

Table 9-6: Test Equipment Used For Testing Frequency Stability

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380	7/23/11
901300	Agilent Technologies	53131A	Frequency Counter	MY40001345	7/29/11
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 40dB	BK5859	2/17/11

Test Personnel:

 Daniel Baltzell EMC Test Engineer	Signature	August 12, 2010 Date Of Test
---	-----------	---------------------------------

10 FCC Part 2.1047(a): Modulation Characteristics - Audio Frequency Response

10.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz was set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref. The audio signal generator was varied from 100 Hz to 5 kHz with the input level held constant. The deviation in kHz was recorded using a modulation analyzer as DEVfreq. The response in dB relative to 1 kHz was calculated as follows:

$$\text{Audio Frequency Response} = 20 \text{ LOG (DEVfreq/DEVref)}$$

10.2 Test Data

Plot 10-1: Modulation Characteristics - Audio Frequency Response


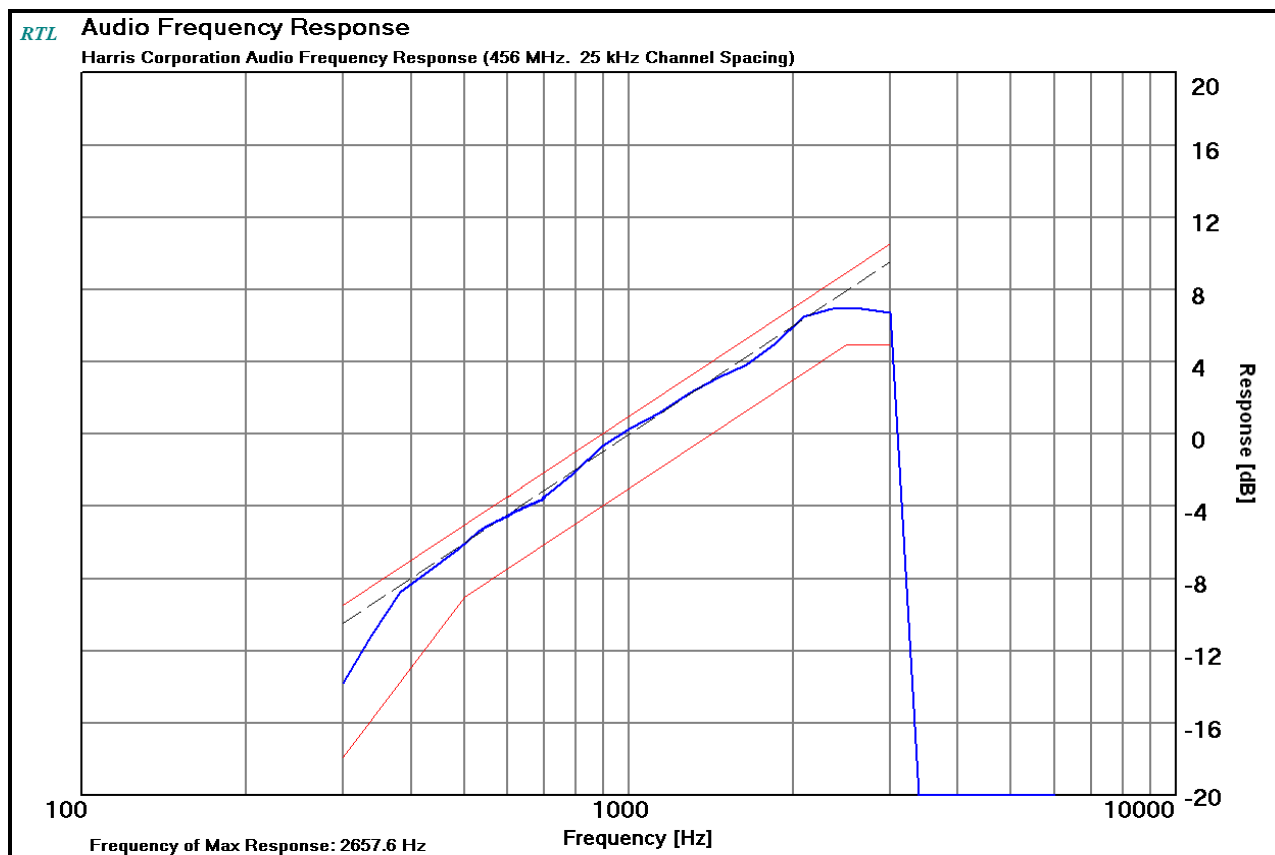


Table 10-1: Test Equipment Used For Testing Audio Frequency Response

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	3/4/11
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	9/29/10
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 40dB	BK5859	2/17/11

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

August 13, 2010
Date Of Test

11 FCC Part 2.1047(a): Modulation Characteristics – Audio Low Pass Filter

11.1 Test Procedure

ANSI/TIA/EIA-603-2002, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

11.2 Test Data

Plot 11-1: Modulation Characteristics – Audio Low Pass Filter

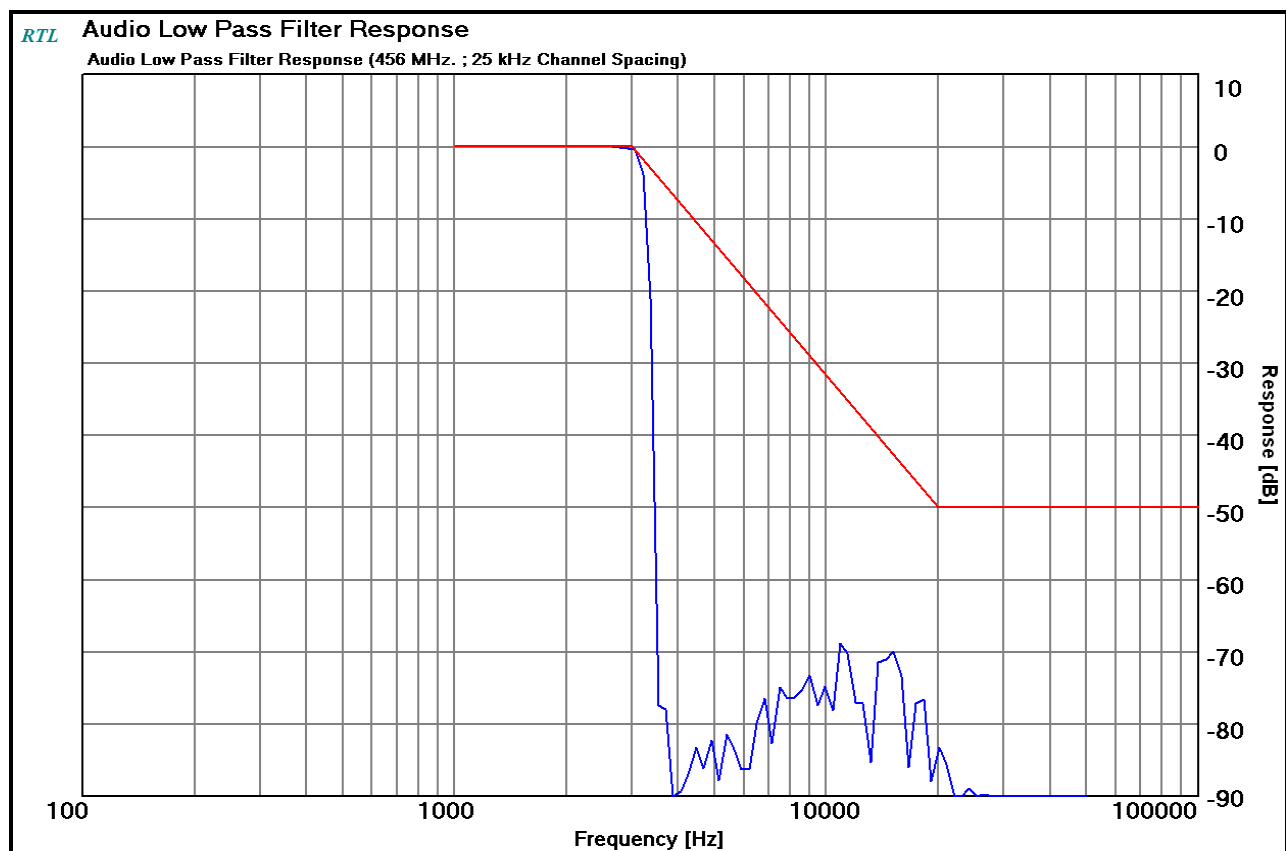


Table 11-1: Test Equipment Used For Testing Audio Low Pass Filter Response

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	3/4/11
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	9/29/10
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892	12/5/10
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 40dB	BK5859	2/17/11

Test Personnel:

Daniel Baltzell		August 13, 2010
Test Engineer	Signature	Date Of Test

12 FCC Rules and Regulations Part 2.1047(b): Modulation Characteristics - Modulation Limiting


12.1 Test Procedure

ANSI/TIA/EIA-603-2002, section 2.2.3


The transmitter was adjusted for full rated system deviation. The audio input level was adjusted for 60% of rated system deviation at 1000 Hz. Using this level (0 dB) as a reference, the audio input level was varied from the reference +/-20 dB for modulation frequencies of 300 Hz, 1,000 Hz, and 2,500 Hz. The system deviation obtained as a function of the input level was recorded. Both positive and negative peak deviations were recorded.

12.2 Test Data


Plot 12-1: Modulation Characteristics – Modulation Limiting; Positive Peak; Wideband

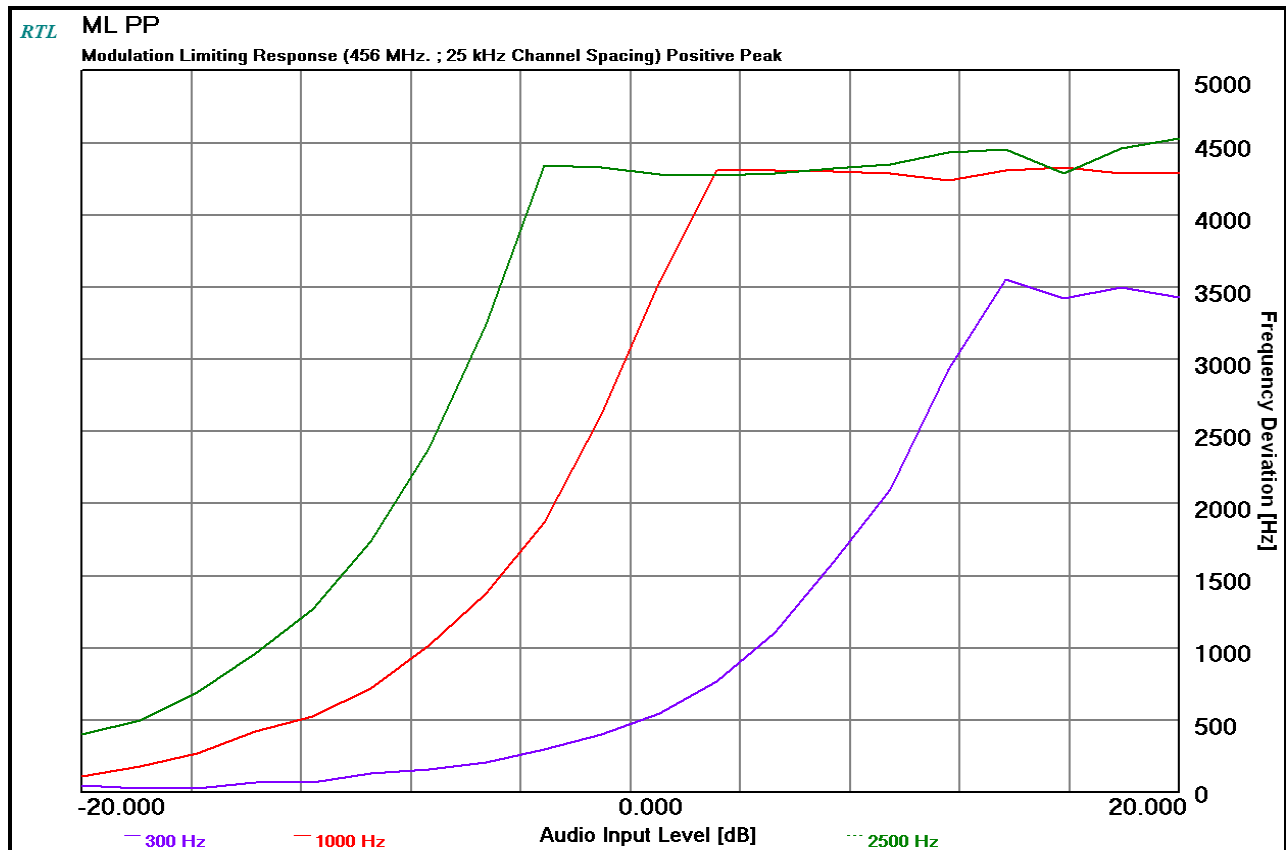

Plot 12-2: Modulation Characteristics – Modulation Limiting; Negative Peak; Wideband

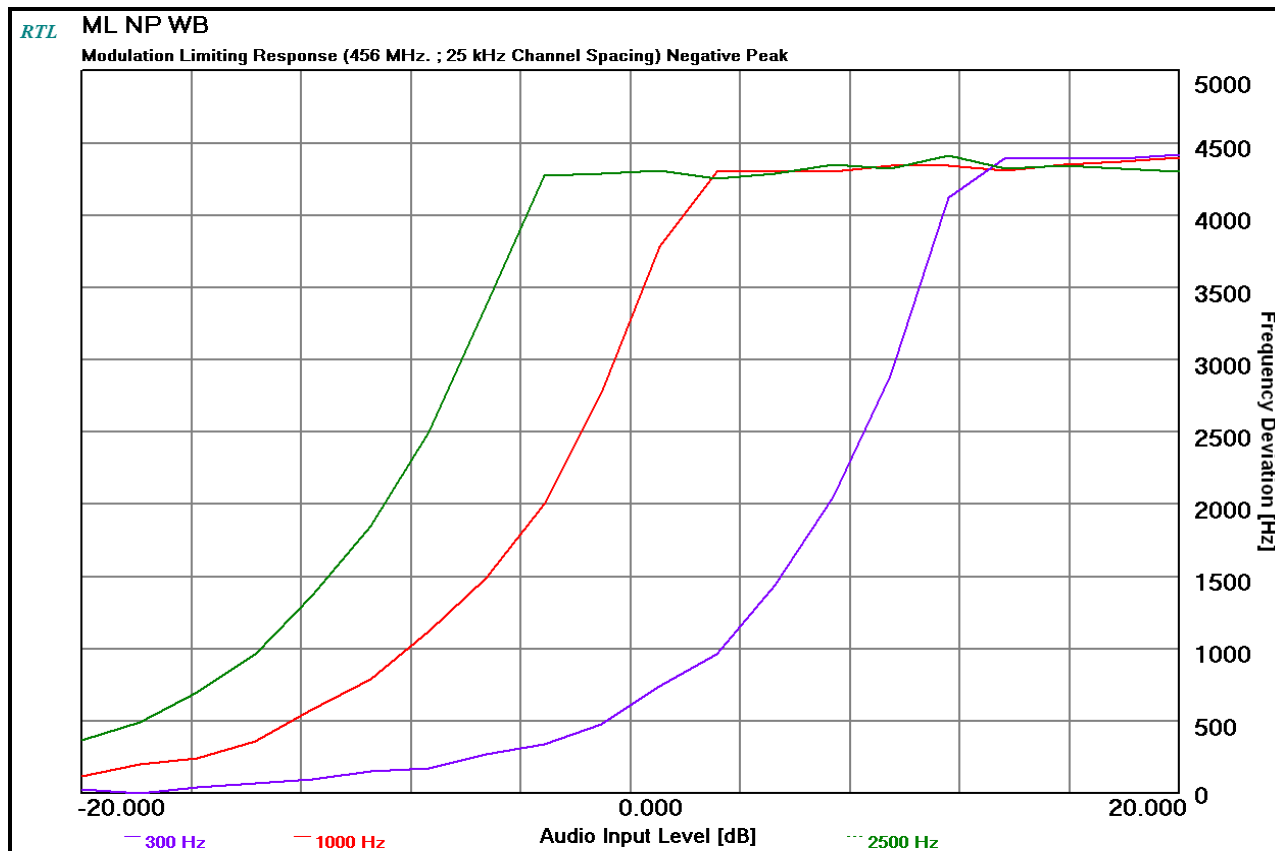

Plot 12-3: Modulation Characteristics – Modulation Limiting; Positive Peak; Narrowband

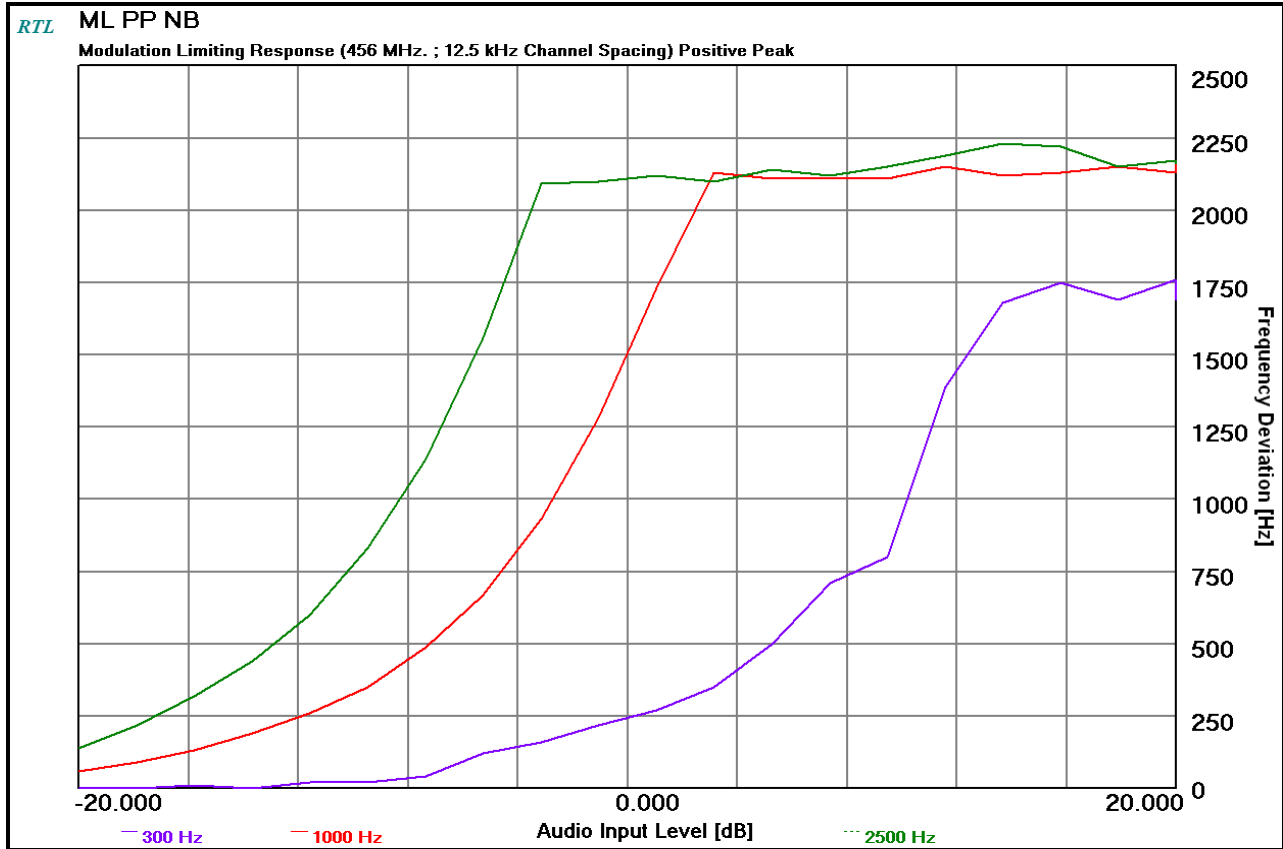

Plot 12-4: Modulation Characteristics – Modulation Limiting; Negative Peak; Narrowband

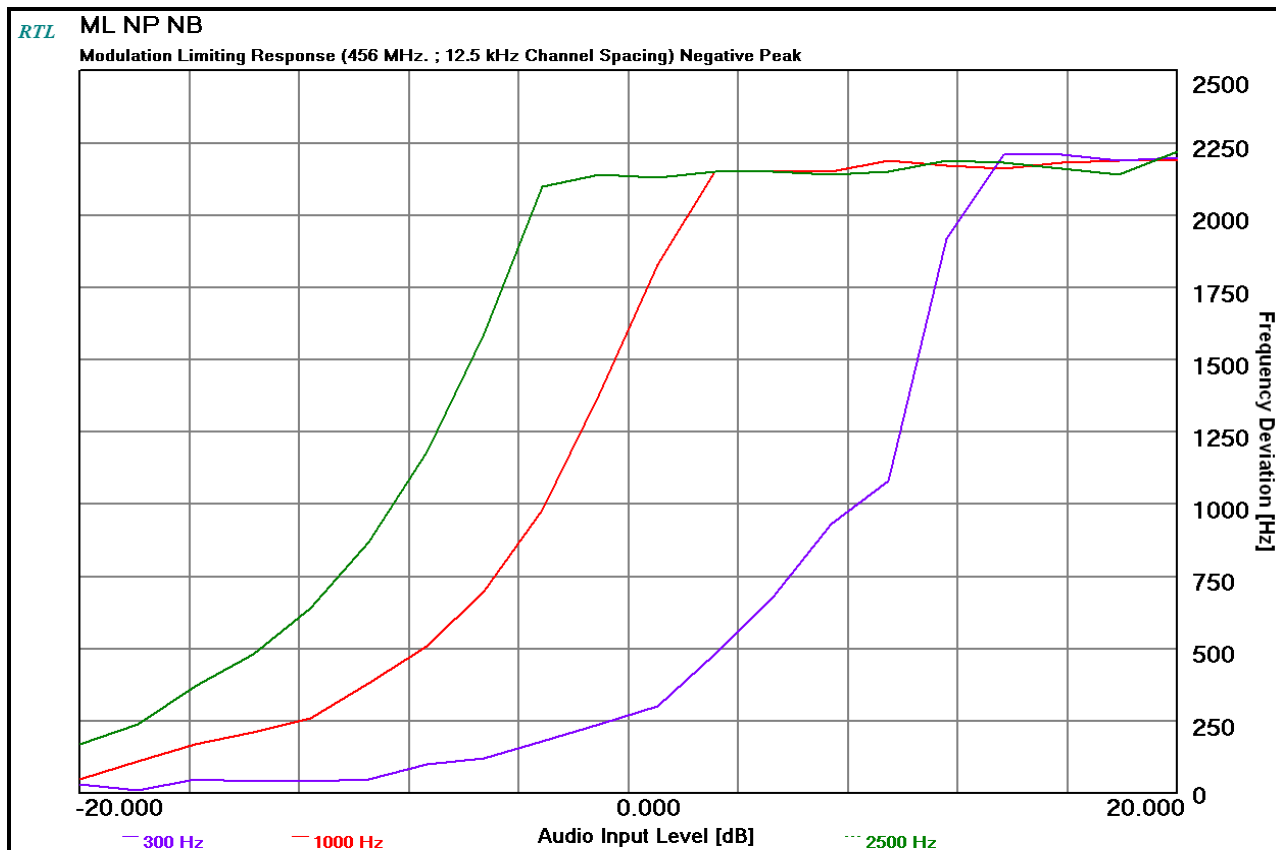


Table 12-1: Test Equipment Used For Testing Modulation Limiting

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585	3/4/11
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	9/29/10
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 40dB	BK5859	2/17/11

Test Personnel:

Daniel Baltzell
Test Engineer

Signature

August 13, 2010
Date Of Test


13 FCC Rules and Regulations Part §90.214; IC RSS-119 §5.9: Transient Frequency Response

13.1 Test Procedure


ANSI/TIA/EIA-603-2002, section 2.2.3

13.2 Test Data


Plot 13-1: Transient Frequency Behavior – 450 MHz; High Power; Wide Band; Carrier On Time

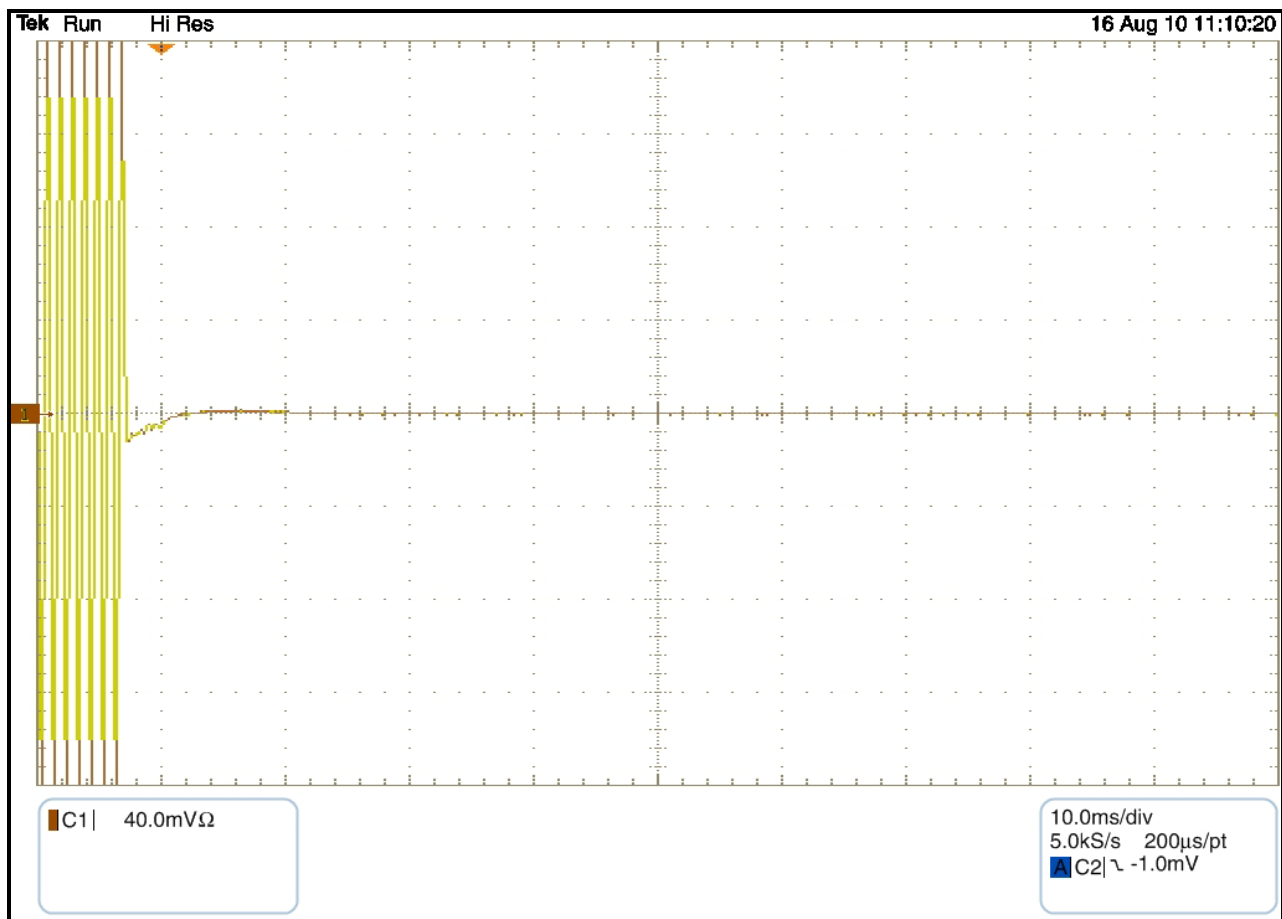


Plot 13-2: Transient Frequency Behavior – 450 MHz; High Power; Wide Band; Carrier Off Time

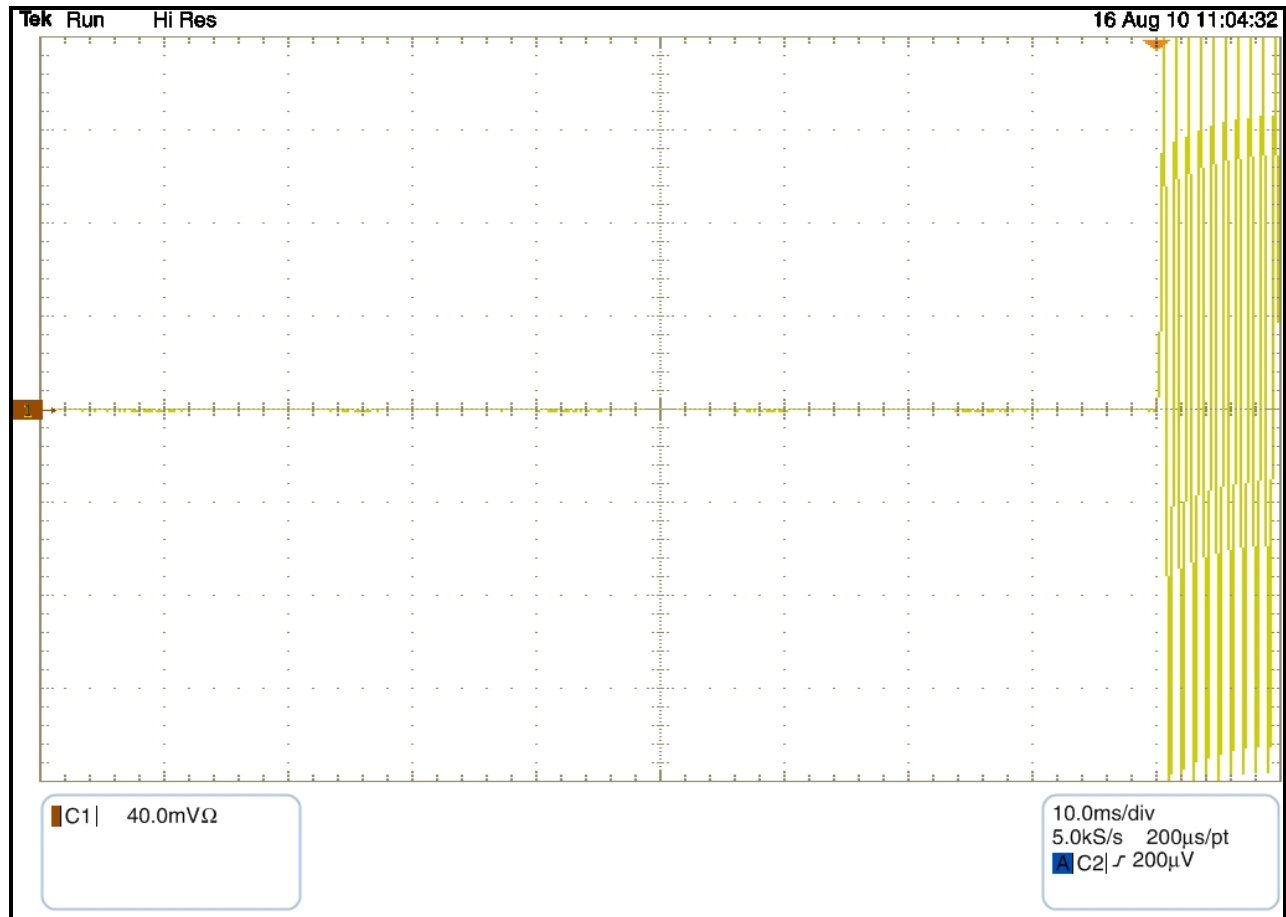


Plot 13-3: Transient Frequency Behavior – 450 MHz; High Power; Narrow Band; Carrier On Time

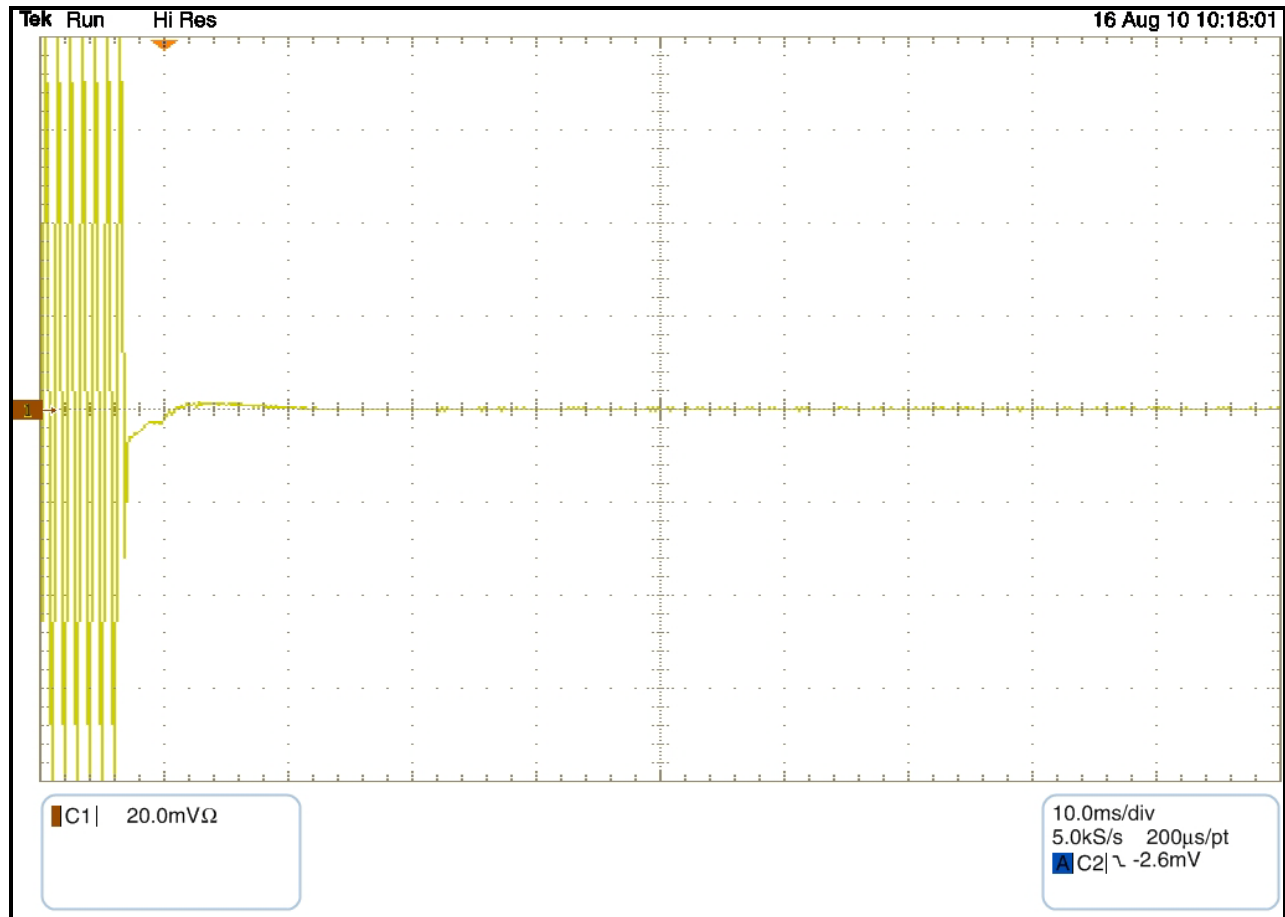


Plot 13-4: Transient Frequency Behavior – 450 MHz; High Power; Narrow Band; Carrier Off Time

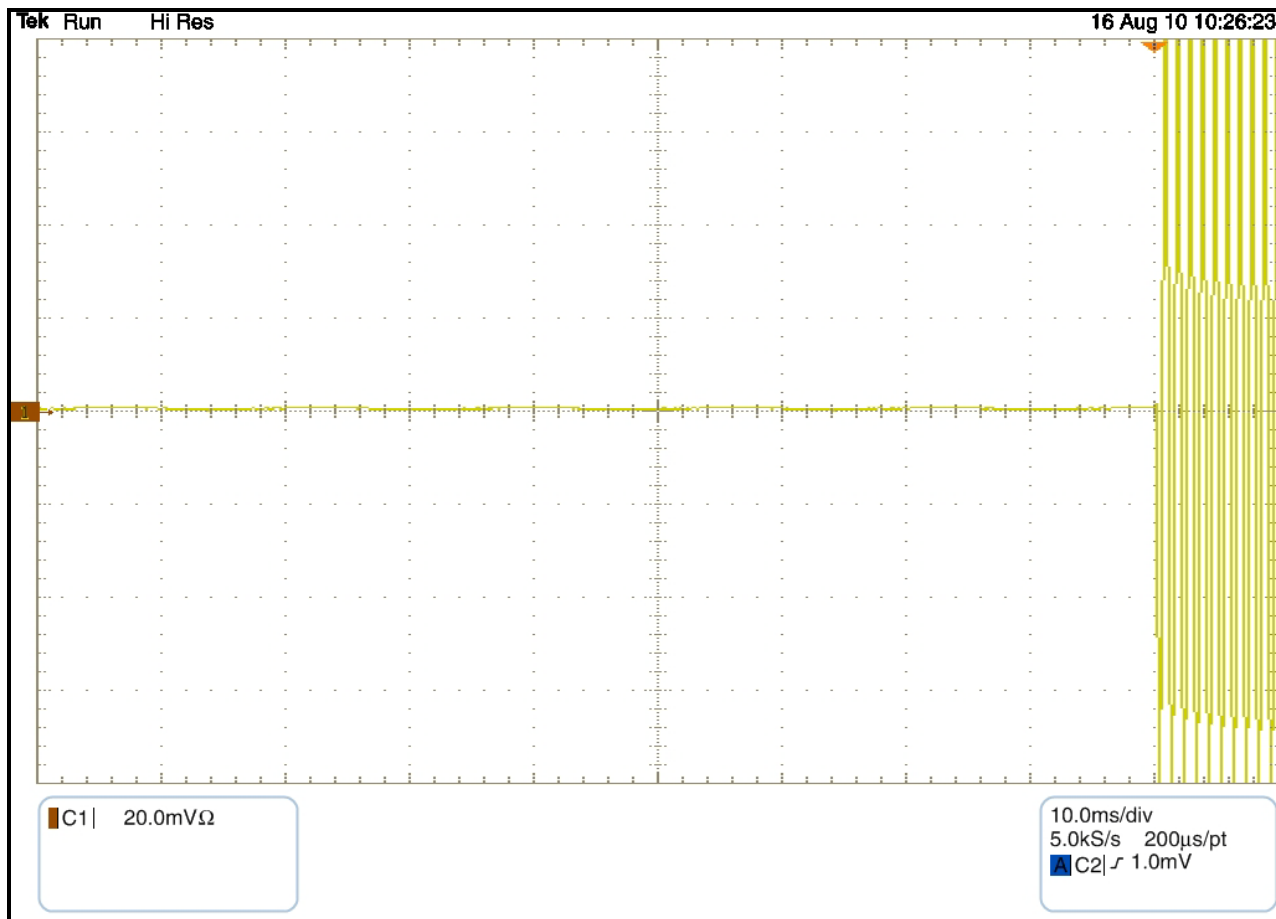


Plot 13-5: Transient Frequency Behavior – 454 MHz; High Power; Wide Band; Carrier On Time

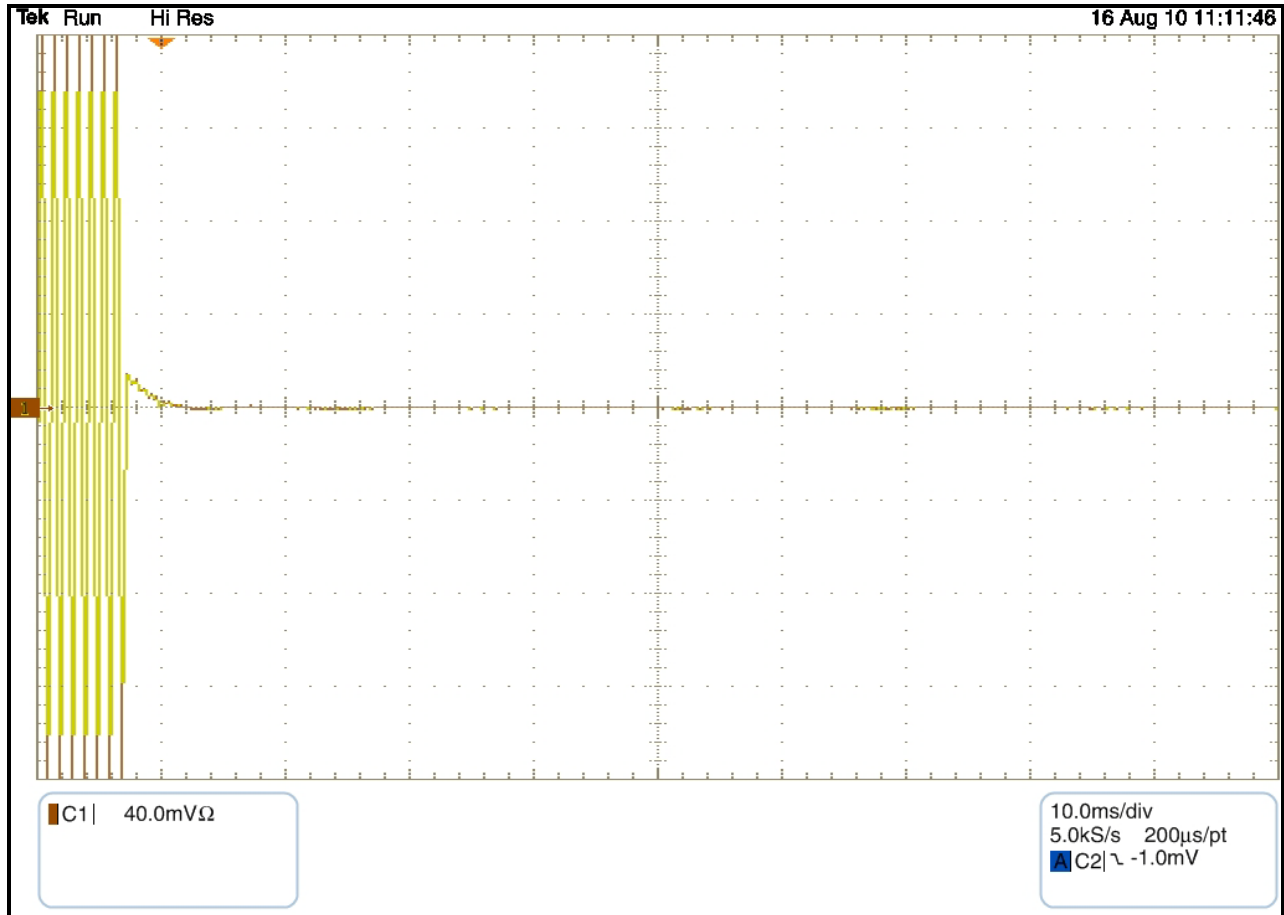


Plot 13-6: Transient Frequency Behavior – 454 MHz; High Power; Wide Band; Carrier Off Time

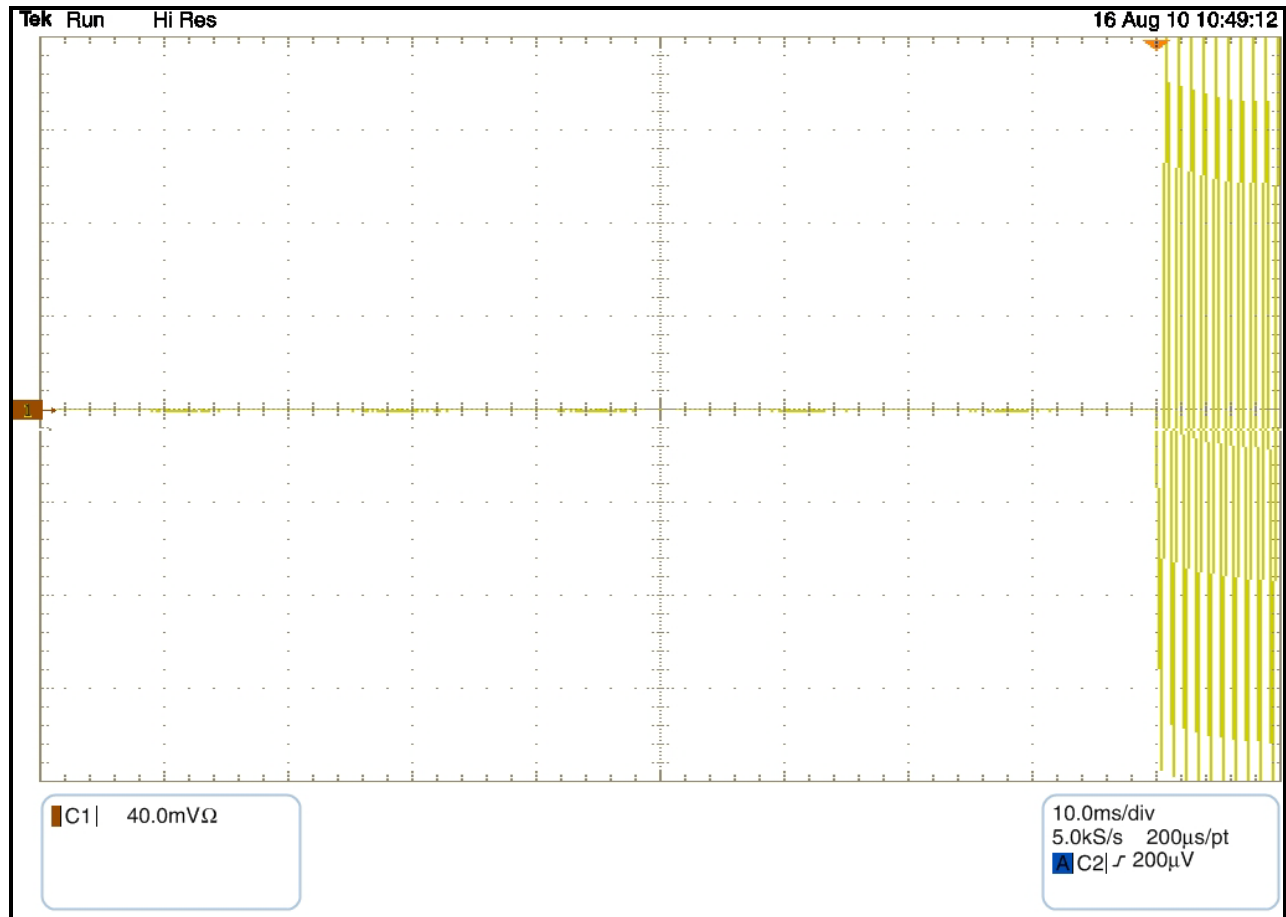


Plot 13-7: Transient Frequency Behavior – 454 MHz; High Power; Narrow Band; Carrier On Time

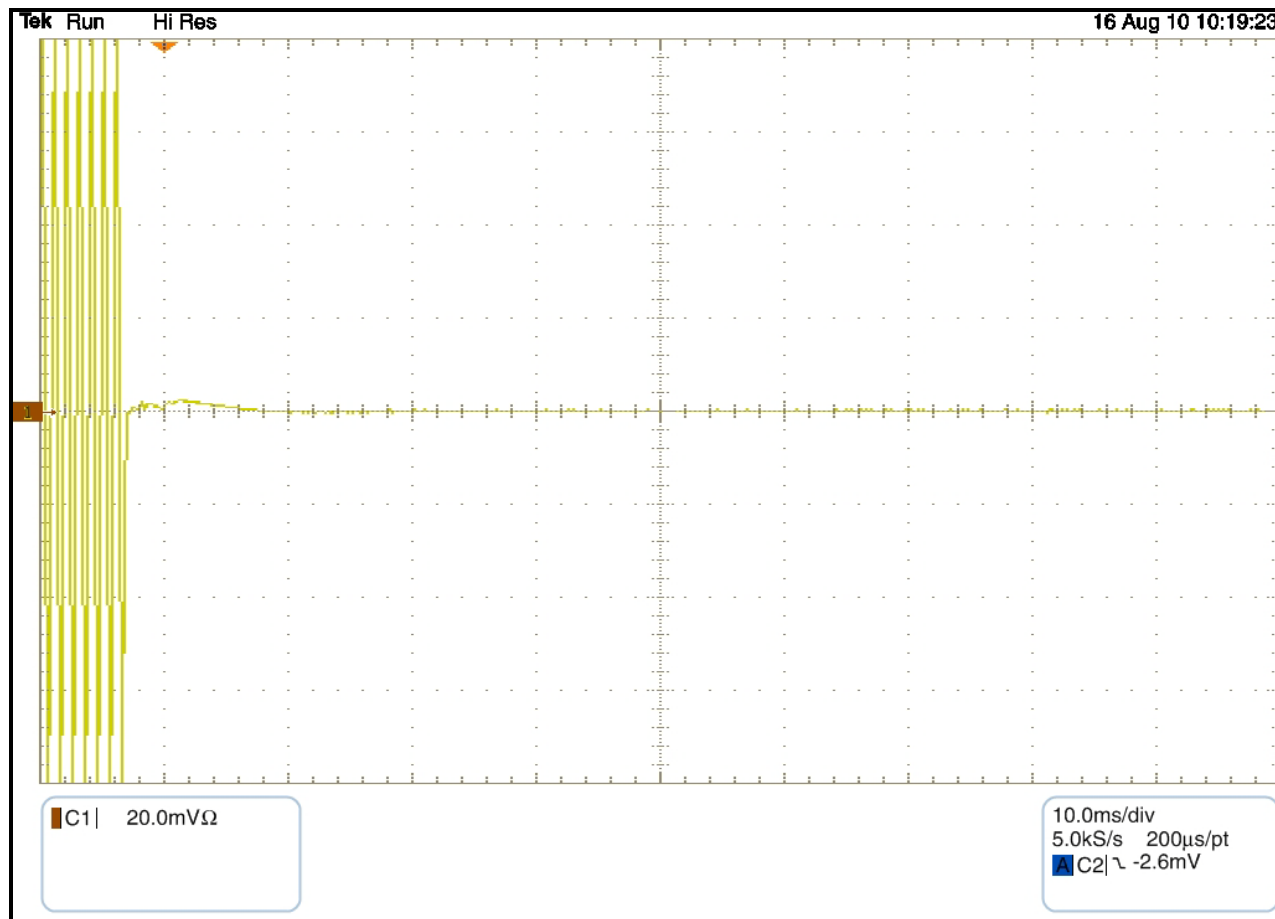


Plot 13-8: Transient Frequency Behavior – 454 MHz; High Power; Narrow Band; Carrier Off Time

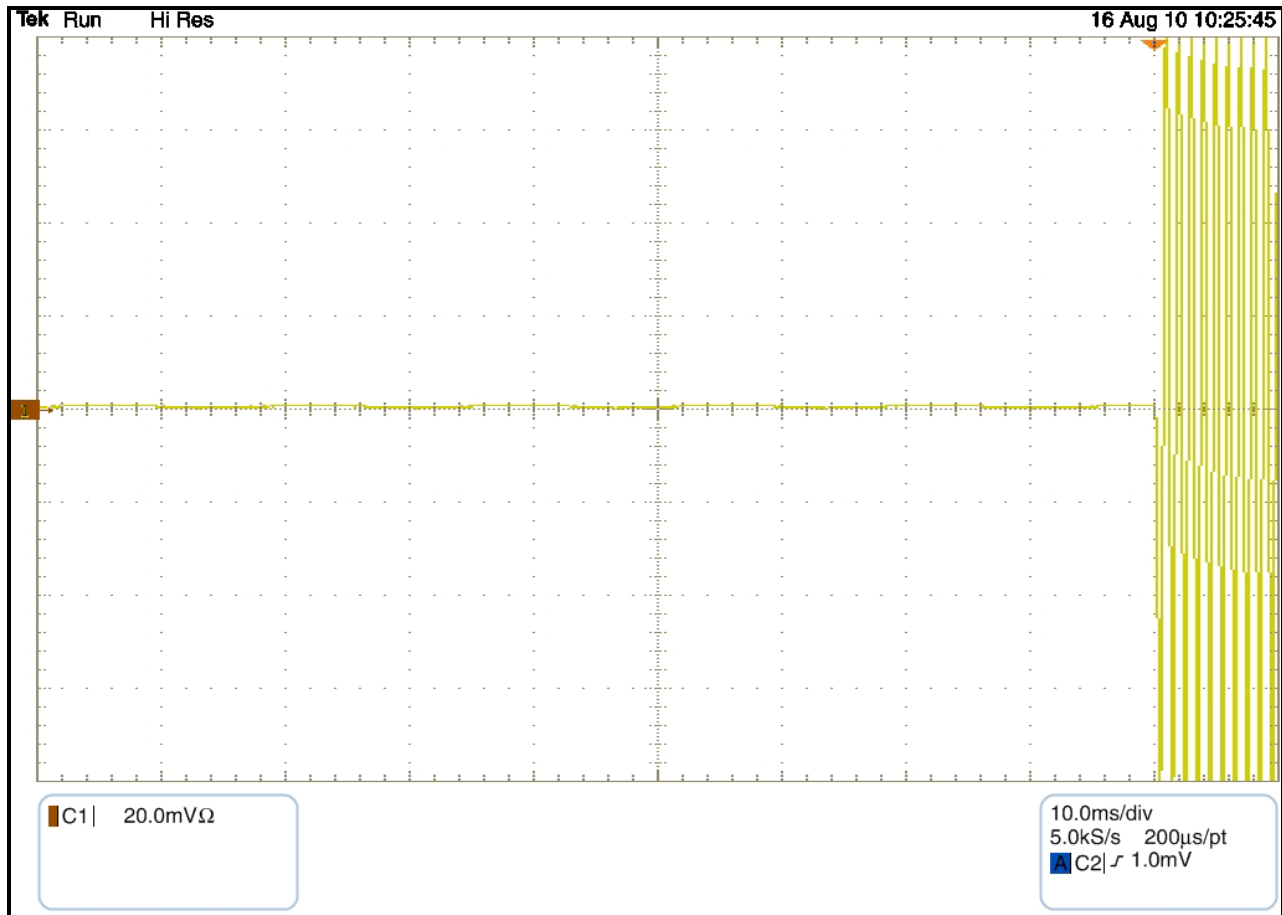


Plot 13-9: Transient Frequency Behavior – 456 MHz; High Power; Wide Band; Carrier On Time

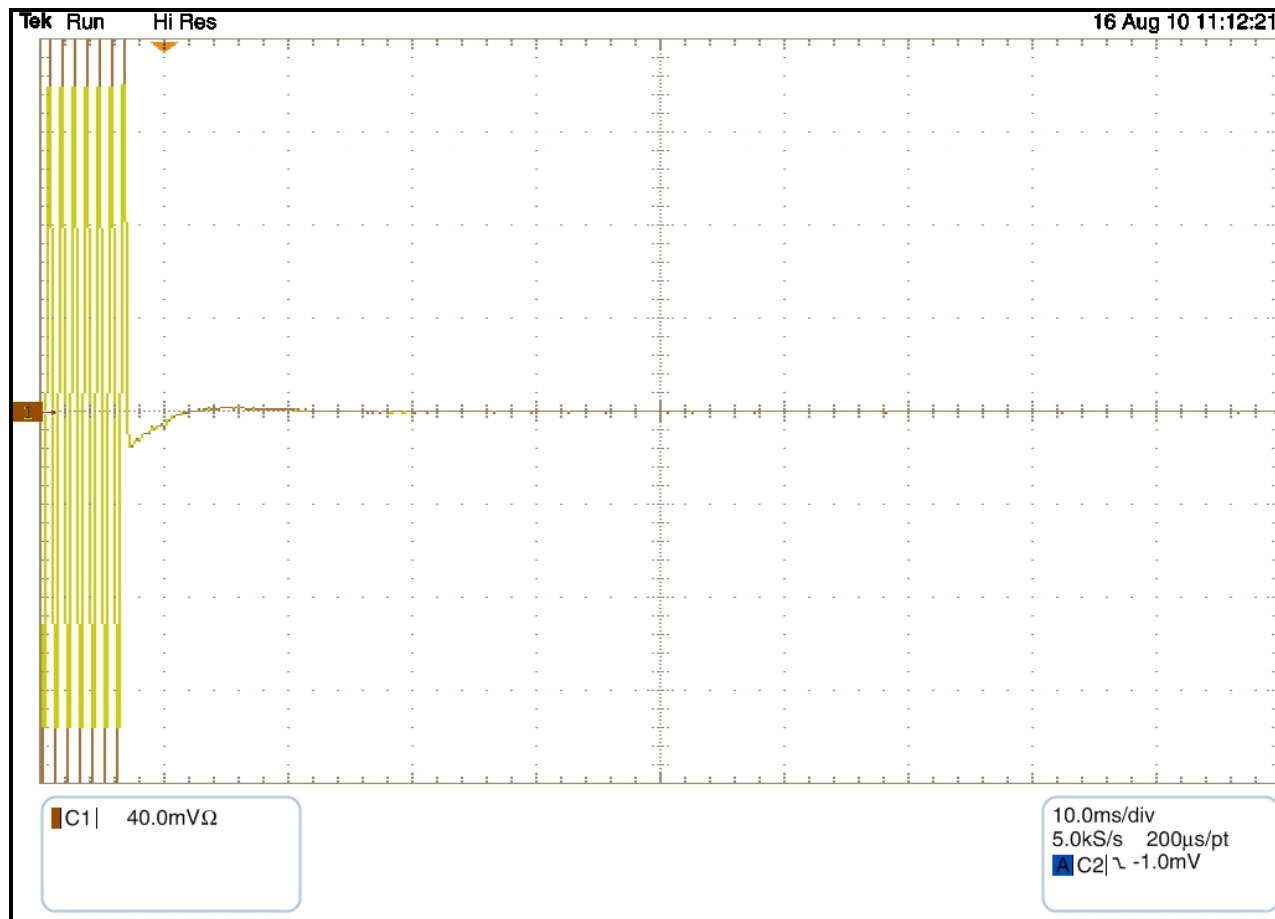


Plot 13-10: Transient Frequency Behavior – 456 MHz; High Power; Wide Band; Carrier Off Time

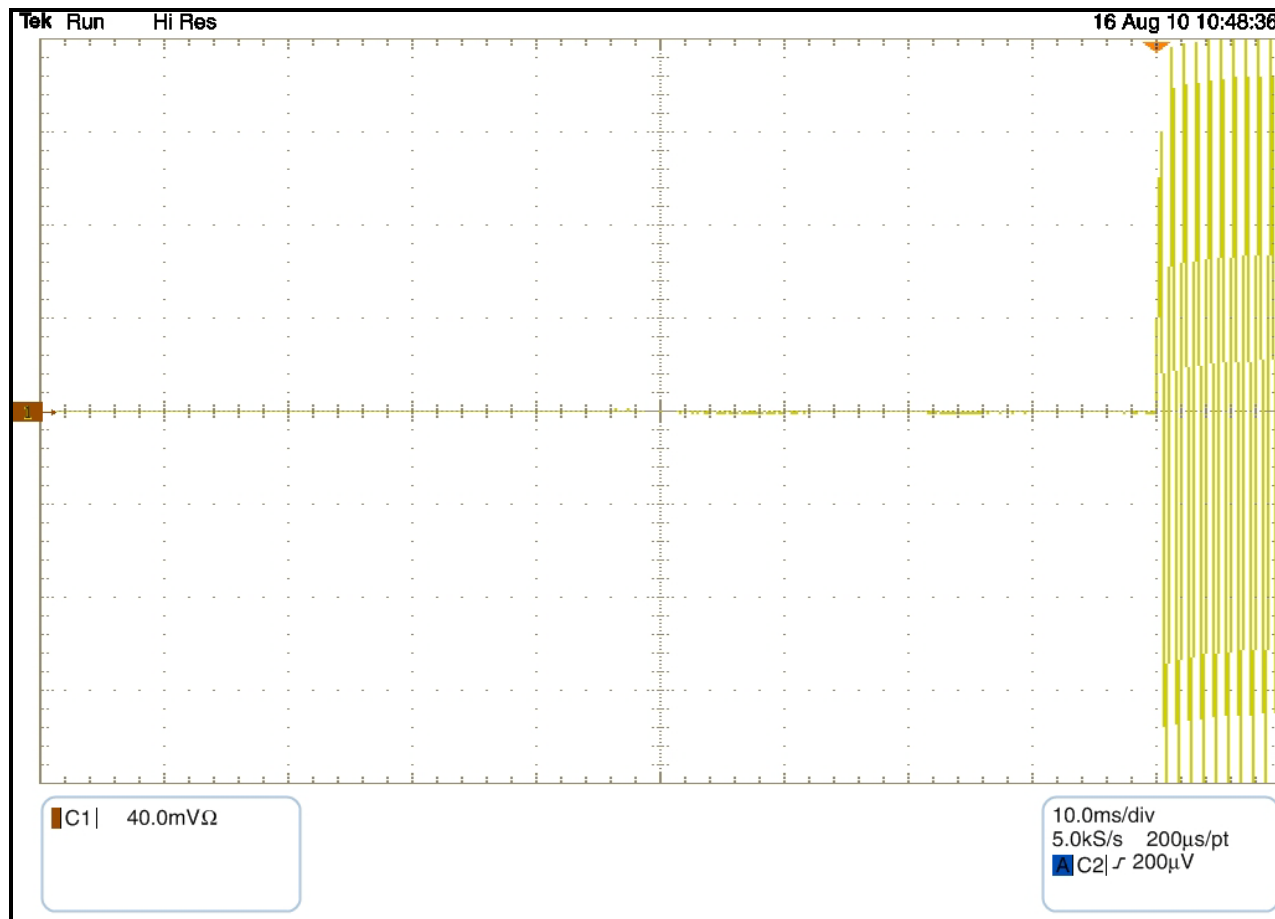


Plot 13-11: Transient Frequency Behavior – 456 MHz; High Power; Narrow Band; Carrier On Time

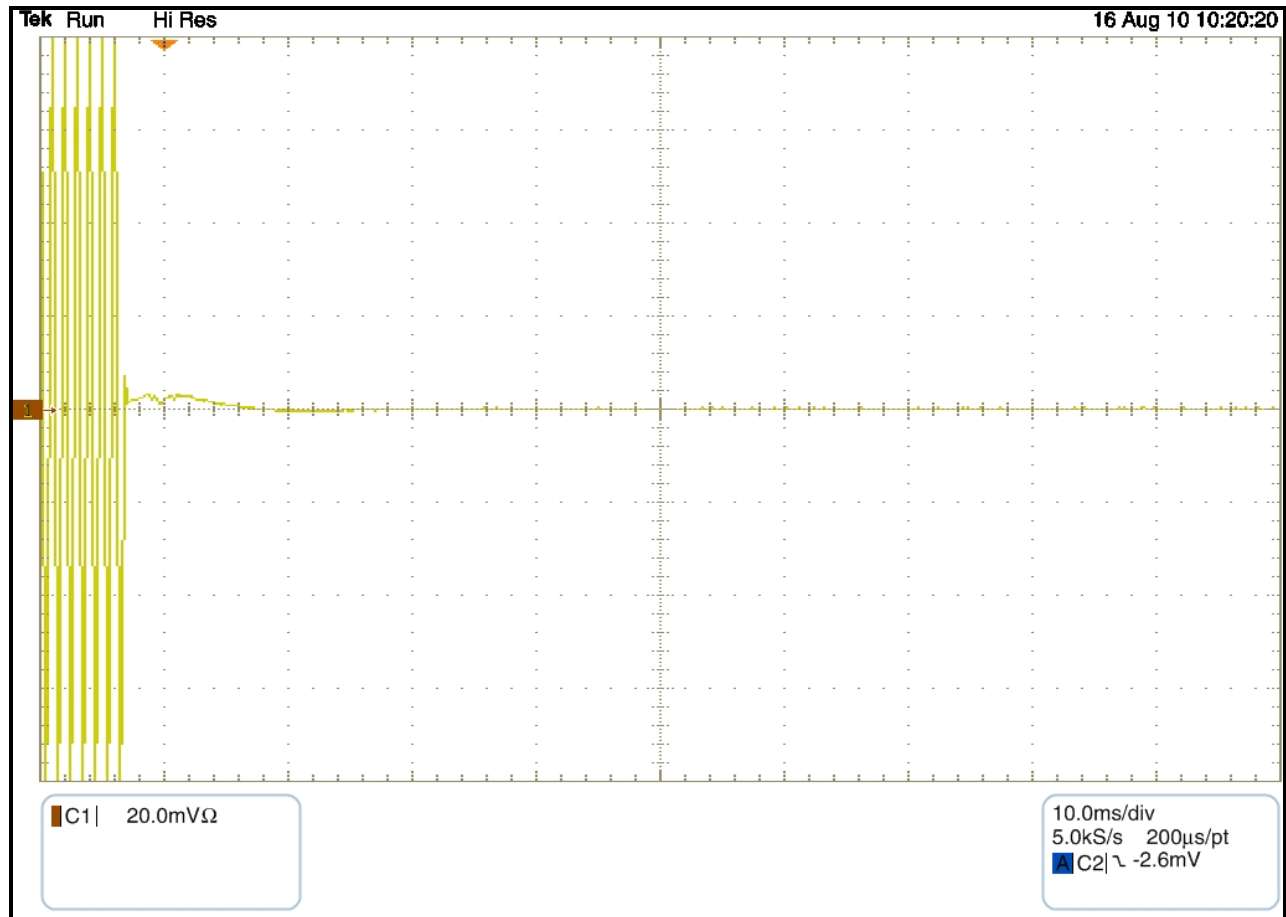


Plot 13-12: Transient Frequency Behavior – 456 MHz; High Power; Narrow Band; Carrier Off Time

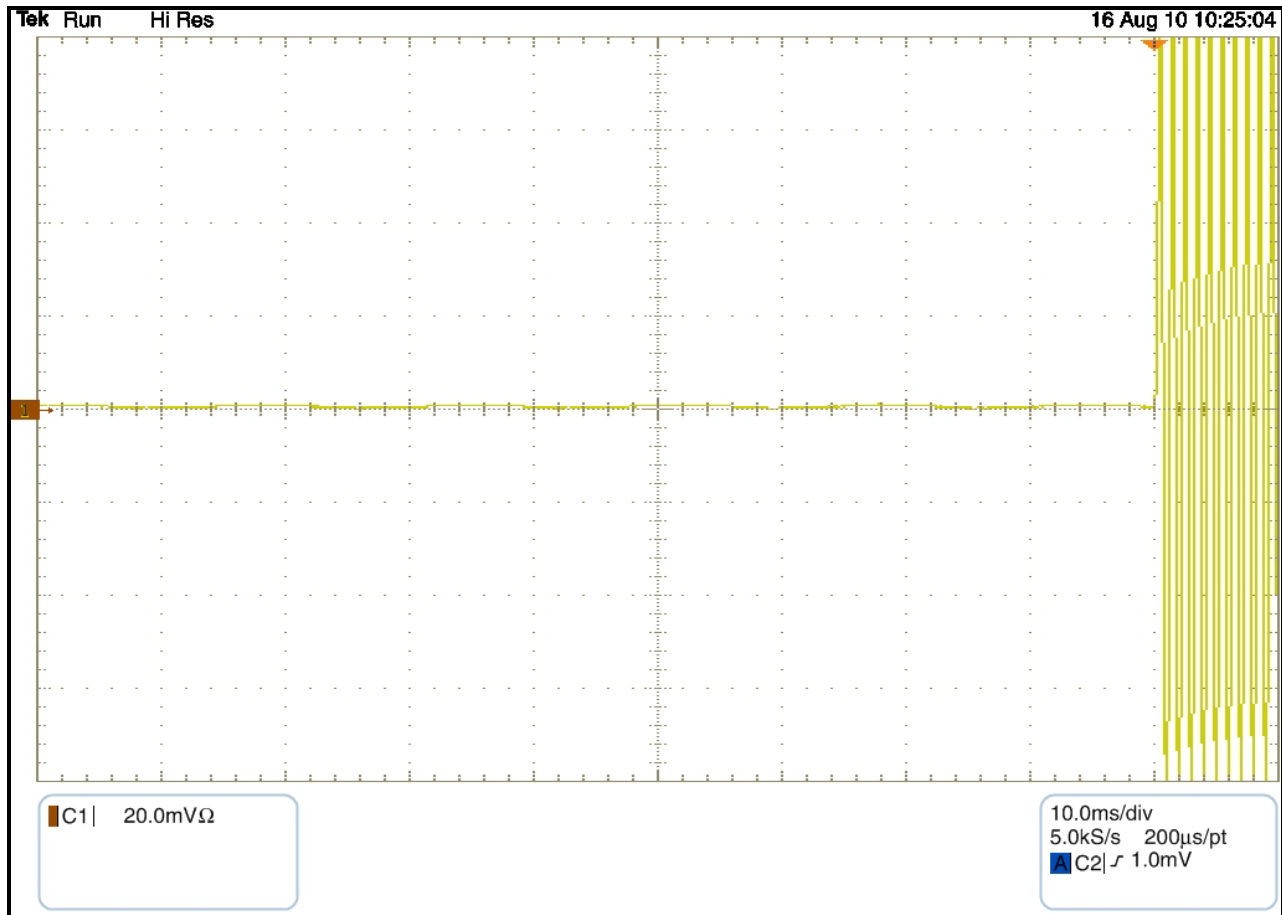


Plot 13-13: Transient Frequency Behavior – 470 MHz; High Power; Wide Band; Carrier On Time

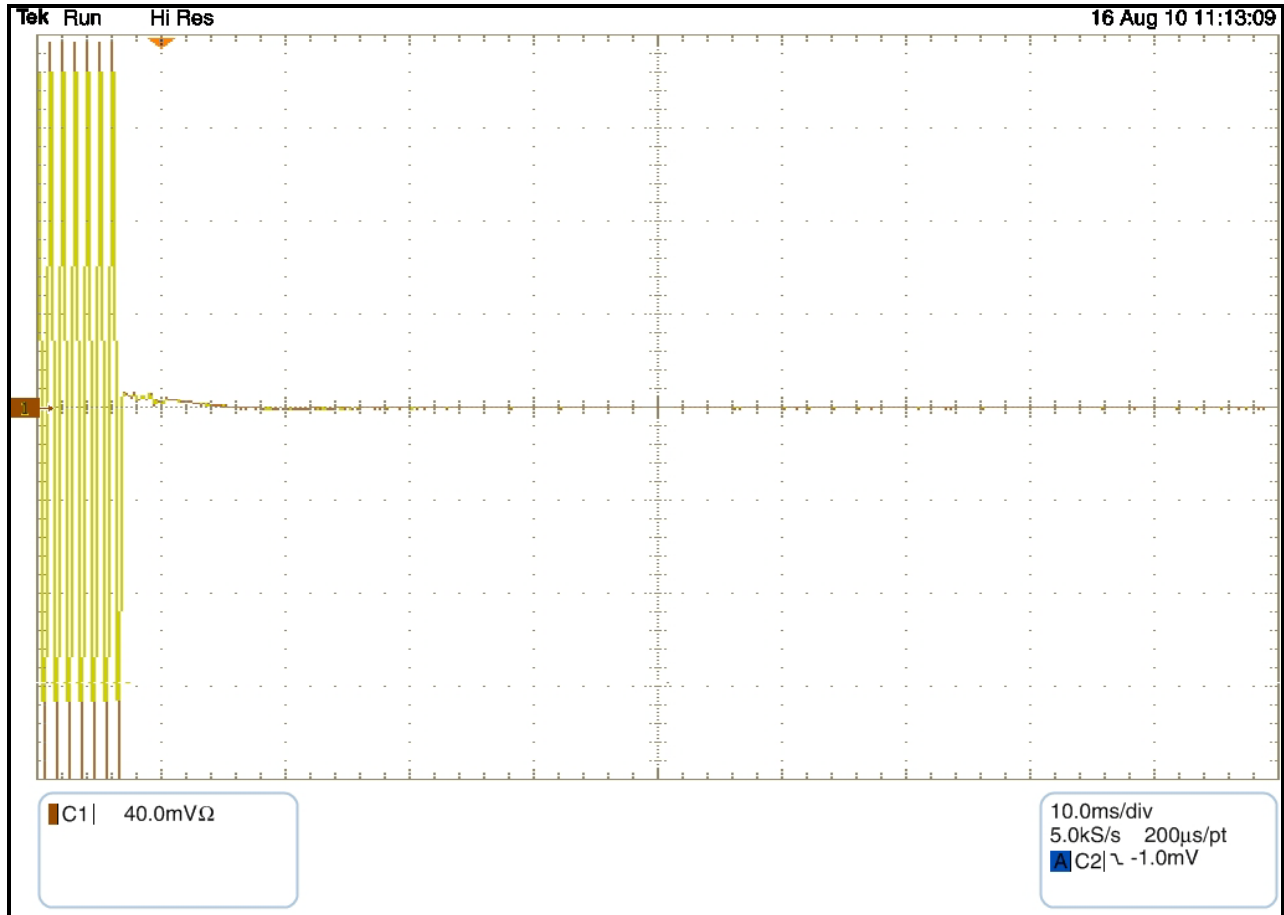


Plot 13-14: Transient Frequency Behavior – 470 MHz; High Power; Wide Band; Carrier Off Time

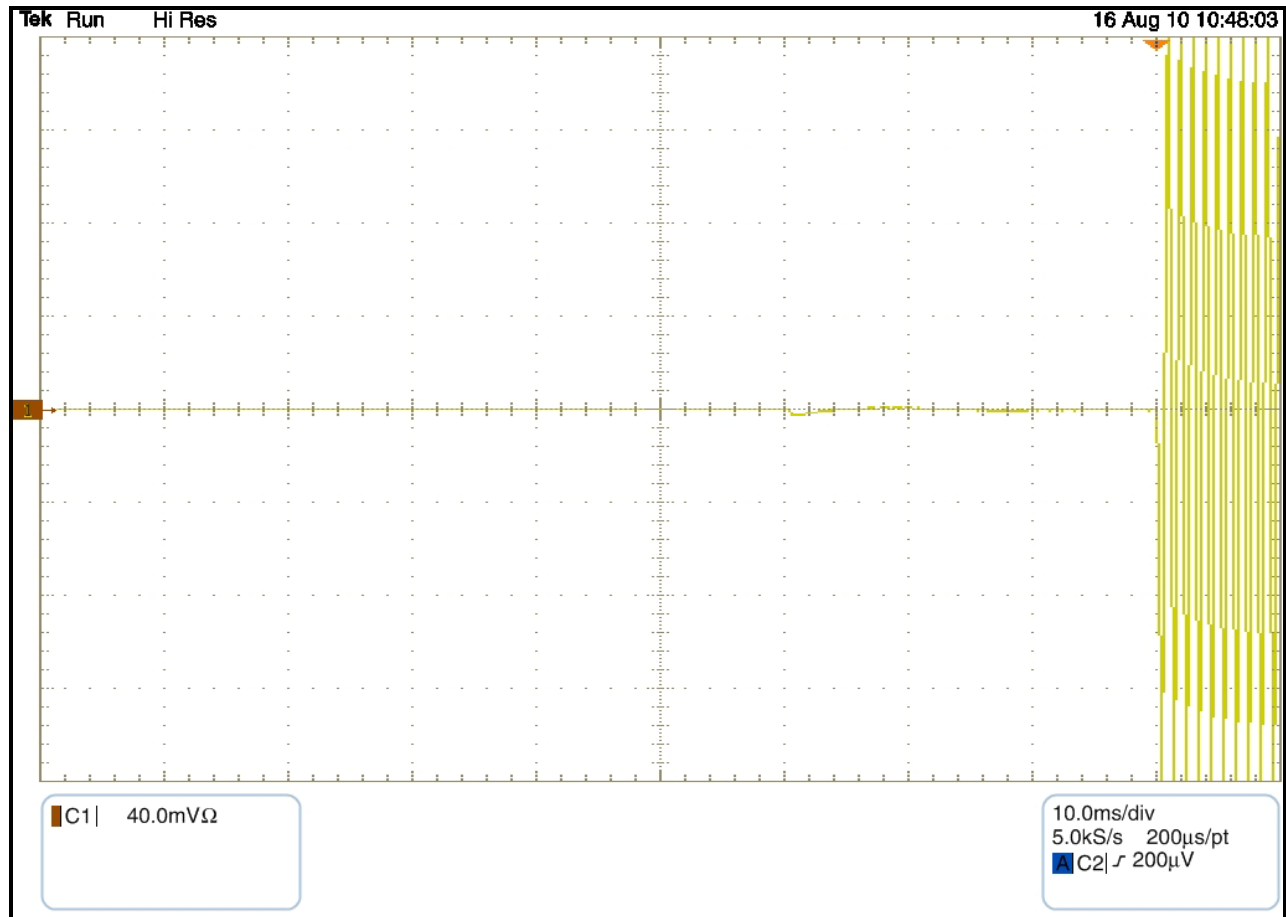


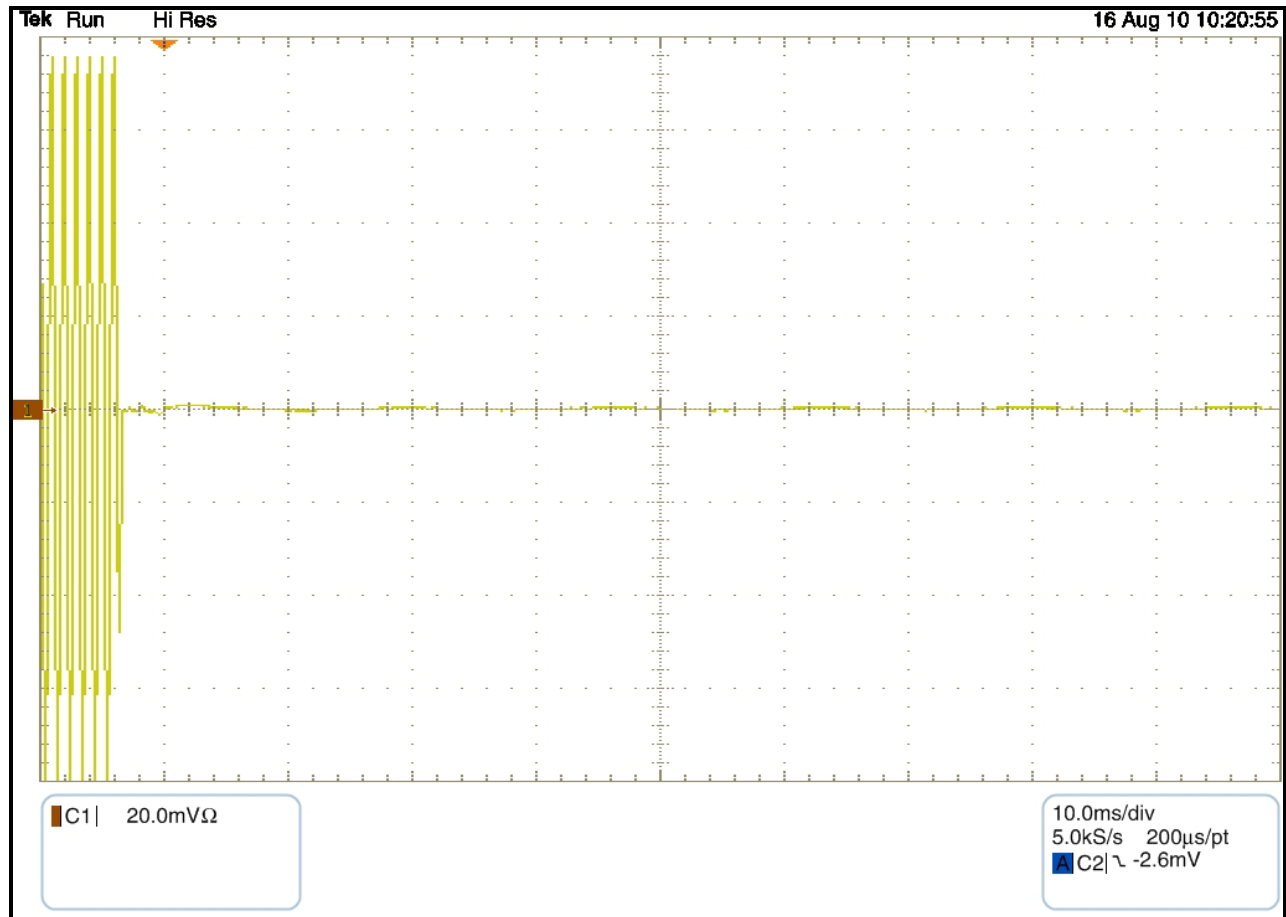


Plot 13-16: Transient Frequency Behavior – 470 MHz; High Power; Narrow Band; Carrier Off Time

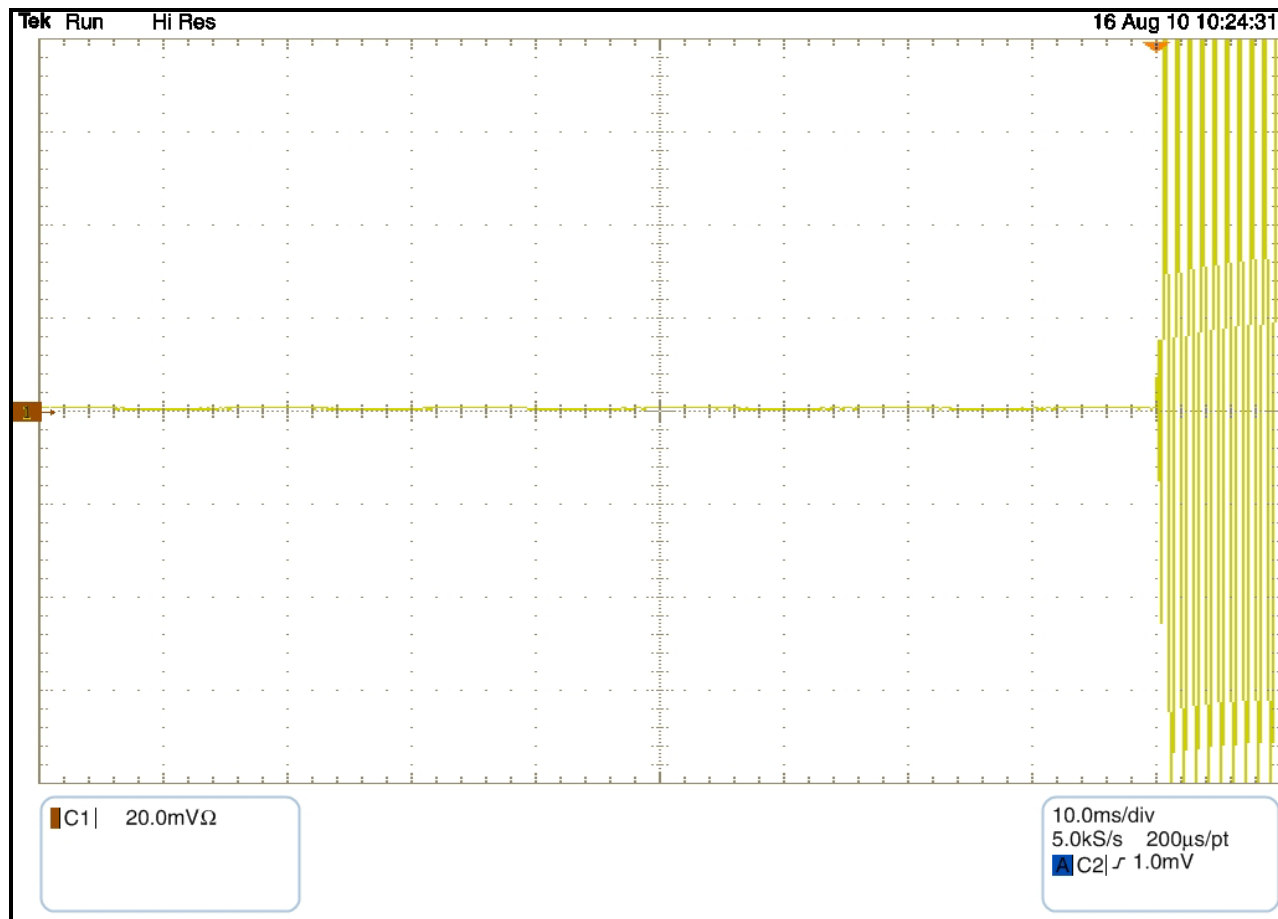


Plot 13-17: Transient Frequency Behavior – 512 MHz; High Power; Wide Band; Carrier On Time

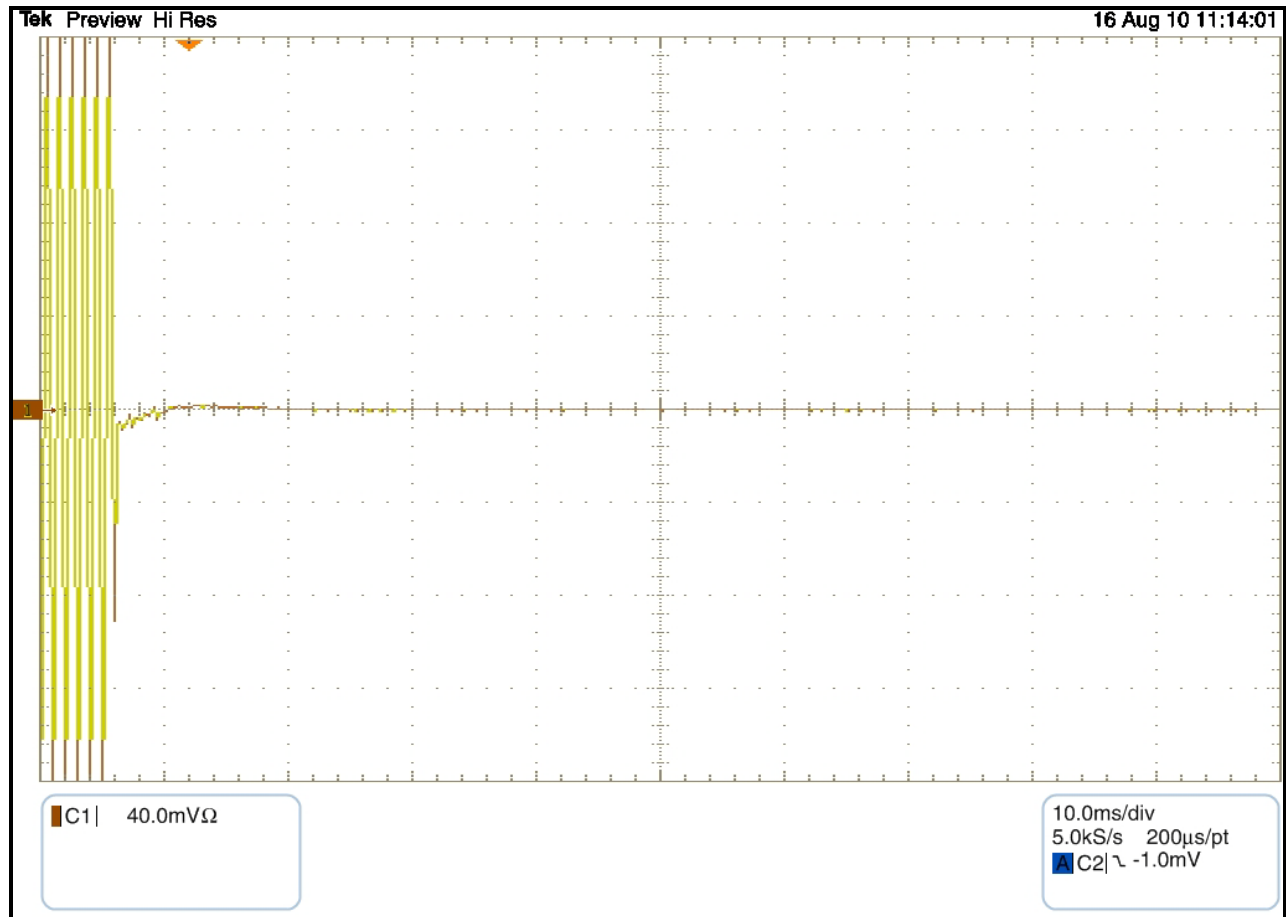

Plot 13-18: Transient Frequency Behavior – 512 MHz; High Power; Wide Band; Carrier Off Time

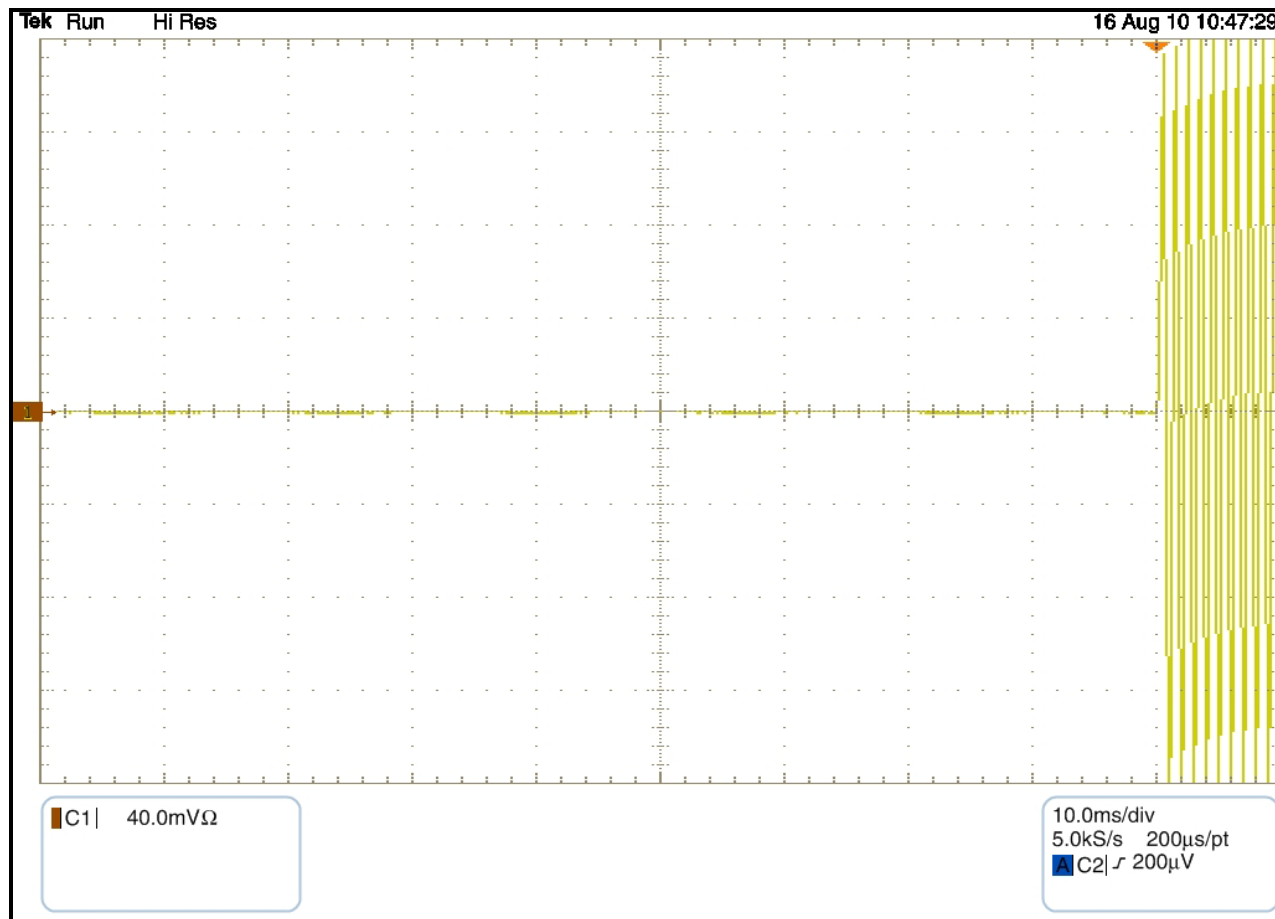

Plot 13-19: Transient Frequency Behavior – 512 MHz; High Power; Narrow Band; Carrier On Time

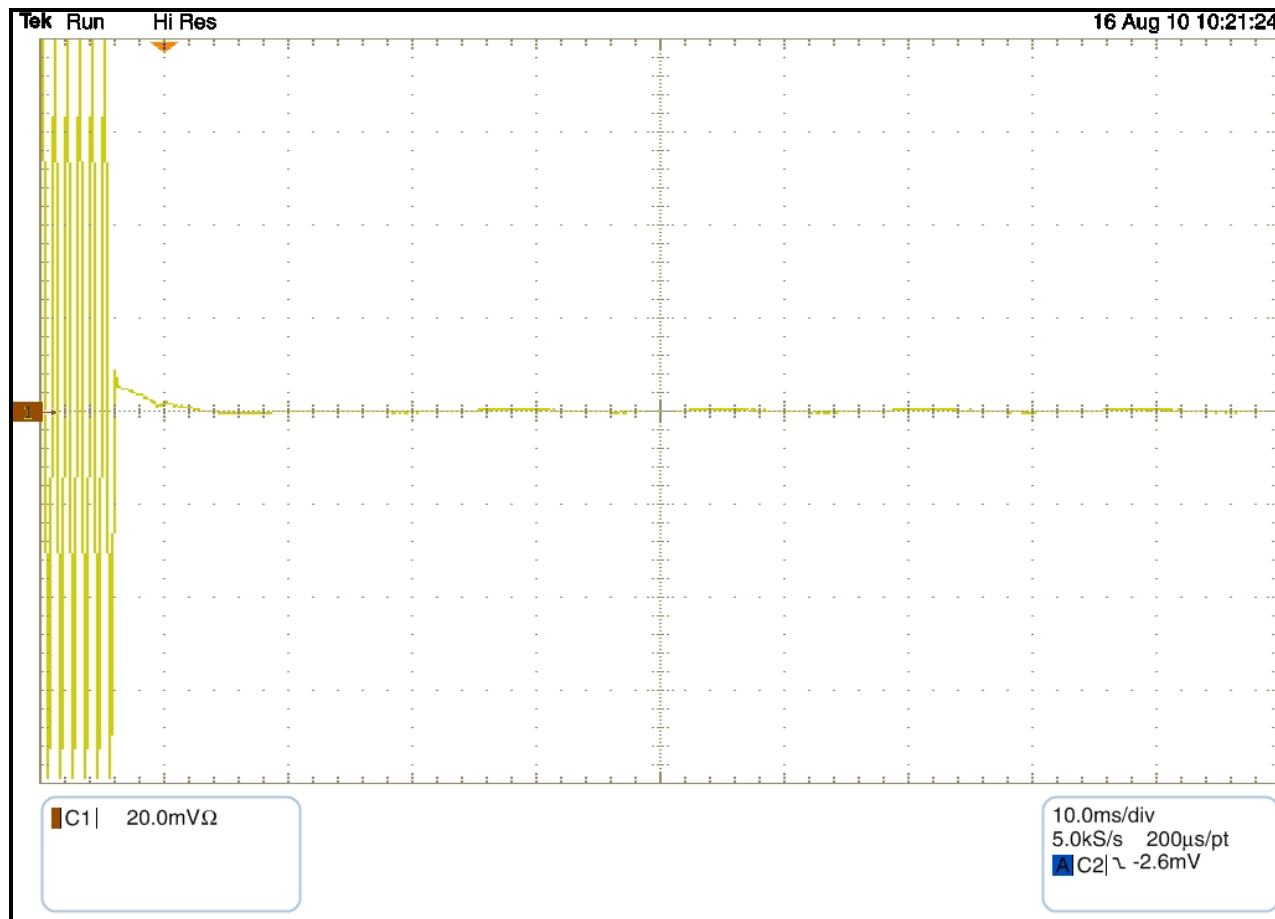

Plot 13-20: Transient Frequency Behavior – 512 MHz; High Power; Narrow Band; Carrier Off Time


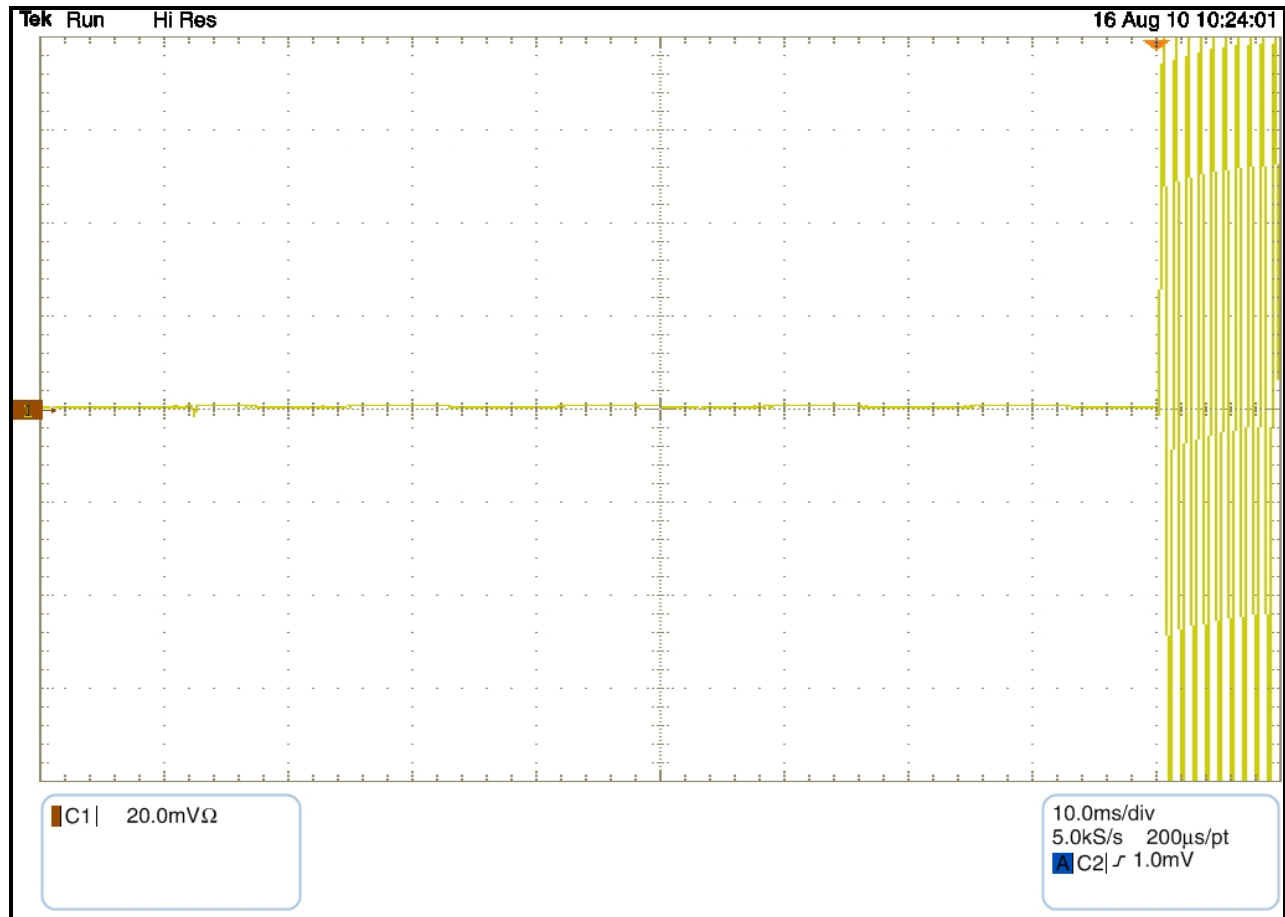


Table 13-1: Test Equipment Used For Testing Transient Frequency Behavior

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901118	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2406A00178	9/29/10
901514	Tektronix	TDS7404B	Oscilloscope	B010161	9/16/10
900917	Hewlett Packard	8648C	Signal Generator (.009 - 3200 MHz)	3537A01741	10/7/10
900948	Weinschel	47-10-43	Attenuator DC-18 GHz 10 dB 50W	BH1487	2/17/11
901511	Pasternack	PE 2003	Power divider (10 MHz - 1 GHz)	NA	N/A
901463	Werlatone Inc.	C1795	Directional coupler, 100W, 40 dB, 1-1000 MHz	4067	2/18/11
901263	Agilent Technologies	.01-12 GHz	SMA Detector	2936A05505	N/A

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

August 16, 2010
Date Of Test

14 FCC Rules and Regulations Part 2 §2.202: Necessary Bandwidth and Emission Bandwidth

Type of Emission: F3E, F1D, F1E

Voice – 25 kHz channel separation

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 5

Constant factor (K): 1 (assumed)

$B_n = 2 \times M + 2 \times DK = 16.0 \text{ kHz}$

Emission designator: 16K0F3E

Voice – 12.5 kHz channel separation

Calculation:

Max modulation (M) in kHz: 3.0

Max deviation (D) in kHz: 2.5

Constant factor (K): 1 (assumed)

$B_n = 2 \times M + 2 \times DK = 11.0 \text{ kHz}$

Emission designator: 11K0F3E

Digital Voice and Data (9600W) – 25 kHz channel spacing

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 3000

$2D/R = 0.625$

$B_n = 3.86D + 0.27R = 3.86(3000) + 0.27(9600) = 14.172 \text{ kHz}$

Emission designator: 14K2F1D, 14K2F1E

Digital Voice and Data (9600N) – 12.5 kHz channel spacing

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1900

$2D/R = 0.396$

$B_n = 3.86D + 0.27R = 3.86(1900) + 0.27(9600) = 9.926 \text{ kHz}$

Emission designator: 9K90F1D, 9K90F1E

Digital Voice and Data (4800N) – 12.5 kHz channel spacing

Calculation:

Data rate in bps (R) = 4800

Peak deviation of carrier (D) = 1500

$2D/R = 0.625$

$B_n = 3.86D + 0.27R = 3.86(1500) + 0.27(4800) = 7.086 \text{ kHz}$

Emission designator: 7K10F1D, 7K10F1E

OpenSky TDMA Wideband

Calculation:

Data rate in bps (R) = 19200

Peak deviation of carrier (D) = 3750

$B_n = \lceil 19200 / \log_2(4) \rceil + 2(3750)(0.461) = 13.100 \text{ kHz}$

Emission designator: 13K1F9W

P25 and OpenSky TDMA Narrowband – 9600 bps:

Calculation:

Data rate in bps (R) = 9600

Peak deviation of carrier (D) = 1800

$B_n = \lceil 9600 / \log_2(4) + 2 \rceil (1800) (1) = 8.400 \text{ kHz}$

Emission designator: 8K40F1D, 8K40F1E

15 Conclusion

The data in this measurement report shows that the **Harris Corporation Model M7300 440-512MHz 50W Radio, FCC ID: OWDTR-0062-E, IC: 3636B-0062**, complies with all the applicable requirements of Parts 90, 15 and 2 of the FCC Rules, and Industry Canada RSS-119, Issue 10, 2010.